


5.1 Function bar

The following provides descriptions of the Function bar in the **RL** page.

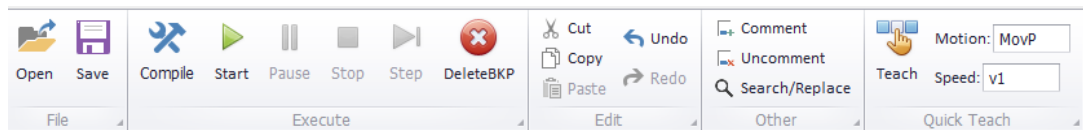

Icon	Name	Description
	Open	Open an RL script file.
	Save	Save the file.
	Compile	Compile the program for debugging. The robot does not move during compilation.
	Start	Start running the program until reaching the end or the next breakpoint. After you click Start , the system first checks for errors in the program. Then, the program starts if no errors exist. If there are errors, debug the program until no errors exist, and then click Start again to start the program.
	Pause	Pause the program.
	Stop	Stop the program.
	Step	Execute the program line by line starting from the line with a breakpoint.
	DeleteBKP	Delete all breakpoints.
	Cut	Cut.
	Copy	Copy.
	Paste	Paste.
	Undo	Undo.
	Redo	Redo.
	Comment	Add a comment to the selected program segment.
	Uncomment	Delete the comment from the selected program segment.
	Search/Replace	Search or replace.
	Teach	Select MovP (joint motion) or MovL (linear motion) for the Motion, set the Speed, click Teach to teach the point, and then the motion instruction is added to the script.