

"Generating Tests for Your MATLAB Code" Workshop Guide

This workshop provides a step-by-step guide to generating automated tests using the MATLAB Unit Test Framework and MATLAB Test.

In this workshop, you will:

- fork and modify your own copy of the MathWorks [Generating Tests for Your MATLAB Code Workshop](#) repository on GitHub
- generate tests using your command history and MATLAB Copilot
- automatically find and run existing tests
- explore code coverage metrics for your tested code
- identify bugs based on testing and code coverage
- automate your testing using continuous integration (CI) practices with GitHub Actions and build tool

Note: Some of the file links may not work in the PDF version of this document, but they work in the WorkshopGuide.m file in MATLAB.

Table of Contents

Workshop Requirements.....	1
Part 1: Getting the workshop files and configuring GitHub for automated testing and results publishing.....	2
Part 2: Generating your first tests for rockPaperScissors.m.....	13
Part 3: Finding existing tests, measuring coverage, and catching bugs.....	28
Part 4: Updating badges, committing our changes, and pushing to GitHub.....	51
Part 5: Watch GitHub Actions automatically test our changes and publish results.....	64
Homework: Hands-on experience with property-based testing.....	70
Workshop wrap-up and additional information.....	72

Workshop Requirements

The following steps cover all of the things you will need to successfully complete the workshop:

A) Use the free MATLAB Expo Workshop license for the workshop

- Go to: https://www.mathworks.com/licensecenter/classroom/expo_2025_5
- Note: If you do not have a MathWorks account, the above link will ask you to create an account for free

B) The MATLAB Test product

- The MATLAB Expo Workshop and MATLAB Online (basic) both have the MATLAB Test product available
- For desktop MATLAB, you will need to buy and install MATLAB Test (if you don't already have it)

C) A GitHub account

- The workshop leverages free repository and CI capabilities offered by GitHub and GitHub Actions
- Go to: <https://github.com/signup>

Part 1: Getting the workshop files and configuring GitHub for automated testing and results publishing

In this section, we will:

1. Fork the workshop files to our personal GitHub account
2. Enable GitHub Actions for automated testing
3. Enable GitHub Pages for report publishing
4. Open the workshop in MATLAB Online

Part 1.1: Fork the "Generating Tests for Your MATLAB Code Workshop" repository to your GitHub Account

First, we'll start by forking the "[Generating Tests for Your MATLAB Code Workshop](#)" repository to our own GitHub account.

Wait... What does it mean to "fork a repository" and why should I do it?

Forking a repository allows you to freely experiment with changes to a project without affecting the original project.

GitHub provides some great information about "why" and "how" to fork a repository: <https://docs.github.com/en/enterprise-cloud@latest/pull-requests/collaborating-with-pull-requests/working-with-forks/fork-a-repo>

Let's get started!

Go to: <https://github.com/mathworks/Generating-Tests-for-Your-MATLAB-Code-Workshop>

Initial workshop commit
6705f67 · 1 minute ago · 1 Commit

.github/workflows Initial workshop commit 1 minute ago

code Initial workshop commit 1 minute ago

projectUtilities Initial workshop commit 1 minute ago

resources/project Initial workshop commit 1 minute ago

tests Initial workshop commit 1 minute ago

About

No description, website, or topics provided.

- Readme
- View license
- Security policy
- Activity
- Custom properties
- 0 stars
- 0 watching
- 0 forks

Press the "Fork" button (top right)

Initial workshop commit
6705f67 · 1 minute ago · 1 Commit

.github/workflows Initial workshop commit 1 minute ago

code Initial workshop commit 1 minute ago

projectUtilities Initial workshop commit 1 minute ago

resources/project Initial workshop commit 1 minute ago

tests Initial workshop commit 1 minute ago

About

No description, website, or topics provided.

- Readme
- View license
- Security policy
- Activity
- Custom properties
- 0 stars
- 0 watching
- 0 forks

Create your fork

GitHub offers the ability to rename your copy of the repository, but this guide will assume the default name.

Create a new fork

A *fork* is a copy of a repository. Forking a repository allows you to freely experiment with changes without affecting the original project.

Required fields are marked with an asterisk (*).

Owner *



Repository name *

Generating-Tests-for-Your

Generating-Tests-for-Your-MATLAB-Code-Workshop is available.

By default, forks are named the same as their upstream repository. You can customize the name to distinguish it further.

Description

0 / 350 characters

Copy the main branch only

Contribute back to mathworks/Generating-Tests-for-Your-MATLAB-Code-Workshop by adding your own branch. [Learn more](#).

You are creating a fork in your personal account.



Create fork

Notes:

- You may need to log into your GitHub account again during this step
- There's no problem with renaming your copy of the repository, but the rest of the workshop guide and screenshots assume the default repository name

Once you've forked the repository, you should see:

- your GitHub username in at the top of your repository
- "forked from mathworks/Generating-Tests-for-Your-MATLAB-Code-Workshop"

The screenshot shows a GitHub repository page. At the top, there's a navigation bar with tabs for Code, Pull requests, Actions, Projects, Wiki, Security, Insights, and Settings. The 'Actions' tab is currently selected. Below the navigation bar, the repository name 'Generating-Tests-for-Your-MATLAB-Code-Workshop' is displayed, along with a profile picture of the owner and a note that it's forked from 'mathworks/Generating-Tests-for-Your-MATLAB-Code-Workshop'. Underneath this, there's a summary showing 'main' branch, '1 Branch', '0 Tags', and search/filter options. A red box highlights the 'Actions' tab.

Before we go to MATLAB Online, let's enable some useful GitHub features that will be automatically triggered when we push our changes to GitHub later.


Part 1.2: Enable GitHub Actions

GitHub offers built-in continuous integration (CI) services via their "GitHub Actions" feature. By default, GitHub Actions is disabled for forked repositories, so we'll have to enable Actions before we can use them for the workshop. The workshop already provides a GitHub Actions YAML file to automatically test your code and publish test results so you can see them directly from your repository every time you push your code.

Select the "Actions" tab

This screenshot is identical to the one above, showing the GitHub repository page for 'Generating-Tests-for-Your-MATLAB-Code-Workshop'. The 'Actions' tab is highlighted with a red box and a large red arrow points directly at it, indicating where the user should click to enable GitHub Actions.

Click the "I understand my workflows, go ahead and enable them" button

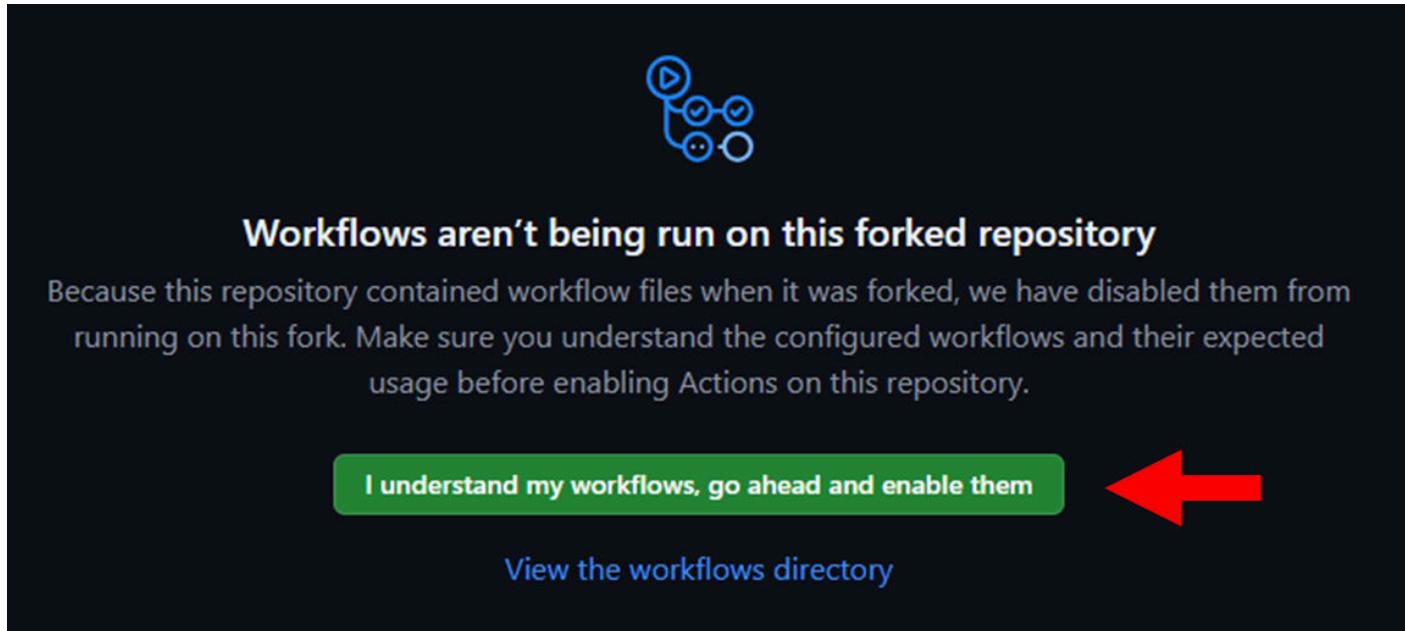

And that's it! GitHub Actions is now enabled for your repository.


Part 1.3: Enable GitHub Pages to publish our test results

GitHub offers a built-in way to publish test reports and artifacts created from your CI jobs. By default, GitHub Pages is disabled for new repositories, so we'll have to enable Pages before we can publish our test reports.

Select the "Settings" tab



Select the "Pages" entry on the left-side navigation panel

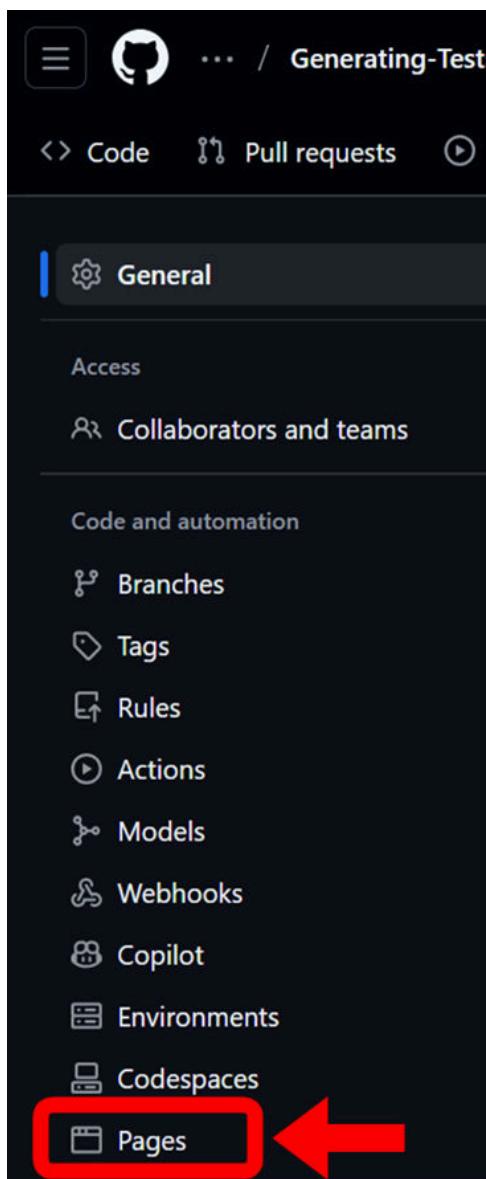

Change the "Build and deployment > Source" dropdown to "GitHub Actions"

The screenshot shows the GitHub Pages settings interface. At the top, it says "GitHub Pages" and describes it as designed to host personal, organization, or project pages from a GitHub repository. Below this is a section titled "Build and deployment". Under "Source", there is a dropdown menu with two options: "Deploy from a branch" and "GitHub Actions". A red arrow points to the "Deploy from a branch" option. Another red arrow points to the "GitHub Actions" option, which is highlighted with a blue background and has a checkmark next to it. The "GitHub Actions" section also includes text about being best for using frameworks and customizing build processes, and links to "Deploy from a branch" and "Classic Pages experience". Below this is a "Visibility" section for GitHub Enterprise.

[GitHub Pages](#) is designed to host your personal, organization, or project pages from a GitHub repository.

Build and deployment

Source

Deploy from a branch ▾

GitHub Actions

Best for using frameworks and customizing your build process

✓ Deploy from a branch
Classic Pages experience

Visibility (GitHub Enterprise)

With a GitHub Enterprise account, you can restrict access to your GitHub Pages site by publishing it privately. You can use privately published sites to share your internal documentation or knowledge base with members of your enterprise. You can try GitHub Enterprise risk-free for 30 days. [Learn more about the visibility of your GitHub Pages site.](#)

GitHub Pages is now enabled and your GitHub Actions will be allowed to publish test results for everyone to see.

Part 1.4: Open the workshop in MATLAB Online


We are providing access to a special instance of MATLAB Online for MATLAB Expo, and we will be using this MATLAB Online to do the workshop.

Let's get started!


Go to: https://www.mathworks.com/licensecenter/classroom/expo_2025_5

- Note: If you do not have a MathWorks account, you will need to create one before continuing.

Get the workshop files selecting Home > New > Git Clone

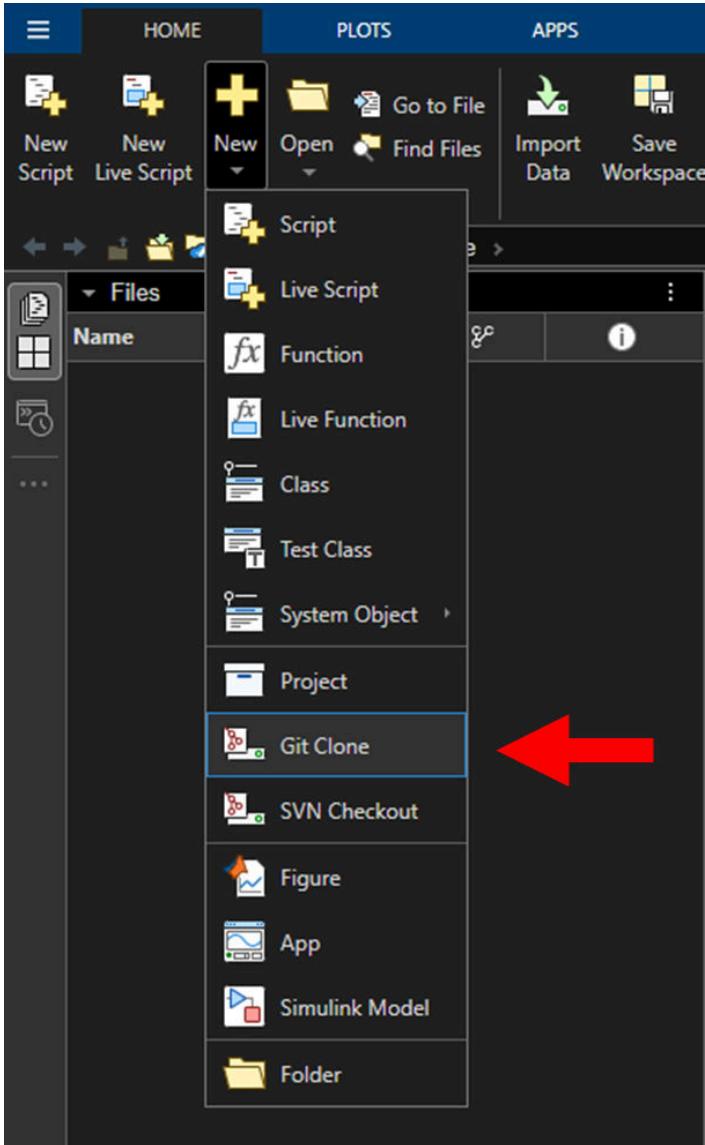


Enter the URL of your GitHub repository in the dialog and hit "Clone"

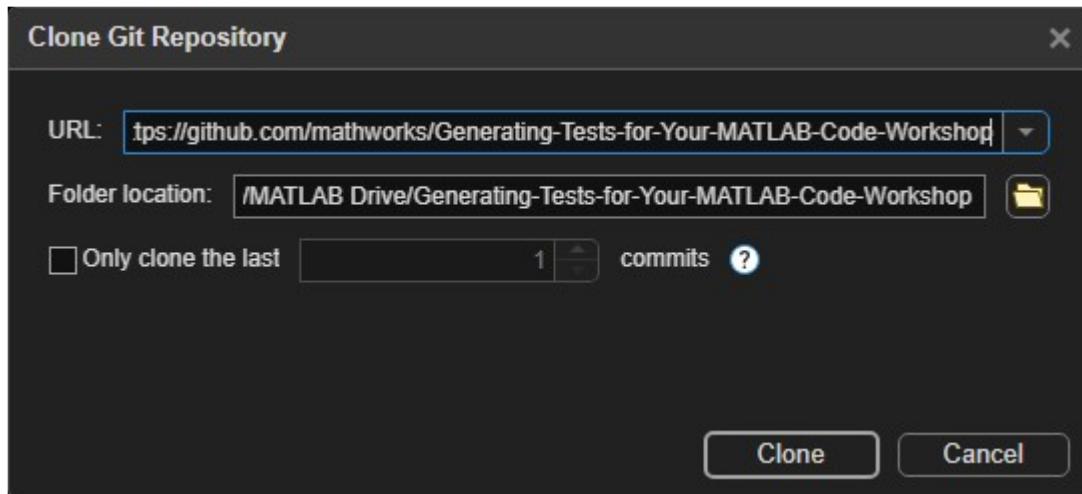

Open the workshop project by double-clicking on the [WorkshopProject.prj](#) file

A MATLAB project is a useful tool that makes it easy to:

- automatically set up your path consistently across multiple users and machines
- run startup and shutdown scripts when you open or close the project
- keep one project from affecting the environment of another project

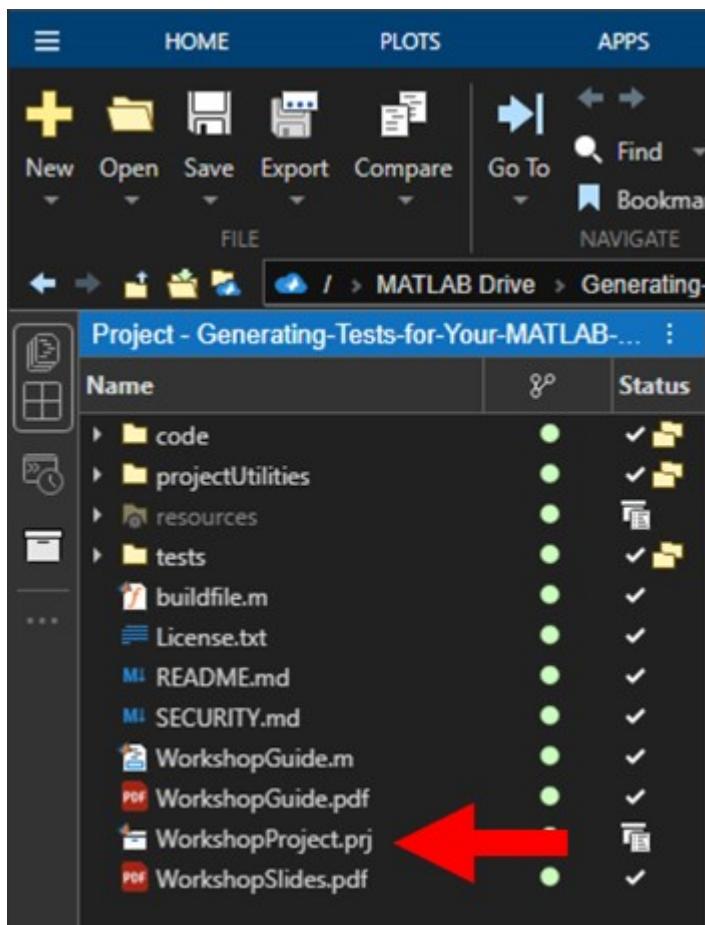


Give MATLAB permission to run project startup tasks


As part of our commitment to security, MATLAB will ask you for permission before executing any code during project startup the first time you open a project.

We have configured the workshop to automatically open the workshop guide ([WorkshopGuide.m](#)) for you when you open the project.


In the following dialog, please select "Open" to open the project and run this startup task.

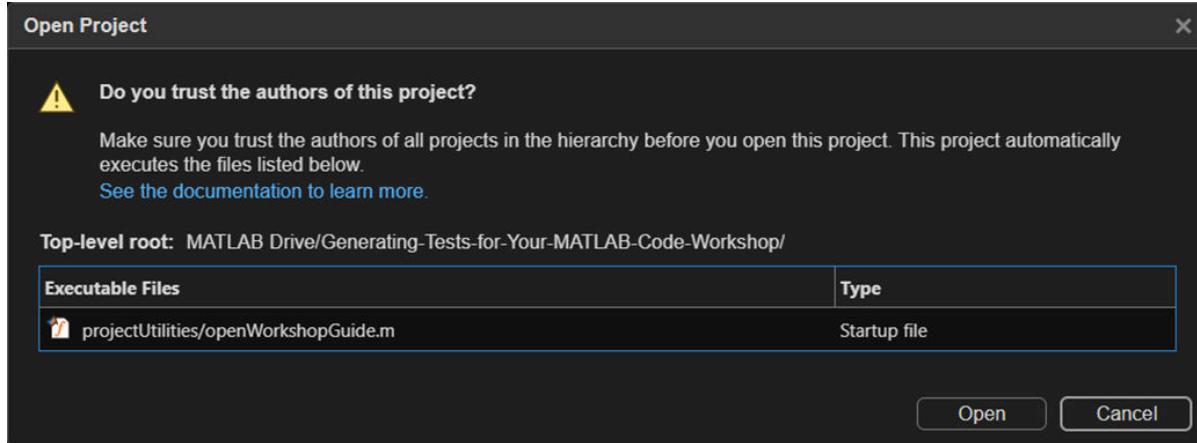

Your MATLAB now should look something like this:

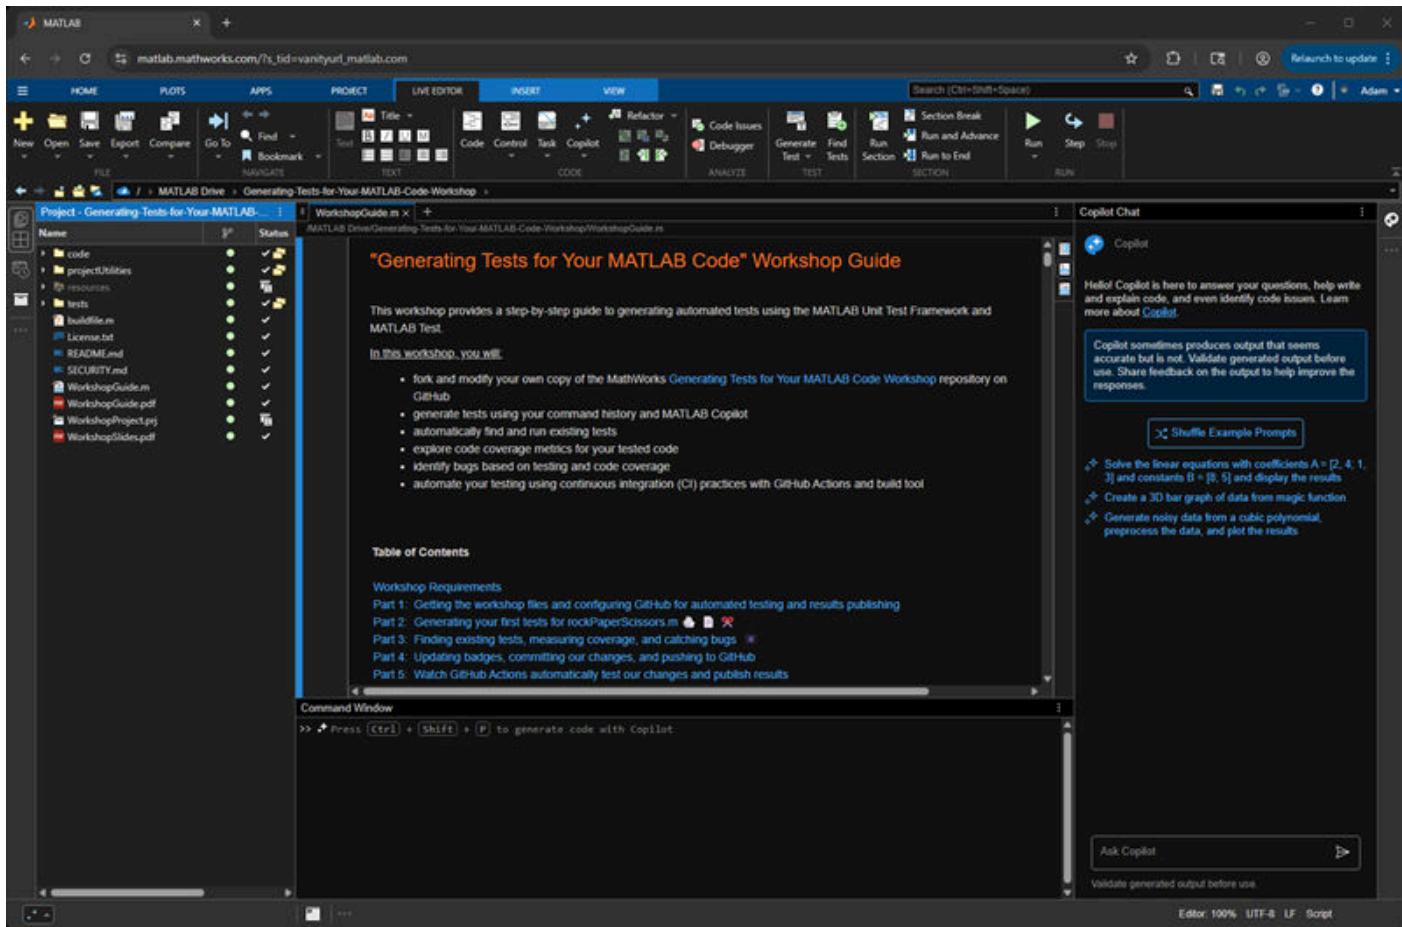

Note: You can enable Dark Mode by going to Home > Settings > MATLAB > Appearance and selecting "Dark" as the desktop theme.

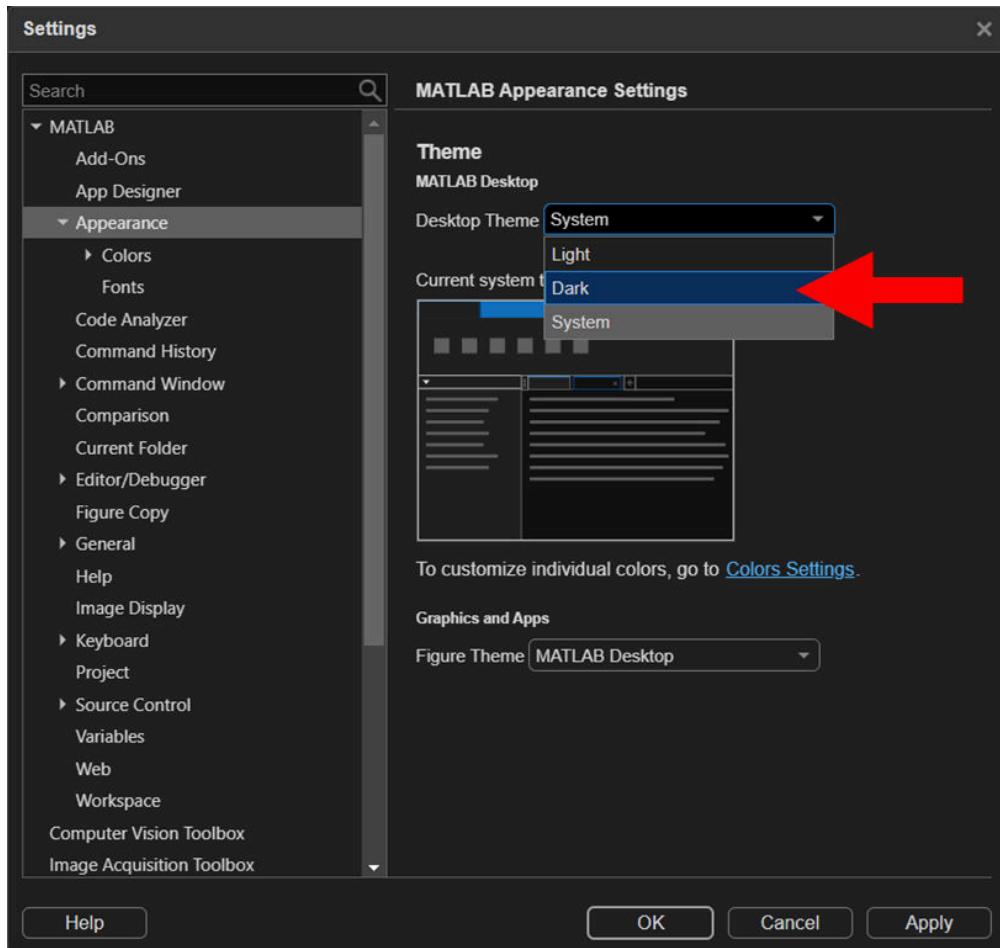

Now you're ready to start generating tests!

Part 2: Generating your first tests for [rockPaperScissors.m](#)

In this section, we will:

1. Generate tests using your command history
2. Generate tests using MATLAB Copilot
3. Add generated tests to your project

Part 2.1: Generating your first test using Command History

For this workshop, we are going to use the `code/rockPaperScissors.m` function that emulates playing the game "rock, paper, scissors" as a starting point.

- Note: If you're unfamiliar with "rock, paper, scissors" (also known as "rock, scissors, paper"), you can learn more about the game here: https://en.wikipedia.org/wiki/Rock_paper_scissors

Open the `rockPaperScissors` function

```
edit rockPaperScissors.m
```

Interactively test `rockPaperScissors.m` by playing rock, paper, scissors using the MATLAB Command Window

Here's an example code you can run at the Command Window:

```
>> player1Choice = "rock";
>> player2Choice = "scissors";
>> result = rockPaperScissors(player1Choice,player2Choice)

result =
    "Player 1 wins"
```


Feel free to try other inputs to see which player wins.

Generate our first test for the `rockPaperScissors` function using our command history

While we could start creating a test from scratch, wouldn't it be nice if we could reuse the interactive testing we did at the Command Window?


As of MATLAB R2025a, MATLAB Test™ introduced a feature to generate a test from your command history.

Go to the Command History panel

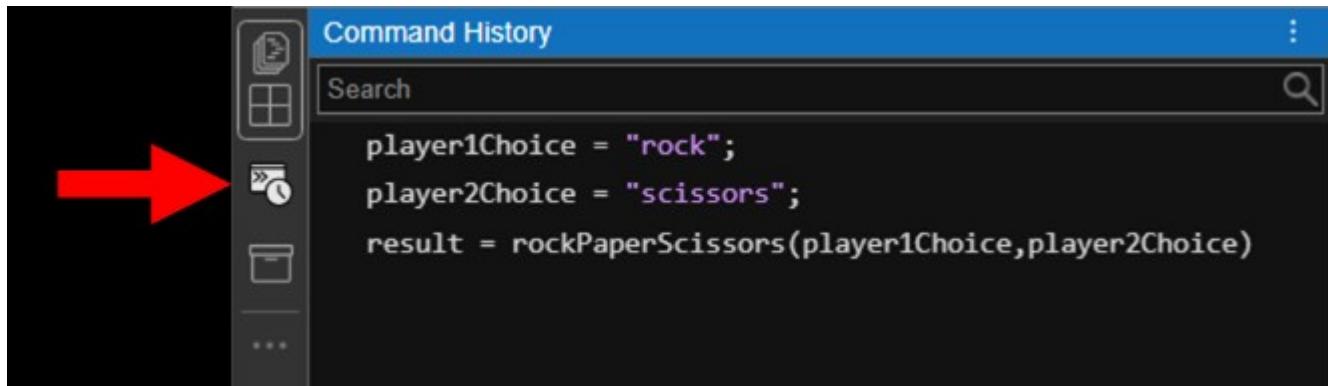


Note: If you don't see the Command History panel icon, you can add the icon by selecting the "..." option and selecting the "Command History" item.



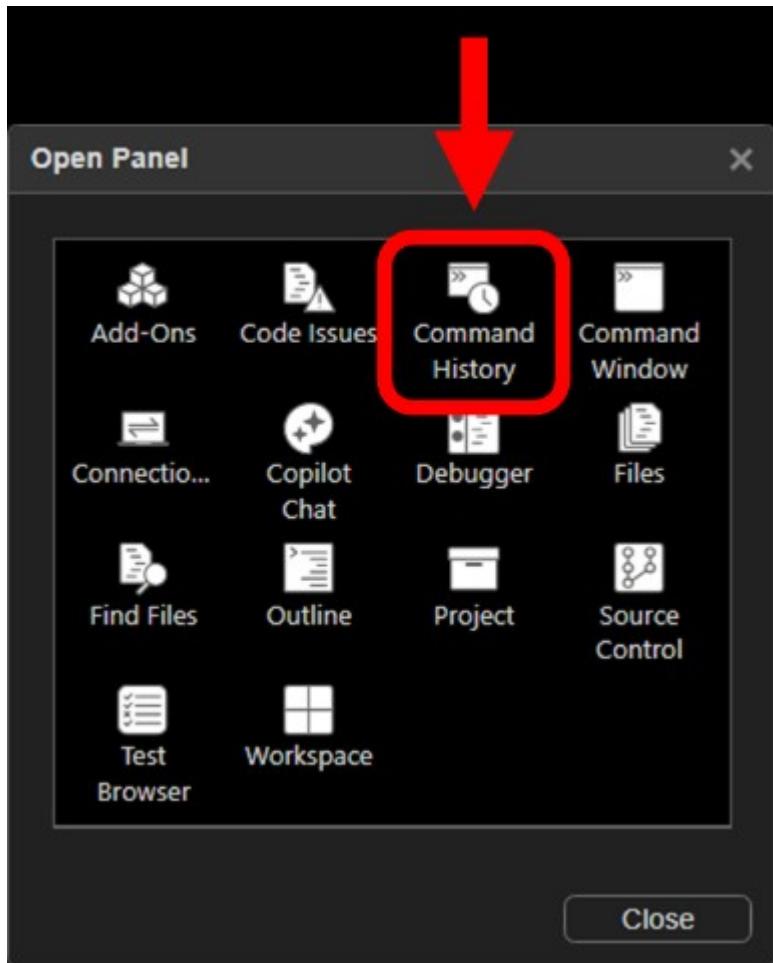

Note: You can also access your command history by pressing the "up" key while at the MATLAB Command Window.

Right-Click one of your calls to rockPaperScissors and select "Generate Test"

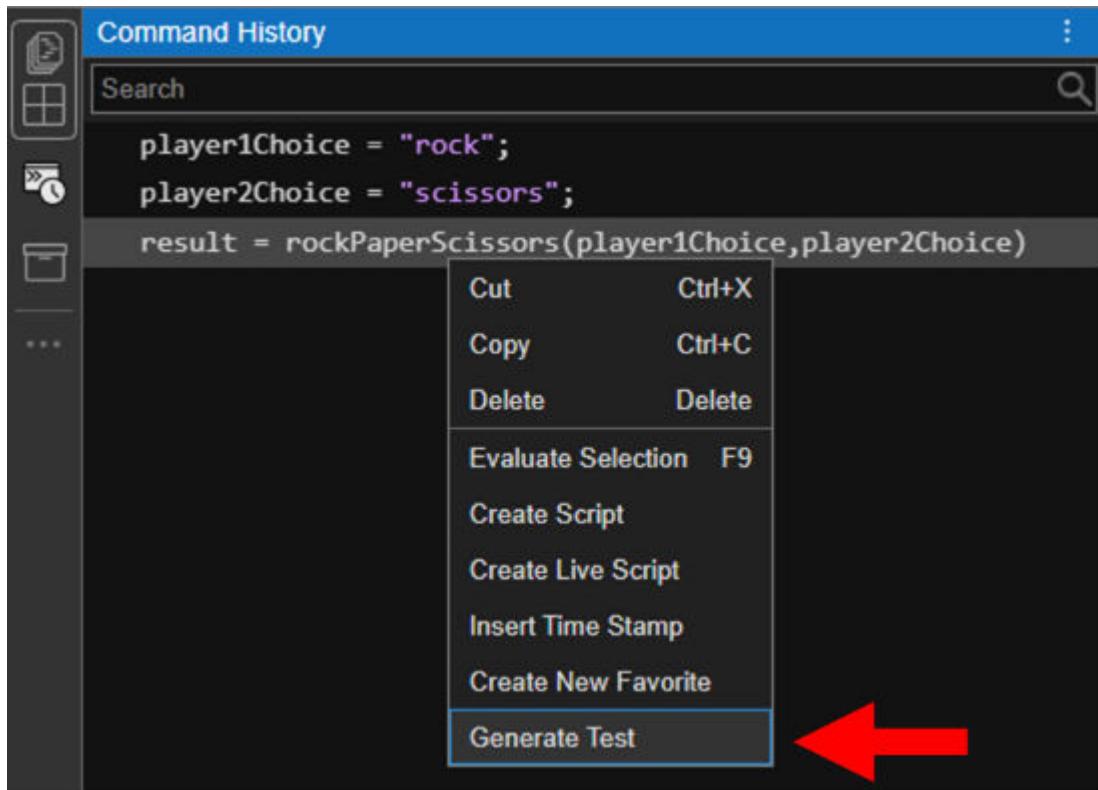

This will automatically gather all relevant code lines needed to execute that command successfully and generate a test for you. All you need to do is add in your expected output.

A screenshot of a MATLAB editor window showing an autogenerated test script named "untitled3". The script content is as follows:

```
% This is an autogenerated sample test for file rockPaperScissors
classdef testrockPaperScissors < matlab.unittest.TestCase
    methods (Test)
        function test_rockPaperScissors(testCase)
            % Specify the input(s)
            player1Choice = "rock";
            player2Choice = "scissors";

            % Exercise the function
            actualOutput_result = rockPaperScissors(player1Choice,player2Choice);

            % Specify the expected output(s)
            expectedOutput_result = %<br>


            % Verify the results
            testCase.verifyEqual(actualOutput_result, expectedOutput_result);
        end
    end
end
```

A large red arrow points to the line "expectedOutput_result = %
" where the expected output is currently empty.


Add in your expected output

```
untitled3 * X +  
1 % This is an autogenerated sample test for file rockPaperScissors  
2 classdef testrockPaperScissors < matlab.unittest.TestCase  
3 methods (Test)  
4     function test_rockPaperScissors(testCase)  
5         % Specify the input(s)  
6         player1Choice = "rock";  
7         player2Choice = "scissors";  
8  
9         % Exercise the function  
10        actualOutput_result = rockPaperScissors(player1Choice,player2Choice);  
11  
12        % Specify the expected output(s)  
13        expectedOutput_result = "Player 1 wins";   
14  
15        % Verify the results  
16        testCase.verifyEqual(actualOutput_result, expectedOutput_result);  
17    end  
18    end  
19 end
```

Save your test to the "tests" folder

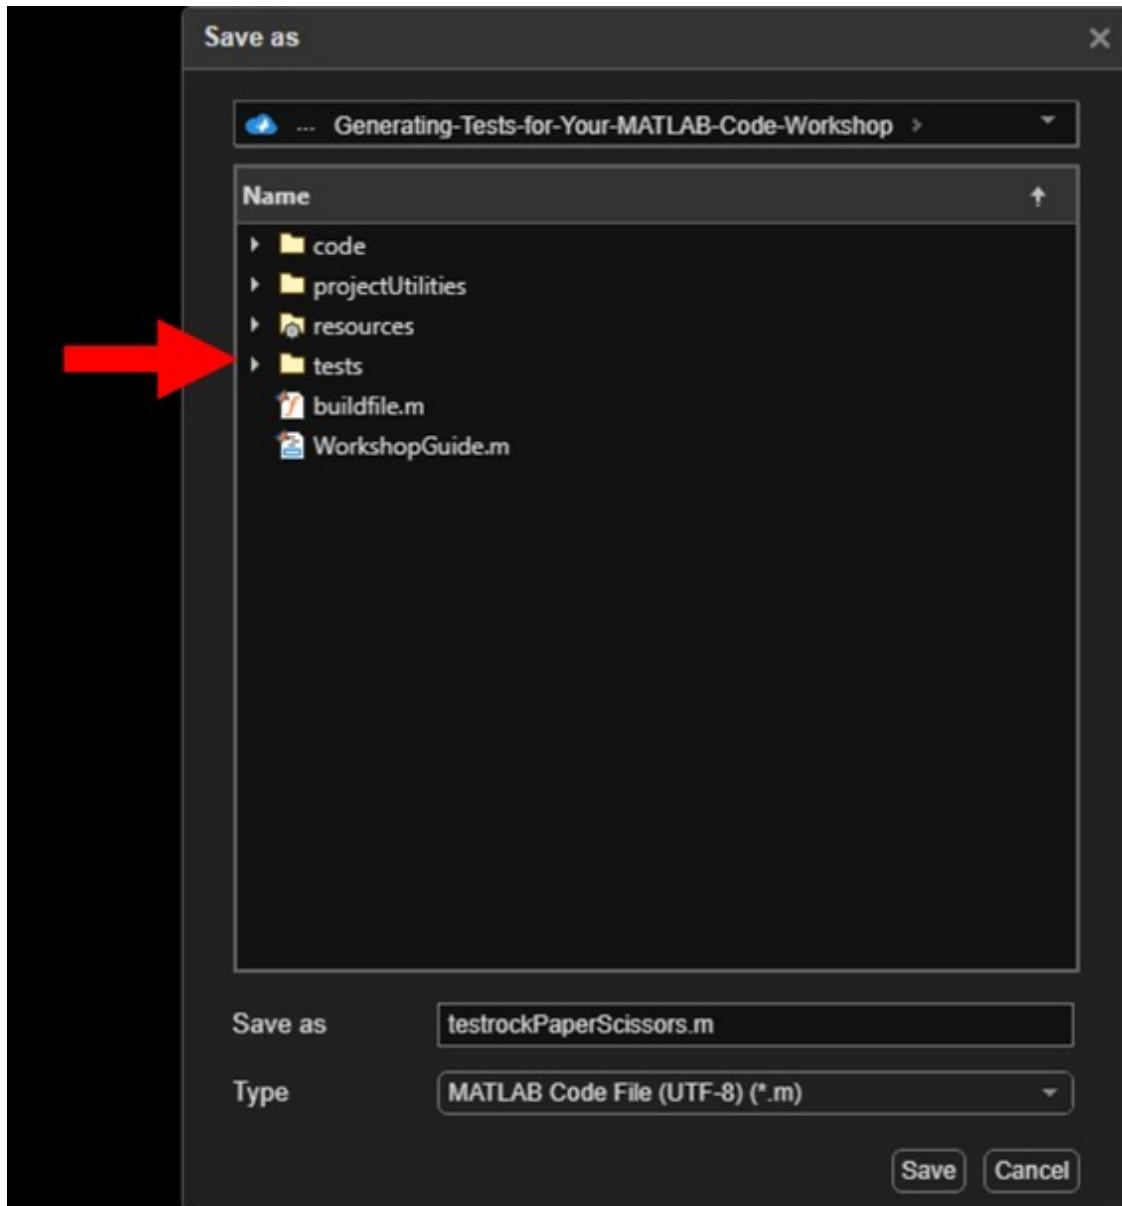


Run your test using the "Run Tests" button in the Editor toolbar

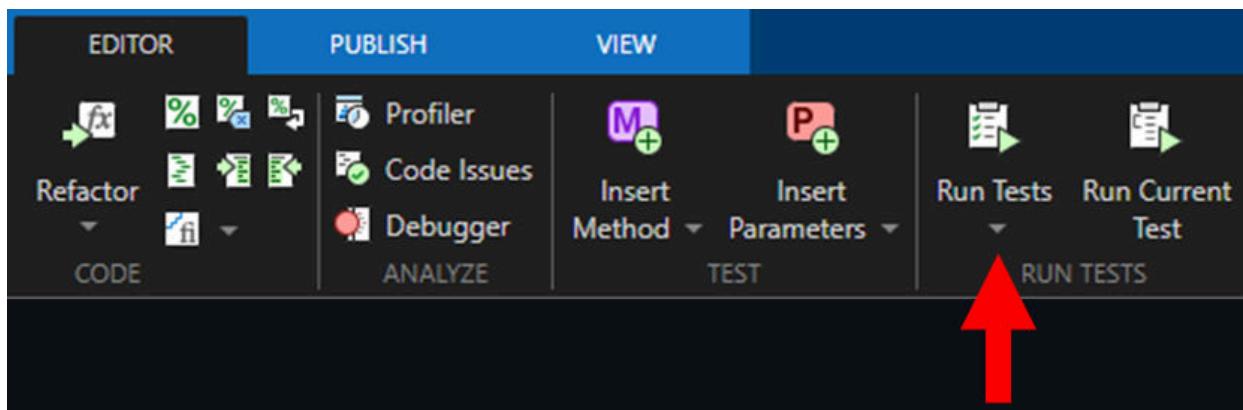


As of R2023a, running tests from the Editor toolbar will open the MATLAB Test Browser.

The MATLAB Test Browser makes it easy to:

- rerun tests without being in the test file
- explore test failure diagnostics
- filter results based on test status (pass, fail, incomplete)
- enable code coverage
- enable parallel test execution

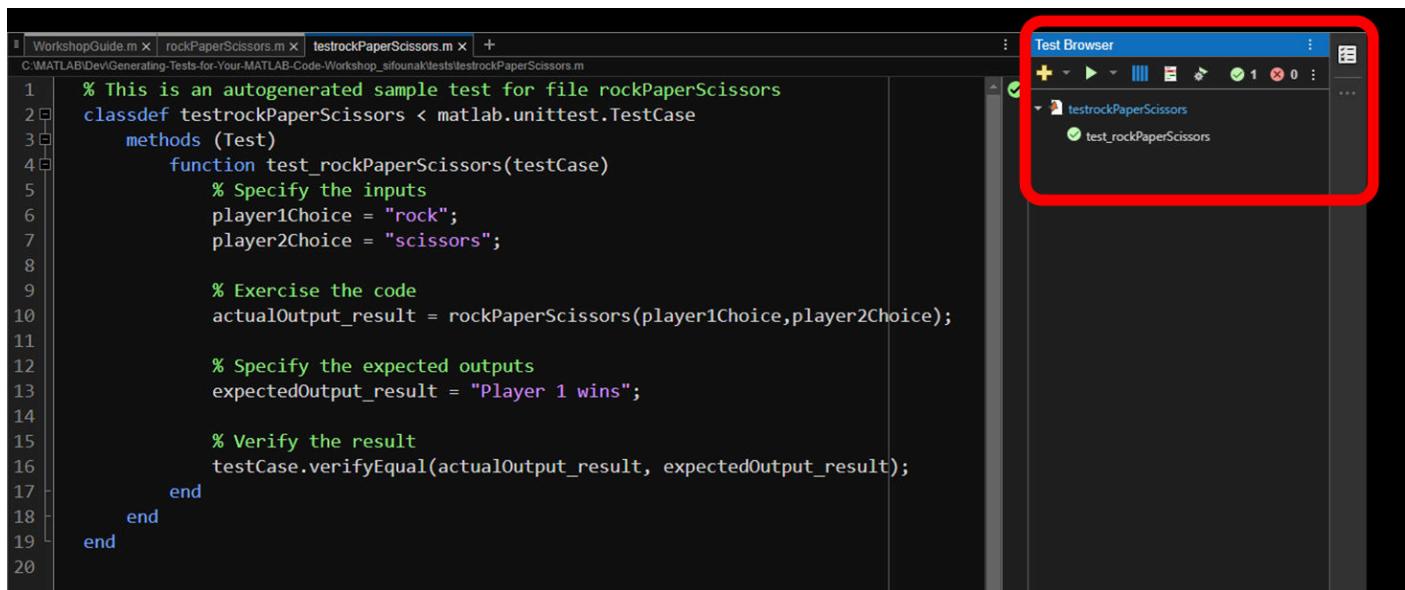

Note: If you do not see the Test Browser appear, it may be that the right-side panel is collapsed and you need to click on the Test Browser icon to expand the right-side panel.



After your tests are done running, you will be able to quickly see that your tests have passed. Yay!

Part 2.2: Generate tests using MATLAB Copilot

As of MATLAB R2025a, MATLAB now offers MATLAB Copilot (requires a separate license) that enables GenAI capabilities optimized for MATLAB code within the MATLAB Desktop. As with most platforms, we have a MATLAB Copilot chat panel to use AI in a conversational way.


To make testing even easier, MATLAB Test enables 1-click buttons to automatically generate tests for the code you are looking at.

Note: Only the "Generate test for the current file using Copilot" option uses MATLAB Copilot. All other test generation options do not use any LLM technology and create tests using templates and static code analysis.

Go back to [rockPaperScissors.m](#)

```
edit rockPaperScissors.m
```

In the Editor toolbar, use the "Generate Test" drop down menu and select "Generate test for the current file using MATLAB Copilot"

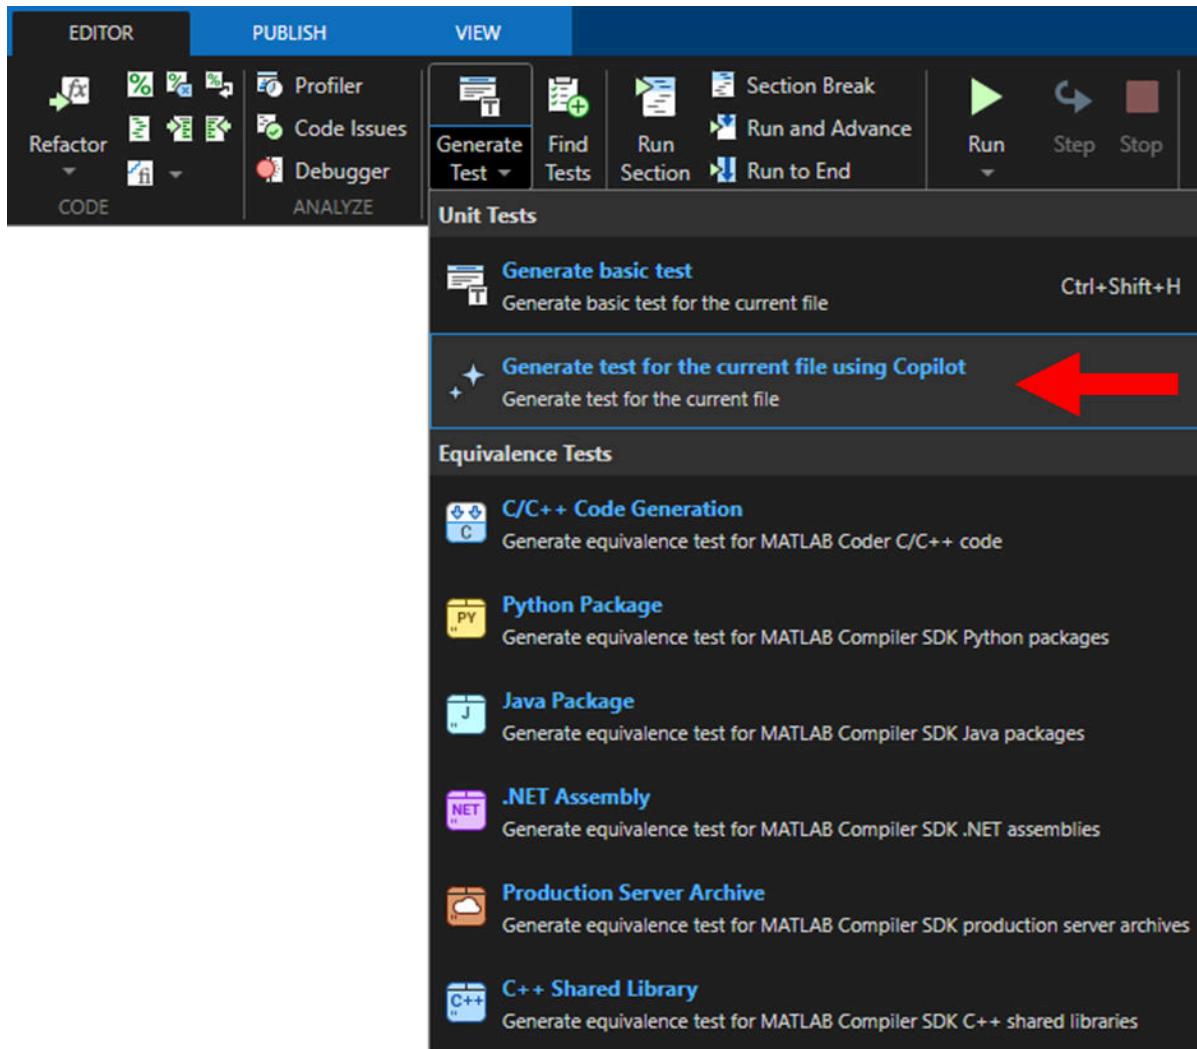

MATLAB Copilot will generate multiple ready-to-run tests.


```
rockPaperScissors.m X RockPaperScissorsTest.m X +
1 % This test file was generated by Copilot. Validate generated output before use.
2 classdef RockPaperScissorsTest < matlab.unittest.TestCase
3 methods(Test)
4     function testTie(testCase)
5         p1 = "rock";
6         p2 = "rock";
7         expectedResult = "Tie";
8
9         actualResult = rockPaperScissors(p1, p2);
10
11         testCase.verifyEqual(actualResult, expectedResult);
12     end
13
14     function testPlayer1Wins(testCase)
15         p1 = "rock";
16         p2 = "scissors";
17         expectedResult = "Player 1 wins";
18     end

```

Note: As with all LLM-based technologies, remember to validate the output before using it in production systems.


Save and run your generated tests

Just like before, save your new tests to the "tests" folder and run your tests.

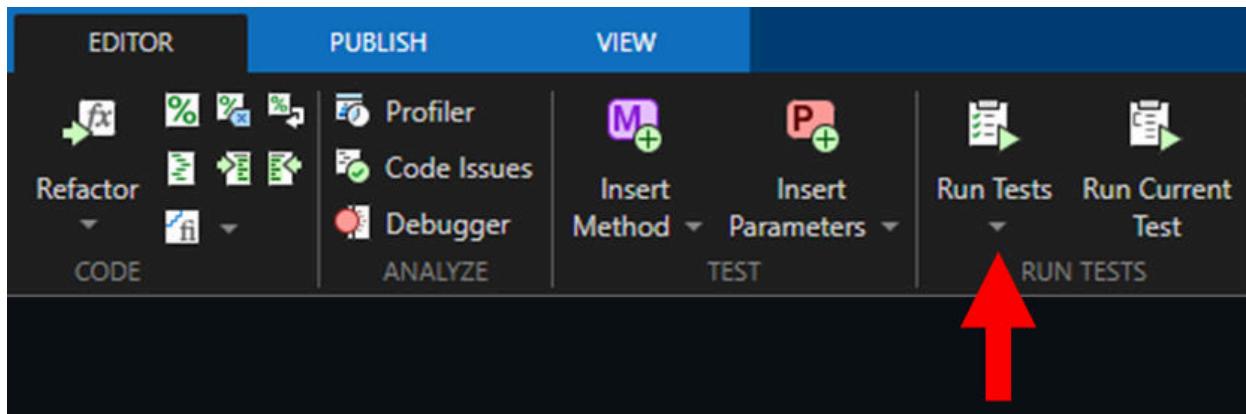

Look at your test results in the MATLAB Test Browser

- Note: Depending on the tests MATLAB Copilot generates, you may end up with some failing tests.

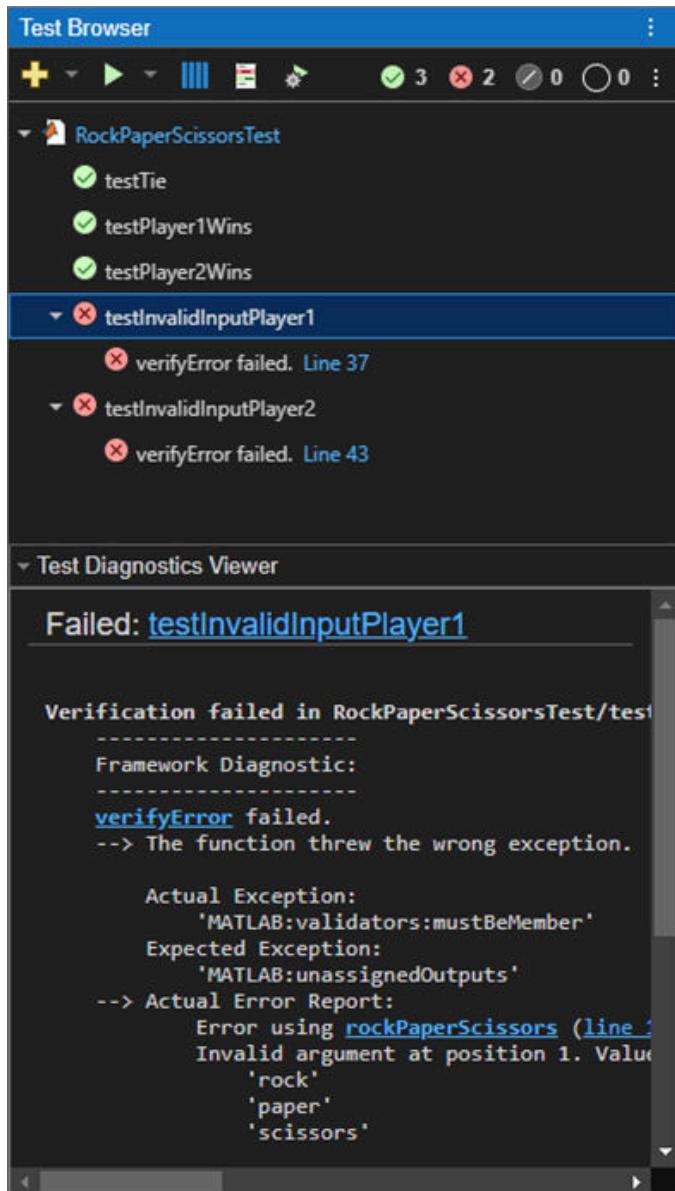

For the sake of time in this workshop, let's simply comment out or remove any failing tests from the test file and rerun the tests to ensure all remaining tests pass.

Note on generated test failures:

- In the screenshot above, MATLAB Copilot generated two failing tests where it intentionally provided invalid inputs to the `rockPaperScissors` function to ensure the function would error in the expected way. This practice is called "negative testing." However, in this case, the tests failed because MATLAB Copilot was expecting the incorrect error message compared to the error the function gave. To fix this, we can simply put in the right error message for the test to check or remove these two tests completely if we don't find them

very useful at this time. In either case, this reinforces the fact that we should always validate the output of LLMs.

Part 2.3: Add generated tests to your project


When you create a new file directly from the Project side panel, the file is automatically added to the project and to source control.

However, when you create a new file in another way (e.g., "New > Function," the "+" button on the Editor's tab toolbar, or the test generation options), MATLAB leaves it up to you to decide whether or not to include the file in your project.

Let's add our 2 new test files to the project

Find your new test files in the "tests" folder using the Project side panel


Go back to the Project side panel.

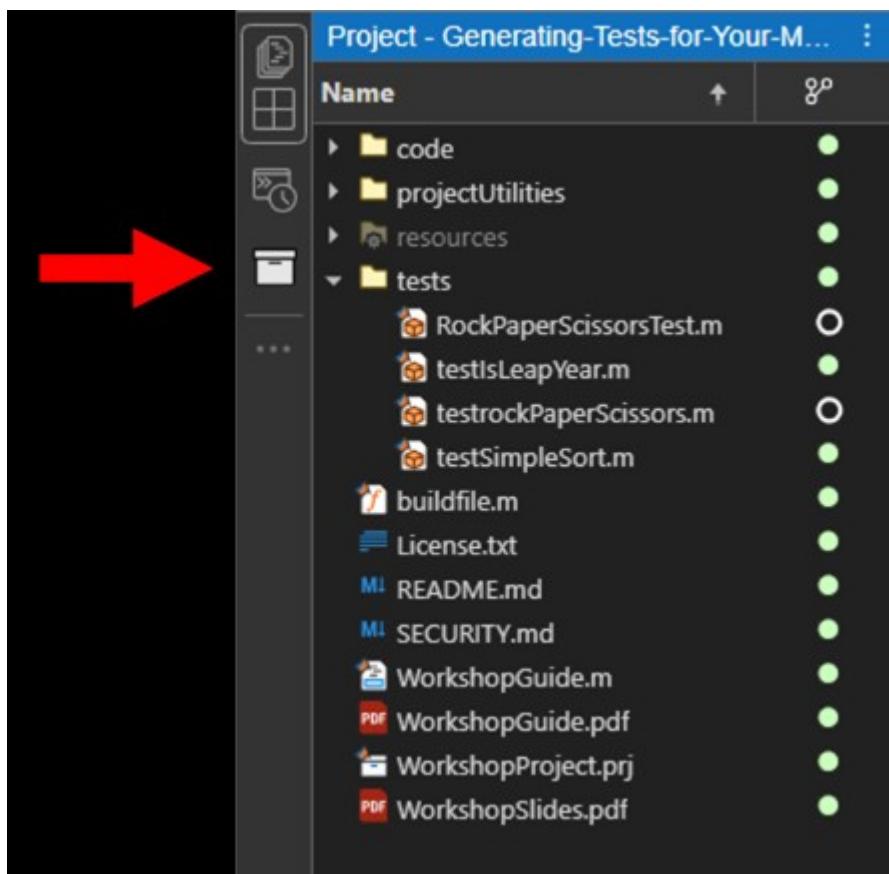

You can identify files not in your project when the Status column is not a check mark or the Git column is an empty circle.

Name	git	Status
code	●	✓
projectUtilities	●	✓
resources	●	■
tests	●	✓
RockPaperScissorsTest.m	○	•
testIsLeapYear.m	●	✓
testRockPaperScissors.m	○	•
testSimpleSort.m	●	✓
buildfile.m	●	✓
License.txt	●	✓
README.md	●	✓
SECURITY.md	●	✓
WorkshopGuide.m	●	✓
WorkshopGuide.pdf	●	✓
WorkshopProject.prj	●	■
WorkshopSlides.pdf	●	✓

Right-click the test files and select "Add to Project"

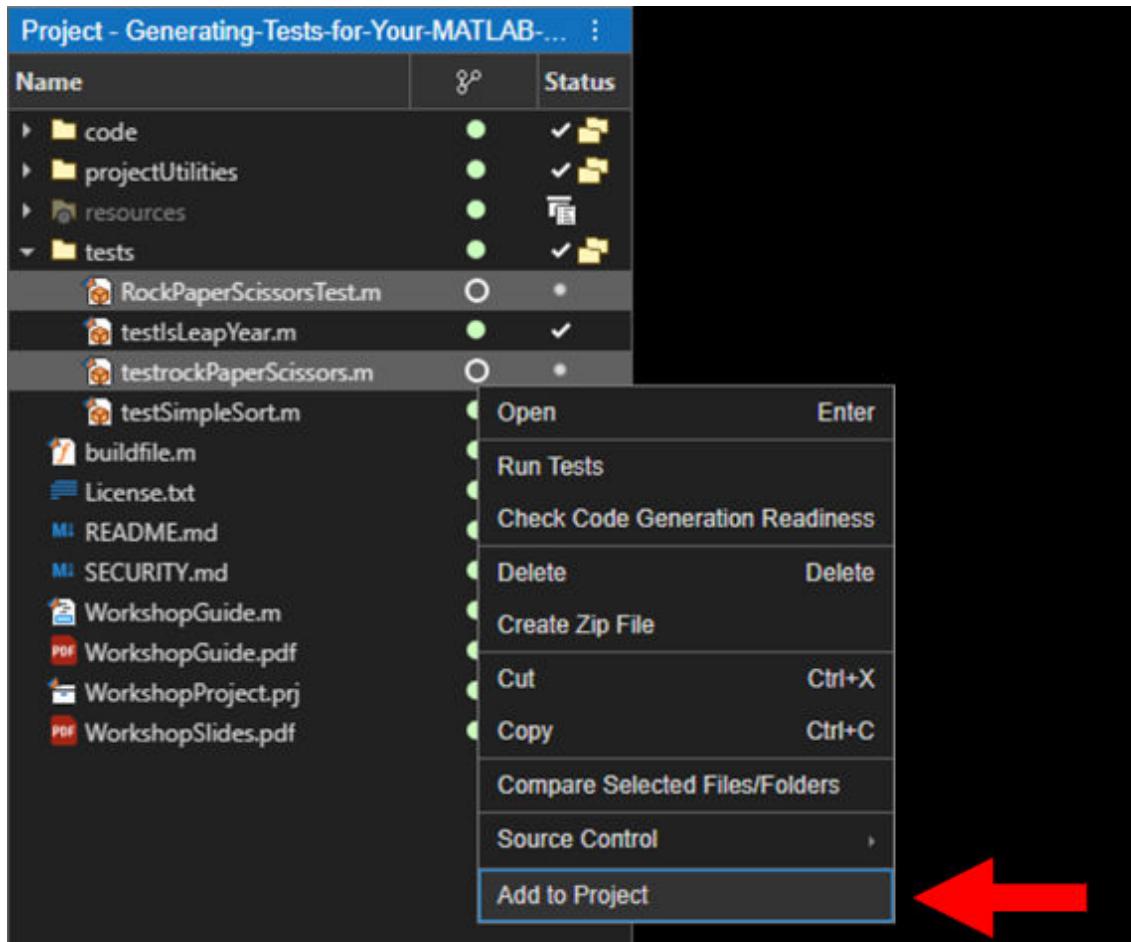

Confirm your test files have been added to the project by seeing the check mark in the Status column and the "+" icon in the Git column

Name	XP	Status
code	●	✓
projectUtilities	●	✓
resources	●	
tests	■	✓
RockPaperScissorsTest.m	+	✓
testIsLeapYear.m	●	✓
testRockPaperScissors.m	+	✓
testSimpleSort.m	●	✓
buildfile.m	●	✓
License.txt	●	✓
README.md	●	✓
SECURITY.md	●	✓
WorkshopGuide.m	●	✓
WorkshopGuide.pdf	●	✓
WorkshopProject.prj	●	
WorkshopSlides.pdf	●	✓



Congratulations! You just created multiple tests for MATLAB code!

It was easier than you thought, right?

Part 3: Finding existing tests, measuring coverage, and catching bugs

In this section, we will:

1. Find existing tests for `isLeapYear.m`
2. Enable and explore code coverage
3. Identify missing coverage and a bug
4. Fix the bug
5. Add a test point to an existing test suite

Part 3.1: Finding existing tests for a code file

When working with a new codebase or making changes to an existing file, you should run any existing tests that exercise that function to make sure you haven't broken anything.

But this raises several questions:

- Are there any existing tests?
- Where are the tests?
- Should we just run all the tests?
- How do we know which tests (or if any tests) actually exercise the code we are working on?

In MATLAB R2025a, MATLAB Test introduced a "Find Tests" feature that automatically finds any tests related to the file you are looking at and ignores any tests that are not related to this file.

Let's see how this works using the `isLeapYear` function.


A leap year is defined as a year that is either:

- divisible by 400
- divisible by 4 and not divisible by 100

Open `isLeapYear.m`


```
edit isLeapYear.m
```

Press the "Find Tests" button in the Editor toolbar

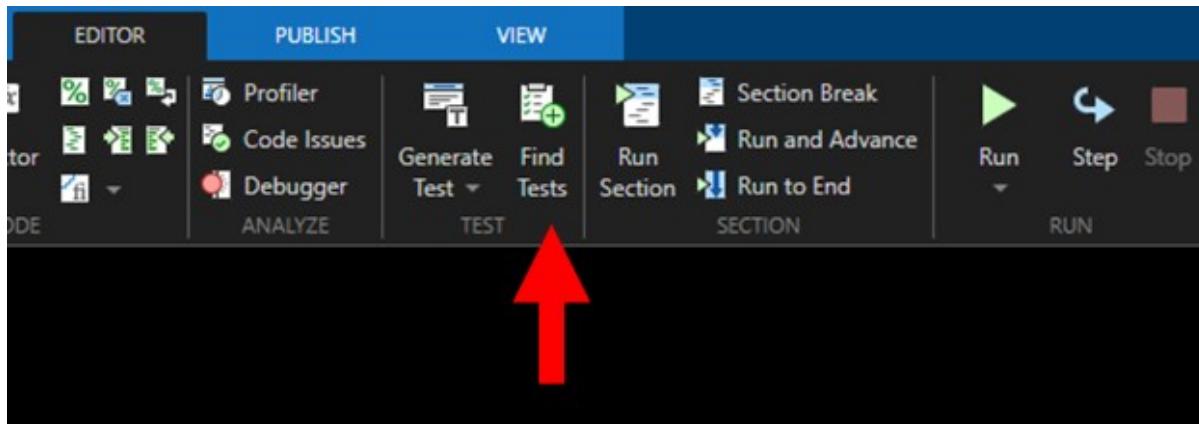


Select the root of your project to identify all tests in your project that use `isLeapYear`


- Note: This root of your project is the default location, so you can just choose "Select Folder"

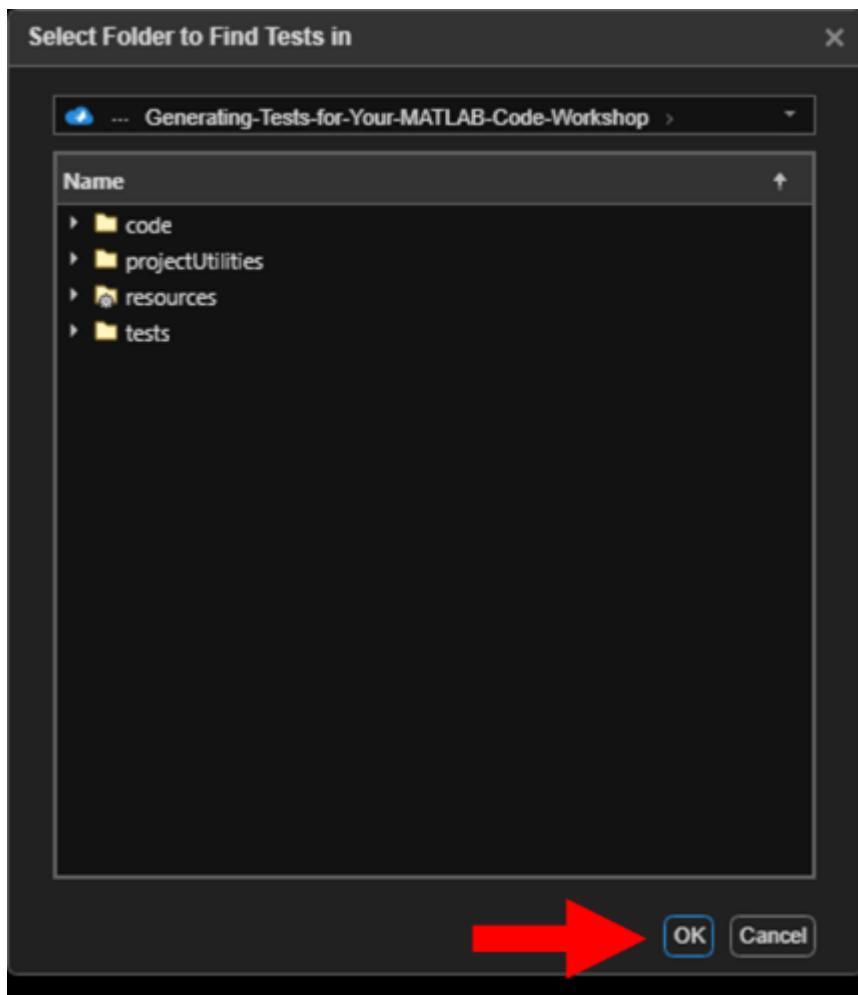


MATLAB automatically will perform a dependency analysis on `isLeapYear`.

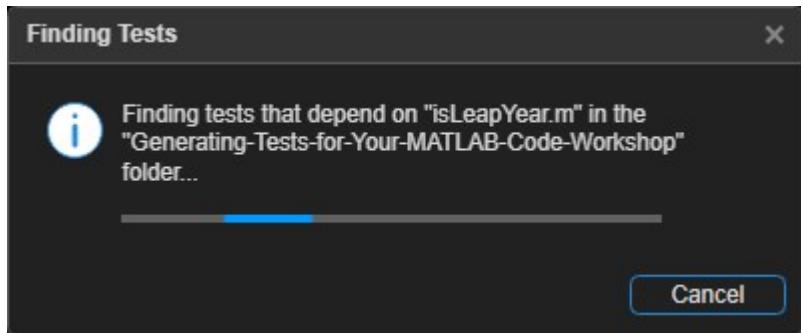


After the dependency analysis, you will see 5 tests that are related to `isLeapYear` open in the MATLAB Test Browser.

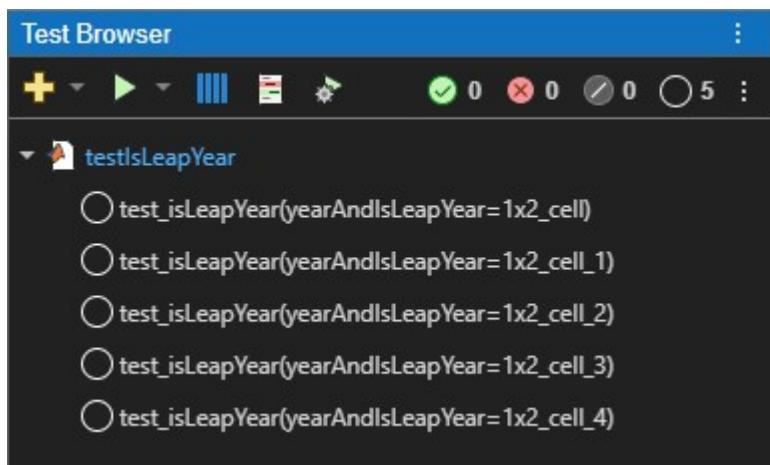

Run the tests in the MATLAB Test Browser using the "Run" button

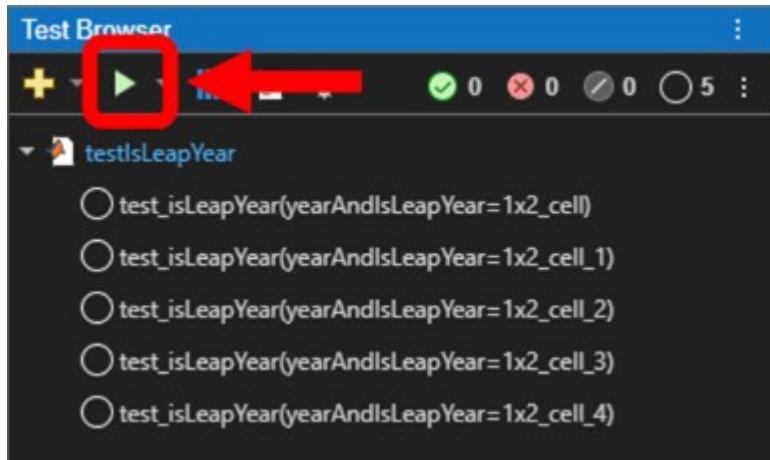

It looks like all the tests passed!

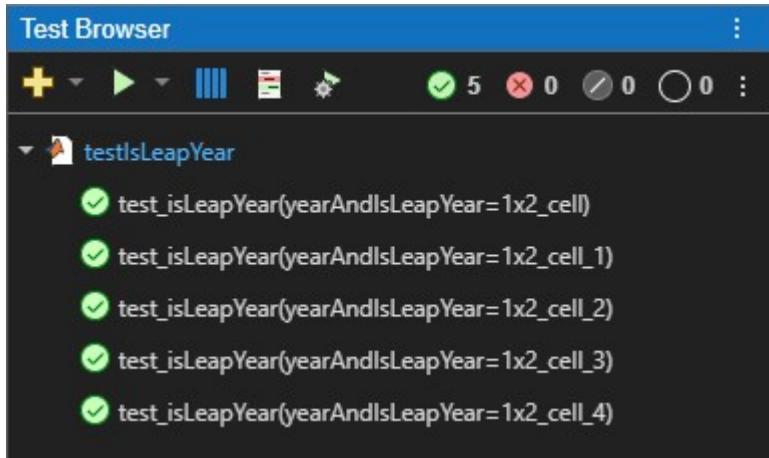

Part 3.2: Using code coverage to understand how much of your code is being exercised by your tests

It was great that we already had tests for `isLeapYear`, but how much of `isLeapYear` being exercised by those tests?

"Code coverage" is a way to measure how much and which parts of your code have been exercised by your tests.


There are several types of code coverage metrics:

- Statement coverage: Measure which statements have been executed
- Decision coverage: Measures whether both true and false conditions have been exercised for logical branches (e.g., if, switch/case)
- Condition coverage: When logical branches are composed of multiple logical conditions (e.g., $x > 5 \&\& x < 10$), this measures whether the true and false have been exercised for each logical condition
- Modified Condition/Decision Coverage (MC/DC): A modified set of decision + condition coverage metrics that is primarily used in code certification processes


Note: Decision, Condition, and MC/DC metrics require MATLAB Test

The MATLAB Unit Test Framework can automatically measure code coverage, but it is off by default, so let's enable code coverage!


[Open code coverage settings](#)

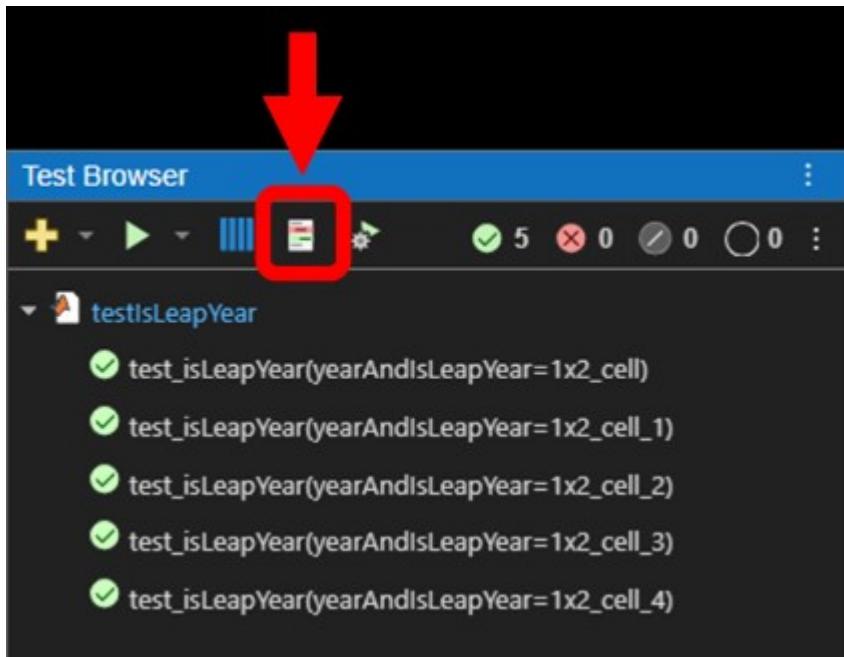

Enable coverage reporting

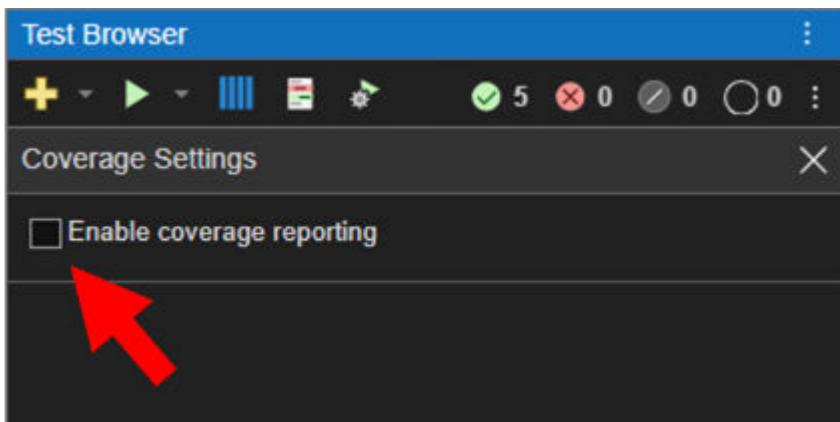


Select the "Condition" coverage metric

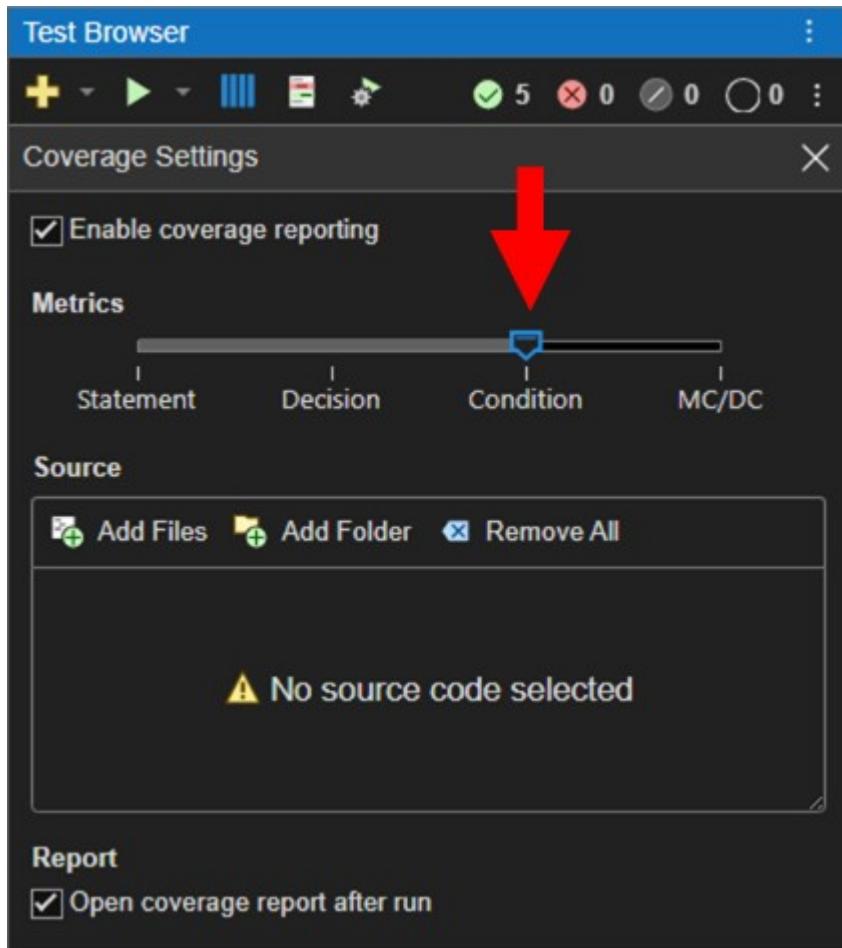


For this workshop, we will skip MC/DC since it is a significantly more advanced topic and primarily used in certification workflows.

Add the "****code" folder to the "Source" list


By selecting specific files or folders, we can focus our code coverage measurements on only the files and folders you select and avoid complicating our code coverage reports with code that is less critical for our application.

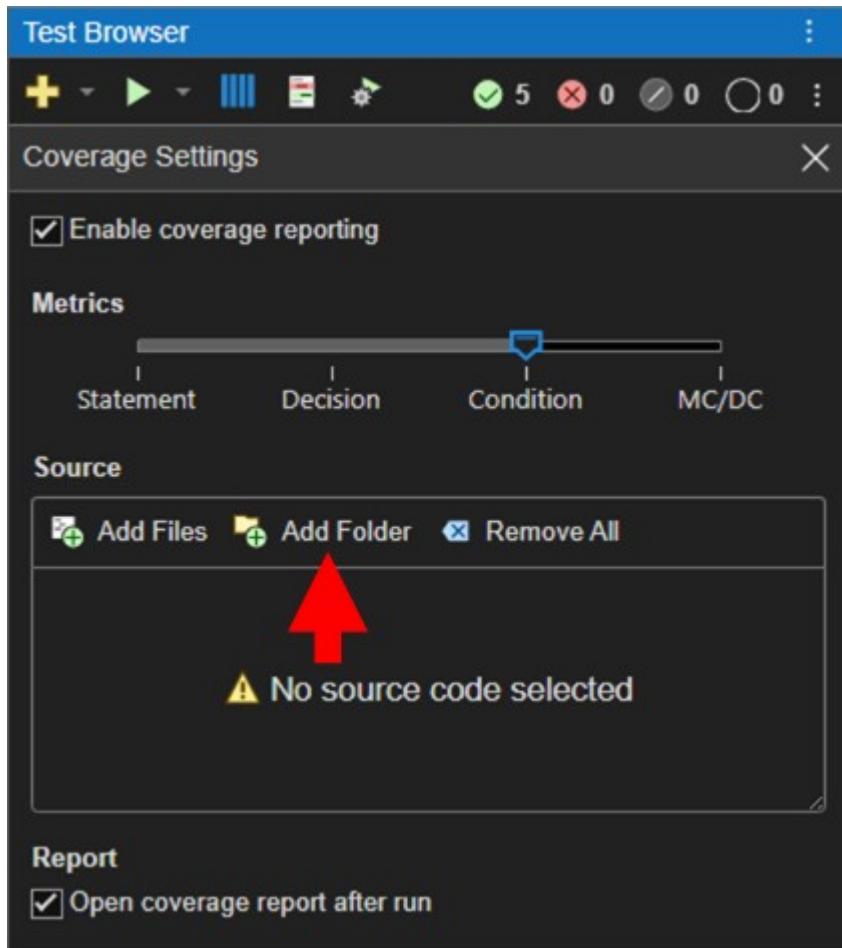


While this option offers the convenience of automatically open the coverage report after your tests are done running, it can sometimes be distracting when you are rerunning tests frequently.

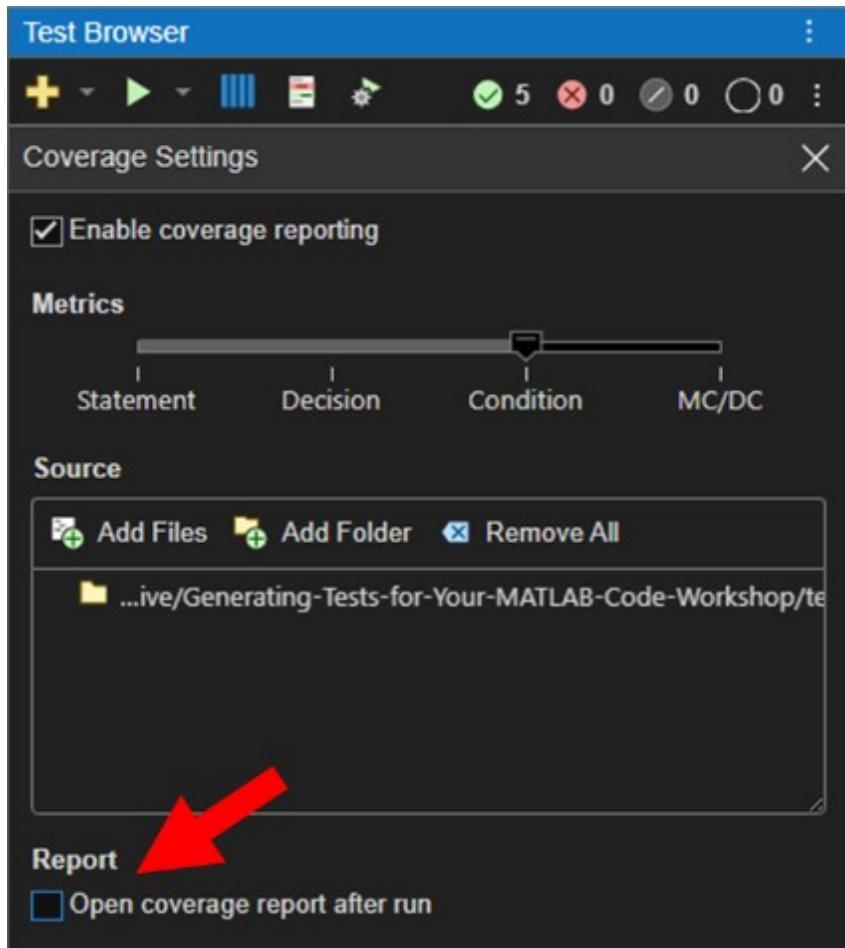

Close the Coverage Settings

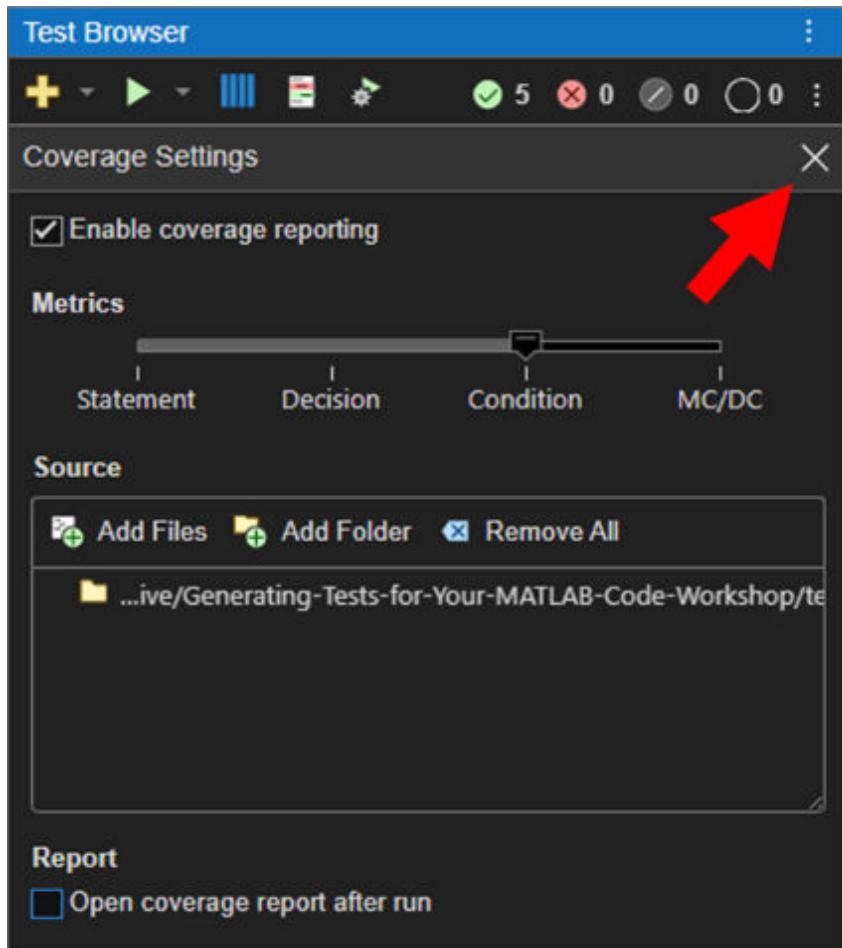

Rerun your tests

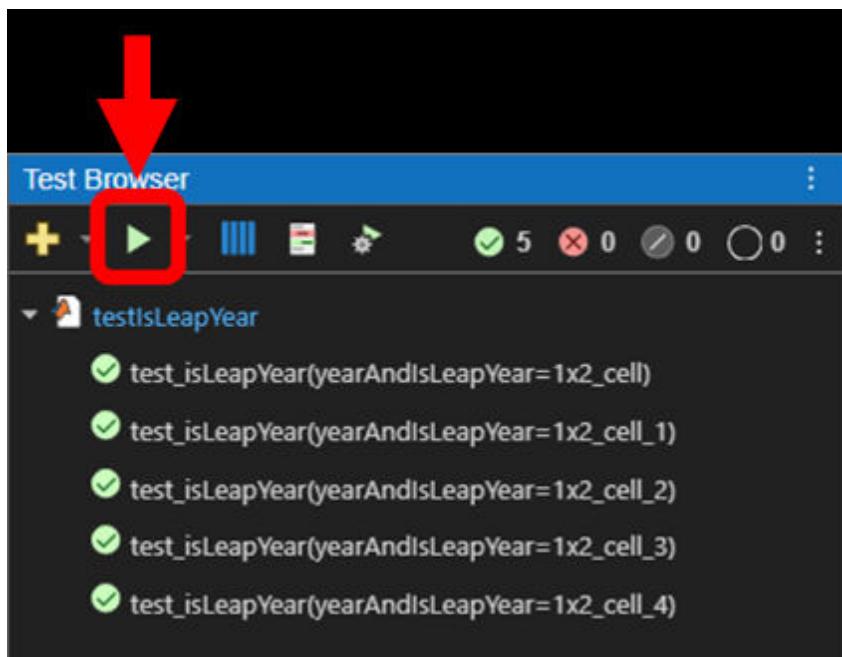


Click the link in the Command Window to open the code coverage report

```
Command Window
Running testIsLeapYear
.....
Done testIsLeapYear

MATLAB code coverage report has been saved to:
/tmp/tp154a93df_9369_4cf2_b6ee_cc3bf25c59e0/index.html
>>
```



You should see a Code Coverage Report very similar to the one below.

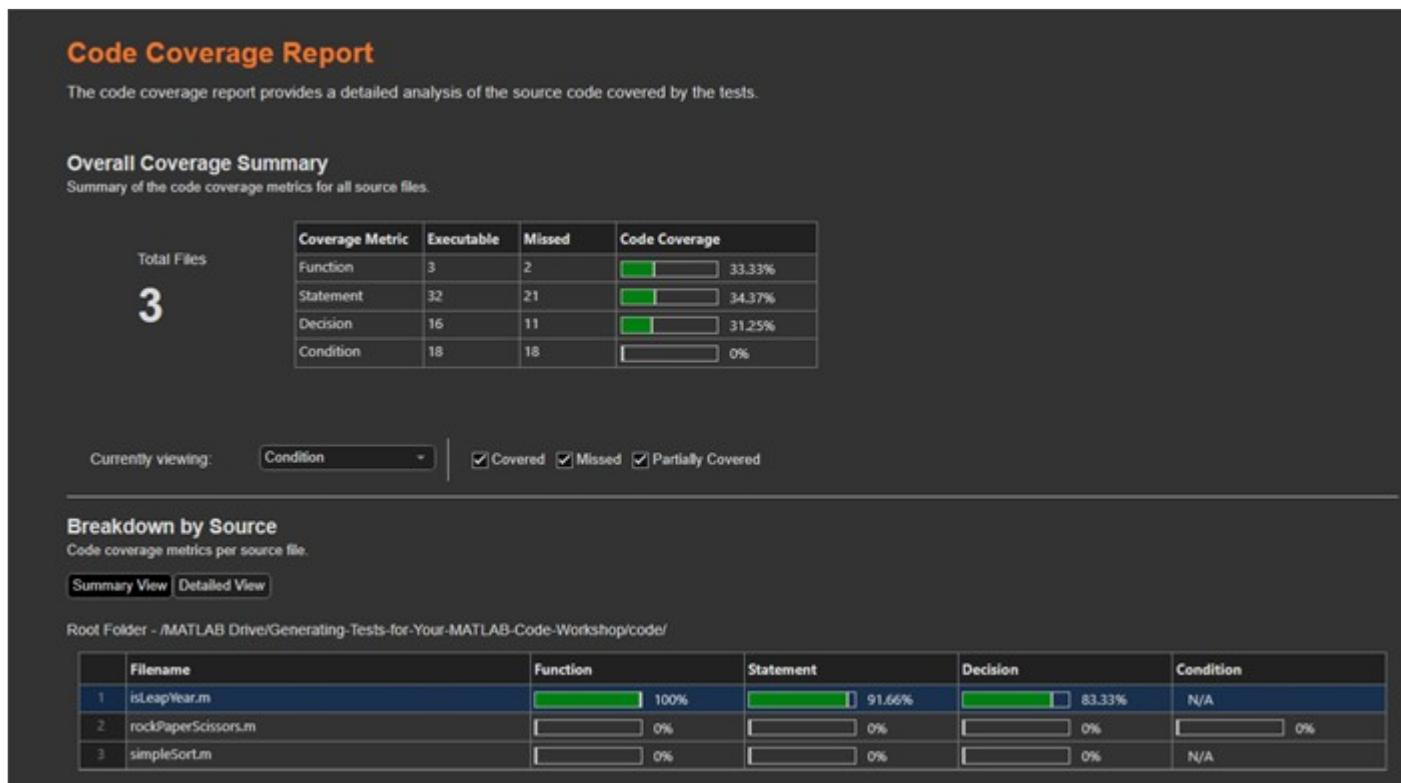

The screenshot shows the MATLAB Code Coverage Report interface. At the top, it says "Code Coverage Report" and "Overall Coverage Summary". It displays an overall coverage summary table:

Total Files	Coverage Metric	Executable	Missed	Code Coverage
3	Function	3	2	33.33%
	Statement	32	21	34.37%
	Decision	16	11	31.25%
	Condition	18	18	0%

Below this, there is a dropdown menu showing "Currently viewing: Condition" and checkboxes for "Covered", "Missed", and "Partially Covered".

Under "Breakdown by Source", it shows code coverage metrics per source file:

Filename	Function	Statement	Decision	Condition
1 isLeapYear.m	100%	91.66%	83.33%	N/A
2 rockPaperScissors.m	0%	0%	0%	0%
3 simpleSort.m	0%	0%	0%	N/A

The top of the report gives you an overall summary of the coverage metrics for all of the code in the folders you have chosen, while the "Breakdown by Source" table gives you a breakdown of coverage metrics by file.

For this workshop, we will focus on the "Breakdown by Source" and the detailed coverage inside each of the code files.

Part 3.3: Identifying testing gaps (and potential bugs) for `isLeapYear` using code coverage

Let's look at the detailed coverage metrics for the `isLeapYear.m` file and see which parts of the code have been exercised.

Select the `isLeapYear.m` row in the "Breakdown by Source" table

The screenshot shows the MATLAB Code Coverage Report interface. At the top, it displays an 'Overall Coverage Summary' table with metrics for three total files. Below this is a 'Breakdown by Source' table listing three files: 'isLeapYear.m', 'rockPaperScissors.m', and 'simpleSort.m'. A red arrow points to the row for 'isLeapYear.m' in the 'Breakdown by Source' table.

Code Coverage Report

The code coverage report provides a detailed analysis of the source code covered by the tests.

Overall Coverage Summary

Summary of the code coverage metrics for all source files.

Total Files	Coverage Metric	Executable	Missed	Code Coverage
3	Function	3	2	<div style="width: 33.33%;"></div> 33.33%
	Statement	32	21	<div style="width: 34.37%;"></div> 34.37%
	Decision	16	11	<div style="width: 31.25%;"></div> 31.25%
	Condition	18	18	<div style="width: 0%;"></div> 0%

Currently viewing: Condition Covered Missed Partially Covered

Breakdown by Source

Code coverage metrics per source file.

Root Folder - /MATLAB Drive/.../Testing-Tests-for-Your-MATLAB-Code-Workshop/code/	Filename	Function	Statement	Decision	Condition
1	isLeapYear.m	<div style="width: 100%;"></div> 100%	<div style="width: 91.66%;"></div> 91.66%	<div style="width: 83.33%;"></div> 83.33%	N/A
2	rockPaperScissors.m	<div style="width: 0%;"></div> 0%	<div style="width: 0%;"></div> 0%	<div style="width: 0%;"></div> 0%	<div style="width: 0%;"></div> 0%
3	simpleSort.m	<div style="width: 0%;"></div> 0%	<div style="width: 0%;"></div> 0%	<div style="width: 0%;"></div> 0%	N/A

Scroll down to see the detailed source code and coverage metrics

Currently viewing:

Condition

 Covered Missed Partially Covered

Source Details

Detailed analysis of code coverage for a source file.

	Function	Statement	Decision	Condition	/MATLAB Drive/Generating-Tests-for-Your-MATLAB-Code-Workshop/code/isLeapYear.m
1	5				function isLeap = isLeapYear(year)
2					%ISLEAPYEAR Determine if a year is a leap year
3					%
4					% isLeap = isLeapYear(year) returns true if the year is a leap year
5					% - Leap years are divisible by 400, or divisible by 4 and not 100
6					%
7					% Example:
8					% isLeapYear(2000) % returns true
9					% isLeapYear(2024) % returns true
10					% isLeapYear(2025) % returns false
11					arguments
12		5, 5			year (1,1) {mustBeInteger, mustBePositive}
13					end
14					
15					† Set up logical comparisons for clarity
16					isDivBy400 = mod(year,400) == 0;
17					isDivBy100 = mod(year,100) == 0;
18					isDivBy4 = mod(year, 4) == 0;
19					
20					† Check for leap year
21					if isDivBy400
22					isLeap = true;
23					elseif isDivBy4
24					isLeap = true;
25					elseif isDivBy100
26					isLeap = false;
27					else
28					isLeap = false;
29					end
30					
31					end
32					
33					

Well, that seems like a rather boring detailed report, right?

The reason we don't really see a whole lot of interesting data in Source Details is because we are looking at the "Condition" coverage metric, but `isLeapYear` is a very simple code with no conditions in its logical branches. We can also see that the "Condition" column is empty, which further supports this conclusion.

However, we can see that the Statement and Decision columns have data in them, so let's take a look at those coverage metrics.

Select "Decision" coverage in the "Currently viewing" overlay at the top of the page

Now the coverage report looks much more interesting!

Currently viewing: Decision Covered Missed Partially Covered

Source Details
Detailed analysis of code coverage for this source file.

	Function	Statement	Decision	
1	S			/MATLAB Drive/Generating Tests for Your MATLAB Code Workshop/code/isLeapYear.m
2				function isLeap = isLeapYear(year)
3				%ISLEAPYEAR Determine if a year is a leap year
4				%
5				% isLeap = isLeapYear(year) returns true if the year is a leap year
6				% - Leap years are divisible by 400, or divisible by 4 and not 100
7				%
8				% Example:
9				% isLeapYear(2000) % returns true
10				% isLeapYear(2024) % returns true
11				% isLeapYear(2025) % returns false
12				
13		5,5		arguments
14				year (:,1) (mustBeInteger, mustBePositive)
15				end
16				
17		5		% Set up logical comparisons for clarity
18				isDivBy400 = mod(year,400) == 0;
19		5		isDivBy100 = mod(year,100) == 0;
20				isDivBy4 = mod(year, 4) == 0;
21				
22		5	T, 1, F; 4	% Check for leap year
23				if isDivBy400
24		4	T, 1, F; 3	isLeap = true;
25		1		elseif isDivBy4
26		3	T, 0, F; 3	isLeap = true;
27		0		elseif isDivBy100
28				isLeap = false;
29		3		else
30				isLeap = false;
31				end
32				end
33				

We can see several kinds of highlights you may see in the source code:

- Green: Both true and false decisions have been exercised
- Yellow: Only one of the true or false decisions have been exercised
- Red: None of the true or false decisions have been exercised

Note: The coverage report does not have any red because all of the decision branches have been at least partially exercised by at least one test

In addition to the source code highlights, the "Decision" column shows how many times each decision outcome (true and false) has been exercised by your tests. You can use these numbers to identify which condition outcome you did not exercise or help you decide whether you want to exercise a specific code branch more times.

We can also take a look at the "Statement" coverage metrics to see which statements in our code have and have not been exercised by our tests.

Select "Statement" coverage in the "Currently viewing" overlay at the top of the page

Source Details
Detailed analysis of code coverage for the current source file.

Line	Function	Statement	File
1			/MATLAB Drive/Generating Tests for Your MATLAB Code Workshop/code/isLeapYear.m
2			function isLeap = isLeapYear(year)
3			%ISLEAPYEAR Determine if a year is a leap year
4			%
5			% isLeap = isLeapYear(year) returns true if the year is a leap year
6			% - Leap years are divisible by 400, or divisible by 4 and not 100
7			%
8			% Example:
9			% isLeapYear(2000) % returns true
10			% isLeapYear(2024) % returns true
11			% isLeapYear(2025) % returns false
12			arguments
13	5,5	year (1,1) {mustBeInteger, mustBePositive}	
14		end	
15			% Set up logical comparisons for clarity
16			5 isDivBy400 = mod(year,400) == 0;
17			5 isDivBy100 = mod(year,100) == 0;
18			5 isDivBy4 = mod(year, 4) == 0;
19			
20			% Check for leap year
21			5 if isDivBy400
22			1 isLeap = true;
23			4 elseif isDivBy4
24			1 isLeap = true;
25			3 elseif isDivBy100
26			0 isLeap = false;
27			3 else
28			3 isLeap = false;
29			end
30			end
31			
32			
33			

```
function isLeap = isLeapYear(year)
%ISLEAPYEAR Determine if a year is a leap year
%
% isLeap = isLeapYear(year) returns true if the year is a leap year
% - Leap years are divisible by 400, or divisible by 4 and not 100
%
% Example:
% isLeapYear(2000) % returns true
% isLeapYear(2024) % returns true
% isLeapYear(2025) % returns false

arguments
    year (1,1) {mustBeInteger, mustBePositive}
end

% Set up logical comparisons for clarity
isDivBy400 = mod(year,400) == 0;
isDivBy100 = mod(year,100) == 0;
isDivBy4 = mod(year, 4) == 0;

% Check for leap year
if isDivBy400
    isLeap = true;
elseif isDivBy4
    isLeap = true;
elseif isDivBy100
    isLeap = false;
else
    isLeap = false;
end
end
```

From the highlights, we can see that line 27 of our code has never been exercised by our tests.

Now we can ask the questions:

- Do we just need an extra test to exercise this piece of the code?
- Is this code unreachable (i.e., is it "dead code") and can be removed?
- Or is this a symptom of a bug in our code?

Let's try to find the answers to our questions.

Part 3.4: Debugging [isLeapYear](#)

Before we dive in, let's take a moment to explain how a leap year is determined.

A leap year is a year satisfies either of these criteria

- The year is divisible by 400
- The year is divisible by 4, but it is not divisible by 100

From the Decision coverage above, it looks like we're missing a test case that satisfies the "divisible by 100" part of the logic, so let's try testing the code with a year that is divisible by 100, but not divisible by 400.

Let's use the year 1900, since it is divisible by 100 and not divisible by 400. The result of this test should be `false` because it does not satisfy either of the criteria above.

```
>> isLeapYear(1900)
ans =
logical
1
```

Oh no! We got the wrong answer! It looks like we found a bug in our code!

Where is the bug?

When we look at the code flow, we see that the logical branches are being executed in this order:

1. Is the number divisible by 400?
2. Is the number divisible by 4?
3. Is the number divisible by 100?

Ah! There's our problem! We are checking whether the year is divisible by 4 before we check whether the year is divisible by 100. We'll never hit the "divisible by 100" code branch because all years that are divisible by 100 are also divisible by 4.

Fix the bug and test our changes

One easy way to fix the code is to switch the order of logical branch #2 (lines 24-25) and logical branch #3 (lines 26-27).

But...!

With logic branches, it's often useful to consider whether the logic can be written in a simpler, more readable way. One way to do this is to write the logic the same way we would describe it verbally. Earlier in this section, we defined a leap year as "a year that is divisible by 400, or it is a year divisible by 4 and not divisible by 100."

Using the variables we've already defined in the code, we can rewrite the following code:

```
% Check for leap year
if isDivBy400
    isLeap = true;
elseif isDivBy4
    isLeap = true;
elseif isDivBy100
    isLeap = false;
else
    isLeap = false;
end
```

as:

```
% Check for leap year
if isDivBy400 || (isDivBy4 && ~isDivBy100)
    isLeap = true;
else
    isLeap = false;
end
```

This code is much more readable than the multiple if/elseif blocks we had before because:

- the code is simpler to look at
- it makes it clear that there are only 2 possible outcomes: true and false
- the true case is ultimately broken down into 2 conditions: condition1 || condition2
- if neither of the conditions is satisfied, the answer is false

Update the code and run again

```
>> isLeapYear(1900)

ans =
logical
0
```

We've fixed the bug! Yay!

Rerun our tests to see how our code coverage is affected by these changes

Rerunning our tests and opening the coverage report, we see that we now have interesting data in our "Condition" coverage.

Currently viewing: Condition

Covered Missed Partially Covered

Source Details

Detailed analysis of code coverage for a source file.

	Function	Statement	Decision	Condition	File
1	5				/MATLAB Drive/Generating Tests for Your MATLAB Code Workshop/code/isLeapYear.m
2					function isLeap = isLeapYear(year)
3					%ISLEAPYEAR Determine if a year is a leap year
4					%
5					% isLeap = isLeapYear(year) returns true if the year is a leap year
6					- Leap years are divisible by 400, or divisible by 4 and not 100
7					%
8					% Example:
9					% isLeapYear(2000) % returns true
10					% isLeapYear(2024) % returns true
11					% isLeapYear(2025) % returns false
12					arguments
13	5, 5				year (1,1) {mustBeInteger, mustBePositive}
14					end
15					% Set up logical comparisons for clarity
16	5				isDivBy400 = mod(year,400) == 0;
17	5				isDivBy100 = mod(year,100) == 0;
18	5				isDivBy4 = mod(year, 4) == 0;
19					
20					% Check for leap year
21					> 22 5 T: 2, F: 3 T: 1, 1, 0, F: 4, 3, 1 if isDivBy400 (isDivBy4 && ~isDivBy100)
22					isLeap = true;
23	2				else
24					isLeap = false;
25	3				end
26					
27					
28					
29					

Unfortunately, we still see yellow highlights in the "not divisible by 100" logic. This means that we are missing some part of this coverage.

We can dig a bit deeper into the details of each condition by expanding the results on line 22 using the collapsible triangle to the left of the line numbers.

20					% Check for leap year
21					
22	5	T: 2, F: 3	T: 1, 1, 0, F: 4, 3, 1	T: 1 F: 4 :: isDivBy400	if isDivBy400 (isDivBy4 && ~isDivBy100)
				T: 1 F: 3 :: isDivBy100	isLeap = true;
				T: 1 F: 2 :: isDivBy4	else
					isLeap = false;
					end
23	2				
24					
25	3				
26					
27					

Looking at the coverage data, we see that we are still missing the coverage for the case where a year is divisible by 100 and not 400.

But didn't we test this with the year 1900?

Oh wait! We did test this, but we only tested the code interactively at the Command Window. We never added the test point to our automated test suite.


Let's add a new test point so that we never run into this bug again.

Part 3.5: Add an additional automated test point for `isLeapYear.m`

Open the test file for `isLeapYear` and add another test point

Wait... Where is the test file for `isLeapYear`? We never actually saw the test file because we found the tests using "Find Tests."

Luckily, the MATLAB Test Browser makes it easy to open the test files related to each test by simply clicking on the test file name. In our case, all of the test points are located in the `testIsLeapYear.m` file.

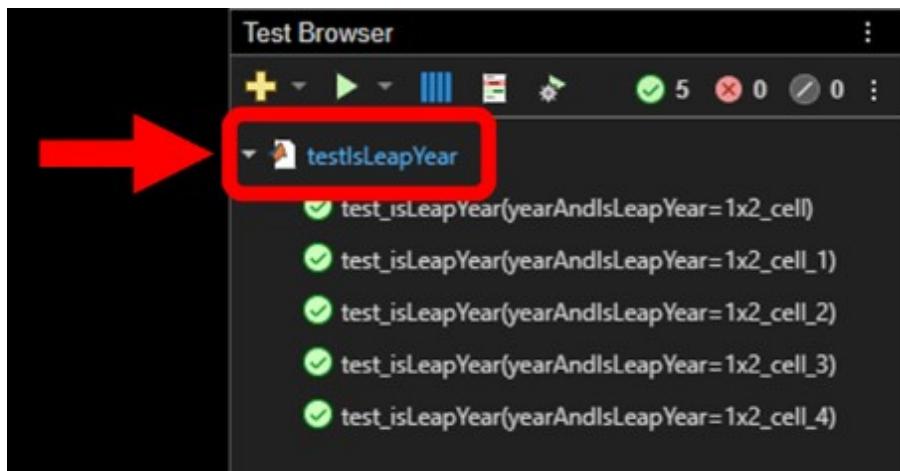

This is what the test file looks like:

```

1 classdef testIsLeapYear < matlab.unittest.TestCase
2
3     properties (TestParameter)
4         yearAndIsLeapYear = { ...
5             {2000, true}; ...
6             {2024, true}; ...
7             {2025, false}; ...
8             {1985, false}; ...
9             {1999, false} };
10    end
11
12 methods (Test, ParameterCombination = "sequential")
13
14     function test_isLeapYear(testCase, yearAndIsLeapYear)
15
16         % Extract input and expected output from parameter for clarity
17         year = yearAndIsLeapYear{1};
18         expected_isLeap = yearAndIsLeapYear{2};
19
20         % Exercise the code
21         actual_isLeap = isLeapYear(year);
22
23         % Verify results
24         testCase.verifyEqual(actual_isLeap, expected_isLeap);
25     end
26 end
27 end

```

Hm... This seems a bit strange. The MATLAB Test Browser showed 5 tests, but this test file looks like it only has 1 test.

What's going on here?

The answer: The test in `testIsLeapYear.m` is a parameterized test.

Understanding parameterized tests


A parameterized test is a kind of test that enables you to reuse a single test function across multiple test points (i.e., multiple inputs).

Parameterized tests are extremely useful when:

- you need to test a code multiple times with multiple inputs
- the calling syntax is the same across the tests
- the verifications are the same across the tests

The way a parameterized test works is by defining a test parameter (or multiple test parameters) that contain the inputs you want to pass into your code, and passing that test parameter to your test function.

In our case, we are using one test parameter that contains both the inputs and expected outputs of our function. The following diagram explains each part of the test parameter definition.

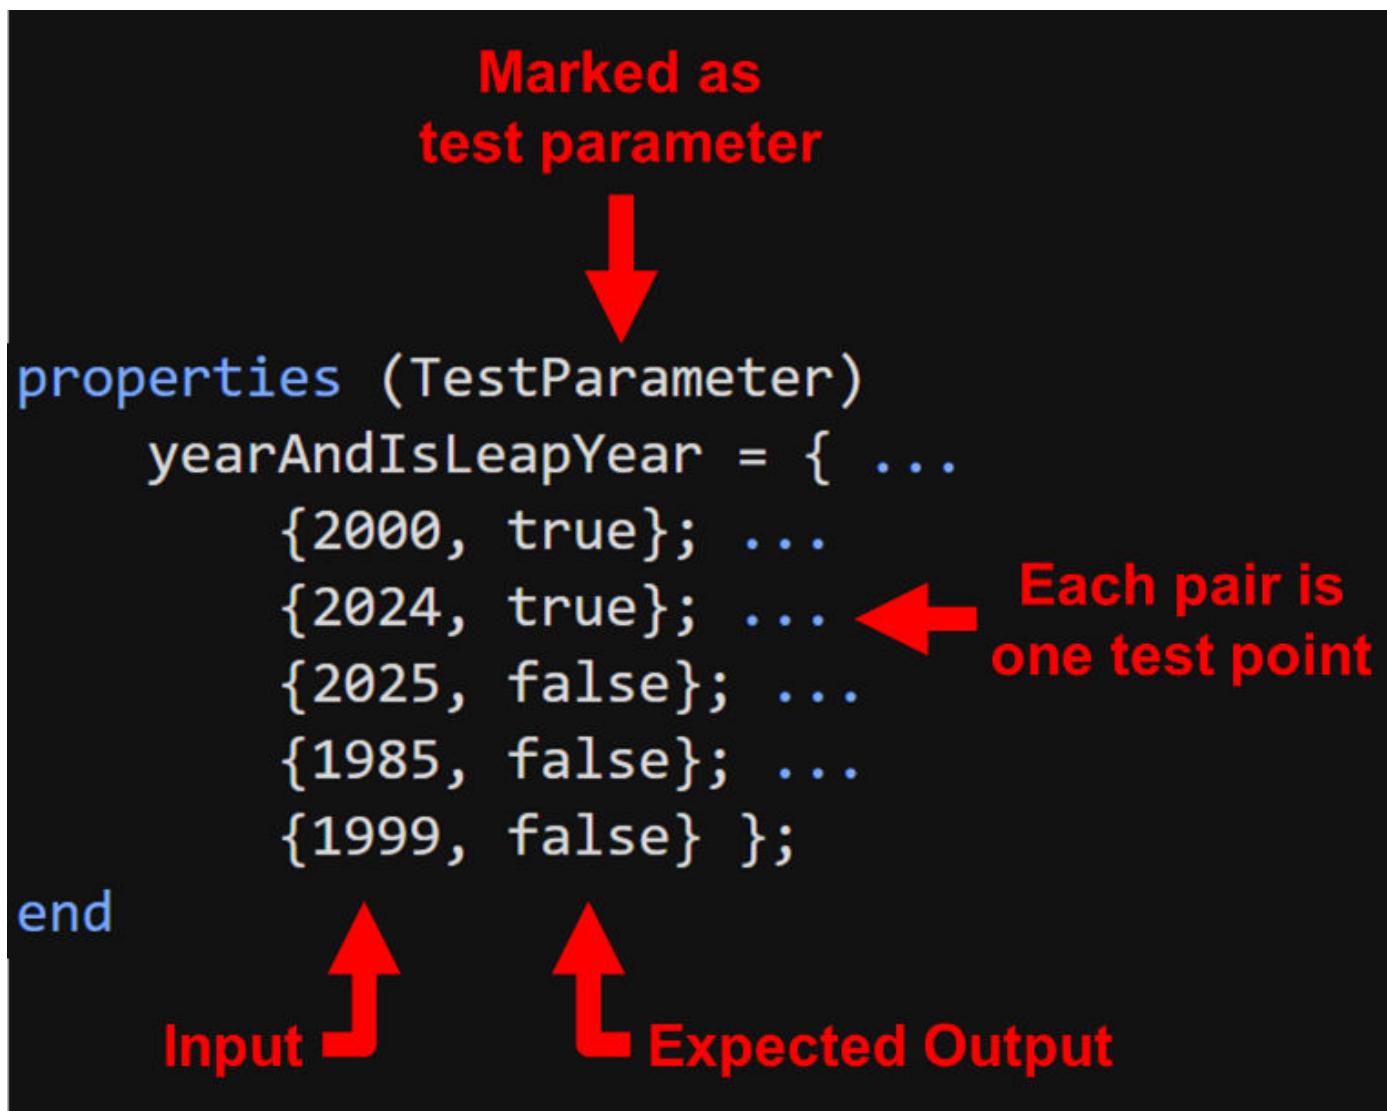

Looking at the test function, you can see it takes this test parameter as an additional input. This test parameter will have a different value every time the function is called.

Test parameter as a test input

```
methods (Test, ParameterCombination = "sequential")  
  
    function test_isLeapYear(testCase, yearAndIsLeapYear)  
  
        % Extract input and expected output from parameter for clarity  
        year = yearAndIsLeapYear{1};  
        expected_isLeap = yearAndIsLeapYear{2};  
  
        % Exercise the code  
        actual_isLeap = isLeapYear(year);  
  
        % Verify results  
        testCase.verifyEqual(actual_isLeap, expected_isLeap);  
    end  
end
```

You can learn more about parameterized testing here: https://www.mathworks.com/help/matlab/matlab_prog/use-parameters-in-class-based-tests.html

Add another test point

To add another test point, we need to add another input and expected output pair to the yearAndIsLeapYear test parameter array.

To do this, you can replace the following code:

```
yearAndIsLeapYear = { ...  
    {2000, true}; ...  
    {2024, true}; ...  
    {2025, false}; ...  
    {1985, false}; ...  
    {1999, false} };
```

with:

```
yearAndIsLeapYear = { ...  
    {2000, true}; ...  
    {2024, true}; ...
```


```
{2025, false}; ...
{1985, false}; ...
{1999, false}; ...
{1900, false} };
```

You should end up with a test parameter that looks like:

```
properties (TestParameter)
    yearAndIsLeapYear = { ...
        {2000, true}; ...
        {2024, true}; ...
        {2025, false}; ...
        {1985, false}; ...
        {1999, false}; ...
        {1900, false} }; ← New
end
test point
```

Rerun your tests and look at the coverage report

Note: You must use the "Run Tests" button in order to pick up the new test point we added. The "Run" button in the MATLAB Test Browser will run all of the tests it lists, but it will not automatically pick up new tests in the files.

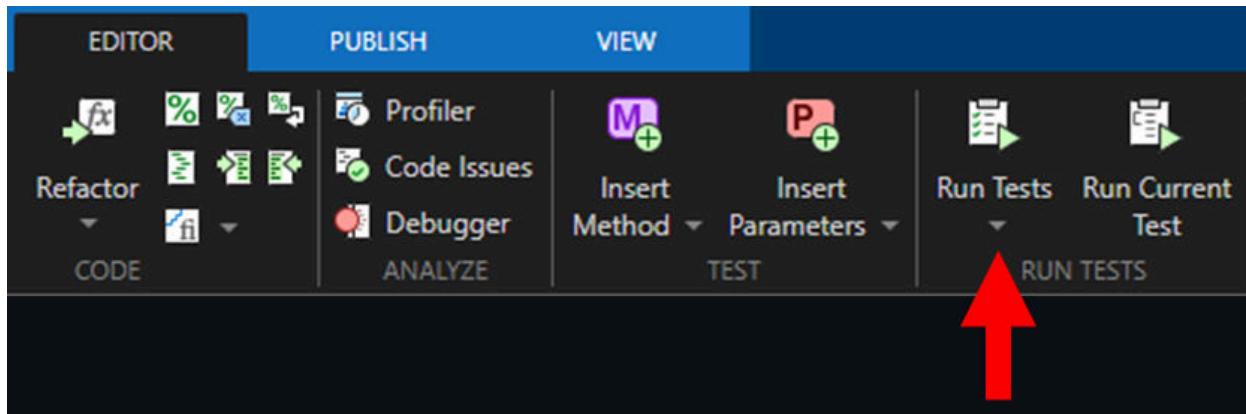

It looks like we've achieved full condition coverage for `isLeapYear`. Yay!

Currently viewing: Condition | Covered Missed Partially Covered

Source Details
Detailed analysis of code coverage for a source file.


	Function	Statement	Decision	Condition	
1	6				/MATLAB Drive/Generating-Tests-for-Your-MATLAB-Code-Workshop/code/isLeapYear.m
2					function isLeap = isLeapYear(year)
3					%ISLEAPYEAR Determine if a year is a leap year
4					%
5					% isLeap = isLeapYear(year) returns true if the year is a leap year
6					% - Leap years are divisible by 400, or divisible by 4 and not 100
7					%
8					% Example:
9					% isLeapYear(2000) % returns true
10					% isLeapYear(2024) % returns true
11					% isLeapYear(2025) % returns false
12					
13	6, 6				arguments
14					year (1,1) {mustBeInteger, mustBePositive}
15					end
16					
17	6				% Set up logical comparisons for clarity
18	6				isDivBy400 = mod(year,400) == 0;
19	6				isDivBy100 = mod(year,100) == 0;
20					isDivBy4 = mod(year, 4) == 0;
21					
22	6	T: 2, F: 4	T: 1, 2, 1, F: 5, 3,	if isDivBy400 (isDivBy4 && ~isDivBy100)	
23	2			isLeap = true;	
24				else	
25	4			isLeap = false;	
26				end	
27					
28					
29					

Part 4: Updating badges, committing our changes, and pushing to GitHub

In this section, we will:

1. Update the repository badges in [README.md](#)
2. Commit our changes to source control
3. Generate a GitHub Personal Access Token
4. Push our changes to GitHub

Part 4.1: Update repository badges




Repository badges are great ways to showcase the quality of your code and provide easy ways for people to explore various aspects of your repository, such as your build status and published results.

Badges are defined in a repository's [README.md](#). One unfortunate aspect of badges is that they are always hardcoded to a specific repository's URL. Since we forked these badges from another repository, we will need to update the badge so they point to your repository instead.

To make this easy, the workshop provides a useful project shortcut that will automatically update the links in your [README.md](#) file.

Update the badges by single-clicking the "Update README Link" item in the "Shortcuts" section of the Project toolbar

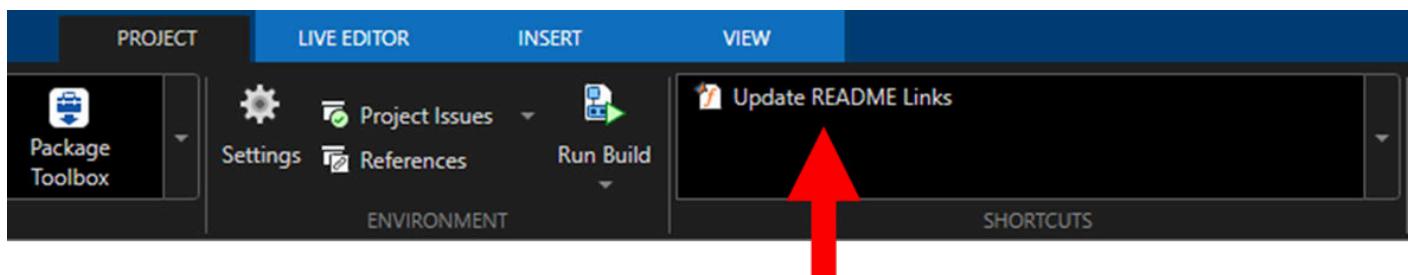

Note: If you want to manually update the links, you will need to make the following changes to all of the links in the [README.md](#) file:


- replace "mathworks" GitHub username with your GitHub username
- if you renamed the repository during the fork process in [Part 1.1](#), replace "Generating-Tests-for-Your-MATLAB-Code-Workshop" repository name with your GitHub repository name

Your badges will now be up-to-date and point to your personal repository once you commit and push your changes.


Part 4.2: Commit our changes to source control

Now that we've fixed a bug, added tests and test points, and updated our badges, it's time to commit our changes!

In the "Project" toolbar tab, press "Commit"

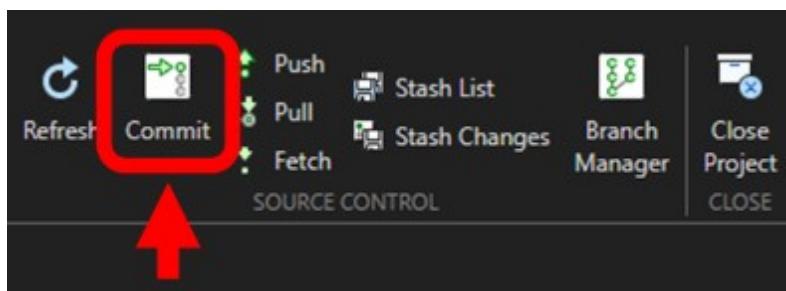

Type in a commit message and press "Commit"

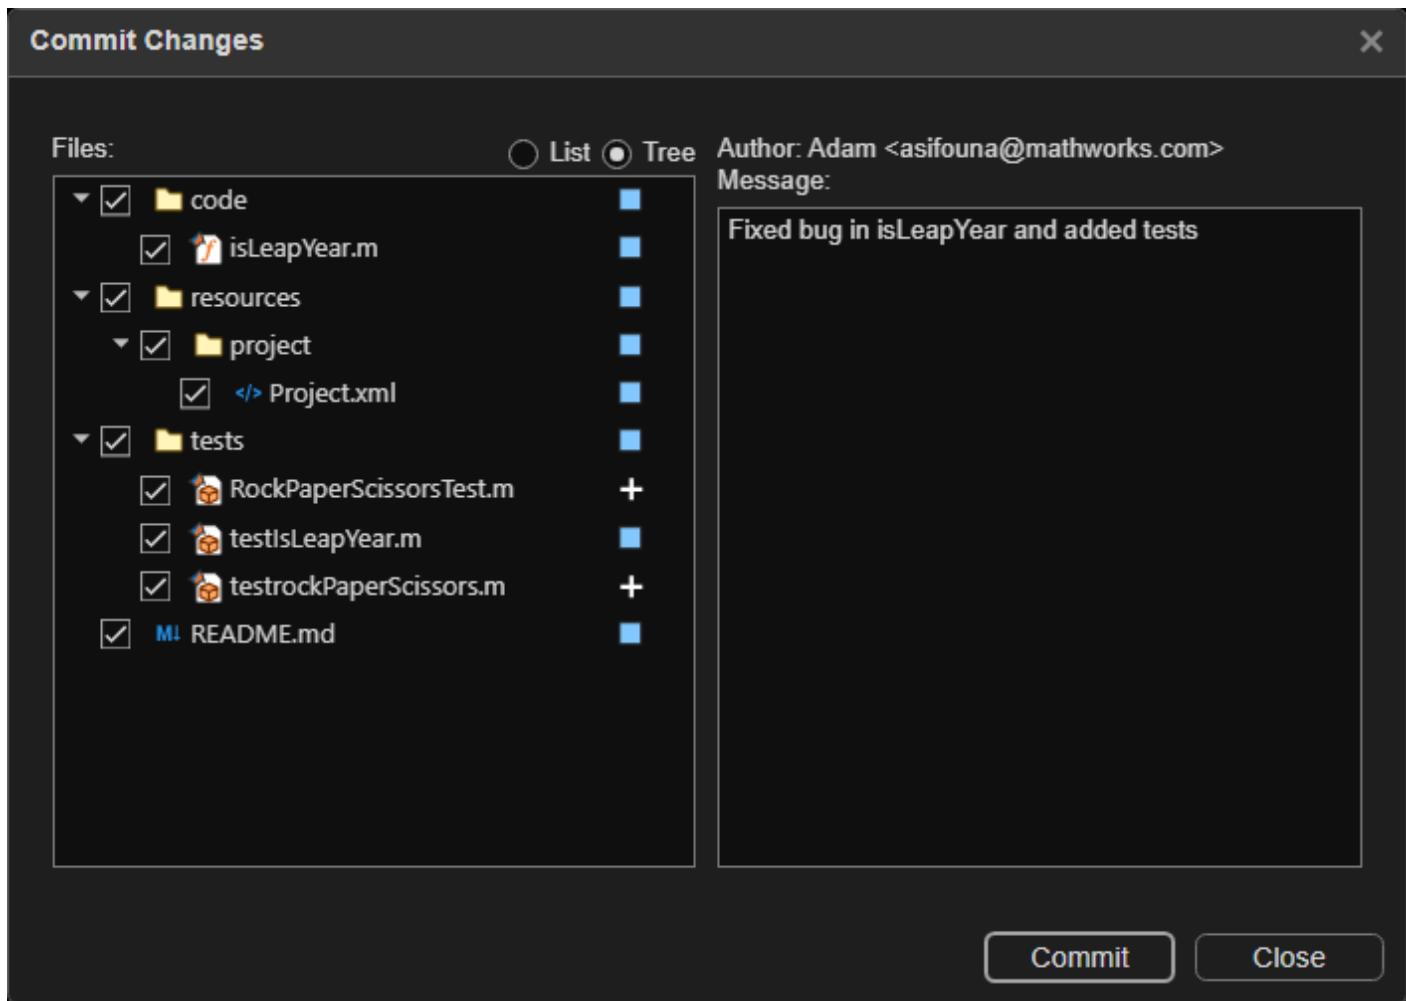

We've now committed our changes and can always get back to this version of our codebase if we ever need to.

Usually, the next step is to push our changes back to GitHub. This is really easy and straightforward when using Git from a desktop application (e.g., the desktop version of MATLAB). However, since we are pushing our changes from an online application (MATLAB Online), GitHub requires a Personal Access Token to allow MATLAB Online to push our changes back to GitHub.

[Part 4.3: Generating a GitHub Personal Access token to enable MATLAB Online to push our changes to our GitHub repository](#)



Over the last few years, GitHub has increased its focus on security. One of the major user-facing ways GitHub is enforcing some of these better security practices is by [moving away from the use of passwords](#), and recommending that people use personal access tokens instead.


Personal access tokens are meant to be treated like passwords:

- They are supposed to be difficult or impossible to memorize or guess
- They are not meant to be written down
- They are not meant to be shared with others


When you install Git on your desktop, it comes with the Git Credential Manager. The Git Credential Manager will accept a username/password combination, will securely get and store a Personal Access Token for you, and make it very easy to push and pull changes without manually generating a Personal Access Token.

For this MATLAB Online session, we will need to manually create a Personal Access Token to give MATLAB Online permission to push changes to GitHub. GitHub provides directions for [how to create a personal access token](#), but this part of the workshop will give you a step-by-step guide to creating your Person Access Token.


On GitHub, press your profile picture (top right of the page) and select "Settings"

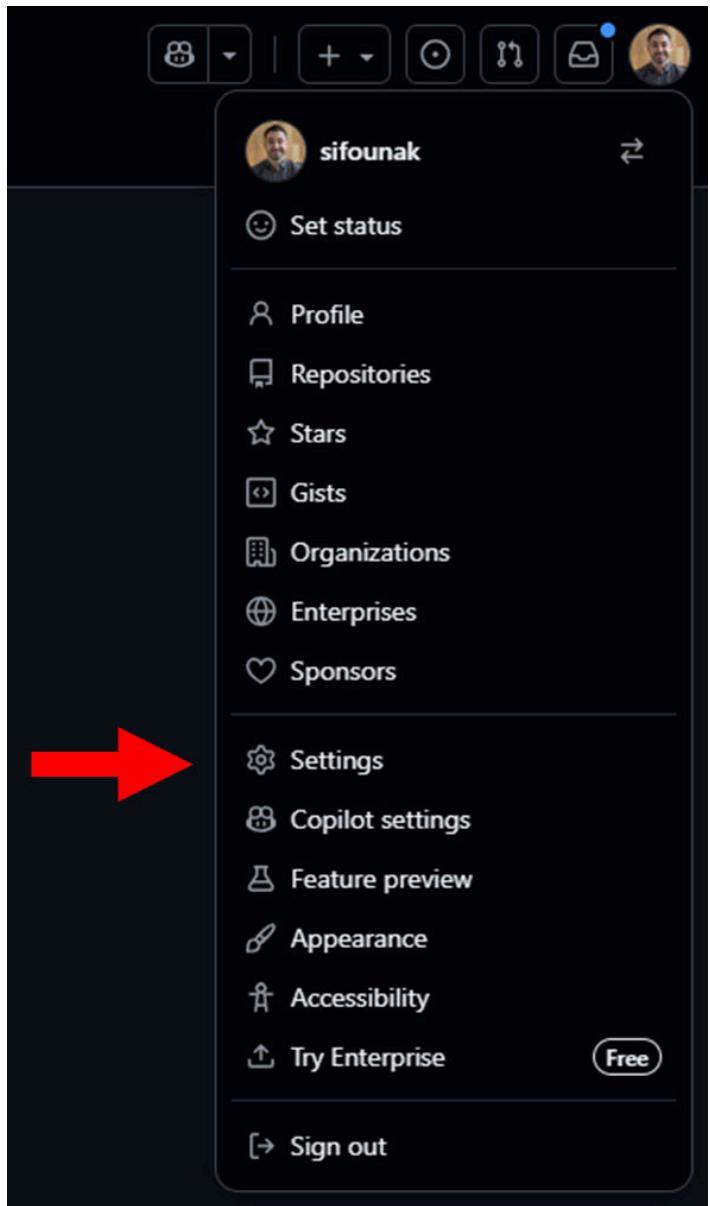


Select "Developer settings" at the bottom of the left-hand navigation menu

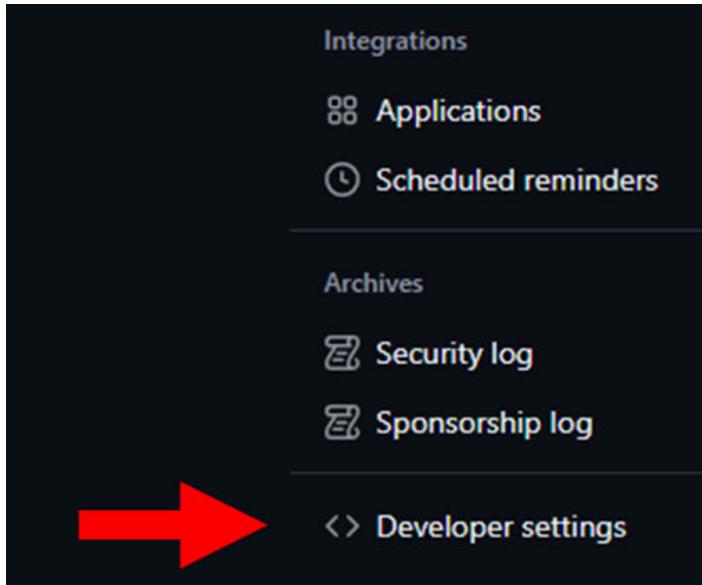

Select "Personal access tokens > Fine-grained tokens"

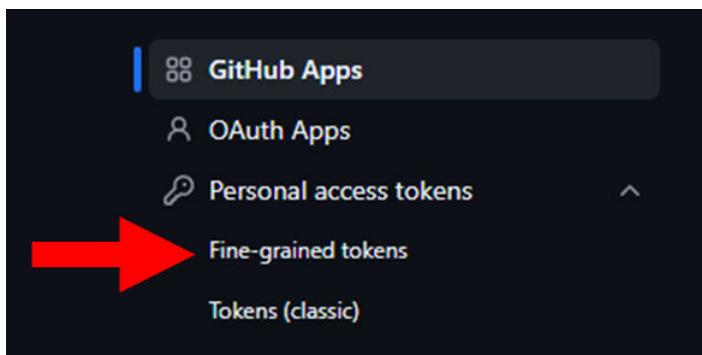

Press "Generate new token"

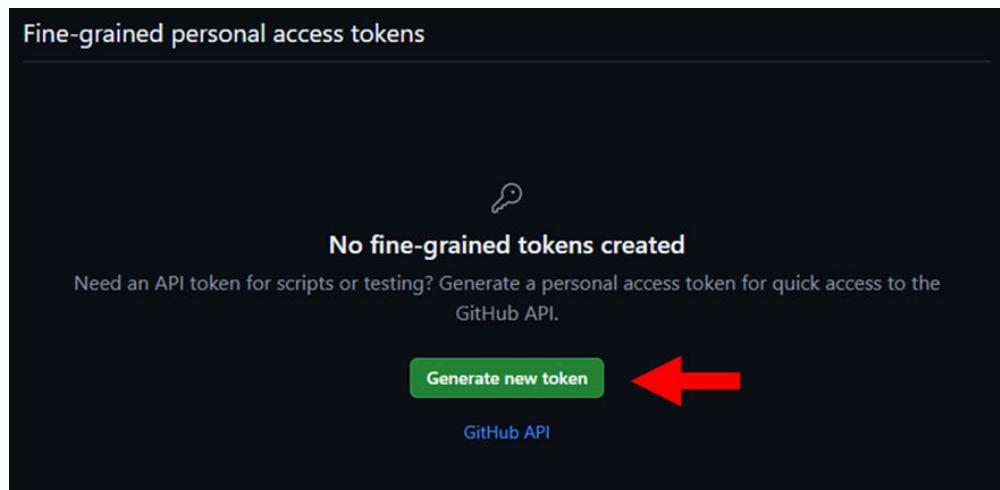

Note: You may need to log into GitHub again to complete this action.

Name your token

New fine-grained personal access token

Create a fine-grained, repository-scoped token suitable for personal API use and for using Git over HTTPS.

Token name *

MATLAB Expo Token

'MATLAB Expo Token' is available.

A unique name for this token. May be visible to resource owners or users with possession of the token.

Description

Resource owner

 asifouna ▾

The token will only be able to make changes to resources owned by the selected resource owner. Tokens can always read all public repositories.


Expiration

30 days (Dec 07, 2025) ▾

The token will expire on the selected date



Limit token access to only the workshop repo

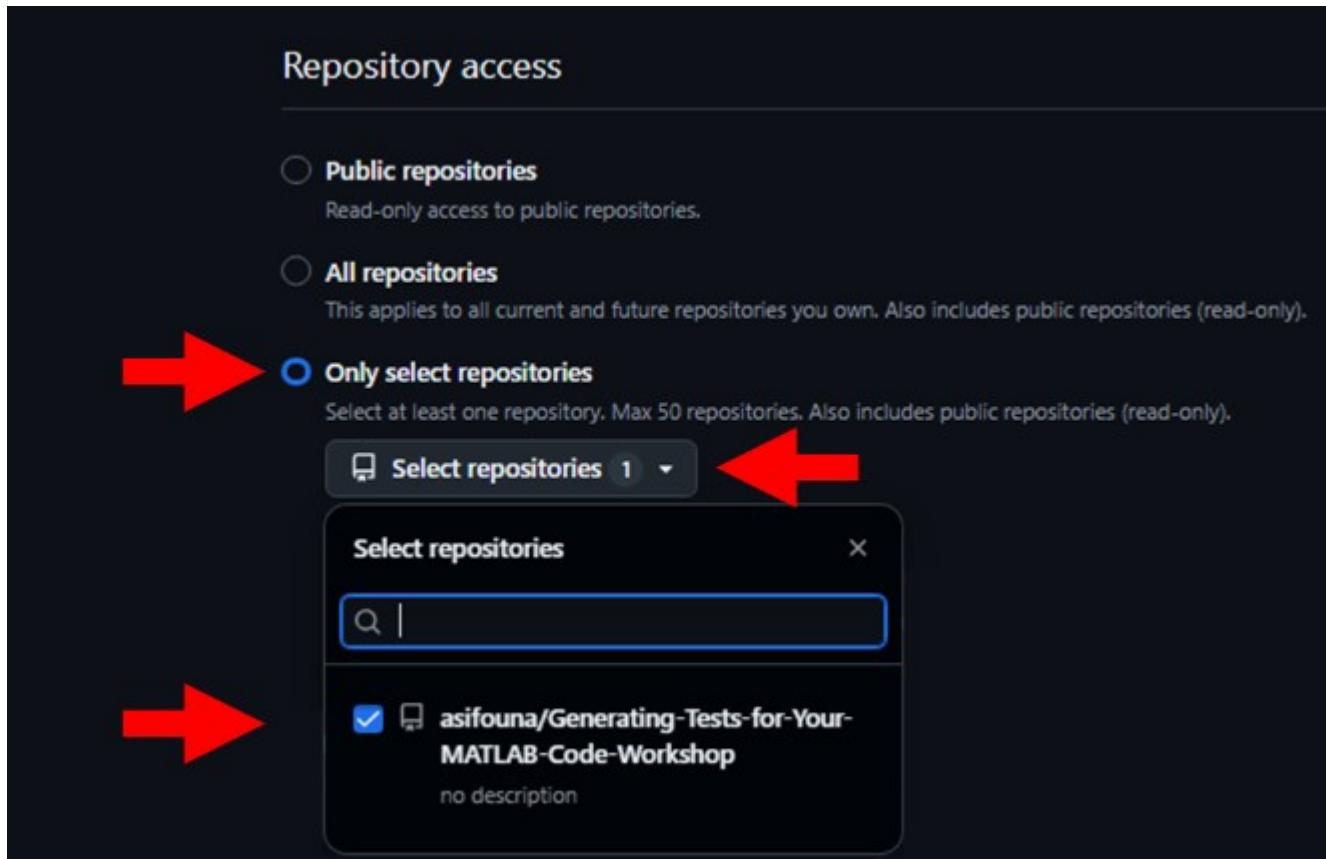

Select "Add Permissions > Contents" to enable pushing changes to your repository

The screenshot shows the 'Permissions' section of the GitHub settings. It displays two repository permissions: 'Repositories' (2) and 'Account' (0). A red arrow points to the '+ Add permissions' button. Below this, there are sections for 'Contents' and 'Metadata'. Under 'Contents', it says 'Repository contents, commits, branches, downloads, releases, and merges.' A red arrow points to the 'Contents' checkbox, which is checked. Under 'Metadata', it says 'Search repositories, list collaborators, and access repository metadata.' At the bottom, there are 'Generate token' and 'Cancel' buttons, and a note stating 'This token will be ready for use immediately.'

Change "Contents" access permissions to "Read and write"

Permissions

Choose the minimal permissions necessary for your needs. [Learn more about permissions.](#)

Repositories 2 Account 0 + Add permissions

Contents
Repository contents, commits, branches, downloads, releases, and merges. [Learn more.](#)

Metadata Required
Search repositories, list collaborators, and access repository metadata. [Learn more.](#)

Access: Read-only [X](#)

Read-only
Read and write

Two red arrows point from the 'Contents' and 'Metadata' sections to the 'Access' dropdown menus, which are currently set to 'Read-only'. A second set of red arrows points to the 'Read and write' option in each dropdown menu.

Press "Generate token"

Permissions

Choose the minimal permissions necessary for your needs. [Learn more about permissions.](#)

Repositories 2 Account 0 + Add permissions

Contents
Repository contents, commits, branches, downloads, releases, and merges. [Learn more.](#)

Metadata Required
Search repositories, list collaborators, and access repository metadata. [Learn more.](#)

Access: Read-only [X](#)


Read-only
Read and write

Generate token Cancel

This token will be ready for use immediately.

A large red arrow points to the green 'Generate token' button at the bottom left of the page.

Confirm the creation of the token

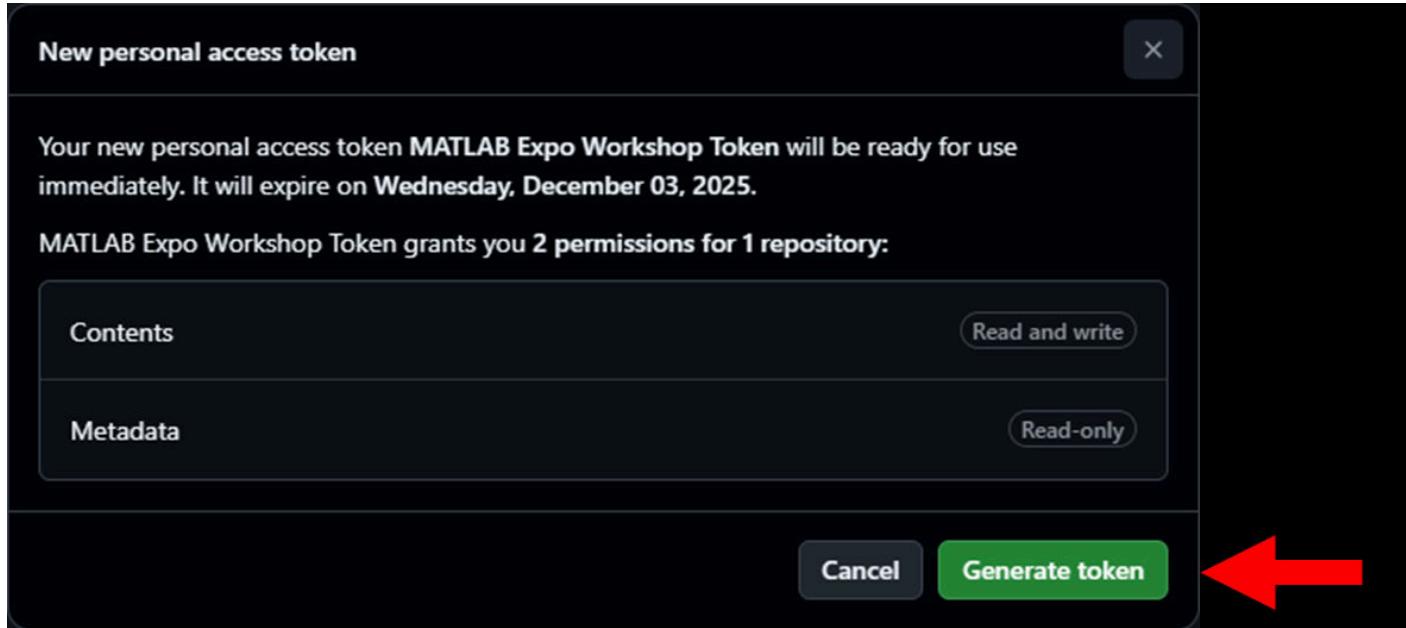

Copy your personal access token to your clipboard

WARNING:

- You only have 1 chance to copy the personal access token, so do not navigate away from the page until you have used the token wherever you need it.
- If you forget to copy your token string or you need to give another service access to your repository at a later time, you will need to create a new token.

Any service that generates access token strings will only allow you to see or copy the token string the moment the token is created. As soon as you refresh the page or navigate away, the token string will be hidden forever. This protects you from having your token stolen or copied if someone breaks into your account.

Fine-grained personal access tokens

[Generate new token](#)

These are fine-grained, repository-scoped tokens suitable for personal [API](#) use and for using Git over HTTPS.


The screenshot shows the GitHub 'Personal Access Tokens' page. A token named 'MATLAB Expo Workshop Token' is listed, with a note indicating it has never been used and expires on Wednesday, December 3, 2025. A red arrow points to the 'Copy' button next to the token value 'github_pat_'. A green callout bubble above the token area says, 'Make sure to copy your personal access token now as you will not be able to see this again.'

Your personal access token should start with "github_pat_" followed by many alphanumeric characters.

Part 4.4: Pushing our changes to GitHub

Now let's push our changes to GitHub!

In the Projects tab, press the "Push" button

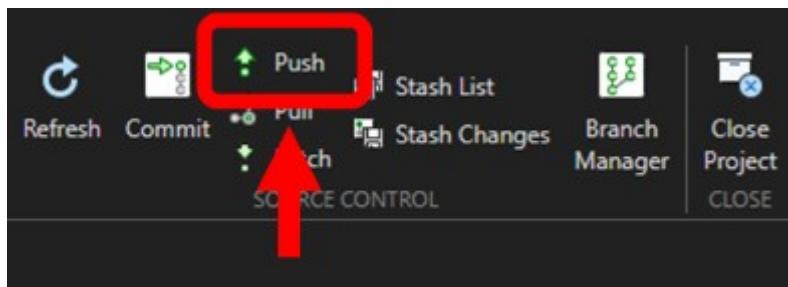

Enter your username and paste your personal access token into the MATLAB Online Git dialog and press "Ok"

Authentication Required

Create a personal access token on github.com and enter the username and token to access "<https://github.com/sifounak/Generating-Tests-for-Your-MATLAB-Code-Workshop>".

Username:


Token:

Remember credentials for the current MATLAB session

OK

Cancel

At this point, all of your changes will be pushed to GitHub.

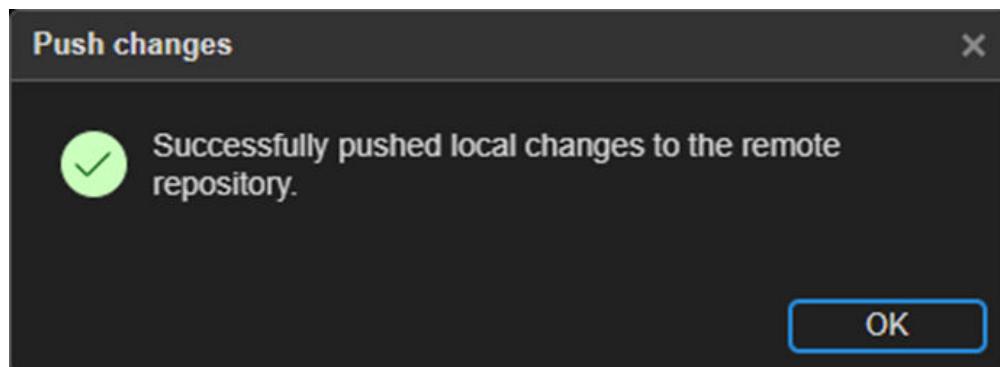

We should now be able to see our latest changes directly on our GitHub repository.

The screenshot shows a GitHub repository page for 'Generating-Tests-for-Your-MATLAB-Code-Workshop'. The commit history is displayed, with the first commit by 'asifouna' highlighted by a red box and a red arrow pointing to it. The commit message is 'Fixed bug in isLeapYear and added tests'.

Commit	Message	Time Ago
.github/workflows	Initial workshop commit	2 hours ago
code	Fixed bug in isLeapYear and added tests	46 minutes ago
projectUtilities	Initial workshop commit	2 hours ago
resources/project	Fixed bug in isLeapYear and added tests	46 minutes ago
tests	Fixed bug in isLeapYear and added tests	now

Part 5: Watch GitHub Actions automatically test our changes and publish results

In this section, we will:

1. Explore GitHub Actions as it automatically tests our changes and publishes test results
2. View our published test and code coverage results

Part 5.1: Watch GitHub Actions automatically test our code and publish our results

Once we push our changes back to Git, GitHub Actions will automatically test our code and publish our test results.

To make this possible, the workshop provides you a pre-written [GitHub Actions YAML file](#) that tells GitHub Actions how to get MATLAB and what to do with your code as soon as changes are pushed.

- You can learn more about GitHub Actions YAML files here: <https://docs.github.com/en/actions/reference/workflows-and-actions/workflow-syntax>

Note: We are using the MATLAB build tool to automate some of the build actions, but all of these actions can be accomplished with simple MATLAB code, as well.

- You can learn more about the MATLAB build tool here: https://www.mathworks.com/help/matlab/matlab_prog/overview-of-matlab-build-tool.html


Select the "Actions" tab to see your build in action

The screenshot shows a GitHub repository page for 'Generating-Tests-for-Your-MATLAB-Code-Workshop'. The 'Actions' tab is highlighted with a red box and a red arrow points to it. The page displays basic repository information: 'Code' (main branch), '1 Branch', '0 Tags', and a search bar 'Go to file'. The main content area shows the repository name and its fork source.

Here you'll see all the builds that are running or have been run in the past.

The screenshot shows the 'Actions' tab selected on a GitHub repository page. The left sidebar lists 'MATLAB Build' under 'Management'. The main area shows a table of workflow runs. One run is listed: 'Fixed bug in isLeapYear and added tests' (MATLAB Build #4; Commit f3a0203 pushed by asifouna). The status is 'In progress'. A red arrow points to this specific workflow run item.

Dive deeper by selecting the listed workflow item

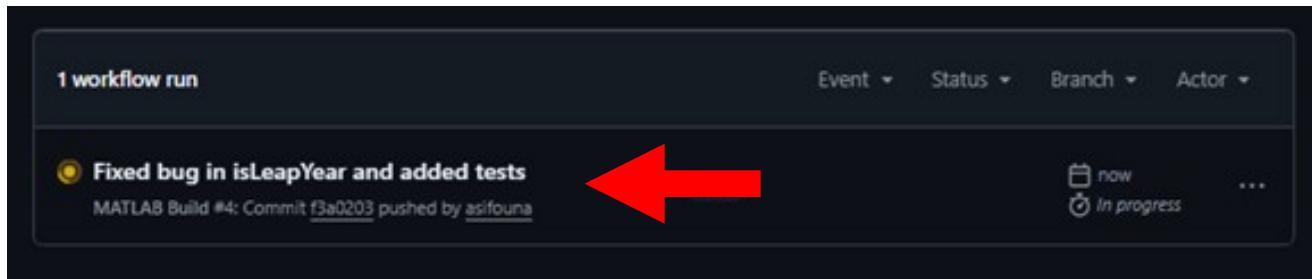

Select the "build" box

A screenshot of the GitHub Actions build step details. The top navigation bar shows "asifouna / Generating-Tests-for-Your-MATLAB-Code-Workshop" and various tabs like "Code", "Issues", "Pull requests", "Actions", "Projects", "Wiki", "Security", "Insights", and "Settings". The "Actions" tab is selected. Below the navigation is a breadcrumb trail "MATLAB Build" and the title "Fixed bug in isLeapYear and added tests #4". A "Cancel workflow" button is on the right. The main area has a sidebar with "Summary" (selected), "Jobs", "build" (highlighted with a red arrow), "Run details", "Usage", and "Workflow file". The "build" section shows a card for "ci.yml" triggered by "asifouna pushed -o f3a0203 main" on "push". The card shows the status "In progress" and a duration of "25s". It also shows the step "Deploying to github-pages" with a progress bar. A red arrow points to this step.

Observe the GitHub Actions log as your build is running

The screenshot shows a GitHub Actions workflow named "Fixed bug in isLeapYear and added tests #4". The "build" job has completed successfully. The logs show the following steps:


- Set up job (5s)
- Run actions/checkout@v5 (1s)
- Setup MATLAB (1m 35s)
- Run buildtool (22s)
 - Run matlab-actions/run-build@v2
 - /home/runner/work/_actions/matlab-actions/run-build/v2/dist/bin/glnxa64/run-matlab-command
 - setenv('ML_ORIG_WORKING_FOLDER', cd('/tmp/run_matlab_command-X12mhQ'));
 - command_affe28da_e211_4b29_bece_6054a4d33193
 - check
 - Starting check
 - Analysis Summary:
 - Total Files: 13
 - Errors: 0 (Threshold: 0)
 - Warnings: 0 (Threshold: Inf)
 - Finished check
 - test
 - Starting test
 -
 - Generating test report. Please wait.

The icon next to the build reflects the result of the build. A green check mark means the build ran successfully.

The screenshot shows a GitHub Actions workflow named "Fixed bug in isLeapYear and added tests #4". The "build" job has succeeded. A red arrow points to the green checkmark icon next to the job name. The logs show the following steps:

- Set up job (5s)
- Run actions/checkout@v5 (1s)
- Setup MATLAB (1m 35s)
- Run buildtool (26s)

Another place you can see an indication of your passing build is on your repository home page.

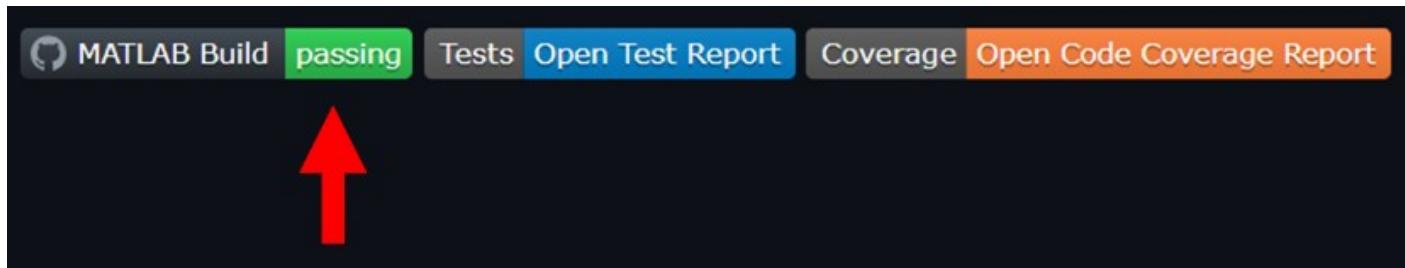

Note: You may need to refresh your browser a few times or use "Shift+F5" for the status to update.

We now have a repository that will automatically test our code every time we push any changes!

Part 5.2: Viewing your test and coverage results directly in GitHub


Once our build completes, anyone that can see your repository will be able to explore your published test and code coverage results.

The badges on your repository's home page offer an easy way to:

- See whether your last build passed or failed
- Open the published test report
- Open the published code coverage report

Note: Badge links will navigate your current browser tab to the link destination, so you will need to navigate back to the main repository page to select a different badge or report

View your test report by selecting the "Open Test Report" badge

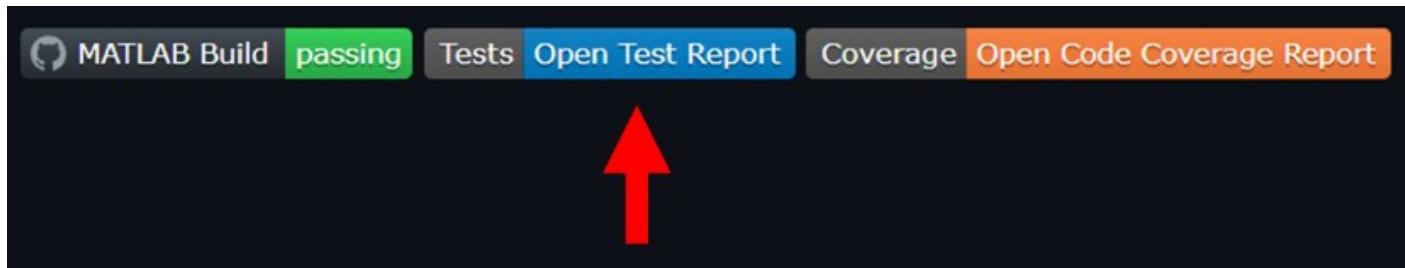

The test report looks like this:

A screenshot of a MATLAB Test Report page. At the top, it says 'MATLAB® Test Report'. Below that, it lists system information: Timestamp: 07-Nov-2025 23:56:34, Host: runnervmf2e7y, Platform: glnxa64, MATLAB Version: 25.2.0.3042426 (R2025b) Update 1. Then it shows test statistics: Number of Tests: 11, Testing Time: 0.1003 seconds, Overall Result: PASSED. A pie chart indicates 11 Passed tests. A legend next to the chart shows a green square labeled '11 Passed'.

MATLAB® Test Report

Timestamp: 07-Nov-2025 23:56:34
Host: runnervmf2e7y
Platform: glnxa64
MATLAB Version: 25.2.0.3042426 (R2025b) Update 1

Number of Tests: 11
Testing Time: 0.1003 seconds


Overall Result: PASSED



Status	Count
Passed	11

11 Passed

View your code coverage report by selecting the "Open Code COverage Report" badge

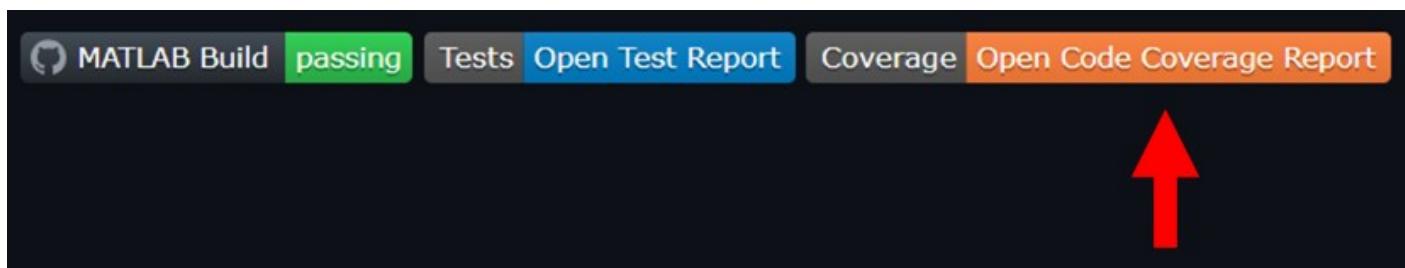

The code coverage report looks like this:

The screenshot shows a browser window displaying a code coverage report from asifouna.github.io/Generating-Tests-for-Your-MATLAB-Code-Workshop/coverage/. The title is "Code Coverage Report". Below it, a sub-section titled "Overall Coverage Summary" provides a summary of metrics for all source files. A large number "3" indicates the total number of files. A table details coverage for Function, Statement, Decision, Condition, and MC/DC categories across these files.

Coverage ...	Executable	Missed	Code Coverage
Function	3	0	<div style="width: 100%;">100%</div>
Statement	28	0	<div style="width: 100%;">100%</div>
Decision	18	1	<div style="width: 94.44%;">94.44%</div>
Condition	24	5	<div style="width: 79.16%;">79.16%</div>
MC/DC	12	4	<div style="width: 66.66%;">66.66%</div>

Below the table, there is a dropdown menu set to "MC/DC" and three checkboxes: "Covered" (checked), "Missed" (checked), and "Partially Covered" (checked).

Breakdown by Source
Code coverage metrics per source file.

[Summary View](#) [Detailed View](#)

Root Folder - /home/runner/work/Generating-Tests-for-Your-MATLAB-Code-Workshop/Generating-Tests-for-Your-MATLAB-Code-Workshop/code/

	Filename	Function	Statement	Decision	Condition	MC/DC
1	isLeapYear.m	<div style="width: 100%;">100%</div>	<div style="width: 100%;">100%</div>	<div style="width: 100%;">100%</div>	<div style="width: 100%;">100%</div>	<div style="width: 100%;">100%</div>
2	rockPaperScissors.m	<div style="width: 100%;">100%</div>	<div style="width: 100%;">100%</div>	<div style="width: 90%;">90%</div>	<div style="width: 72.22%;">72.22%</div>	<div style="width: 55.55%;">55.55%</div>
3	simpleSort.m	<div style="width: 100%;">100%</div>	<div style="width: 100%;">100%</div>	<div style="width: 100%;">100%</div>	N/A	N/A

Now anyone that visits your repository can immediately see the quality of your code, they can explore your test and code coverage results, and they will have more confidence in the code you are writing!

Homework: Hands-on experience with property-based testing

Everything we've done until now is considered "example-based testing." This is the practice of passing a specific input to a function and comparing its results to a specific expected output. For every specific input, we will need a specific output to compare it against.

Another way to test a code is by identifying "properties" (i.e., characteristics) of the results it produces that stay the same no matter what the input is. Once these properties are identified, you can write tests that check these properties against many different test inputs. Being able to run tests against many different inputs (even randomly generated inputs) can sometimes help you discover bugs and edge cases that you might have missed with a smaller sample of test inputs.

Let's explore this concept with an example.

The workshop contains a function named `simpleSort` that sorts an input using a simple bubble sorting algorithm. This function:

- sorts an input in an ascending order
- does not remove duplicates

The properties the result can be determined by this logic:

- Since the function sorts numbers in an ascending order, the change from one element to the next must be greater than or equal to zero
- Since the function does not remove duplicate numbers, the result must have the same number of elements as the input

To get you started, we have provided a test named `testSimpleSort` with both:

- a single example-based test
- a commented out property-based test that will be tested against many inputs without any expected outputs

There are two local functions that are missing the code to check whether the result satisfies each of the properties. Since the code is missing, each of the property-based tests will fail until you provide code to check the properties.

Your homework: Uncomment the property-based test in `testSimpleSort` and add code to the `checkIsSortedAscending` and `checkHasSameNumberOfElements` local functions at the bottom of the file to make the property-based test pass.

Workshop wrap-up and additional information

Congratulations on completing the "Generating Tests for Your MATLAB Code" Workshop!

During this workshop, you have successfully:

- generated tests using your command history and MATLAB Copilot
- automatically found and ran existing tests
- explored code coverage metrics for your tested code
- identified bugs based on your testing and code coverage
- automated your testing using GitHub Actions
- published your test and code coverage results to GitHub Pages

We hope this workshop has shown you the value of software testing, how approachable software testing is with MATLAB and MATLAB Test, and how to automate testing using continuous integration (CI) practices.

Check out these links for more information about features we discussed or additional features that may help you as you test your code:

- Software testing video series: <https://www.mathworks.com/videos/series/software-testing.html>
- Generating tests with MATLAB Test: <https://www.mathworks.com/help/matlab-test/ug/generate-tests-for-matlab-source-code.html>
- Generating equivalence tests for automated C/C++ code generation: <https://www.mathworks.com/help/matlab-test/ug/generate-c-code-and-test-for-equivalence.html>
- Parameterized testing: https://www.mathworks.com/help/matlab/matlab_prog/use-parameters-in-class-based-tests.html
- Property-based testing: https://en.wikipedia.org/wiki/Software_testing#Property_testing
- Finding existing tests using "Find Tests": <https://www.mathworks.com/help/matlab-test/ug/find-tests-that-depend-on-files.html>
- MATLAB Test Browser: <https://www.mathworks.com/help/matlab/ref/testbrowser-app.html>
- Code coverage: <https://www.mathworks.com/help/matlab-test/ug/collect-code-coverage-metrics-for-matlab-source-code.html>
- CI Configuration Examples repository and badge examples: <https://github.com/mathworks/ci-configuration-examples>
- Creating a MATLAB docker container for CI: <https://github.com/mathworks-ref-arch/matlab-dockerfile/tree/main/alternates/non-interactive>
- MATLAB build tool overview: https://www.mathworks.com/help/matlab/matlab_prog/overview-of-matlab-build-tool.html
- MATLAB build tool introduction blog post: <https://blogs.mathworks.com/developer/2022/10/17/building-blocks-with-buildtool>

- Faster testing with MATLAB build tool blog post: <https://blogs.mathworks.com/developer/2025/07/02/test-impact-analysis-intro>
- Developer Zone blog: <https://blogs.mathworks.com/developer>
- CI licensing for private repositories: <https://www.mathworks.com/support/batch-tokens.html>

Copyright 2025 The MathWorks, Inc.