
Install and start

Install R, download the Workbench and open it in your browser.

Guide 1 Install and start
Guide 2 Running the Workbench
Guide 3 Estimating poverty, anchored poverty and mean welfare

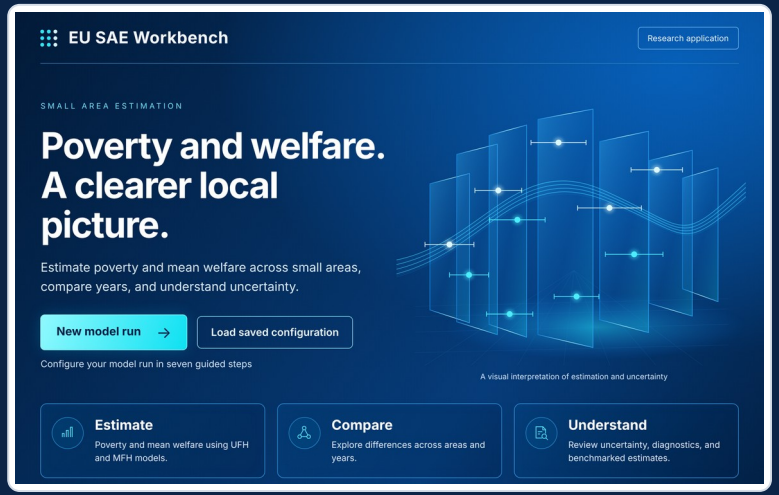

Draft for review, October 2026

BEFORE YOU START

What you need

Three things are required. Report tools are usually set up for you.



R 4.2.0 or later

Free, from cran.r-project.org. The newest version your organisation approves is fine.



The Workbench release

One ZIP file under Assets on the project's GitHub Releases page.



Internet on the first launch

The launcher installs the R packages it needs. This takes several minutes, once.



Pandoc, for the reports

Usually nothing to do: the launcher finds Pandoc on the computer or downloads it once.

Not needed: RStudio or any programming. Optional: an API key for the AI assistant (Guide 2).

STEP 1 OF 3

Install R

R runs the Workbench in the background. You do not need to open it yourself.

1. **Open cran.r-project.org**
   Choose Download R for Windows, macOS or Linux.

2. **Windows**
   Choose base, download the installer and run it with the default options.

3. **macOS**
   Choose the .pkg installer that matches your chip: Apple silicon or Intel.

4. **Managed computer**
   Ask IT for an approved R 4.2 or later. Do not replace your organisation's R installation.

Good to know

- Any R from 4.2.0 works; the very latest release is not required.
- The launcher finds R by itself in the usual places.
- If R is installed somewhere unusual, see 'If something goes wrong' at the end of this guide.

STEP 2 OF 3

Download the Workbench

One ZIP file from GitHub Releases. Extract all of it before starting.

1. **Open the Releases page**
   github.com/Noboyoshida227/eu-sae-application/releases

2. **Download the release ZIP**
   Under Assets, for example EU_SAE_520_w5o.zip. Not the 'Source code' archives.

3. **Windows: unblock, then extract**
   Right-click the ZIP › Properties › tick Unblock (if shown) › OK, then Extract All.

4. **macOS: double-click the ZIP**
   Move the extracted folder to any folder you can write to.

```
EU_SAE_520_w5o/
├─ Start_Here/     launchers
├─ app_wizard.R    guided version
├─ app.R           classic dashboard
├─ R/  scripts/  tests/
├─ Data/           example data
├─ docs/           guides and notes
├─ outputs/        latest results
└─ app_runs/       one folder per run
```

app_runs/ is created by the first run.

STEP 3 OF 3

Start the Workbench

Open the Start_Here folder and double-click the launcher for your computer.

Your computer	Guided version (recommended)	Classic dashboard
Windows	Start_Wizard.bat	Start_Dashboard.bat
macOS	Start_Wizard.command	Start_Dashboard.command
Linux	bash Start_Wizard.command	bash Start_Dashboard.command

1. **A terminal window opens**
   R starts, then your browser opens the Workbench.
2. **Keep that window open**
   Closing it stops the Workbench.
3. **The first launch is slow**
   R packages install (several minutes, internet needed). Later launches are quick.

Keep Start_Here inside the package folder: the launchers work from the folder above it.

MACOS ONLY

On a Mac: two things can block the first launch

macOS treats files from a downloaded ZIP as untrusted. Each fix is needed once.

“Apple could not verify…”

- macOS 15 or later: double-click the launcher once and close the message.
- Open System Settings › Privacy & Security, scroll to Security and click Open Anyway next to the launcher. Confirm, then double-click it again.
- macOS 14 or earlier: right-click the launcher, choose Open, then Open again.

Double-clicking does nothing

- The launcher lost its 'executable' permission during unzipping.
- In Terminal, type bash and a space, drag the launcher onto the window and press Return. This starts the Workbench and repairs the permission.
- Or type chmod +x and a space, drag both .command files from Start_Here onto the window and press Return.

Reports need Pandoc, and it is usually automatic

Pandoc turns the results into the HTML and Word reports.

Pandoc already on the computer?

RStudio, Positron and Quarto include one. The launcher uses it.

→

If not, it is downloaded once

A pinned, checksum-verified copy (26–42 MB) goes into your user profile. No administrator rights needed.

→

No internet?


Install RStudio Desktop, Quarto or Pandoc first. Without Pandoc the analysis still runs, but the report is not produced.

If no report appears: the run log and startup_setup.log (in the package folder) say why.

FIRST SCREEN

The front page

Every session starts here. Choose how to begin.

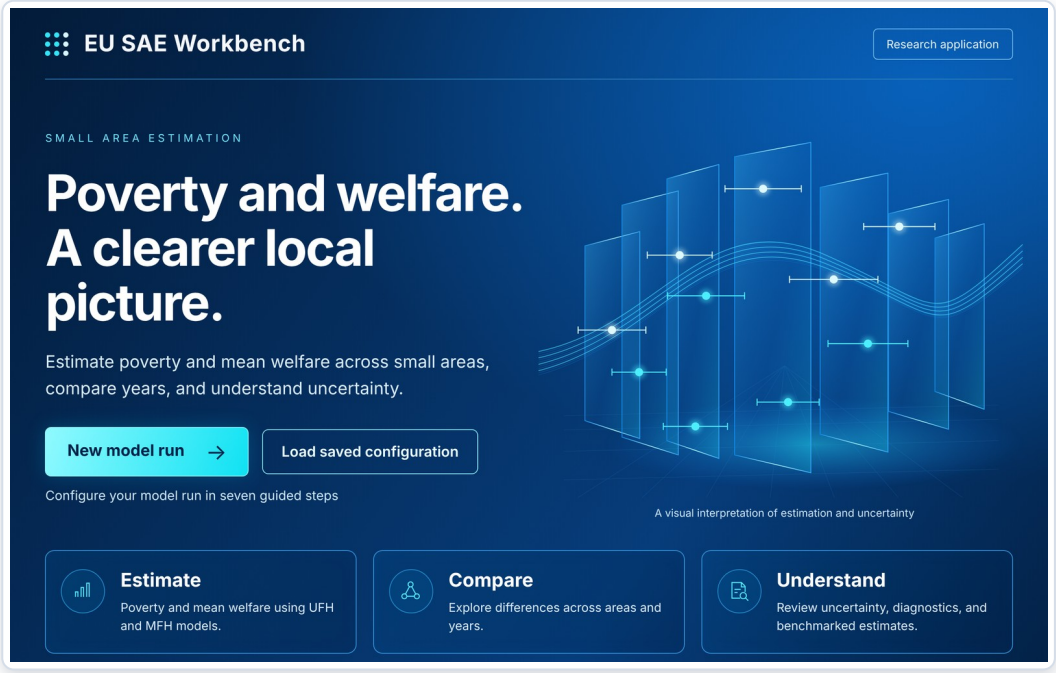

New model run

Starts with the default settings and opens Step 1 of the seven guided steps (Guide 2).

Load saved configuration

Opens the last saved configuration, or one from a file, and goes to the review step.

Inside the Workbench, Guides and notes and About are in the top bar.

REFERENCE

If something goes wrong

The most common problems at installation and start-up.

What you see	What to do
Packages fail to install on the first launch	Check the internet connection and start the launcher again: it installs only what is missing or out of date. On a managed computer, ask IT for access to the R package repository.
The launcher says R is not installed or could not be found	Install R 4.2 or later. If R is in an unusual folder, set EU_SAE_RSCRIPT to the full path of Rscript (Start_Here/README.md).
The browser does not open	Copy the address shown in the terminal window (http://127.0.0.1:...) into your browser.
The Workbench stops responding	Check that the terminal window is still open. Start the launcher again if it was closed.
No report after a run	See 'Reports need Pandoc'. The run log and startup_setup.log give the reason.

NEXT

You are ready to run a model

Guide 2: Running the Workbench, the seven steps from data to results.
Guide 3: Estimating poverty, anchored poverty and mean welfare.

Questions and problem reports: github.com/Noboyoshida227/eu-sae-application/issues