ADMINISTRATOR MANUAL · ENGLISH EDITION

Business Process Map Administrator Manual

Consoles, operations and governance for system administrators. Everything in the User Manual applies to you too.

Company process-map system • As of 2026-11-05

What's inside

01 The Sysadmin Role 3–5

02 Admin Console Map 6–7

03 Content Management 8–14

04 Directory & Org 15–20

05 Framework Management 21–32

06 Database & Backups 33–36

07 Approvals · Groups · Trash 37–41

08 Dashboard 42–43

09 Configuration Reference 44–46

01

The Sysadmin Role

How sysadmin is granted and what it unlocks.

How it's granted

Environment variable

Not in the DB. `BPM_SYSADMINS` (comma-separated login IDs), read at startup.

Dev default

With auth off, effectively everyone is sysadmin.

Real auth

With `DEV_ENFORCE_PERMISSIONS=true` or real auth, listed IDs only.

Idap mode

The Local Accounts Sysadmin toggle can grant it too (effective only there).

Employees tag

Settings → Directory → Employees tags them Sysadmin. **Env-listed users** can't be turned off from any screen.

What sysadmin unlocks

Owner on every map

Collaborators · approvers · visibility · versions · deletion.

Force checkout

The only role that can take another user's edit lock.

Admin consoles

Every admin-only console under Settings.

Moderation

Group approvals · feedback replies · the global trash · manual publishing.

Withdraw is the exception

Pending / Approved versions only by the submitter. Rejected also by owner / sysadmin.

02

Admin Console Map

Every console on the Settings rail, at a glance.

The Settings rail

Content

Notices · Manual · **Knowledge base** · AI chat · **AI prompts** · **Runs**.

Directory

Employees · Departments · **Catalogs** · Local Accounts (ldap only).

Framework


Categories & import (**Manage / Status** views). Delegated admins see their subtree.

Database · Approvals

Tables · Batch jobs (**Back up now**) · Approval Queue.

More

Checks (**Orphaned refs**, everyone) · Groups · Analytics · Trash.

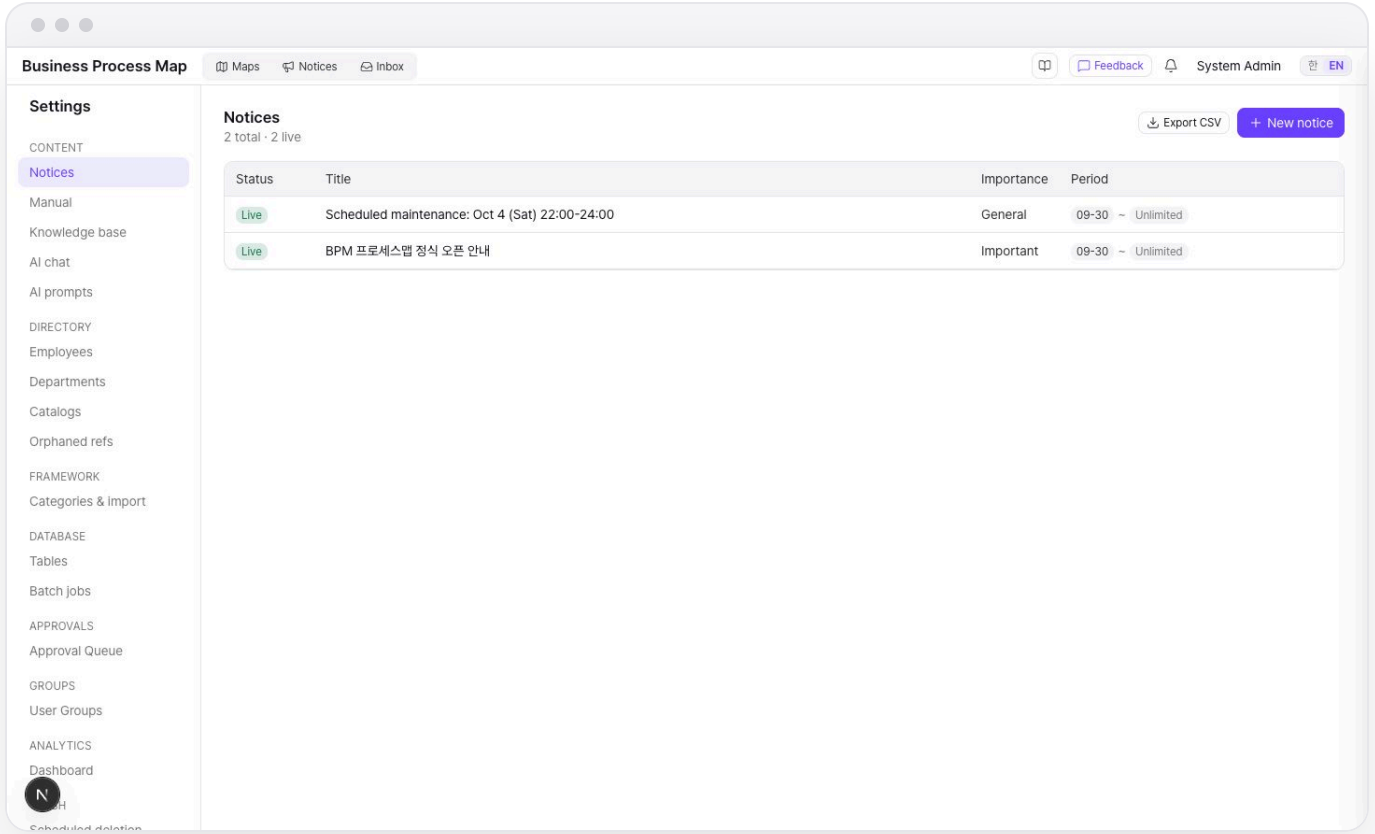

03

Content Management

Notices, the in-app manual, AI knowledge · settings · prompts, and feedback.

Notices

Fields

Title · importance (Important / General) · posting period (open-ended allowed) · Markdown body.

Notify all

Check Notify all users on publish to push to every inbox.

Visibility


Users see active notices only, the admin list shows all. CSV export.

Hard delete

Permanent, no trash. Already-sent bell notifications remain.

Load from file

Fill title and body from a `docs/notices` draft shipped with the build.

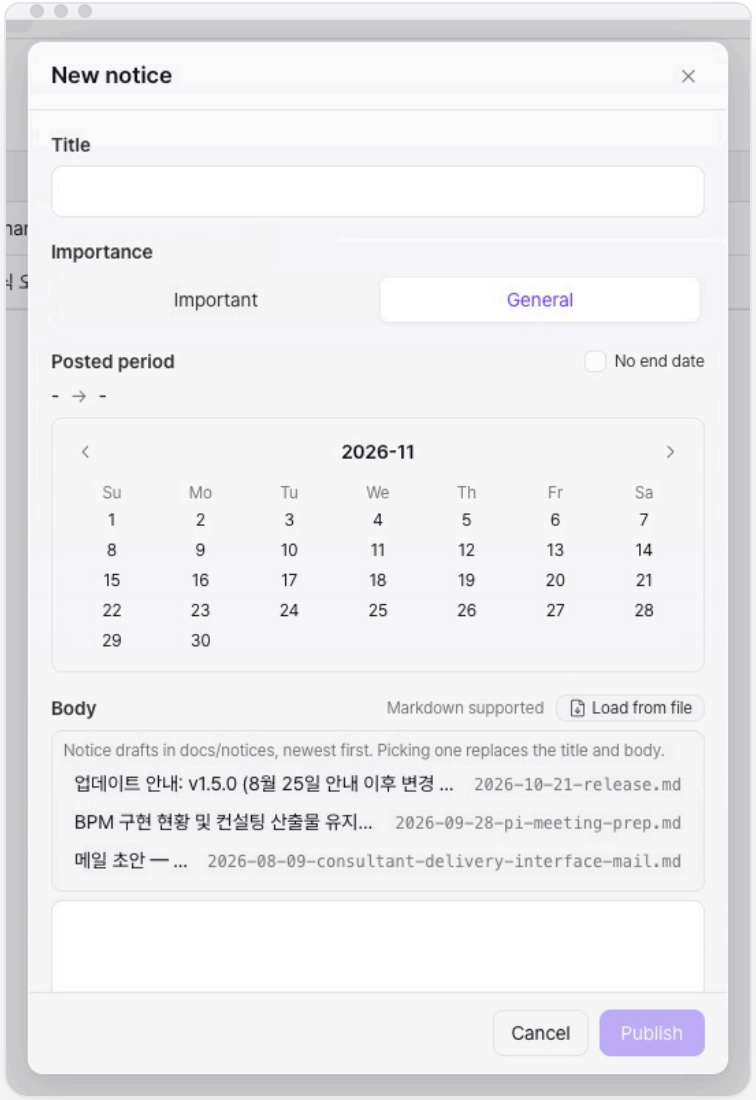

Publishing the manual

Several documents

`/manual`. Format (markdown / HTML) and language (KO / EN). Hand-made docs stay editable.

Synced from files

The six `docs/manual` files apply on deploy automatically (the file wins).

KO / EN pairing


Titles come from the first heading. Same order keeps the language toggle on the same document.

Locked

Docs with the **Synced from file** chip are read-only. Edit the md and redeploy.

TOC rule

`##` / `###` headings. Images and raw HTML don't render.

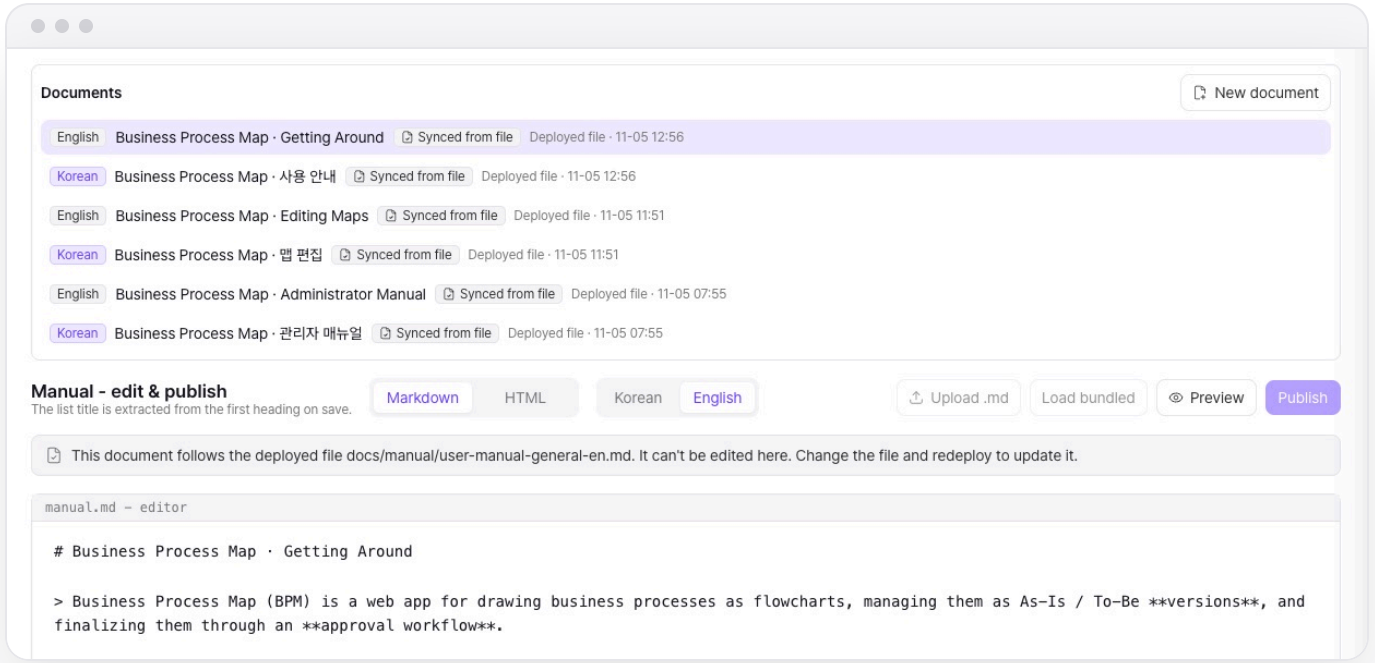

Knowledge base

Purpose


Org documents the AI consultant cites in interviews. Upload SOPs and guides.

Formats

pdf · docx · pptx · xlsx · txt · md, up to 20 MB per file.

Prerequisite

Works only with both `AI_ENABLED` and the embedding server `EMBED_URL` set.

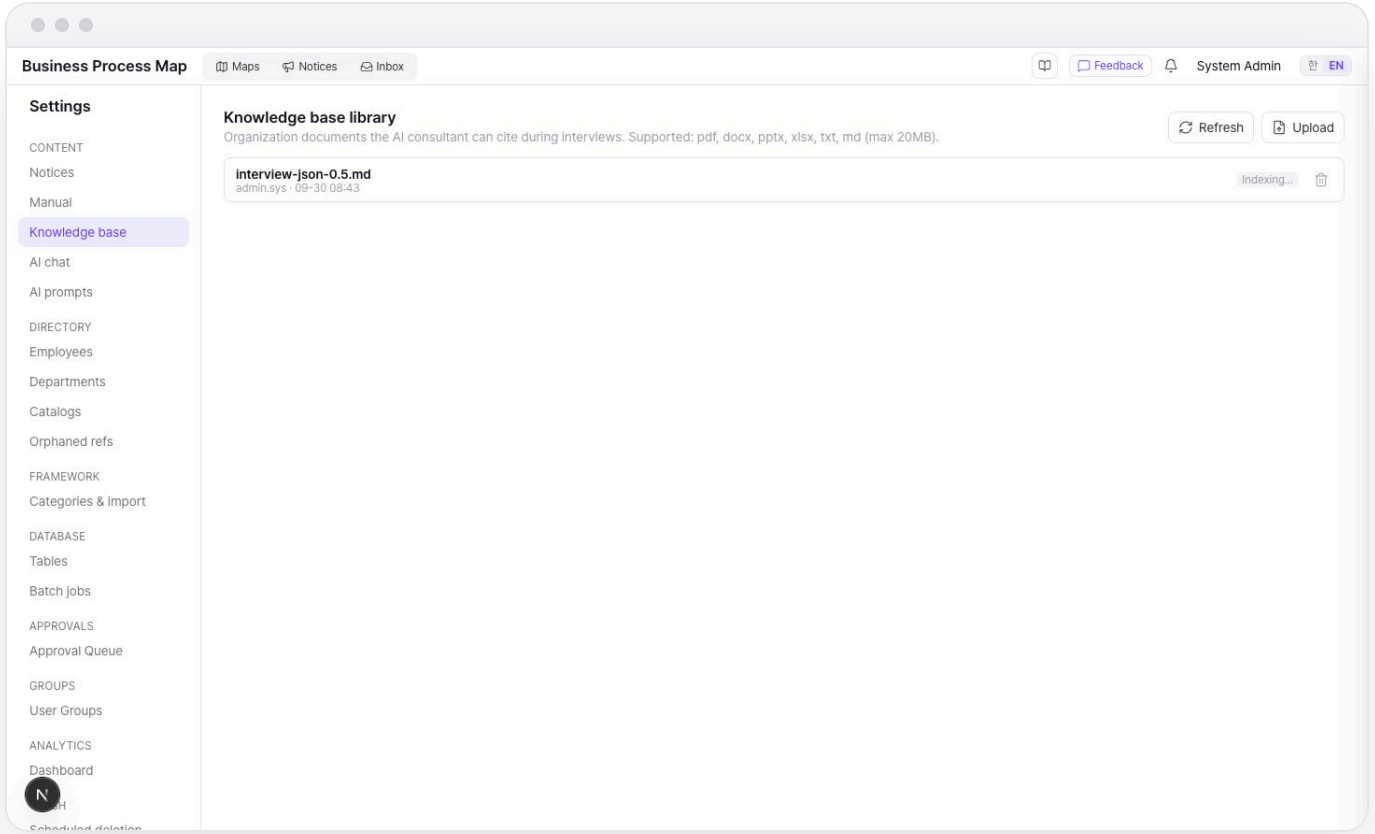

AI chat settings · AI prompts

AI access switch

Pauses every AI feature without a redeploy. Availability = `AI_ENABLED` AND the switch.

Chat storage

Always server-side (user × map, owner-visible). Not a toggle.

Retention caps


20 chats per map · 200 messages per chat · 180 days. Applies immediately.

AI prompts

Override the built-ins. Saves apply instantly, clearing falls back.

Re-check

While overridden, prompt improvements shipped in code are not picked up.

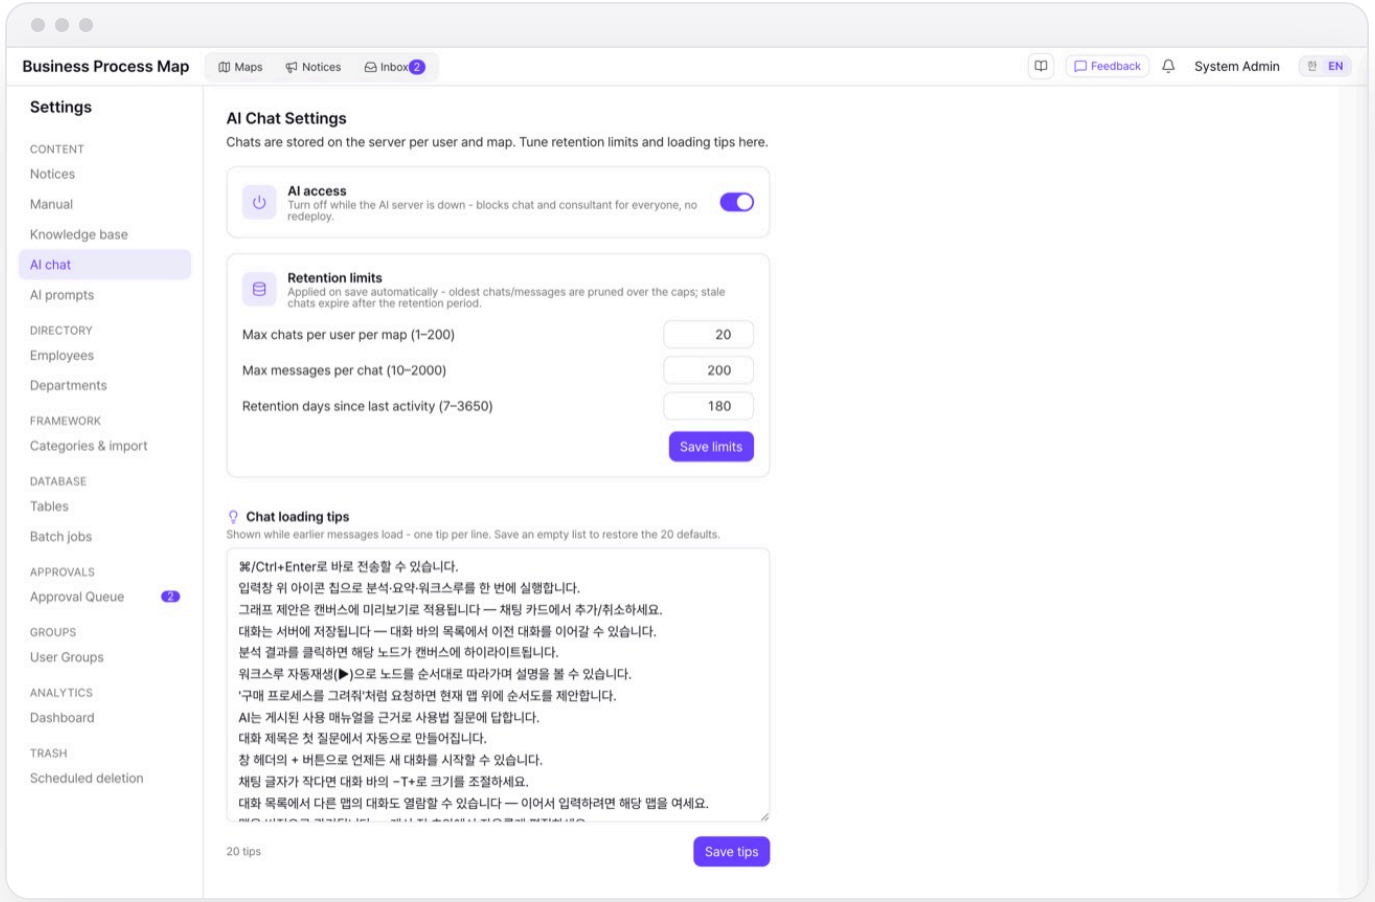

Run settings (Runs)

Idle · summary

Idle warning 30 days · auto stop 40 · summary 30 days after the end (defaults).

Caps

Open: 10 solo per person, 30 shared per map. Keep: 50 shared, 10 solo.

When it applies


Caps on save; day counts from the nightly 03:30 cleanup.

Checks

Days 1 to 3650, caps 1 to 1000. Auto stop must come after the warning.

Results

The **Run retention** card under Batch jobs.

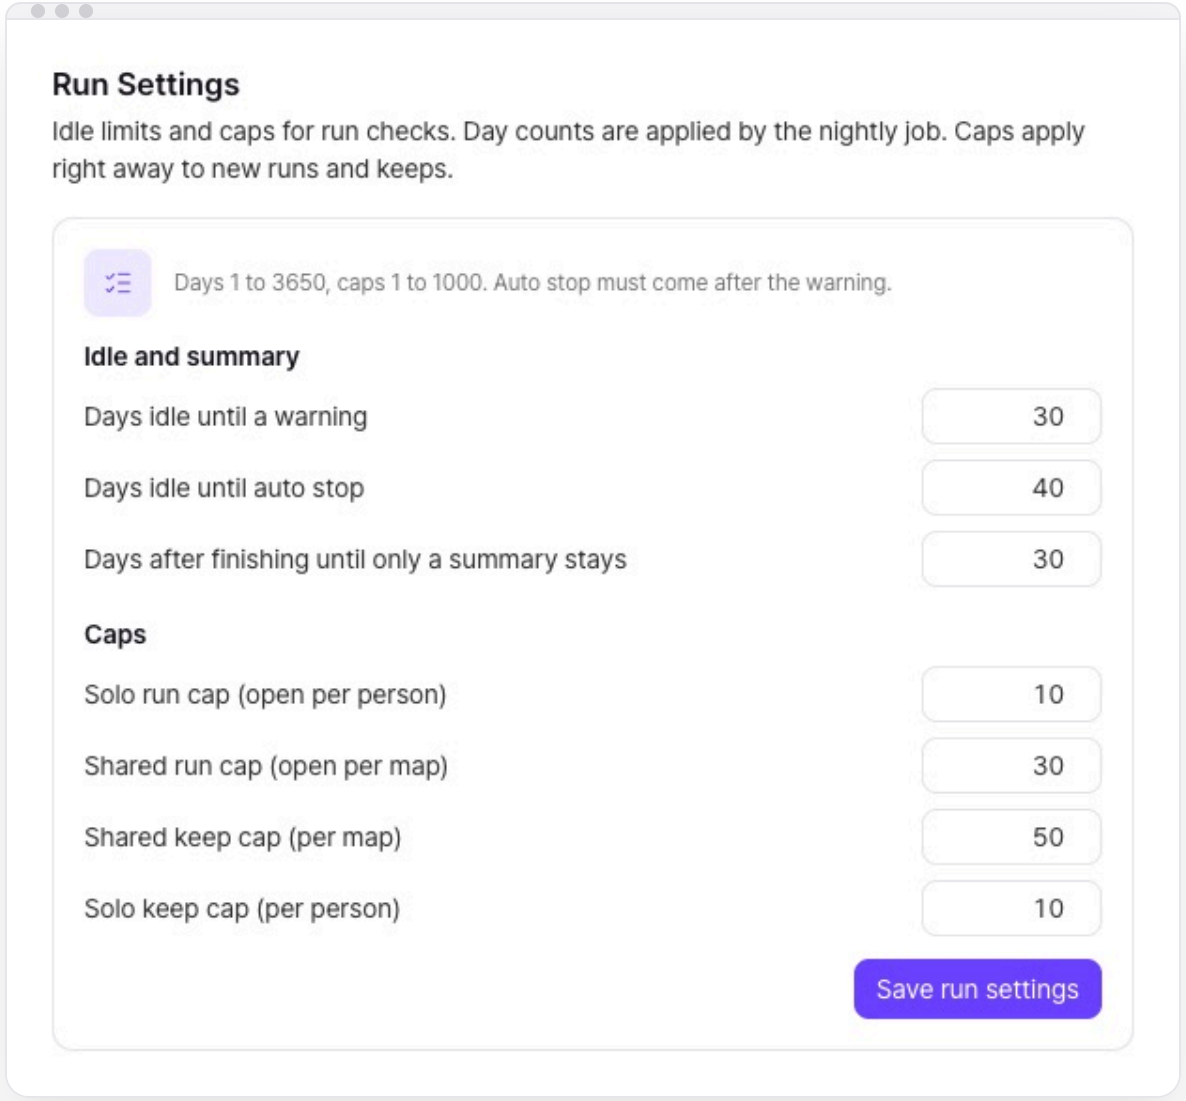

Feedback administration

Status · replies

Sysadmin only. **Done** locks further replies.

Deliberate notifications


Send notification (reply, resendable) ·
Notify status change (once).

Sent log

The "Notification sent ⟨time⟩" meta row.

Notes

Anyone writes, edits keep history, delete = archive. Purge only via the `feedback_notes` table.

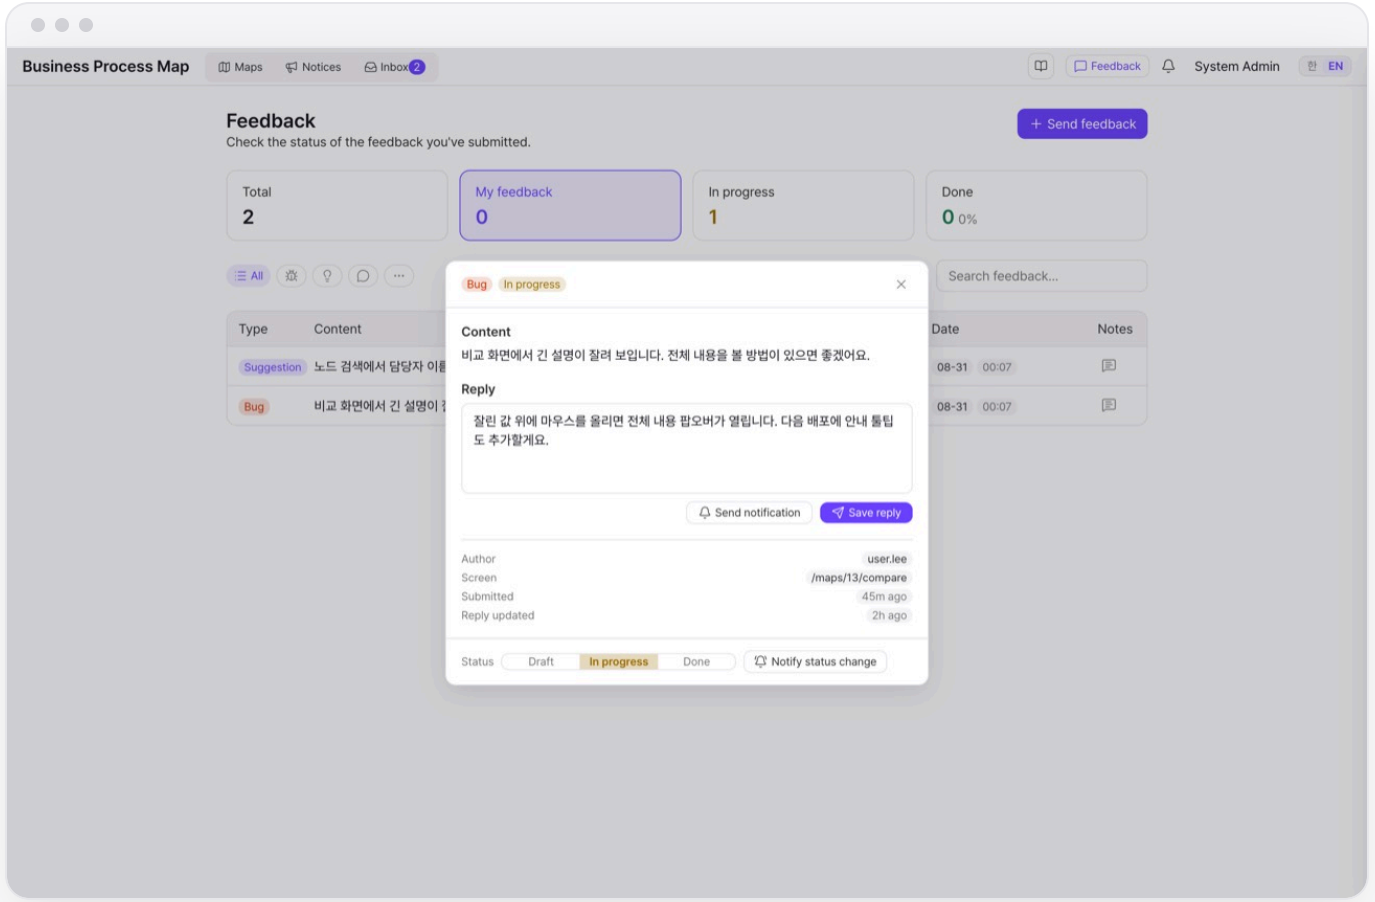

04

Directory & Org

HR-webhook sync, the departments basis, heads, and consultant accounts.

Employees & sync

Source

The n8n HR webhook. A full sync refreshes employees plus departments (AD only enriches titles).

Sync all from AD button

Employees tab. Ends with a scanned / upserted / deactivated / deleted summary. One per 5 min.

Auto sync


`HR_SYNC_INTERVAL_HOURS` (24 h) counts from the last run; overdue runs 5 min after boot.

Safeguards

sync-preview, deletion cap `HR_SYNC_DELETE_CAP_PCT` (20%), mass departures logged per run.

Departures

Not deleted. Marked active=false and excluded from pickers.

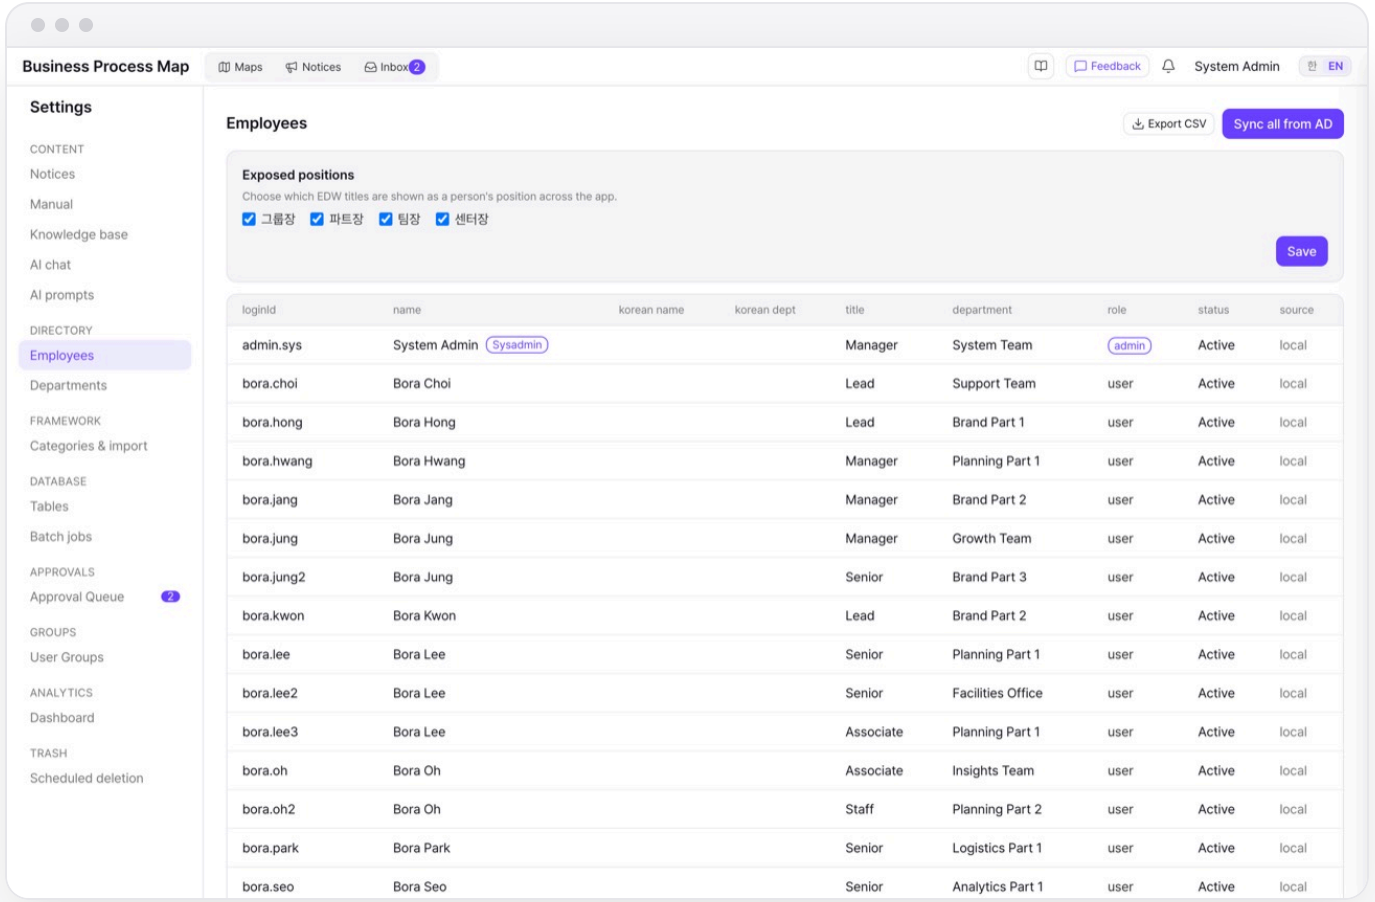

Departments & heads

Org basis

The departments table is the single source for the org chart and path resolution.

Heads

Determined from EDW position (FRNM) data, tagged Manager on the chain.

Exposed positions


An Employees-tab card picks which EDW titles show (defaults: 그룹장 · 파트장 · 팀장 · 센터장).

Clean-up

Stale department and departed-person references go to the **Orphaned refs** tab.

CSV

Both tables export (BOM, formula-injection guard).

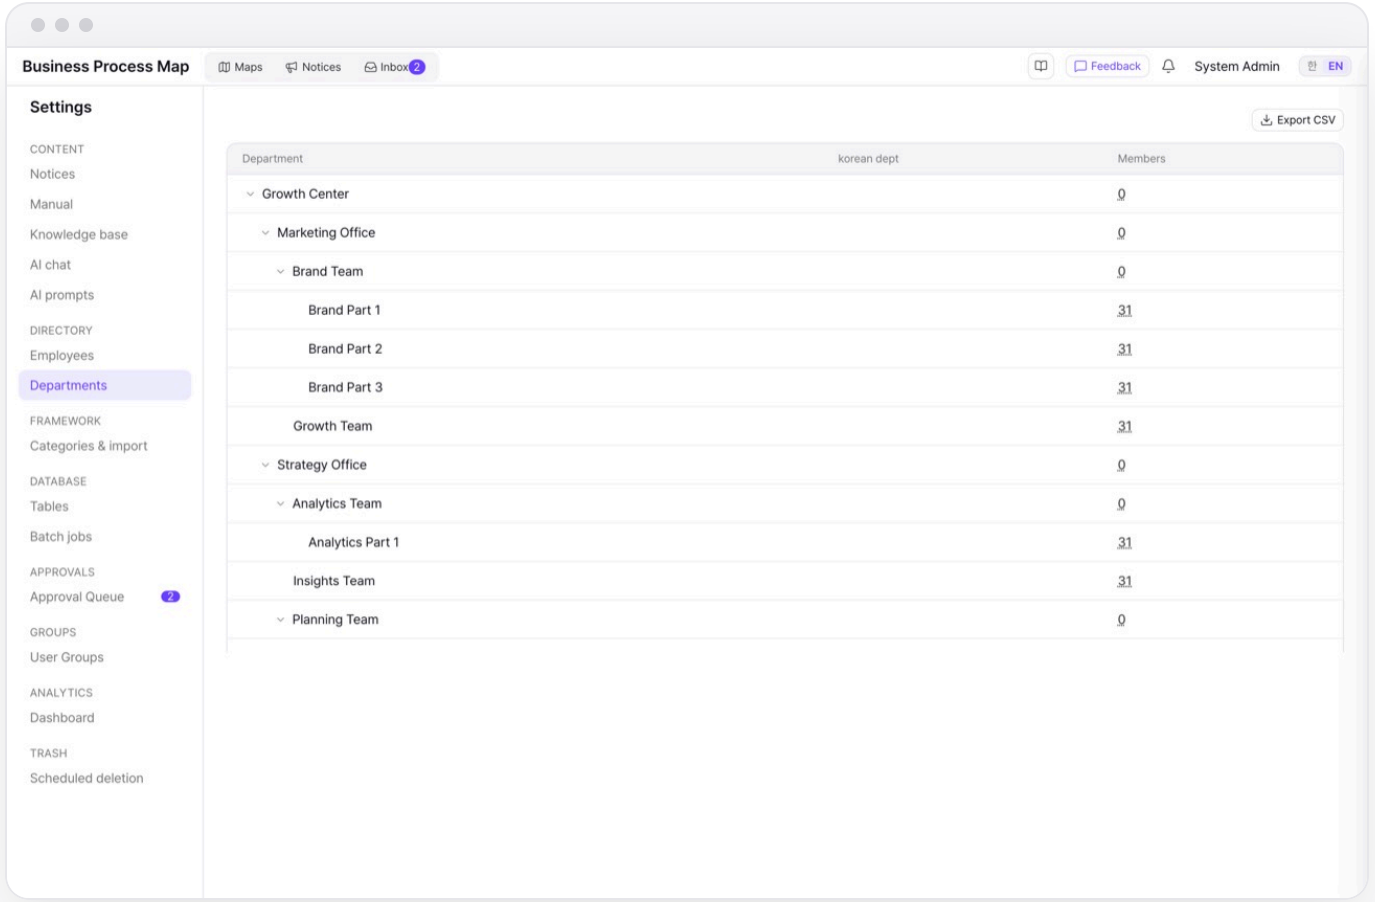

Catalogs (Roles & Systems)

Autocomplete lists

For node Role and System. **Role | System** tabs, item list left, **alias** editor right.

Aliases

Typing one saves the canonical spelling (`sap` → SAP ERP). One alias belongs to one item.

CSV import


Two-column `value,aliases` (split by `|`). The System tab promotes values in use.

Other

Reserved in the System list (undeletable, always on top). Editing is sysadmin-only.

Scope

Editor · CSV · AI assistant · interview · JSON import all normalize against these lists.

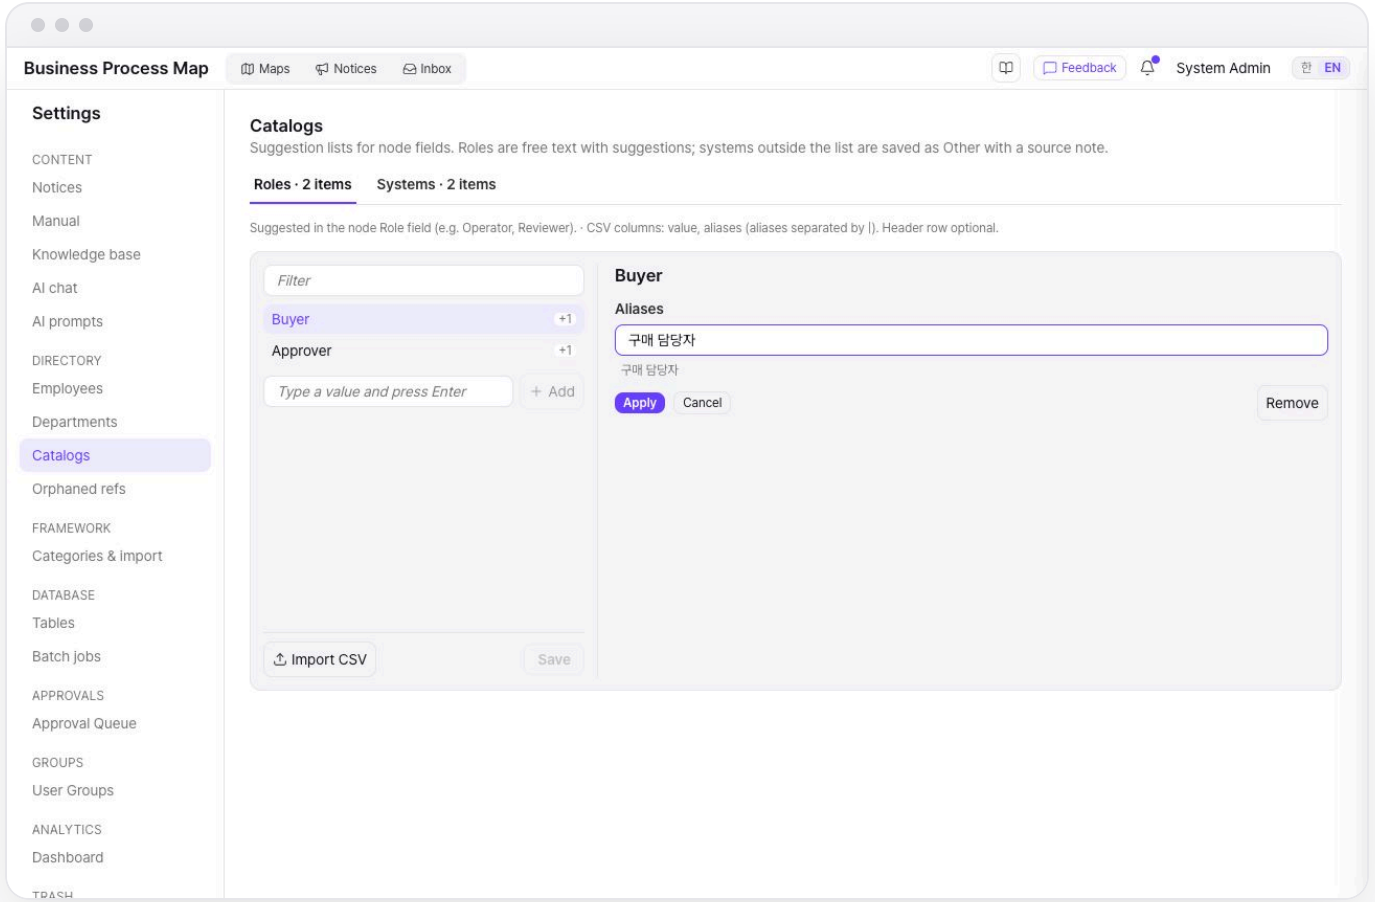

Orphaned reference audit

Rescan

12 places on demand. Node departments / assignees, SP designations, owners, collaborators, approvers, groups, admins.

Grouped by value

Vanished department path or departed person. Expand for each reference with a checkbox.

Bulk replace · remove


Checked lines get a current department or person. Node fields are display-only.

Owner notices

Stale refs fix request (one per owner). Departed owners get a new one assigned.

User side

Stale refs badge on cards, the home Issues filter, warning-colored node icons.

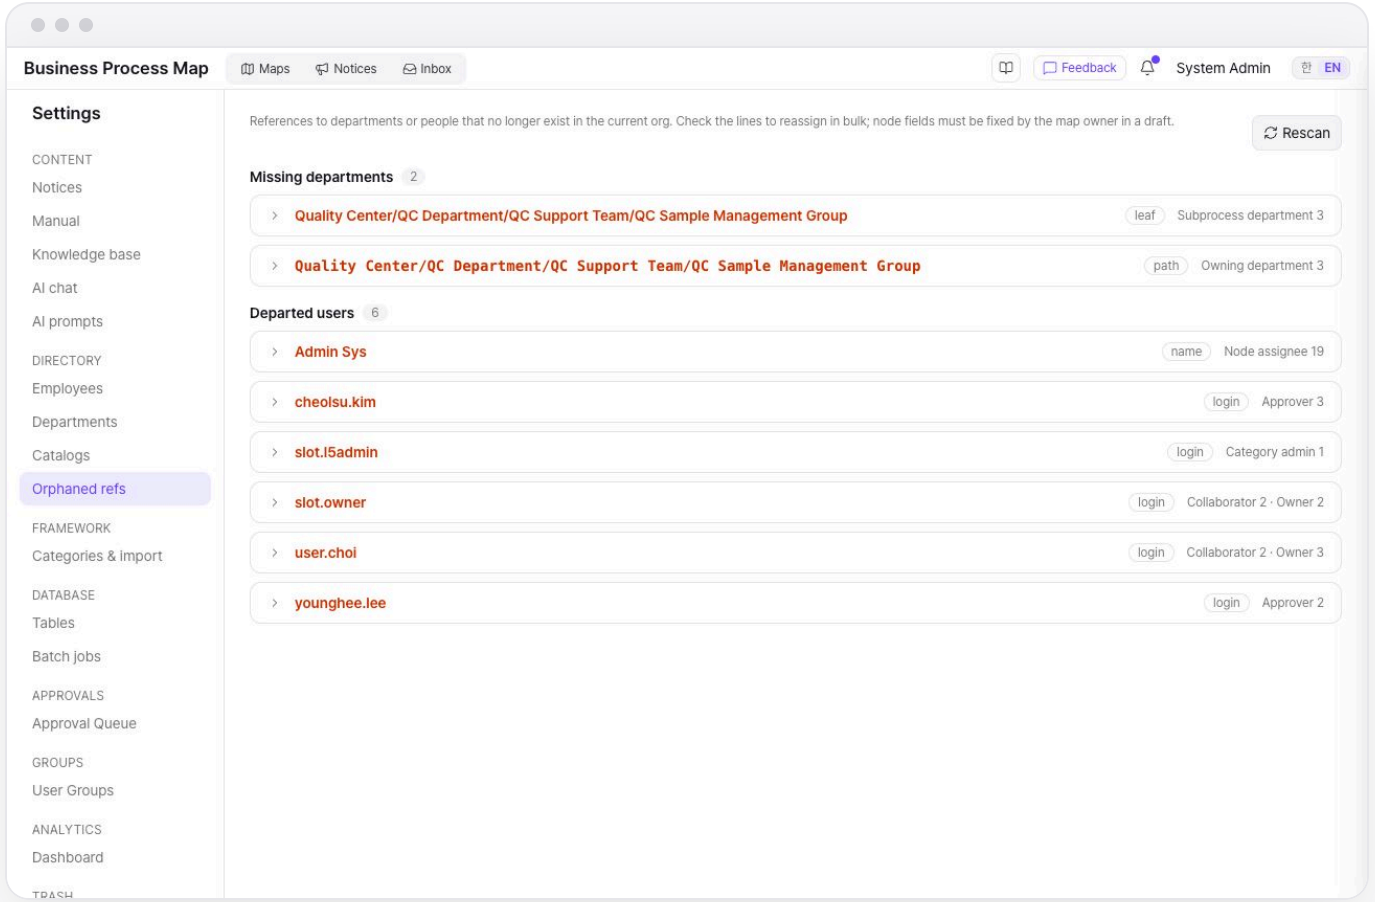

Local accounts (ldap mode)

When shown

Only in ldap auth mode. ID / password logins for external consultants.

Sign-in order

Local accounts first, then AD fallback. 5 attempts per 5 minutes, concurrent ones included.

Per account

Reset password · deactivate / reactivate · delete (permanent). Deactivate first when an engagement ends.

Sysadmin toggle

Local accounts only (directory: `BPM_SYSADMINS`). Revoked when HR takes the ID over.

Tokens

Lifetime and secret rotation live in docs/deploy/deploy.md §2.1.

05

Framework Management

Category tree and level delegation, linkage admins, confirmation governance, slot changes, the status board, interview import, filling an L5 with AI.

Category management & level delegation

Layout

Manage / Status toggle. Tree left, detail panel right. Single-child chains open through to the fork.

Six actions

Add child · Rename · Managing dept · Linkage admins · Move · Delete. Blocked ones show a reason.

Rules


Max 5 levels, maps on L5 only. Duplicate siblings 409; level-changing moves over maps 422.

Managing department

Empty inherits from the parent. Becomes the canvas's owning department.

Delegation

Admins add / rename / reorder under their own category. Can't move or delete it.

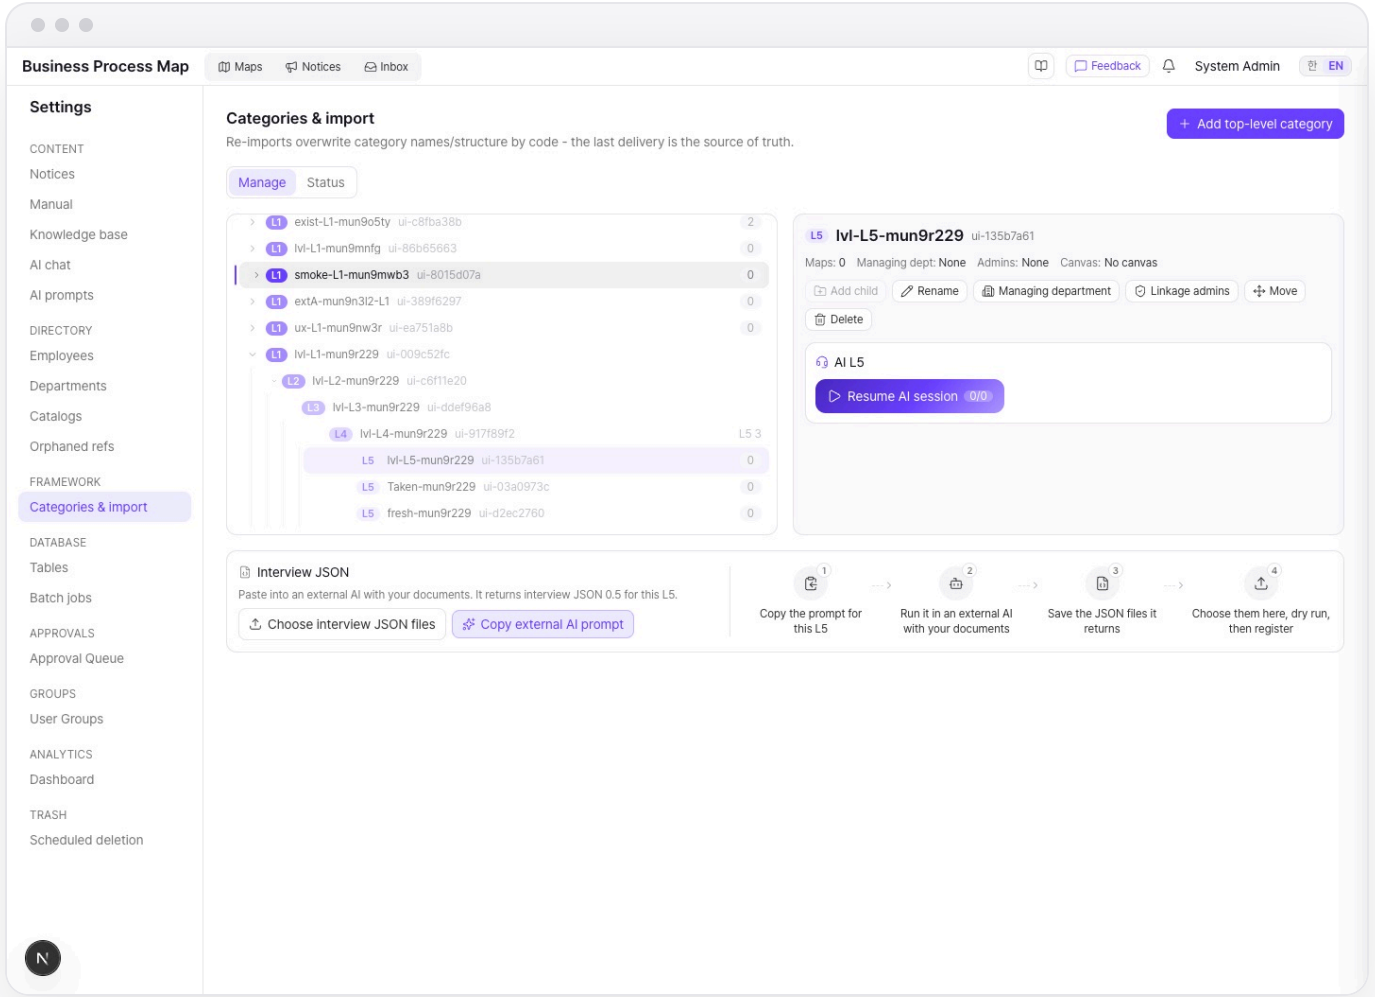

Linkage admins

Appoint

Select a row → **Linkage admins**. Saved on one confirm; removed admins are notified.

Inherit downward

Appoint at L1–L4 and every L5 canvas below becomes editable.

Shown as


The detail panel's info line (three names, then +N), dual-named per language.

Canvases

Real maps (`mode=framework`) hidden from the map list and SP library.

Major confirm

Permanently prunes the previous major's intermediate minors (X.0 and the last minor stay).

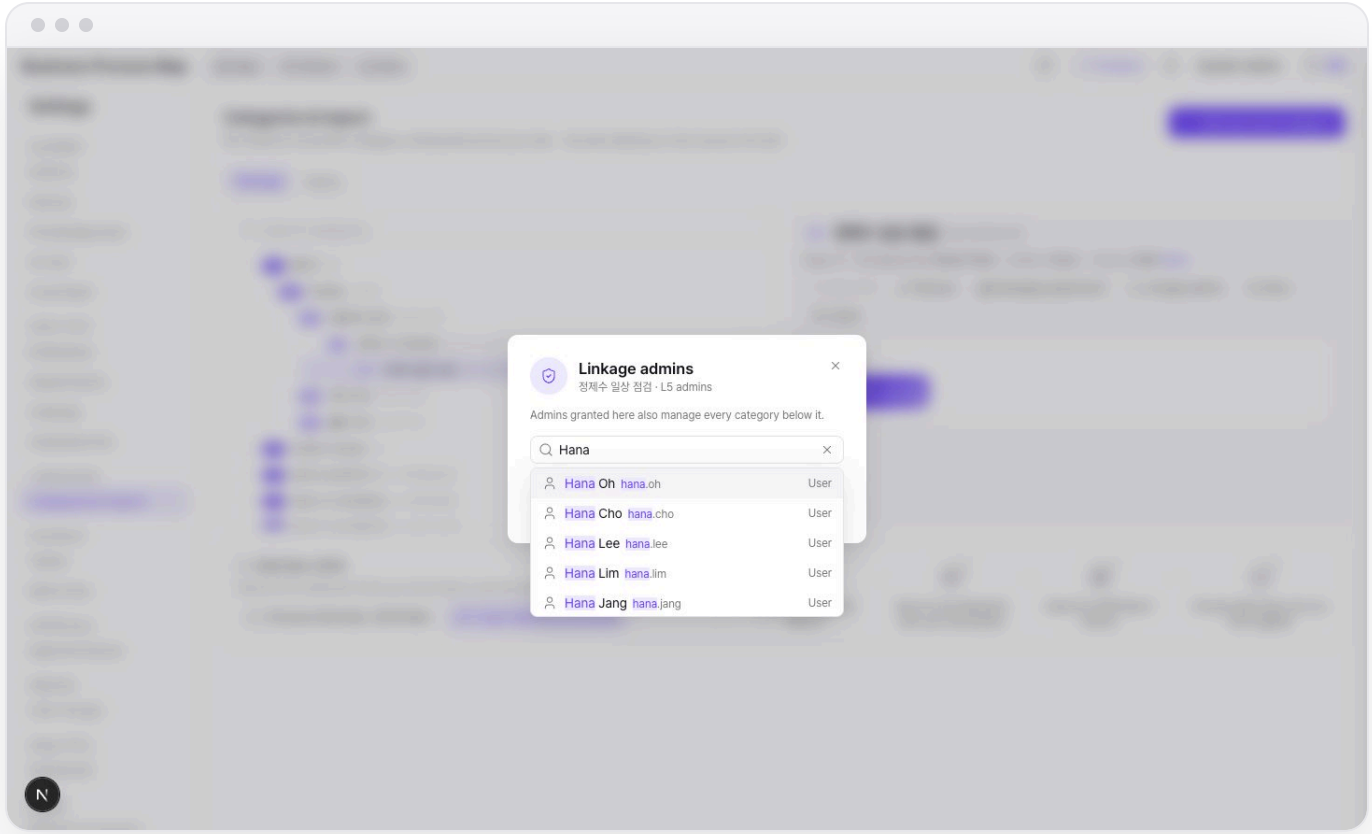

Confirmation governance

confirmed state

Apart from publishing. Snapshots and the draft can't be deleted. Regular workflows are blocked server-side.

Six gates

All L6 placed · no placeholders · no stale links · all L6 published · no exit-less loops · splits use a decision or a parallel exit.

Single source


The Approval tab's **Confirm readiness** checklist. One failing gate disables Confirm.

Who confirms

Direct admin or sysadmin holding checkout. Higher admins request; then only deciders check out.

Draft visibility

Admins and sysadmins only. Everyone else lands on the latest confirmed snapshot.

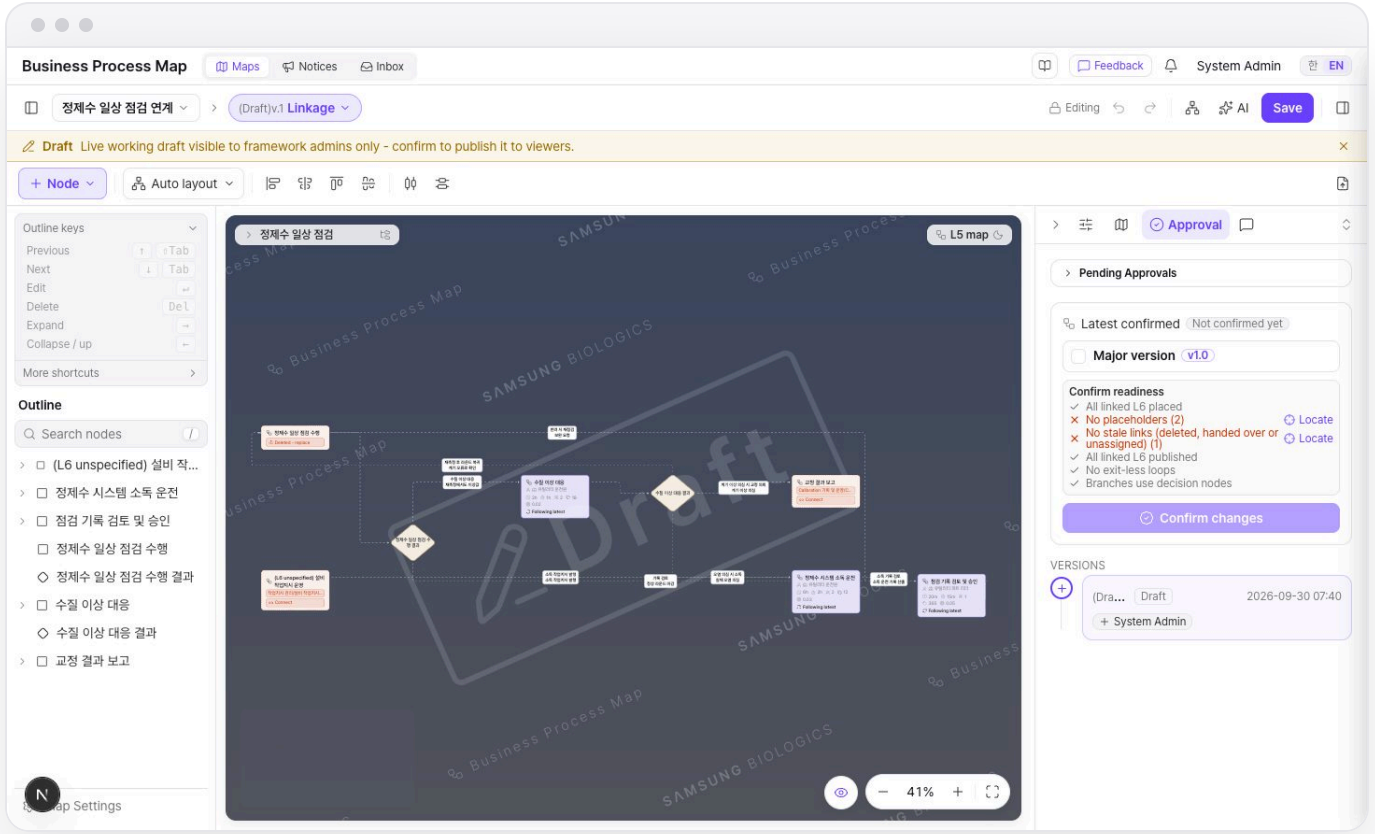

Slot changes

Slot

Which L5 a map belongs to. Assign · unassign · move · hand off · delete, from the **Framework pill**.

Decider

That L5's direct admin (sysadmins too). Higher-category admins only request.

Move


Both L5s' direct admins approve. An L5 without admins falls to sysadmin.

Request path

A direct-admin requester uses **Apply now**. Otherwise an `fw_slot` request lands in the Inbox and queue.

Fallback decider

Sysadmins decide from the queue. Map approvers cannot decide slot requests.

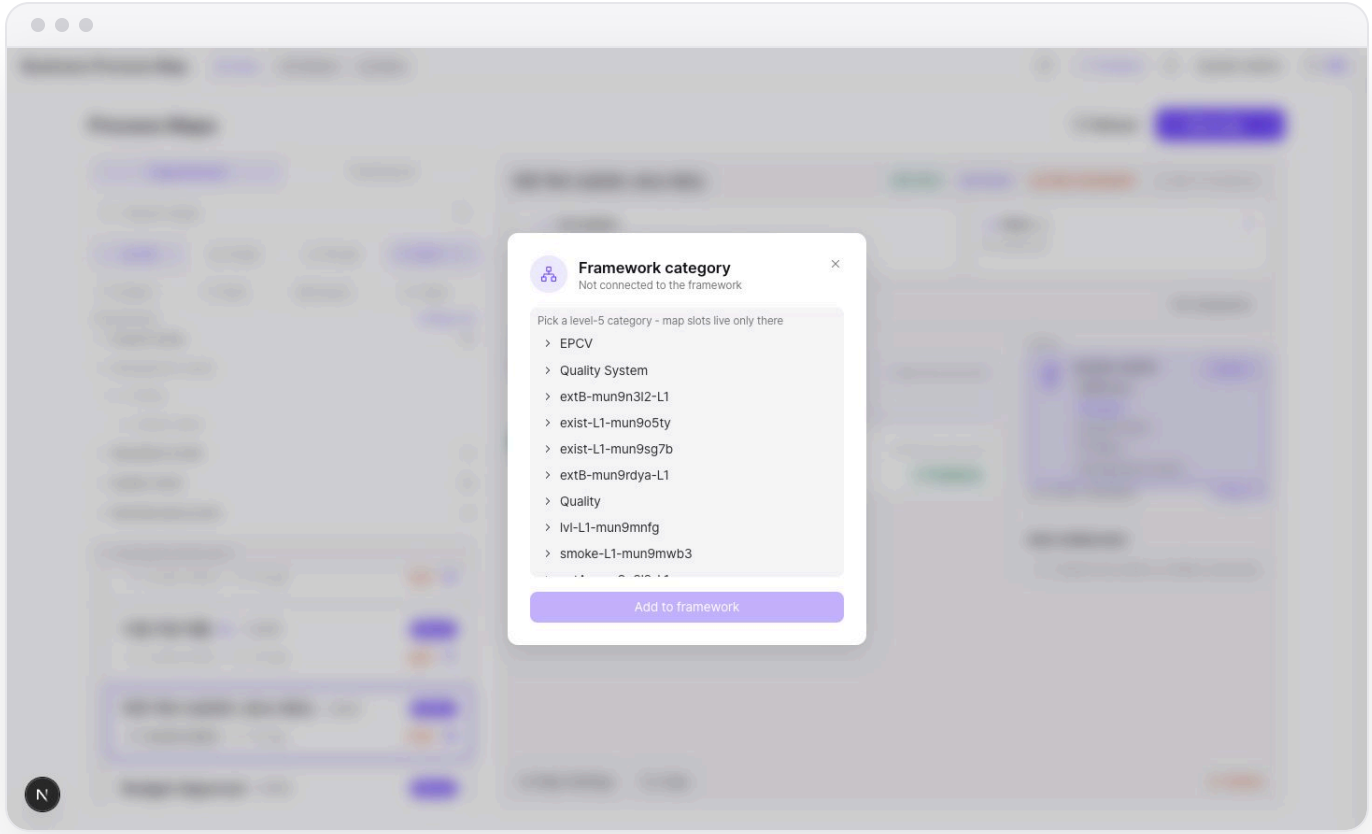

Status board

One table

Every L5 in scope. Path / Latest confirmed / Status (Ready · Blocked · No canvas) + Open.

Negative pills


Failing gates: Missing L6 · Placeholders · Stale links · Unpublished L6 · Exit-less loop · Split without a decision or parallel exit.

Home link

The category summary card shows the same verdicts under Subtree confirmation.

Delegated scope

Delegated admins see their own subtree only.

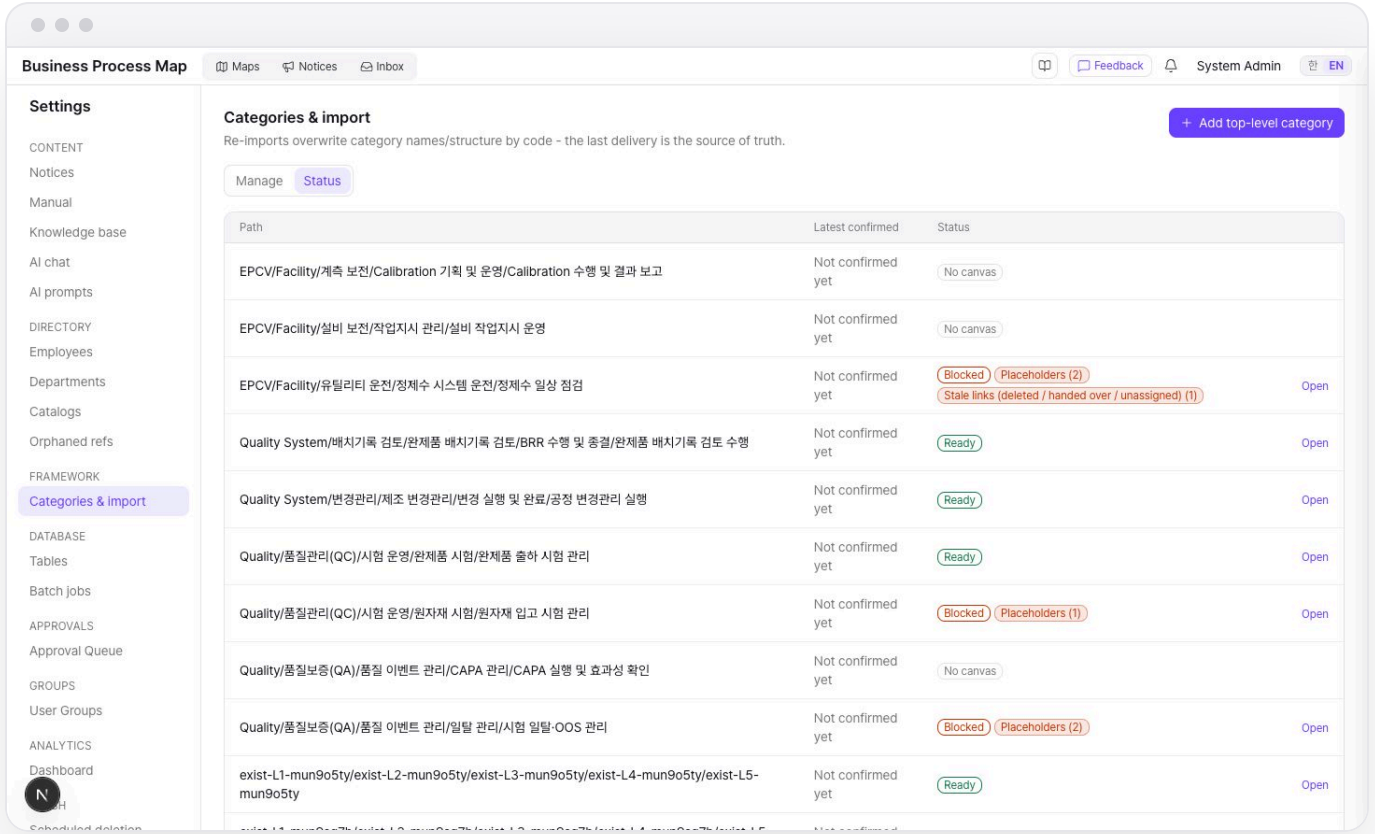

Interview import · format, dry run, governance

Flow

Interview JSON section → file-pill strip → Dry run → report → Apply. Sysadmin-only.

Format

0.4 · 0.5 (`externalTasks`); 0.3 rejected; idempotent. Files moving categories or maps fail.

Two-column report


Left: Summary · Needs review · External L6 · admins · governance. Right: files → L5 canvas → maps.

Governance changes

On re-import, differing owner / department / approvers / notes become rows: Keep ↩ / Replace ⇄.

Owner assignment

An empty or unknown owner makes the importing sysadmin interim owner (Owner unconfirmed).

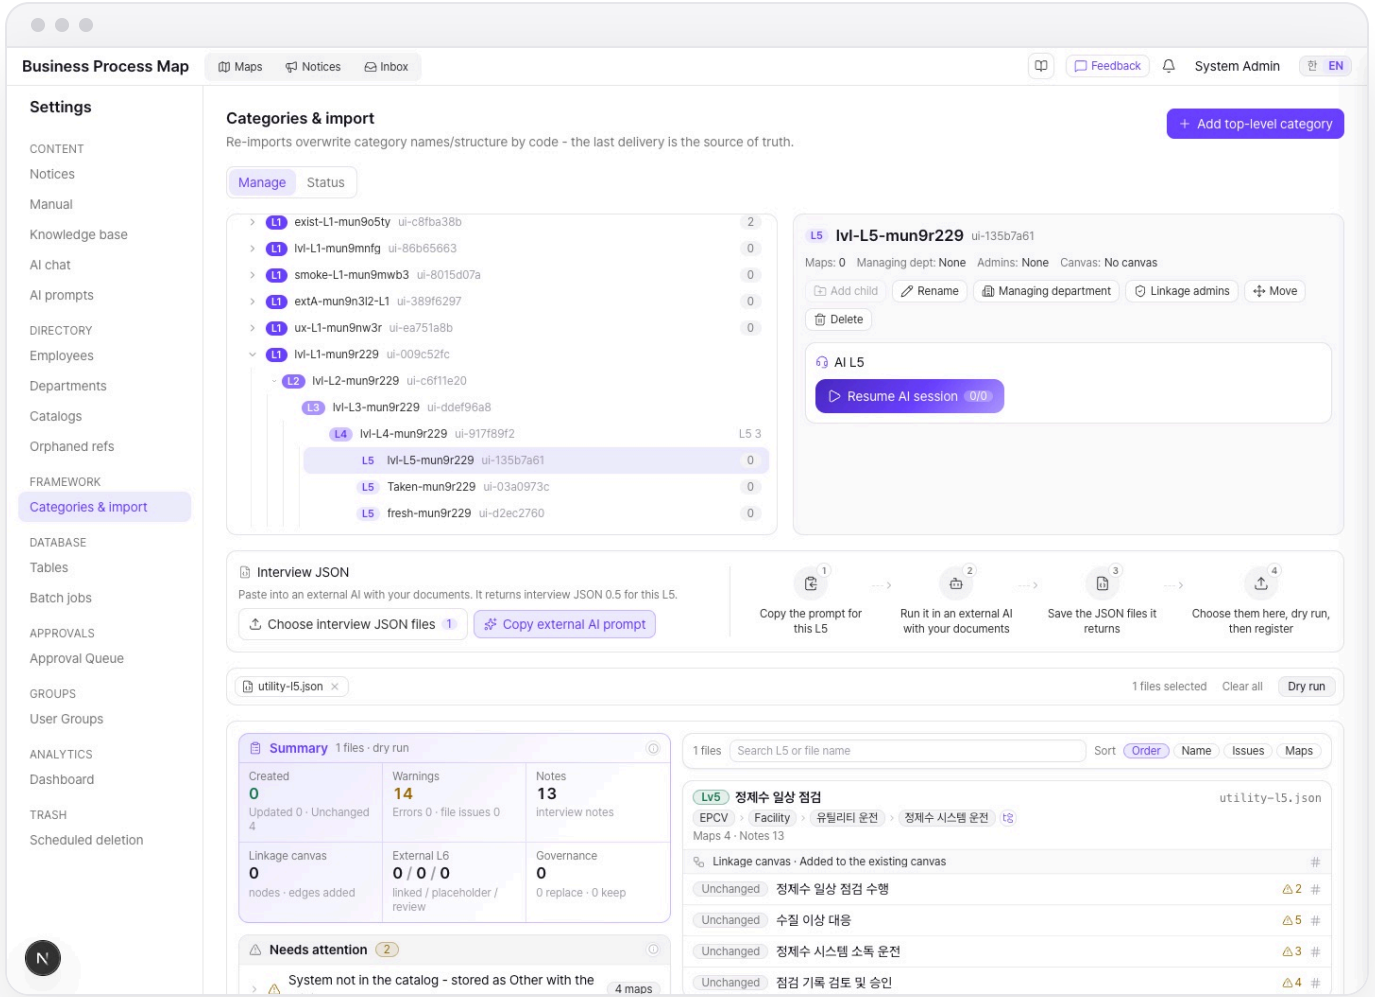

Interview import · landing rules, placeholders, notes

Department path
Exact → leading levels dropped → unique suffix → mirror chain. No match registers the path as-is.

Landing
Activities become nodes, edges connectors. Exclusive → decision, parallel → parallel exit.

Auto branches
Self-loops: "반복 여부(자동 생성됨)" (2nd onward numbered). Mixed fan-outs: "{activity} 결과".

Redelivery carry-over
Values carry over by activity name, or by position when only the name changed.

Fields and notes
Conditions, times and systems land as fields, originals kept as source notes. Systems matched to the catalog.

Automatic
Exact output = input matches link as IO, horizontal auto-layout, a draft right after publish.

L5 canvas
Built or extended from top-level L6 flows (exclusive → decision, parallel → parallel exit). Redelivery only adds nodes.

Notes
Exceptions, VOC and regulatory basis become map notes; L5 entry / flow become category notes.

③ Connections · ④ Register

AI proposal

Entering Connections proposes the L6 flow at once. Plan predecessors are the backbone.

Full-width canvas


L5 linkage canvas with a floating feedback chat. Drag, right-click branches, auto-save.

One outgoing connector

A new one marks the old in red dashes and replaces it. **Propose again** restarts.

Register

Confirm connections → the import screen with an automatic Dry run. Maps publish, the canvas stays draft.

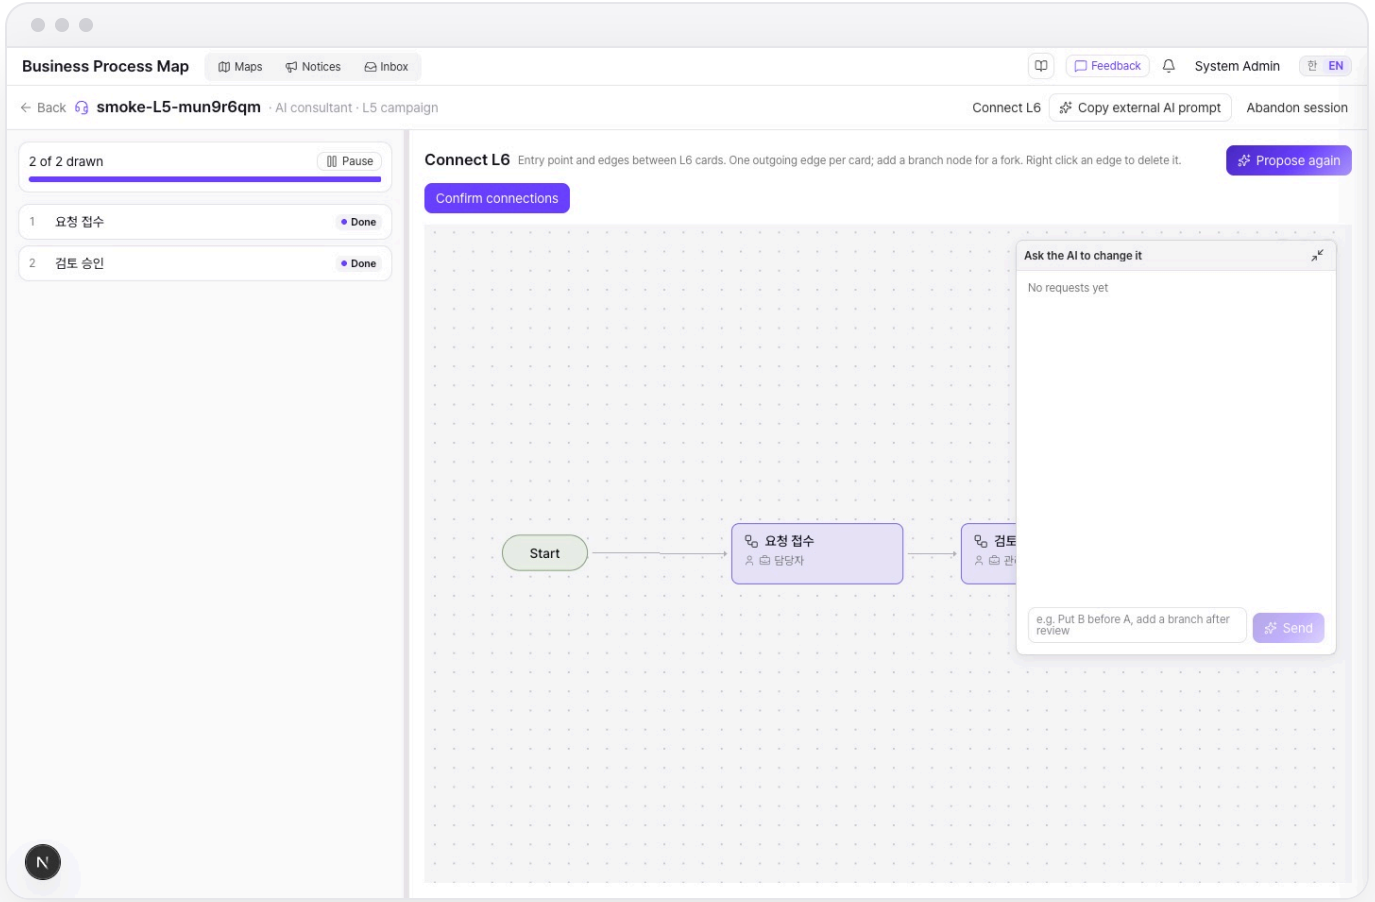

② Questionnaire · settling ambiguity

Per card

Decisions · exceptions · branches → activities → basics → I/O. A one-line reason per question.

Answer rules


All choice questions are required. Free text starts blank; **[AI suggestion]** types it in.

Placeholder

No detail needed yet? **Create as placeholder**. Draw again with AI before registration.

Background drawing

Submitting draws that card's flow while the next questionnaire is prepared.

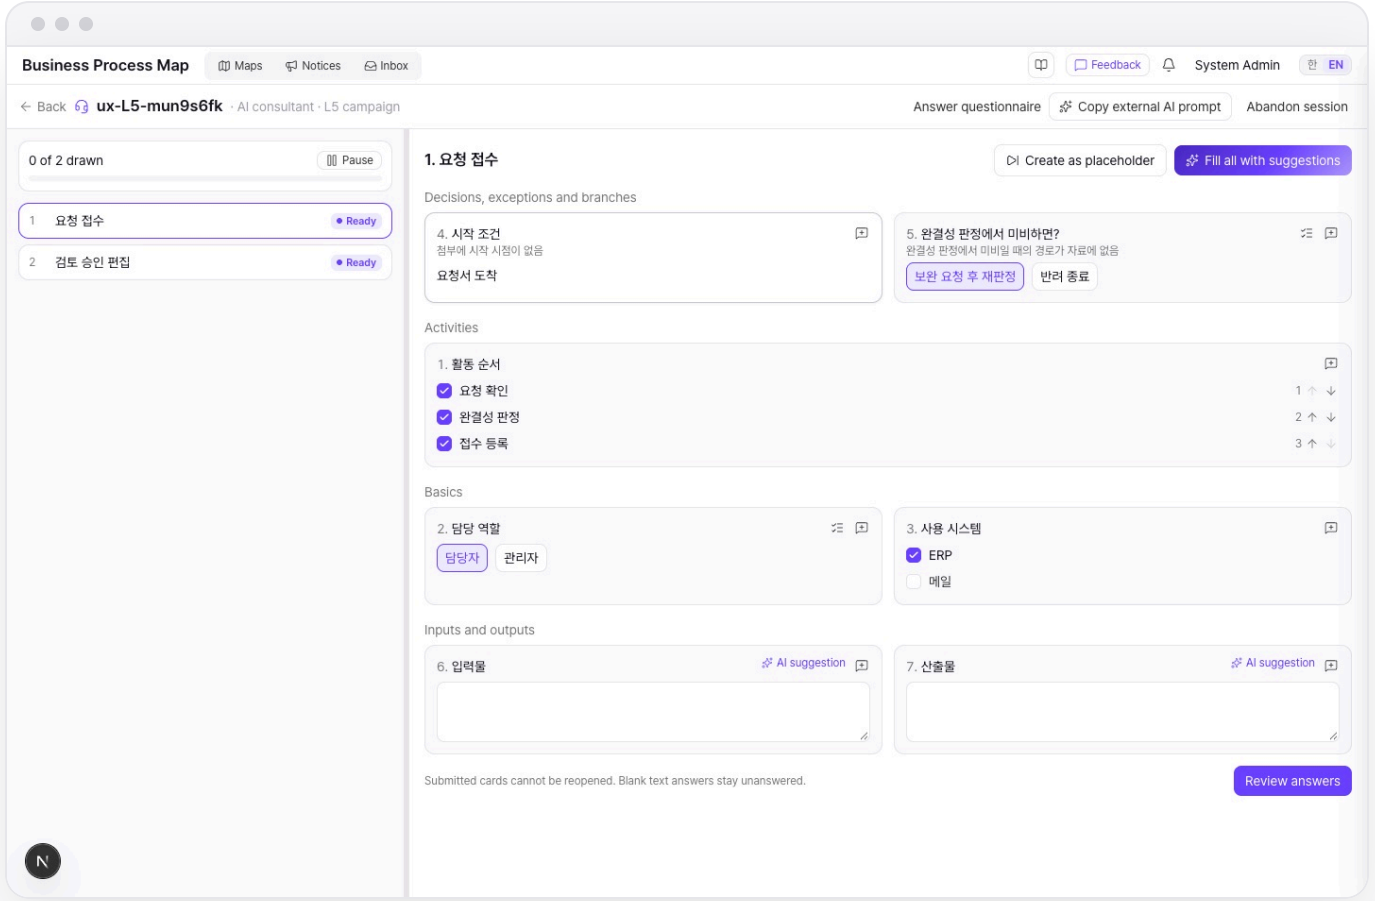

① Plan · cards, stages, external L6

Propose L6 cards

Brief and attachments → cards. Three columns: purpose | stage rows (one row = parallel) | card details.

Stages


Drag tiles between rows, reorder, open a new stage. Predecessors via tile **right-click**.

External L6

Tab or right-click an empty spot. Another L5's L6 as an external tile (connections only).

Pending removal

Removed cards stay as red tiles, restorable. **Lock** starts questionnaire prep.

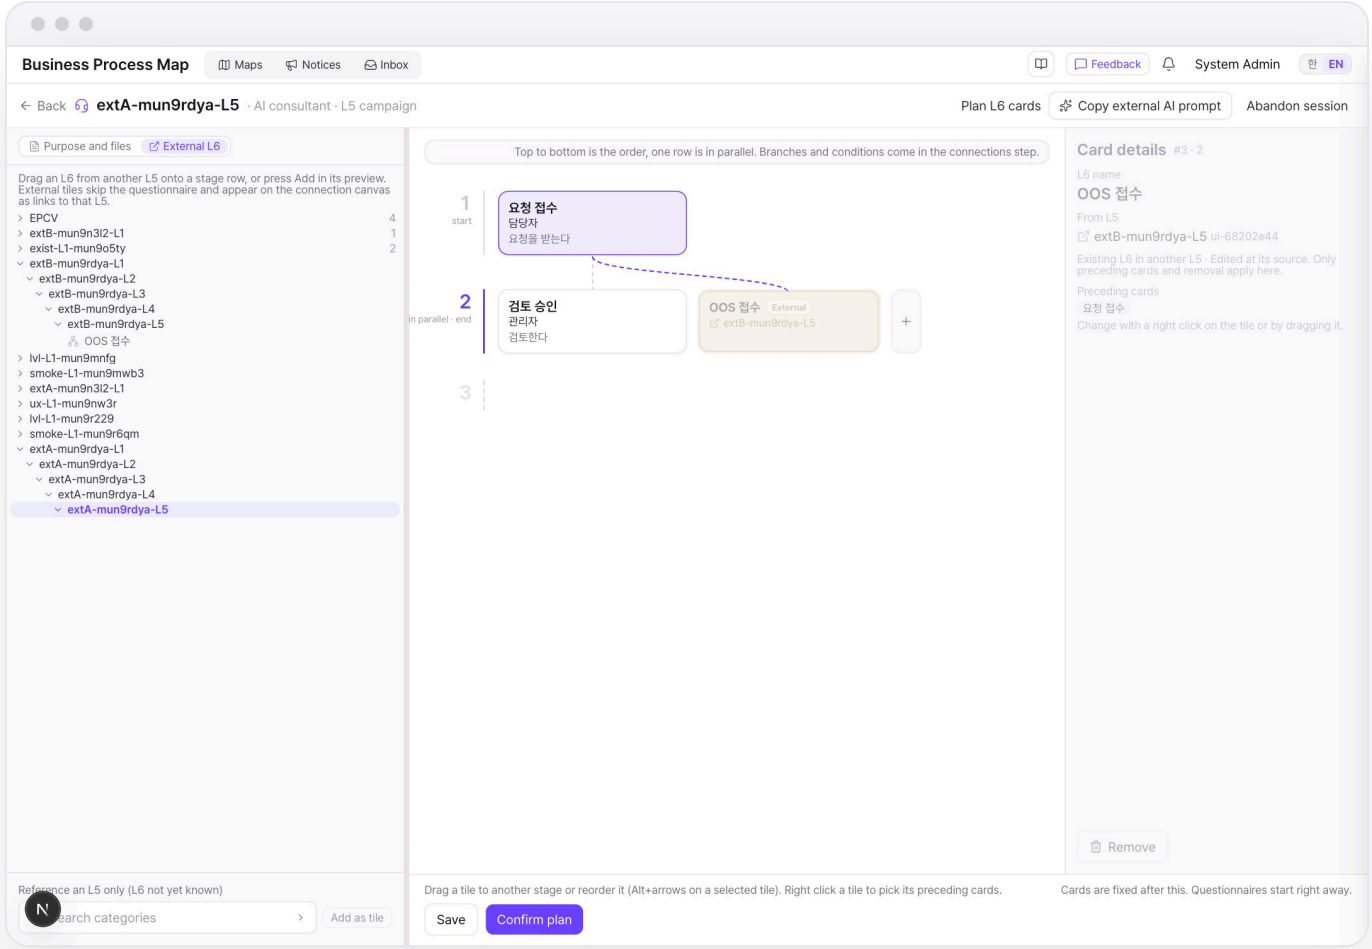

Filling an L5 with AI · entry & sessions

Entry

Select a row in the category tree → level-specific **tile actions** in the detail panel. Sysadmin-only.

Per level


L1–L3 Go down · L4 **Create L5 and start with AI** · L5 **Work with AI** / Resume.

Sessions

Stored in the DB. Leaving keeps them, resume from that L5 row. **Copy external AI prompt** round-trips.

Four steps

① Plan → ② Questionnaire → ③ Connections → ④ Register. Registered L6 load first as **Existing**.

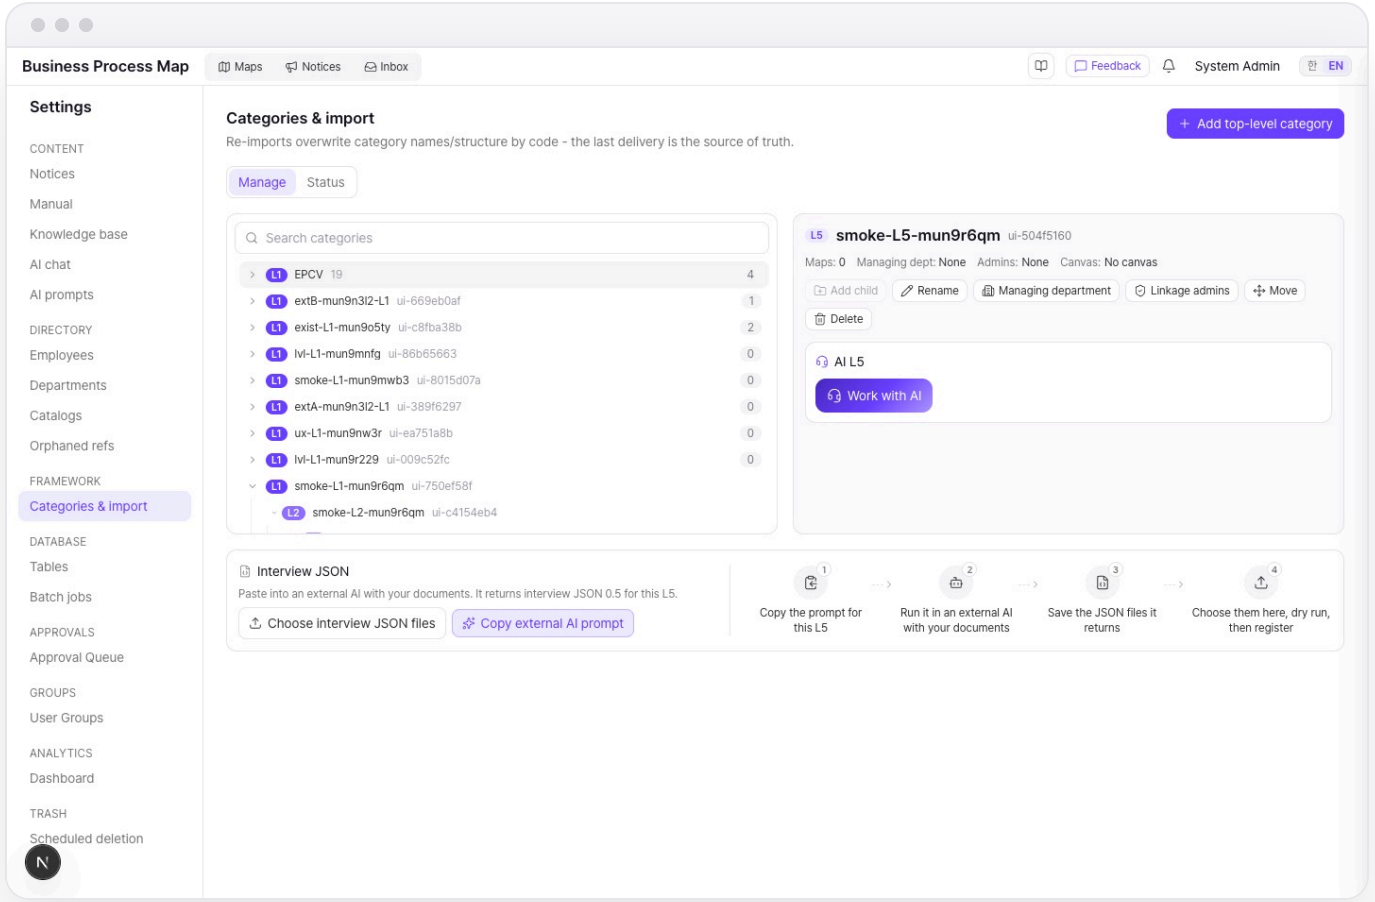

06

Database & Backups

The table viewer, notification purge, batch status, and daily backups.

The table viewer

Read-only

Server-side paging, sorting, filtering; never writes. `password_hash` shows [redacted].

CSV export

All rows with the current sort / filter.

Login records


`login_records`. One row per user per day, the audit view.

Notification purge

Selecting `notifications` adds a range purge. Grouped preview, then hard delete.

Retention

Notifications keep the most recent 100 per person.

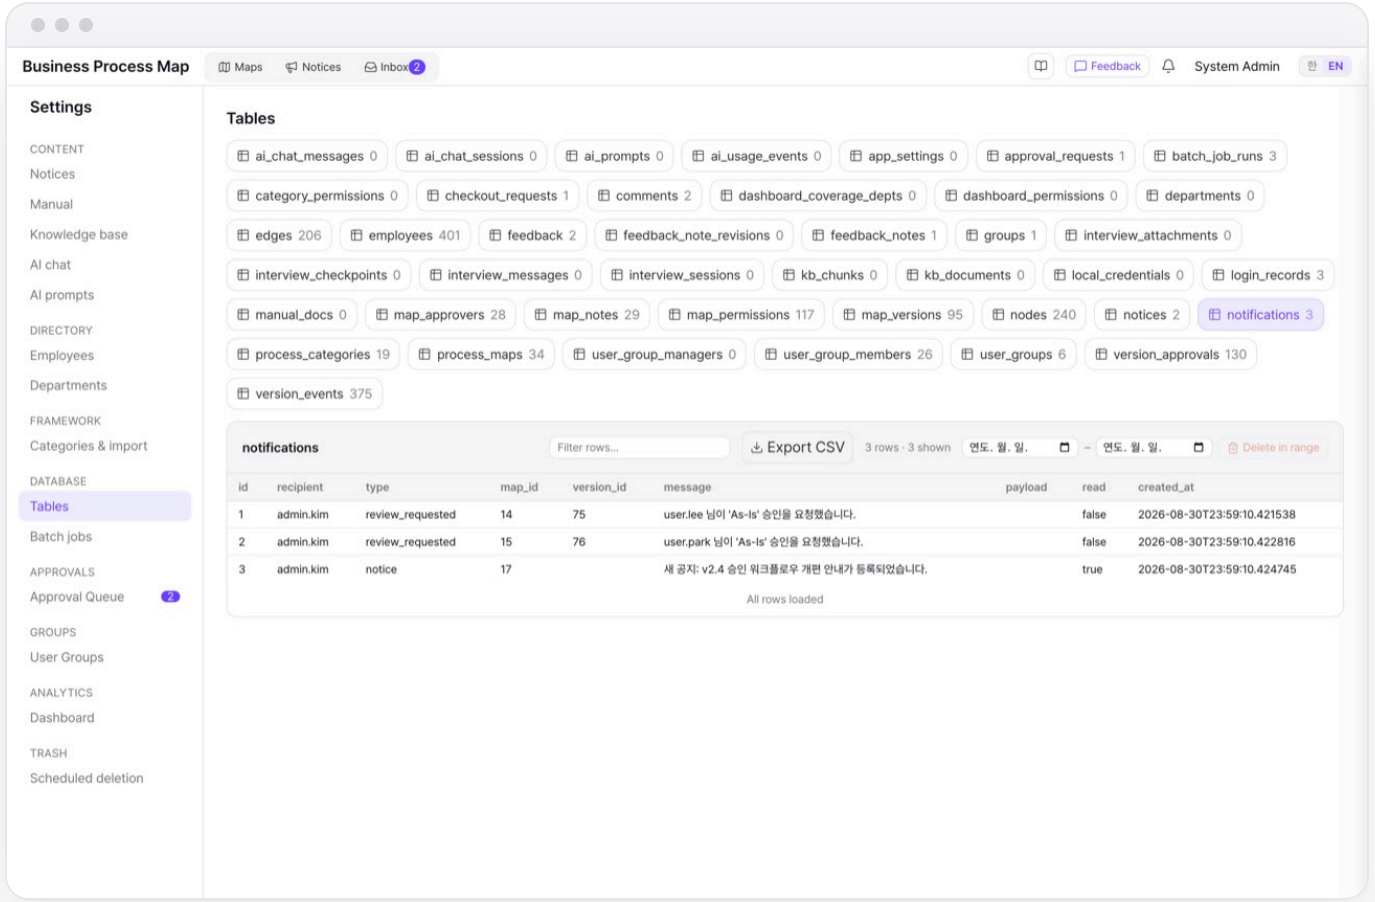

Batch job status

Per job

DB backup, HR sync and run retention. Last success and last failure.

Signal

A failure newer than the last success means act.

Back up now


Outside the daily schedule. Production runs `pg_dump` via the sidecar, local copies sqlite.

Backup files

List of `${BACKUP_DIR}` with downloads for an off-server copy (sysadmin).

HR sync history

Per-run counts, names on expand; large departures get Mass departure.

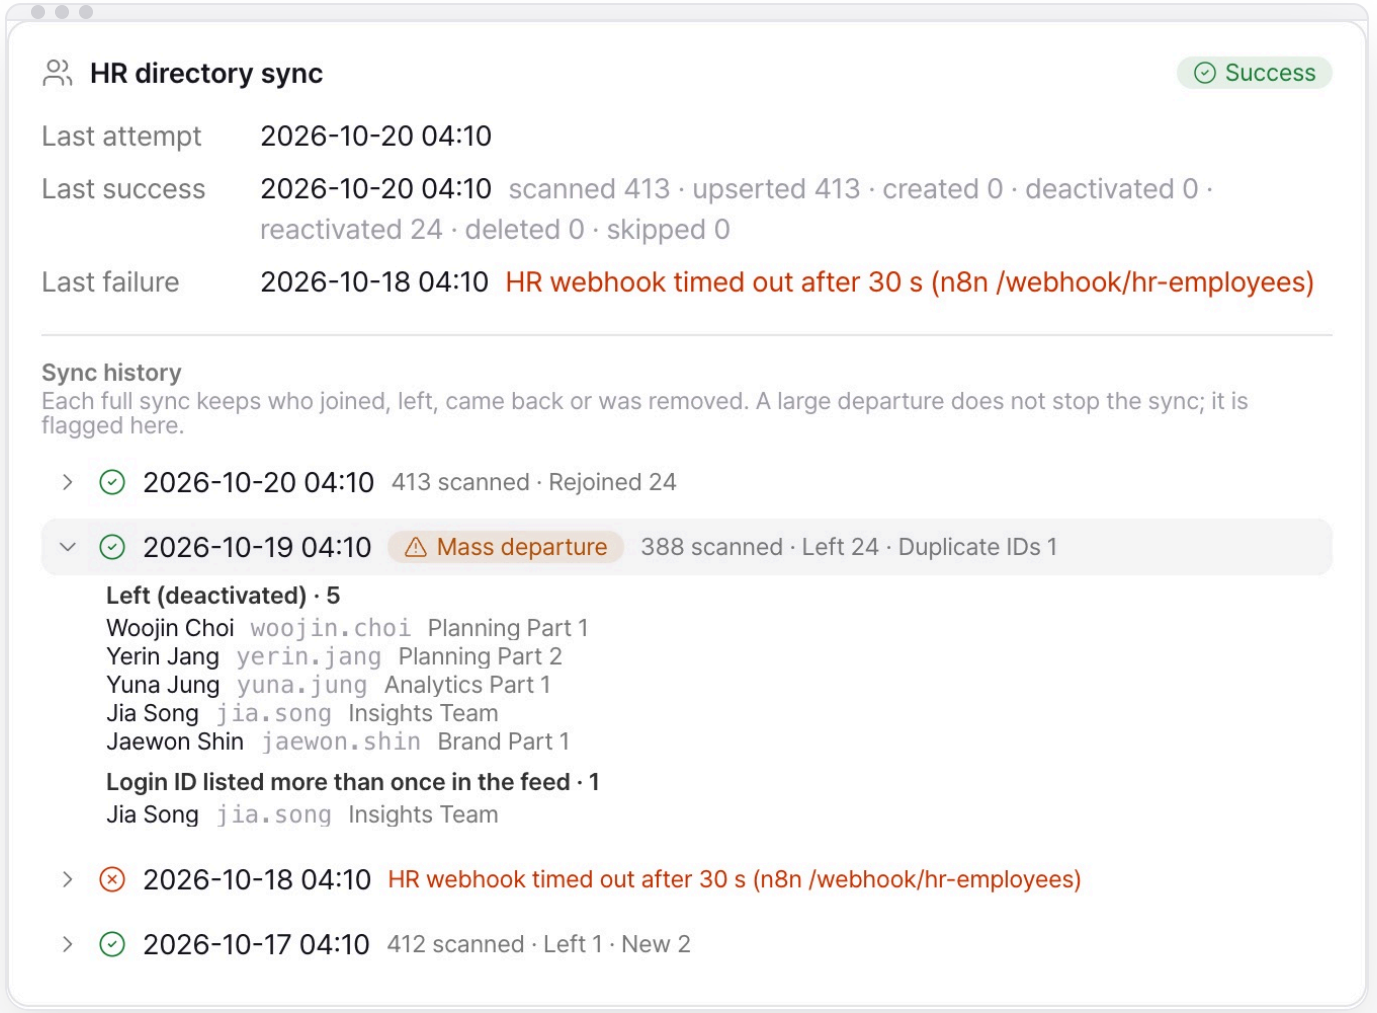

Daily automatic backups (prod)

db-backup sidecar

Daily after **04:00 KST**, plus once on boot if today's dump is missing.

Verification

Kept only after `pg_restore --list` passes. Outcomes land on the Batch jobs tab.

Retention

`${BACKUP_DIR}` (default ./backups) · `${BACKUP_RETENTION_DAYS}` (default 14).

Off-server copies

Server disk only for now; keep off-server copies regularly.

Backup now error

"The backup request could not be written": recreate the sidecar (`--force-recreate db-backup`).

Restore

Empty schema, single transaction, never over the live DB. Runbook `docs/deploy/backup.md`.

07

Approvals · Groups · Trash

The global queue, group approvals, restore, and instant purge.

The global approval queue

Everything pending

Group creation · permission downgrades · visibility · checkout transfers · **slot changes** (map · action · n/m).

Deciding


Approve / reject, no rejection reason. Map-scoped items are also decidable by the map's approvers.

Slot changes

Decided by the L5's direct admin. Sysadmins decide here as the fallback.

From the Inbox

Renames, SP registrations and confirm requests. A canvas failing its gates can't be approved.

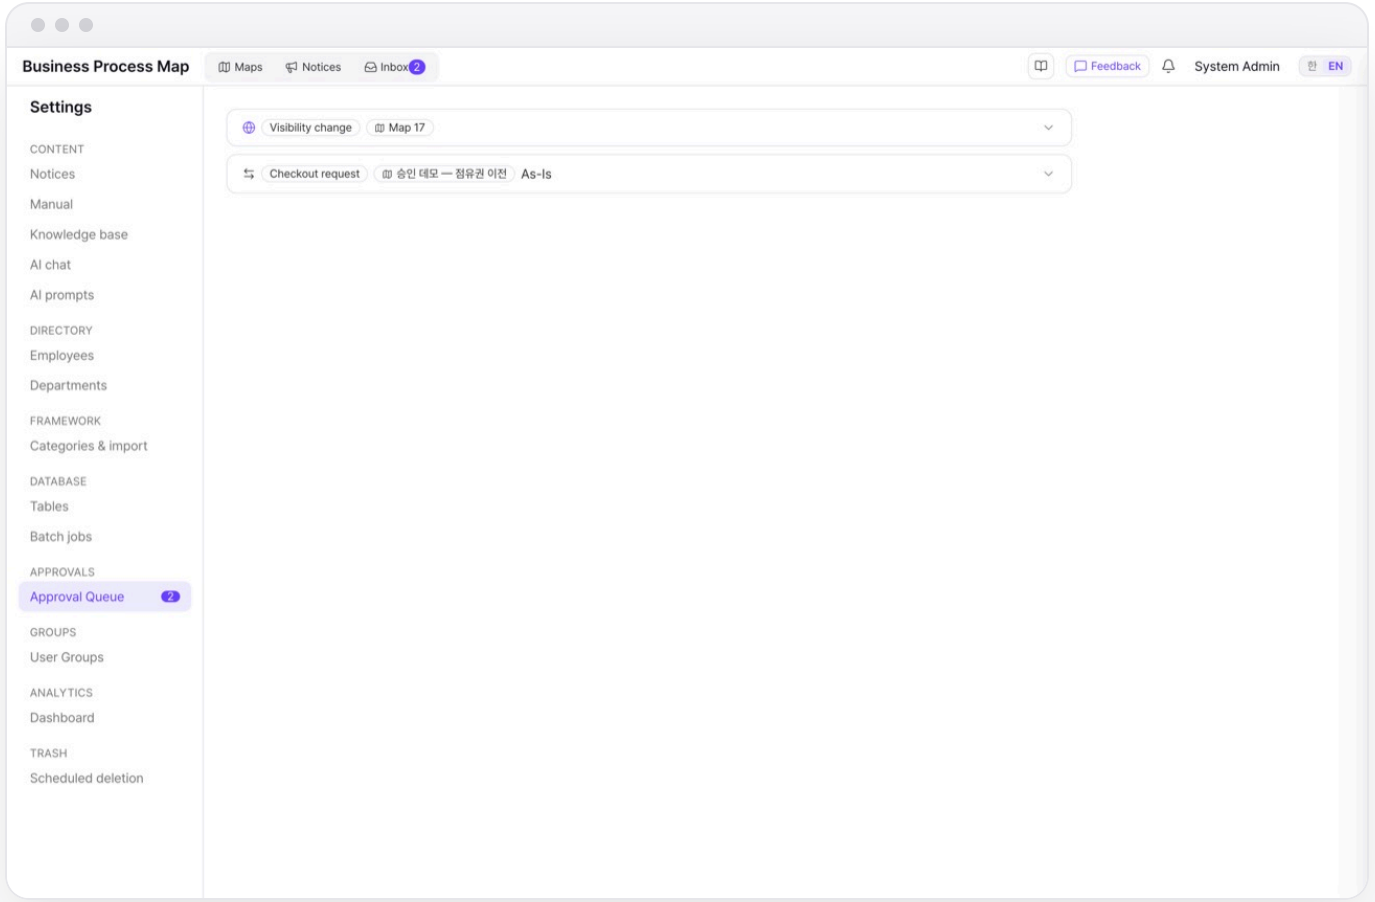

User group administration

Request-based

Active after sysadmin approval.

Check


Name · members (2+) · managers (1+).

See all

Inactive and deleted groups included.

Deletion

7 days in the trash, then purged.

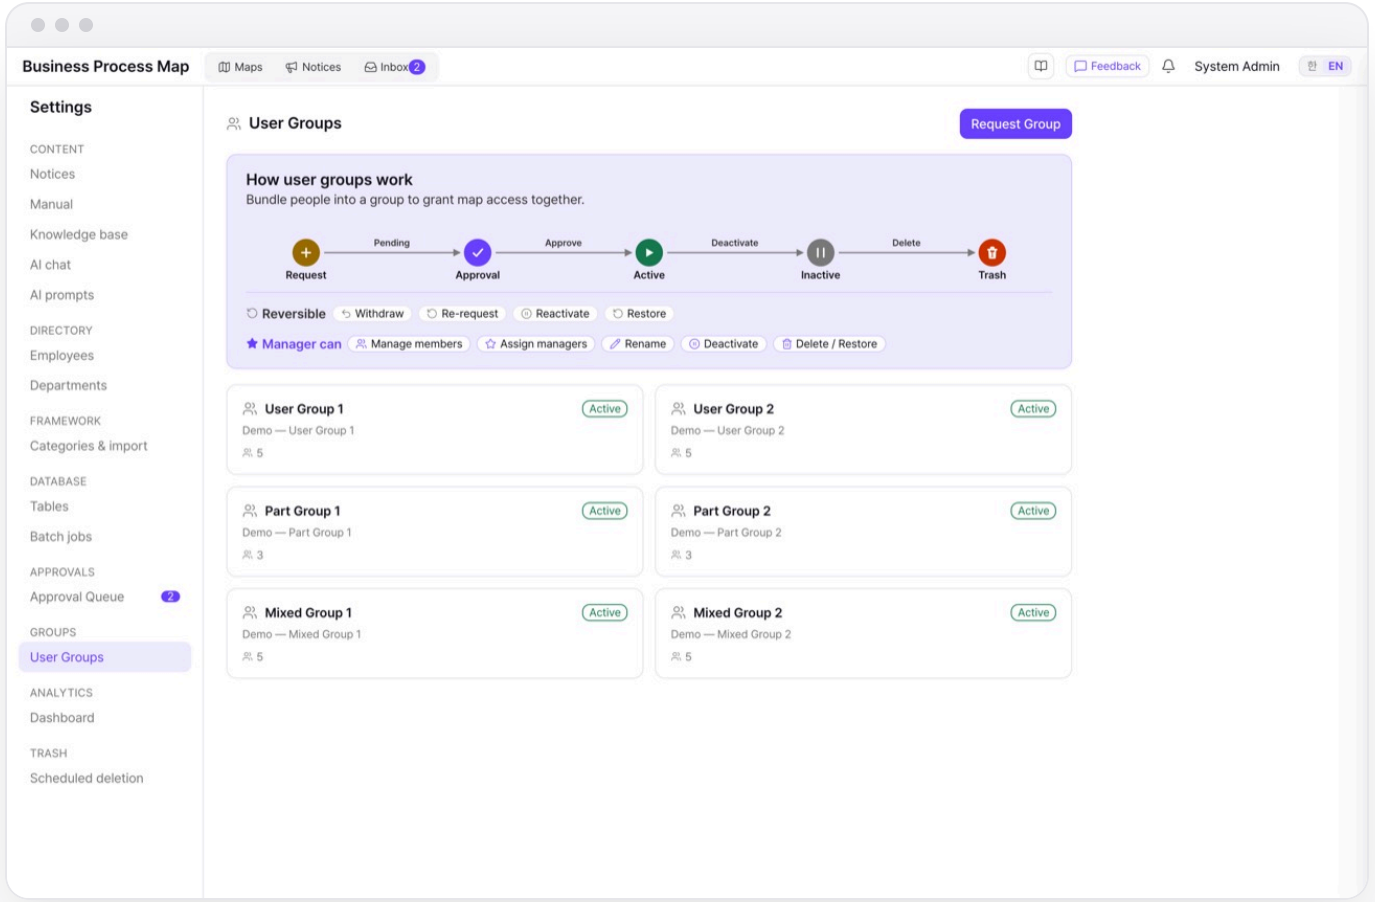

Trash & instant purge

Soft delete

Maps and groups purge after 7 days. **Restore** until then.

Scope

Owners see their own, sysadmin sees everyone's trash.

Instant purge


Remove without the 7-day wait. Trash-state maps only, **no undo**.

Linkage canvases

Trashed canvases read "No canvas"; a sysadmin restore brings them back (409 if replaced).

Run checks

Runs of a trashed map hide; a purge deletes them and their notifications.

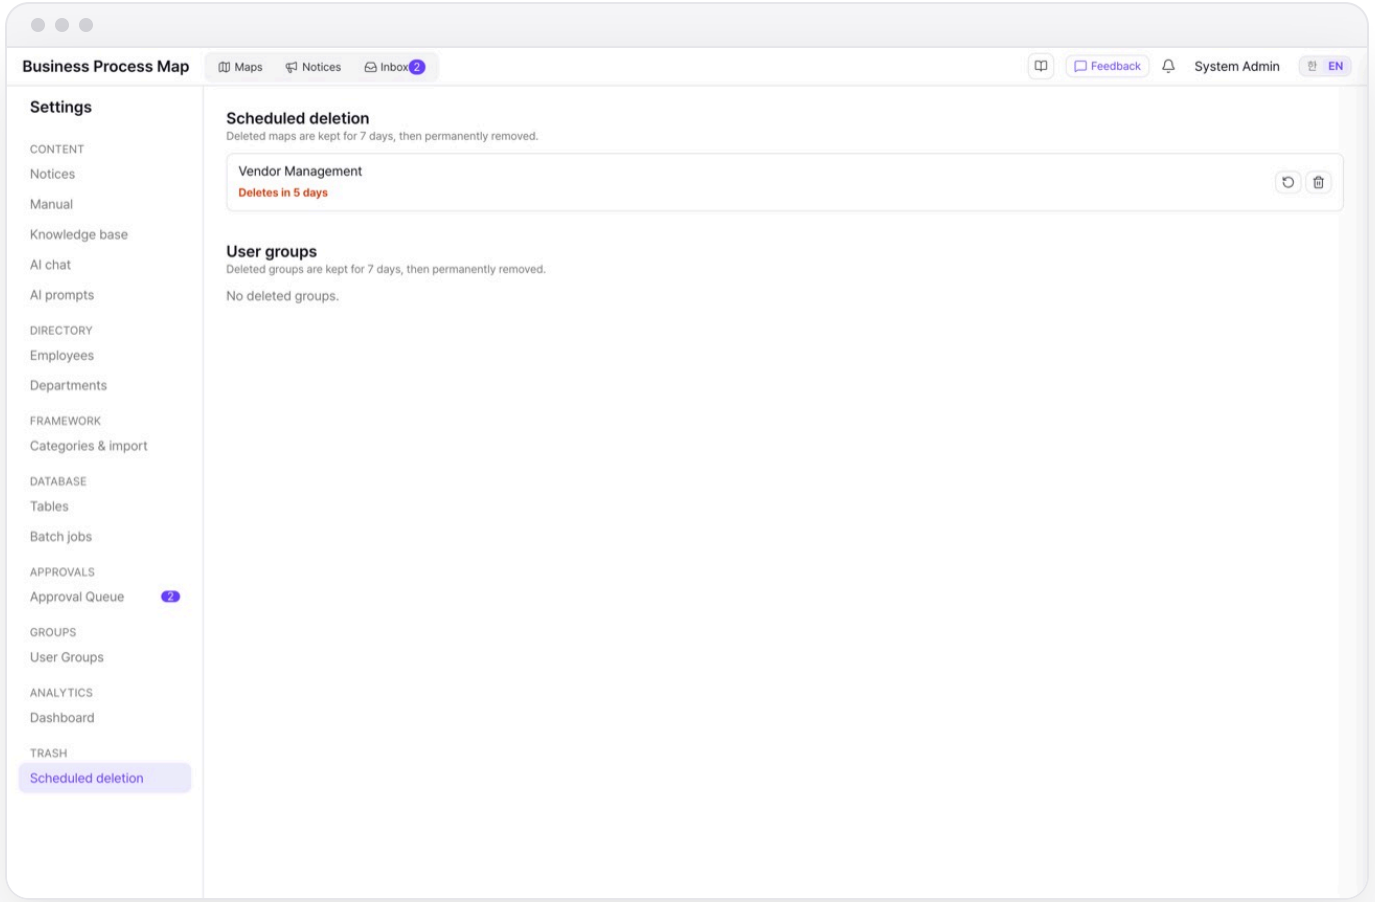

Version workflow · admin powers

Force checkout

Take the lock when the holder is away (unsaved context is lost). Checkouts never expire on their own.

Effective owner

Submit, publish and decide checkouts on any map.

Withdraw is the exception

Submitter-only for Pending / Approved, unless they left or lost access (then a sysadmin).

Approver reassignment

Recover approver-less maps via the forced-reassign flow.

Expiry

Publishing expires the previous version (terminal). Continue via Republish.

08

Dashboard

Live operational metrics and delegated access.

The operations dashboard

Operations

Maps · published · in progress · trash, open comments, unread notifications, transfer requests.

Distribution

Version status and adoption by department (denominator in the Coverage sidebar).

Trends


Login and activity, cumulative growth. 7d / 1m / 3m / custom period filter.

Events · AI

Recent version events, AI usage (7 / 30-day calls, top maps).

Access

Delegate viewing to people, departments, groups. Sysadmins always can.

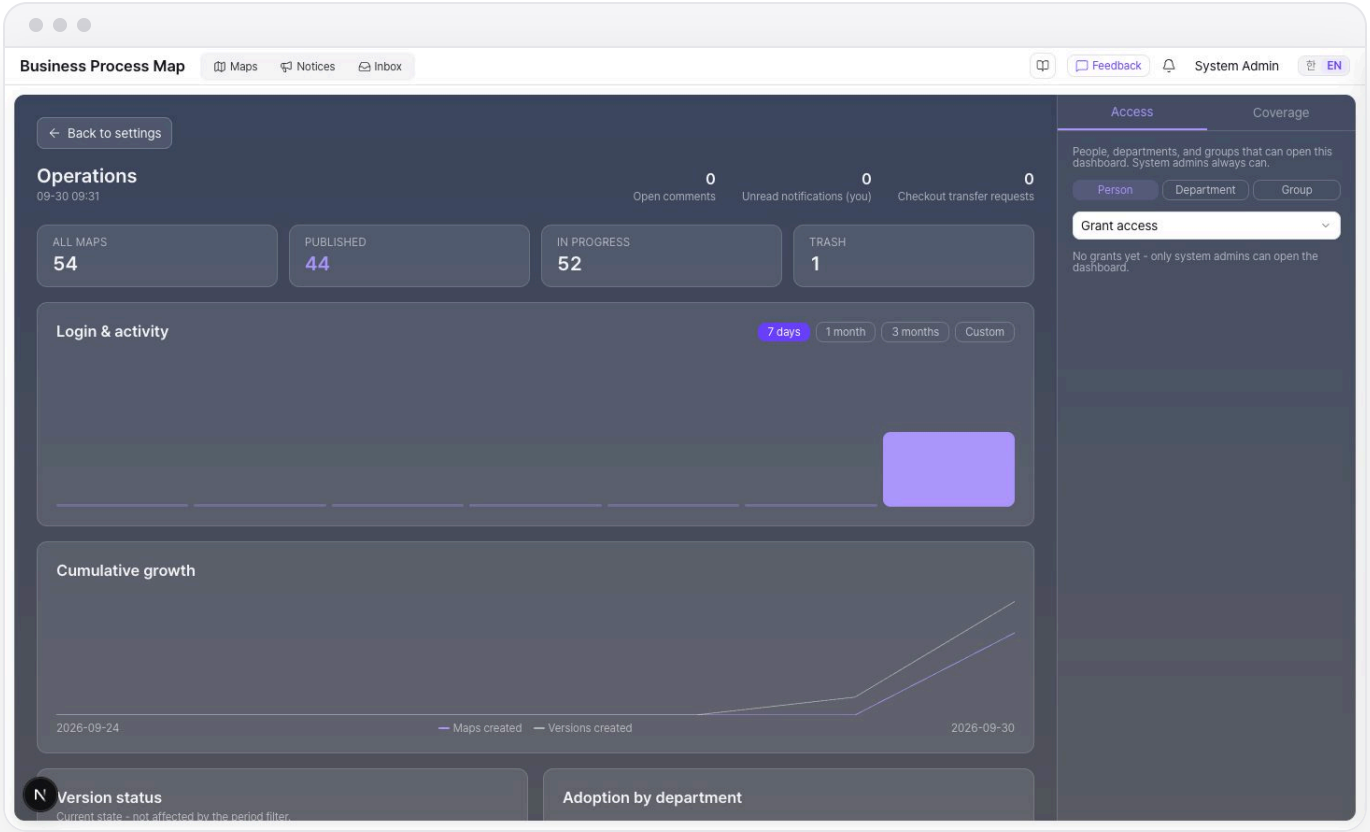

09

Configuration Reference

backend .env and compose variables. Changes need a backend restart.

Env · auth, permissions, AI

VARIABLE	EFFECT
`BPM_SYSADMINS`	Comma-separated sysadmin login IDs
`AUTH_MODE`	`keycloak` | `ldap` | `dev`. The frontend reads it at boot via `GET /api/auth/mode`
`AUTH_JWT_SECRET` / `AUTH_JWT_TTL_HOURS`	ldap session signing key (rotate = kill switch) · lifetime (default 8 h)
`DEV_ENFORCE_PERMISSIONS`	Enforce RBAC locally even with auth off
`AI_BASE_URL` / `AI_MODEL`	AI server (OpenAI-compatible) and model id. The in-house GPU uses just `glm-5.3-nvfp4`
`AI_MAX_TOKENS` / `AI_TIMEOUT_SECONDS`	Response token cap (too low = empty replies) · per-call timeout (120–180 s recommended)

Env · HR, backups, misc

VARIABLE	EFFECT
`N8N_HR_URL` / `N8N_HR_TOKEN`	HR webhook URL & secret. Sync activates only with both
`N8N_POSITION_URL`	EDW head-position webhook. Empty disables collection
`HR_SYNC_INTERVAL_HOURS`	Auto-sync interval (default 24, 0 = off), counted from the last run. Keep 0 for the first migration
`FORWARDED_ALLOW_IPS`	Proxies trusted for X-Forwarded-For. Empty = the compose subnet
`HR_SYNC_DELETE_CAP_PCT`	Sync deletion cap % (default 20, 0 = off)
`BACKUP_DIR` / `BACKUP_RETENTION_DAYS`	Backup path (default ./backups, point at a NAS for off-server) · retention days (default 14)
`MANUAL_URL`	Editor-toolbar manual button. Hidden when empty

※ Env changes need a backend restart (`--reload` does not re-read .env). All deployment values live in .env, never hardcoded.

Run it steady

Check the **Batch jobs tab** each morning, **AI prompt overrides** after deploys, and **Orphaned refs** after reorgs.

