



Business Process Map Administrator Manual

Consoles, operations, and governance for system administrators. Everything in the User Manual applies to you too.

Company process-map system · As of 2026-09-30 · English edition

Navigate with   or click the screen edges ·  to restart

What's inside

01 The Sysadmin Role

03 Content Management

05 Framework Management

07 Approvals · Groups · Trash

09 Configuration Reference

02 Admin Console Map

04 Directory & Org

06 Database & Backups

08 Dashboard

01

The Sysadmin Role

How sysadmin is granted and what it unlocks.

How it's granted

- Not stored in the DB — controlled by the `BPM_SYSADMINS` env var (comma-separated login IDs), read at startup.
- With auth off (dev default), effectively everyone is sysadmin.
- With `DEV_ENFORCE_PERMISSIONS=true` or real auth, only listed IDs are sysadmin.
- In ldap auth mode, the Local Accounts Sysadmin toggle can grant it too (effective only there).
- The **Settings** → **Directory** → **Employees** table tags them Sysadmin (tooltip *managed by environment*) — **env-listed users** can't be turned off from any screen.

What sysadmin unlocks

- Treated as **Owner on every map** — manage collaborators, approvers, visibility, versions, deletion.
- **Force checkout** — the only role that can take another user's active edit lock.
- Every **admin-only console** under Settings.
- Moderation — group approvals, feedback replies/status, the global trash, manual publishing.
- **Withdraw is the exception** — Pending/Approved versions only by the submitter (Rejected also by owner/sysadmin).

02

Admin Console Map

Every console on the Settings rail, at a glance.

The Settings rail

- **Content** — Notices · Manual · **Knowledge base** · AI chat · **AI prompts**.
- **Directory** — Employees · Departments · **Catalogs** · **Orphaned refs** · Local Accounts (Idap mode only).
- **Framework** — Categories & import (**Manage / Status** views, linkage admins). Delegated admins see only their subtree.
- **Database** — Tables · Batch jobs (**Back up now**, backup downloads). **Approvals** — Approval Queue.
- Groups · Analytics (Dashboard) · Trash (Scheduled deletion).

Business Process Map

Maps

Notices

Inbox

Feedback

System Admin

EN

Settings

CONTENT

Notices

Manual

Knowledge base

AI chat

AI prompts

DIRECTORY

Employees

Departments

Catalogs

Orphaned refs

FRAMEWORK

Categories & import

DATABASE

Tables

Batch jobs

APPROVALS

Approval Queue

GROUPS

User Groups

ANALYTICS

Dashboard

Trash

Scheduled deletion

Notices

2 total · 2 live

Export CSV

New notice

Status	Title	Importance	Period
Live	Scheduled maintenance: Oct 4 (Sat) 22:00-24:00	General	09:30 ~ Unlimited
Live	BPM 프로세스맵 정식 오픈 안내	Important	09:30 ~ Unlimited

03

Content Management

Notices, the in-app manual, AI knowledge/settings/prompts, and feedback.

Notices


- Title, importance (Important/General), posting period (open-ended allowed), **Markdown body**.
- Check **Notify all users on publish** to push to every inbox.
- Users see only active notices; the admin list shows all, with **CSV export**.
- **Deletion is hard** — permanent, no trash (already-sent bell notifications remain).

The screenshot shows the 'Business Process Map' interface. The left sidebar contains a 'Settings' menu with categories: CONTENT, DIRECTORY, FRAMEWORK, DATABASE, APPROVALS, GROUPS, ANALYTICS, and TRASH. Under 'CONTENT', 'Notices' is selected. The main area displays the 'Notices' section with a header '2 total · 2 live'. It includes an 'Export CSV' button and a '+ New notice' button. A table lists two notices:

Status	Title	Importance	Period
Live	Scheduled maintenance — Sep 6 (Sat) 22:00-24:00	General	08-31 ~ Unlimited
Live	BPM 프로세스맵 정식 오픈 안내	Important	08-31 ~ Unlimited


Publishing the manual

- `/manual` holds several documents — each with a format (markdown / sanitized HTML) and a language (KO/EN).
- Write inline, upload an .md, or load the bundled copy; preview, then publish for an immediate switch.
- List titles come from the first heading — upload KO and EN in the same order so the language toggle opens the matching document.
- With no publish history the bundled fallback is served and flagged with a bundled badge.
- Click a row to edit, **New document** to add, the row's trash to delete. The viewer builds its TOC from `##` / `###` headings — images and raw HTML don't render.

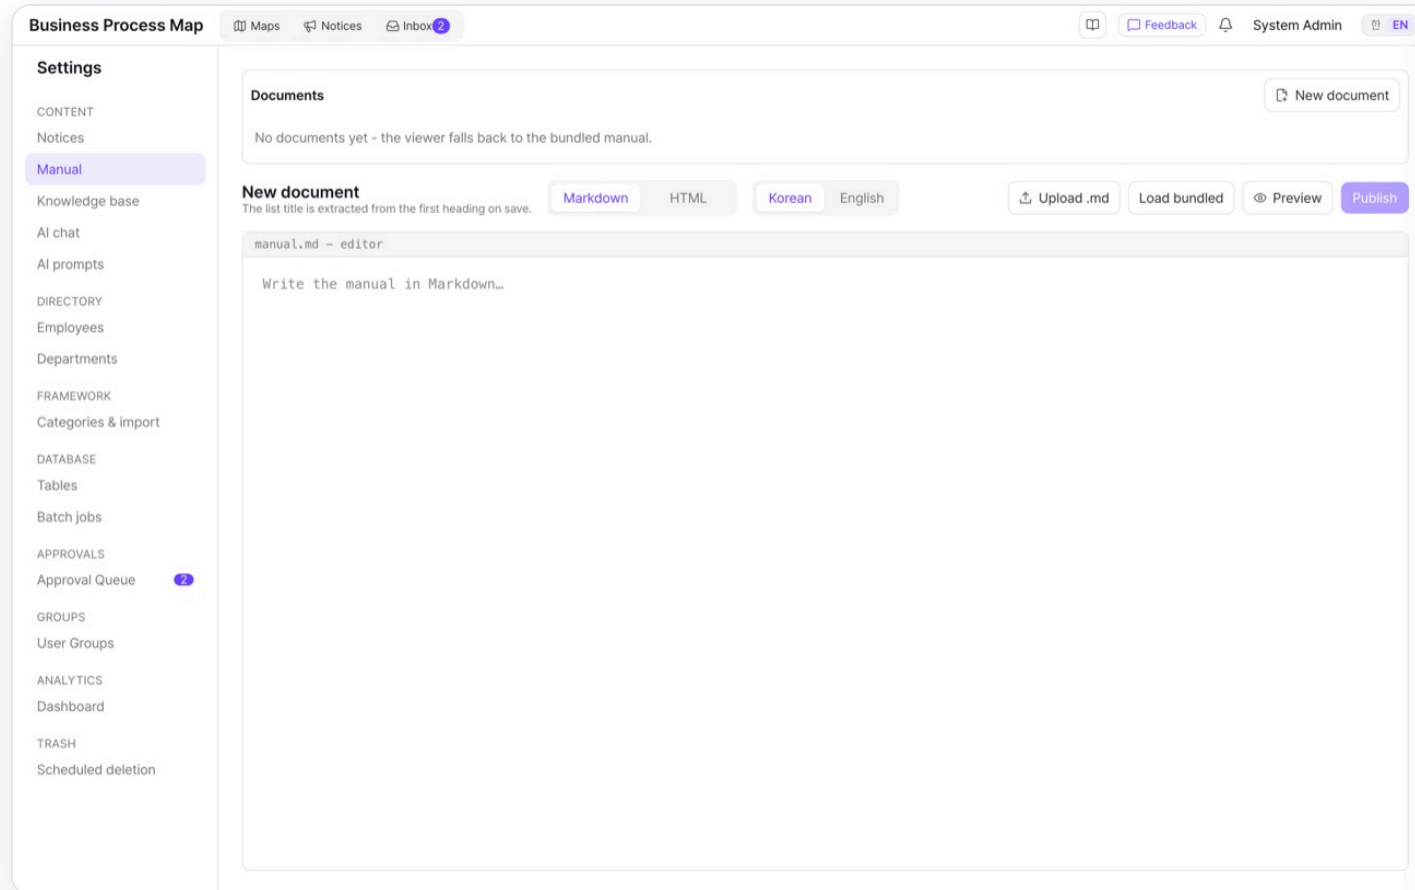


Knowledge base

- A library of org documents the AI consultant cites in interviews — upload SOPs and guides.
- Supported: pdf · docx · pptx · xlsx · txt · md, up to 20 MB per file. Upload adds, Refresh reloads the list.
- Works only when both `AI_ENABLED` and the embedding server `EMBED_URL` (🕒) are set.

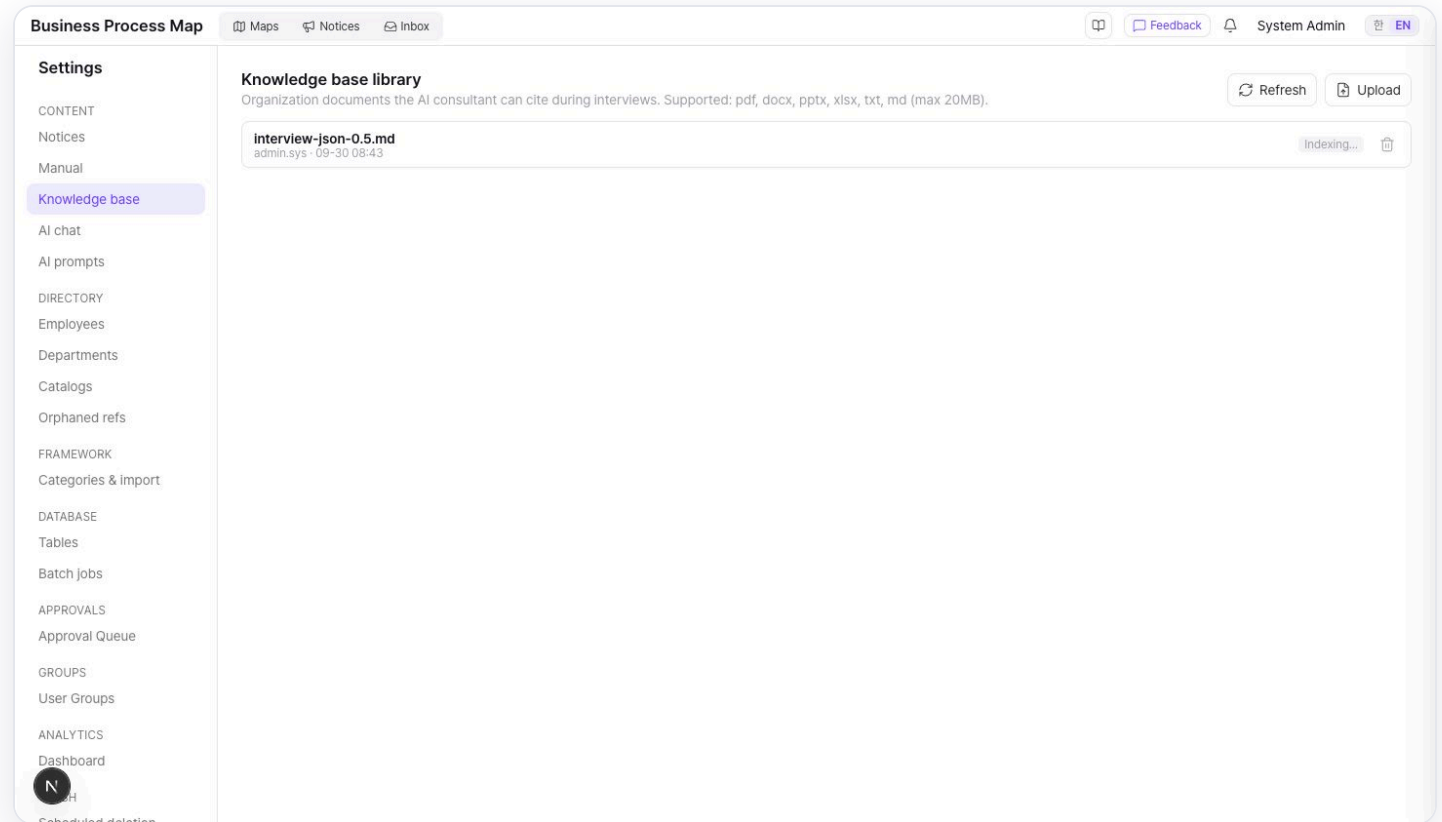


AI chat settings · AI prompts

- The **AI access** switch at the top pauses every AI feature (chat, interview) without a redeploy — effective availability = `AI_ENABLED` AND the switch.
- Chats are always stored server-side (scoped to user × map, owner-visible) — not a toggle.
- Retention caps — 20 chats/map, 200 messages/chat, 180 days (tunable, applies immediately). Loading tips: one per line; clearing restores the 20 defaults.
- AI prompts — override the built-ins: saves apply instantly; clearing falls back to the shipped prompt.
- While overridden, prompt improvements shipped in code are not picked up — re-check periodically.

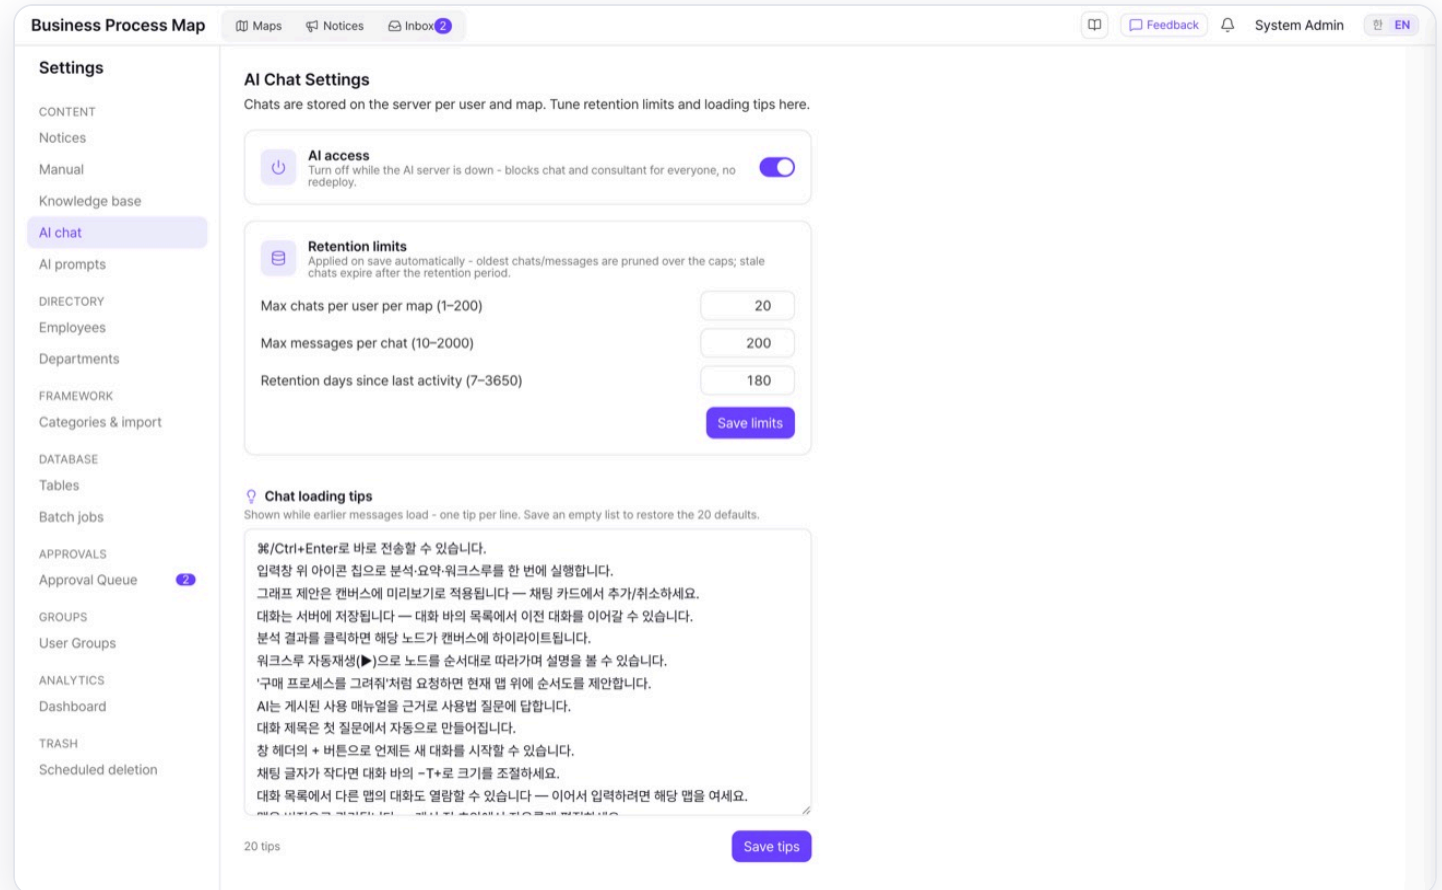

Feedback administration

- Only sysadmin changes status and replies — **done** locks further replies.
- Notifications are deliberate — **Send notification** (reply, resendable) and **Notify status change** (once per item).
- The "Notification sent <time>" meta row records what went out.
- **Notes** — anyone writes; edits keep history; delete = archive. Permanent purge only via the `feedback_notes` table view.

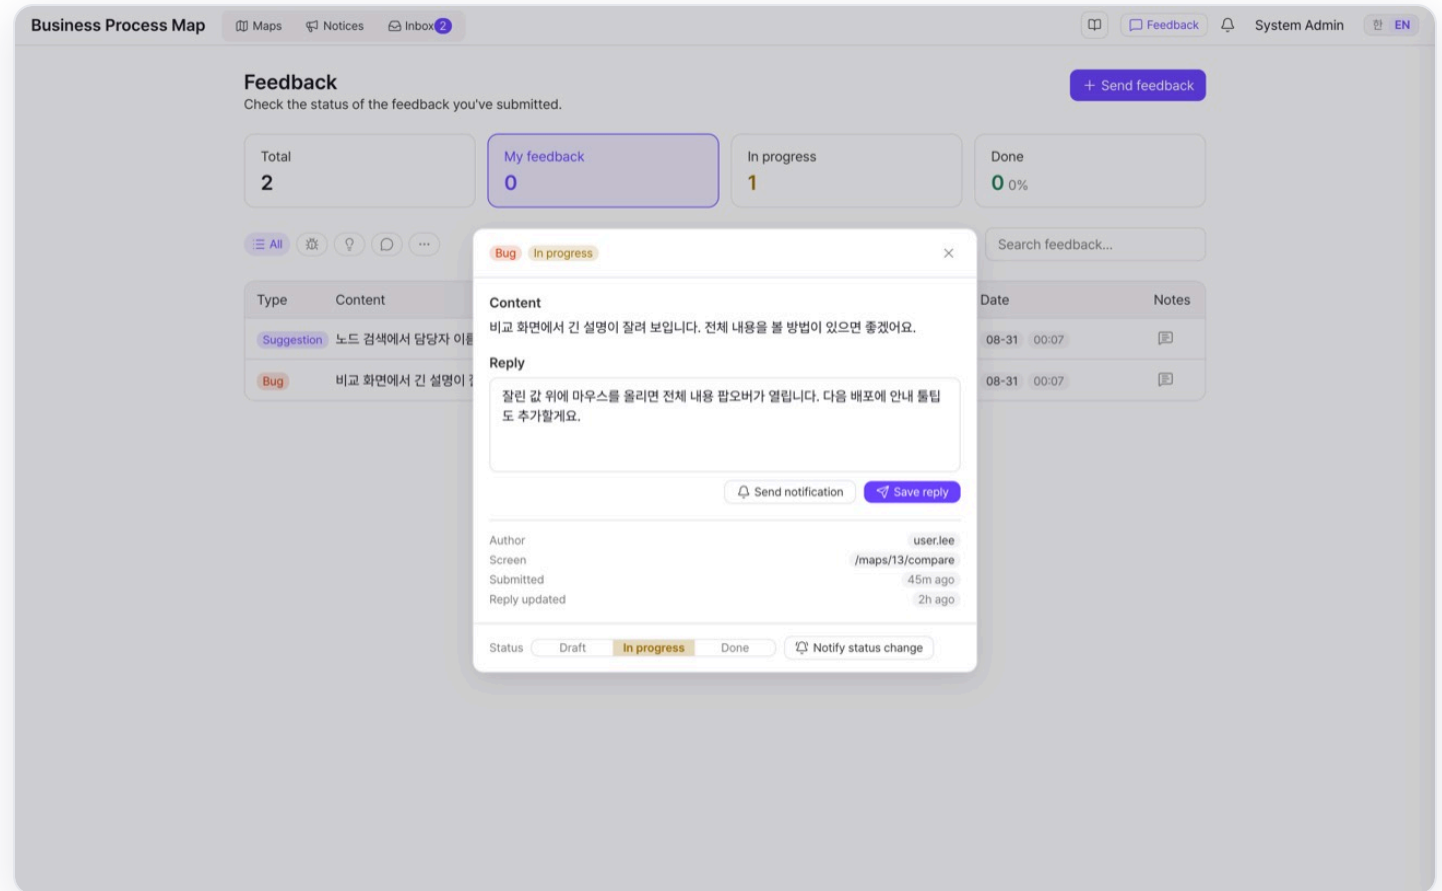

04

Directory & Org

HR-webhook sync, the departments basis, heads, and consultant accounts.

Employees & sync

- The source is the n8n HR webhook — a full sync refreshes employees plus the departments table (AD only enriches titles).
- The Employees tab's **Sync all from AD** button (label kept) — spinner while running, then a scanned/upserted/deactivated/deleted/skipped summary. One per 5 min.
- Auto sync every `HR_SYNC_INTERVAL_HOURS` (default 24 h, 0 = off), plus per-user daily sync on login.
- Safeguards — the sync-preview dry-run API and the deletion cap `HR_SYNC_DELETE_CAP_PCT` (default 20%).
- Departures aren't deleted — marked active=false and excluded from pickers.

Business Process Map Maps Notices Inbox 2

Settings

CONTENT

Notices

Manual

Knowledge base

AI chat

AI prompts

DIRECTORY

Employees

Departments

FRAMEWORK

Categories & import

DATABASE

Tables

Batch jobs

APPROVALS

Approval Queue 2

GROUPS

User Groups

ANALYTICS

Dashboard

TRASH

Scheduled deletion

Employees Export CSV Sync all from AD

Exposed positions

Choose which EDW titles are shown as a person's position across the app.

☒ 그룹장 ☒ 파트장 ☒ 팀장 ☒ 센터장

Save

loginid	name	korean name	korean dept	title	department	role	status	source
admin.sys	System Admin	Sysadmin		Manager	System Team	admin	Active	local
bora.choi	Bora Choi			Lead	Support Team	user	Active	local
bora.hong	Bora Hong			Lead	Brand Part 1	user	Active	local
bora.hwang	Bora Hwang			Manager	Planning Part 1	user	Active	local
bora.jang	Bora Jang			Manager	Brand Part 2	user	Active	local
bora.jung	Bora Jung			Manager	Growth Team	user	Active	local
bora.jung2	Bora Jung			Senior	Brand Part 3	user	Active	local
bora.kwon	Bora Kwon			Lead	Brand Part 2	user	Active	local
bora.lee	Bora Lee			Senior	Planning Part 1	user	Active	local
bora.lee2	Bora Lee			Senior	Facilities Office	user	Active	local
bora.lee3	Bora Lee			Associate	Planning Part 1	user	Active	local
bora.oh	Bora Oh			Associate	Insights Team	user	Active	local
bora.oh2	Bora Oh			Staff	Planning Part 2	user	Active	local
bora.park	Bora Park			Senior	Logistics Part 1	user	Active	local
bora.seo	Bora Seo			Senior	Analytics Part 1	user	Active	local

Departments & heads


- The departments table is the org basis — the single source for the org chart and path resolution.
- Heads are determined from EDW position (FRNM) data, tagged Manager on the chain.
- Exposed positions — a card on the **Employees tab** picks which collected EDW titles show in the app (defaults: 그룹장·파트장·팀장·센터장); an app setting, not env.
- Stale department and departed-person references are cleaned up on the **Orphaned refs** tab (two slides on) — it replaces the old Missing departments remap.
- Both tables support CSV export (BOM, formula-injection guard).

The screenshot shows the 'Business Process Map' application interface. On the left is a sidebar menu with categories: CONTENT (Notices, Manual, Knowledge base, AI chat, AI prompts), DIRECTORY (Employees, Departments), FRAMEWORK (Categories & import), DATABASE (Tables, Batch jobs), APPROVALS (Approval Queue), GROUPS (User Groups), ANALYTICS (Dashboard), and TRASH (Scheduled deletion). The 'Departments' item is highlighted. The main area displays a table with columns 'Department', 'korean dept', and 'Members'. The table lists various departments and their member counts, with some rows expanded to show sub-departments.

Department	korean dept	Members
▼ Growth Center		0
▼ Marketing Office		0
▼ Brand Team		0
Brand Part 1		31
Brand Part 2		31
Brand Part 3		31
Growth Team		31
▼ Strategy Office		0
▼ Analytics Team		0
Analytics Part 1		31
Insights Team		31
▼ Planning Team		0

Catalogs (Roles & Systems)

- Autocomplete lists for node **Role** and **System** — **Role | System** tabs, the item list on the left (filter, add), the selected item's **alias** editor on the right.
- Typing an alias saves the canonical spelling (`sap` → SAP ERP). **One alias belongs to one item** — a colliding alias is dropped on save with a notice.
- Import a two-column `value,aliases` CSV (aliases split by `|`, header optional) with an added/duplicate preview; the System tab offers **values in use** to promote.
- **Other** in the System list is reserved (cannot be deleted, always on top). Everyone reads the lists; **editing and saving is sysadmin-only**.
- The editor, CSV import, AI assistant, consultant interview and interview JSON import all normalize against these lists — unknown systems become Other + source note, unknown roles stay free text.

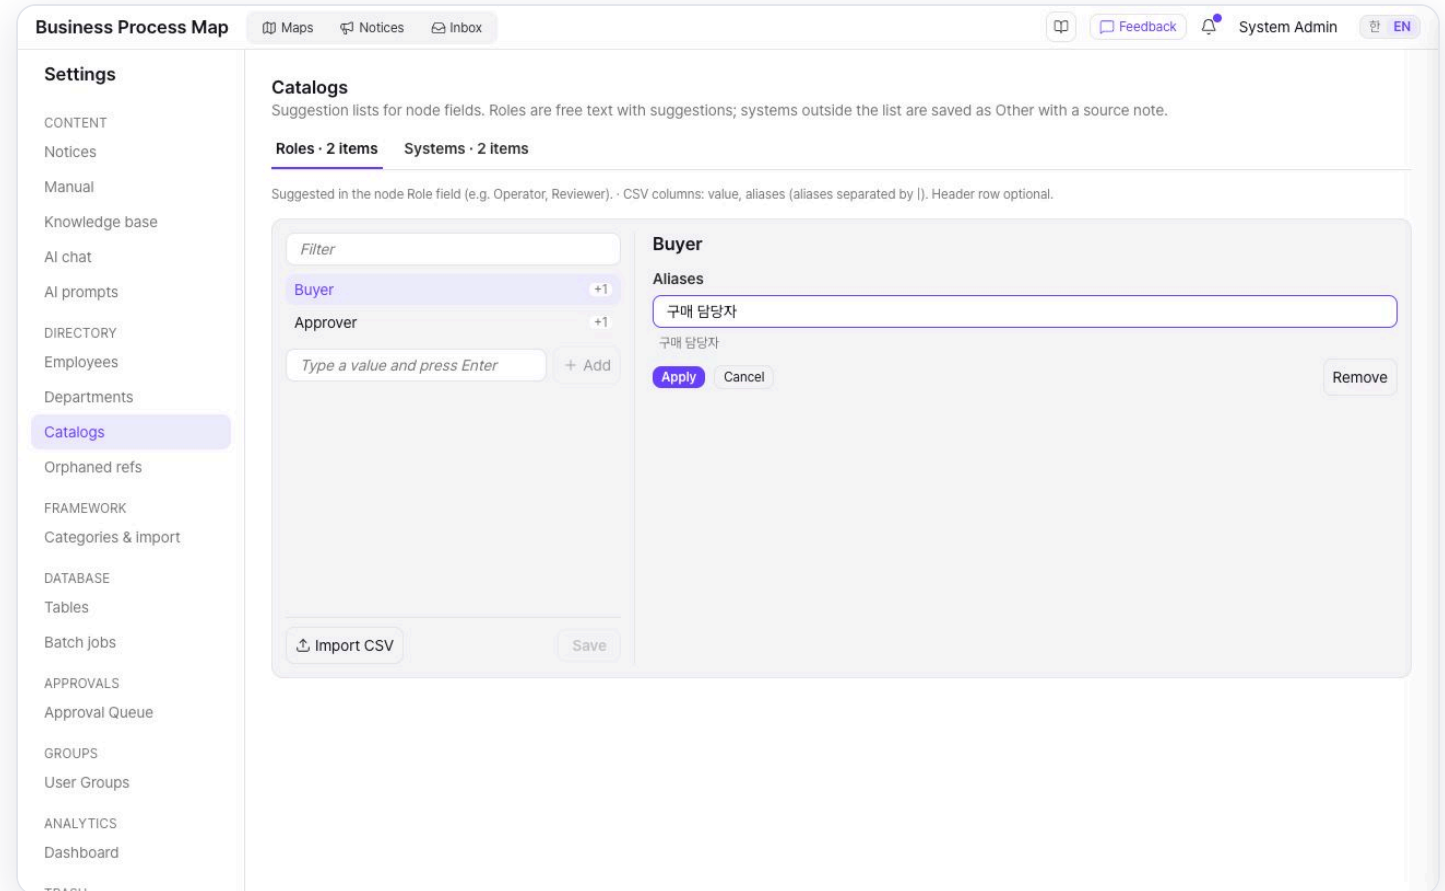

Orphaned reference audit (Orphaned refs)

- **Rescan** scans 12 places on demand — node departments/assignees, SP designations, owners/collaborators/approvers, owning departments, user groups, category admins.
- Results group **by value** (vanished department path, departed person); expanding lists each reference (map, version, node, role) with a checkbox.
- **Bulk replace** checked lines with a current department or person, or **remove** them. Node fields are display-only — fix them in the editor draft.
- Send owners a **Stale refs fix request** (one per owner, map list attached); when the owner has left, assign a new one (**Owner assigned**).
- Users see a **Stale refs** badge, the home **Issues** filter and warning-colored node icons. Replaces the old Missing departments tab.

The screenshot shows the 'Business Process Map' interface with a sidebar on the left and a main content area on the right. The sidebar includes sections like CONTENT, DIRECTORY, FRAMEWORK, DATABASE, APPROVALS, GROUPS, ANALYTICS, and TRASH. The 'Orphaned refs' option is highlighted under the DIRECTORY section.

The main content area displays a message: 'References to departments or people that no longer exist in the current org. Check the lines to reassign in bulk; node fields must be fixed by the map owner in a draft.' A 'Rescan' button is located in the top right corner.

Under the heading 'Missing departments 2', there are two entries:

- > Quality Center/QC Department/QC Support Team/QC Sample Management Group (leaf) Subprocess department 3
- > Quality Center/QC Department/QC Support Team/QC Sample Management Group (path) Owning department 3

Under the heading 'Departed users 6', there are six entries:

- > Admin Sys (name) Node assignee 19
- > cheolsu.kim (login) Approver 3
- > slot.l5admin (login) Category admin 1
- > slot.owner (login) Collaborator 2 · Owner 2
- > user.choi (login) Collaborator 2 · Owner 3
- > younghee.lee (login) Approver 2

Local accounts (ldap mode)

- Appears only in ldap auth mode — issue ID/password logins for external consultants.
- Sign-in checks local accounts first, then falls back to AD. Throttled to 5 attempts per 5 minutes.
- Per account: reset password, deactivate/reactivate, delete (permanent). Deactivate first when an engagement ends.
- Sysadmin toggle — **local accounts only** (directory accounts only via `BPM_SYSADMINS`), effective in ldap mode; env-granted users can't be turned off here.
- Token lifetime and secret rotation (kills all sessions) live in docs/deploy/deploy.md §2.1.


05

Framework Management

Category tree and level delegation, linkage admins, confirmation governance, slot changes, the status board, interview import, filling an L5 with AI.


Category management & level delegation

- Top toggle: Manage / Status. **Tree left, detail panel right** — a click selects and expands the row; single-child chains open through to the fork.
- Add child · Rename · Managing dept · Linkage admins · Move · Delete are **detail-panel buttons**; blocked ones stay disabled with a reason. Max 5 levels, maps on L5 only, no duplicate siblings (409).
- Renames sync the canvas name; subtrees with linked maps or a canvas can't be deleted (409). An empty **managing department** inherits from the parent.
- Delegation — admins add/rename/reorder under their own category, can't move or delete it (children only), appoint admins one level down.
- L5-only admins edit and confirm the canvas only. Top-level categories and interview import stay sysadmin-only.

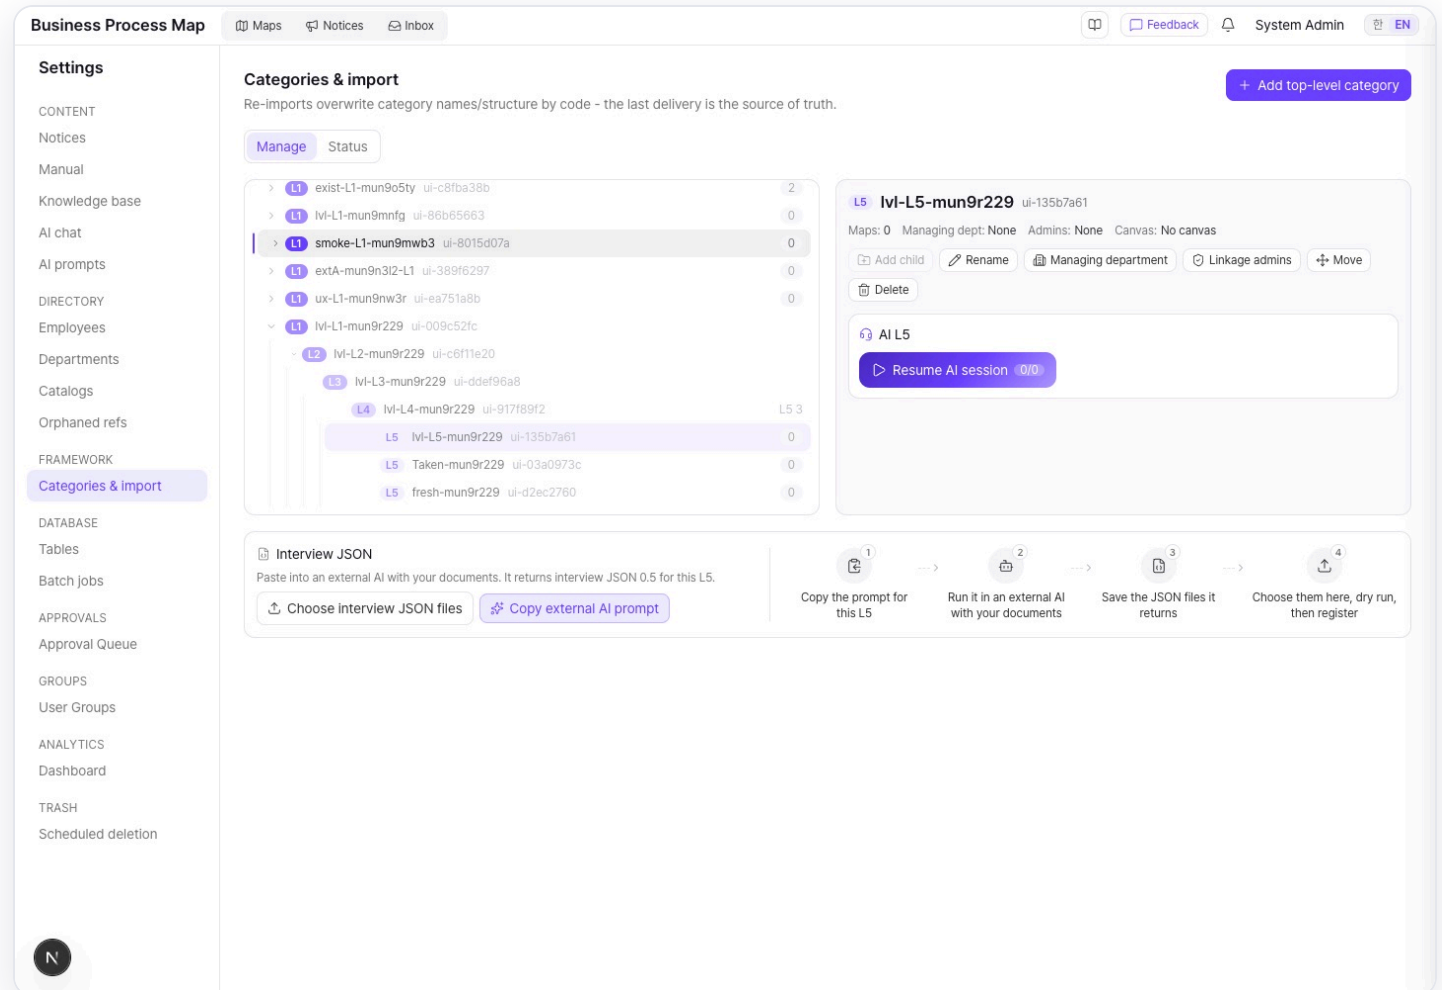


Linkage admins

- Select a row, then the detail panel's **Linkage admins** button appoints users/groups.
Adds/removes buffer until you confirm once;
Cancel, Esc, or clicking outside discards.
- Grants **inherit downward** — appoint at L1–L4 and every L5 canvas below becomes editable.
- Directly appointed admins appear in the detail panel's info line under **Admins** (three names, then +N), dual-named per the language setting.
- Canvases are real maps (`mode=framework`) but never appear in the map list or SP library.
- A major confirm permanently prunes the previous major's **intermediate minors** (X.0 and the last minor are kept, with a preview dialog).

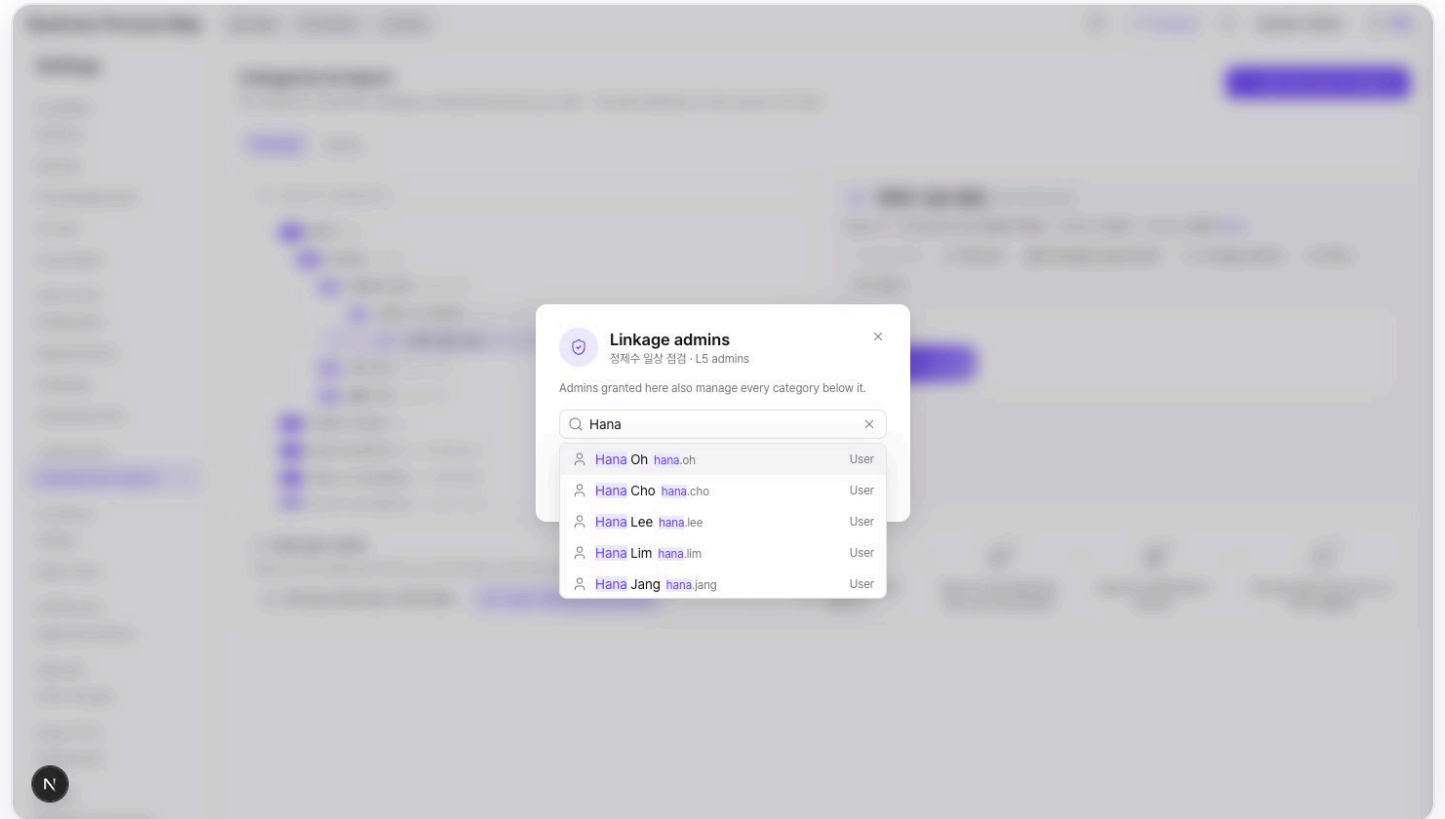


Confirmation governance

- Snapshots are a **confirmed** state apart from publishing — neither they nor the live draft can be deleted; regular map workflows are **blocked server-side**.
- **Six confirm gates** — all L6 placed · no placeholders · no stale links · all L6 published · no exit-less loops · branches use a decision (all-parallel fan-out exempt).
- The Approval tab's **Confirm readiness** checklist is the single source — one failing gate disables Confirm.
- **Who confirms** — the checkout holder, if they are that L5's **direct admin** or a sysadmin. Higher-level admins send a **confirm request** (checkout auto-releases) decided by the direct admin + sysadmin.
- **Draft visibility** — only admins and sysadmins see the live draft; everyone else lands on the latest confirmed snapshot.

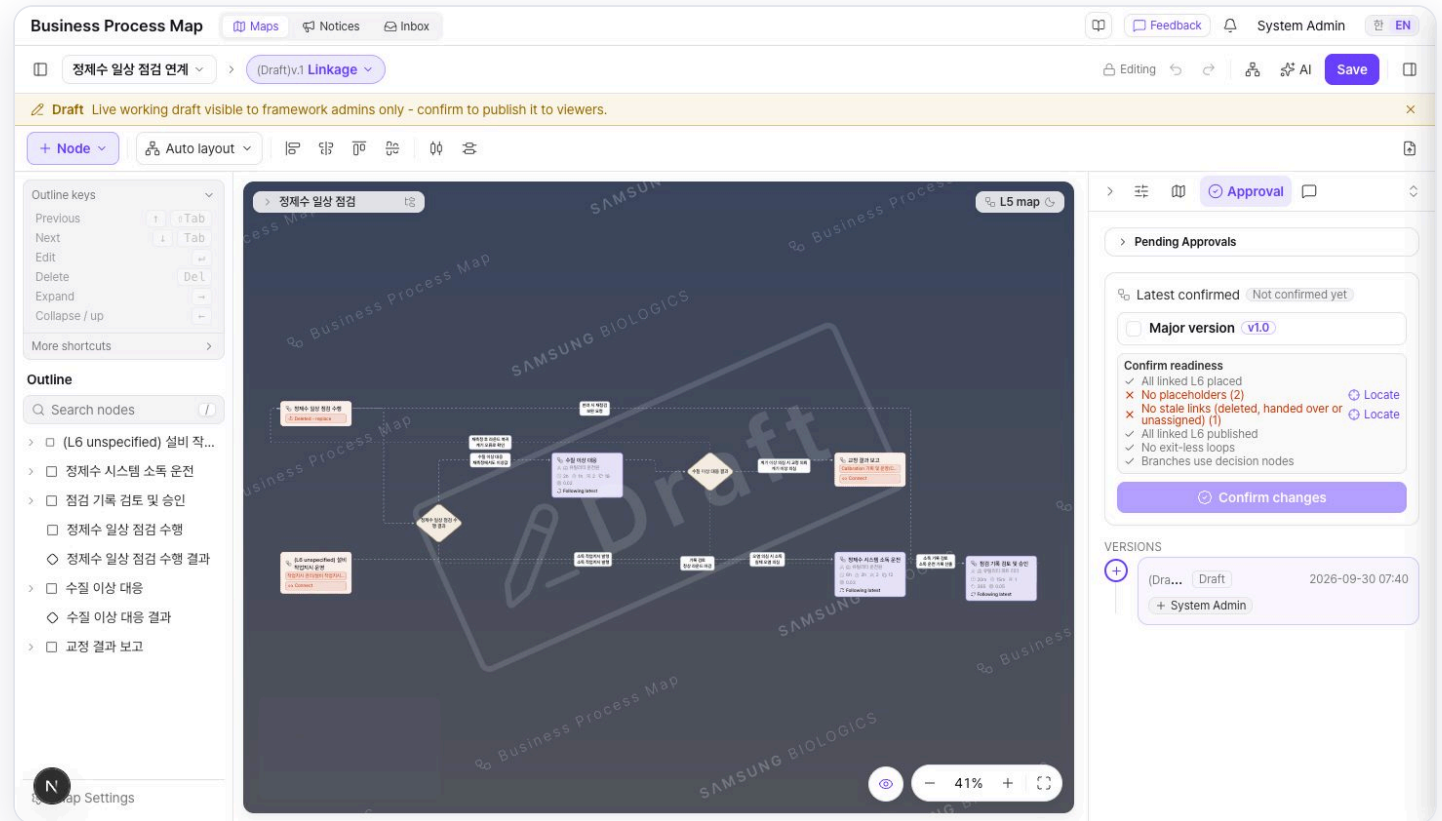

Slot changes

- Which L5 a map belongs to is a **slot** (assign · unassign · move · hand off · delete) — worked from the **Framework pill** on the home card.
- The decider is **that L5's direct admin** (sysadmins too). Higher-category admins can edit the canvas but only **request** a slot change.
- A move between two L5s needs **both L5s' direct admins** (one admin covering both counts once); an L5 without admins falls to sysadmin.
- A requester who is already a direct admin applies it via **Apply now** (toast); otherwise an `fw_slot` request lands in the L5 admins' Inbox, the map's Approval tab and the **Approval Queue** (🔔) — withdrawable by the requester, the current owner or a sysadmin.
- Sysadmins decide from the queue as the **fallback decider** — the map's approvers cannot decide slot requests.

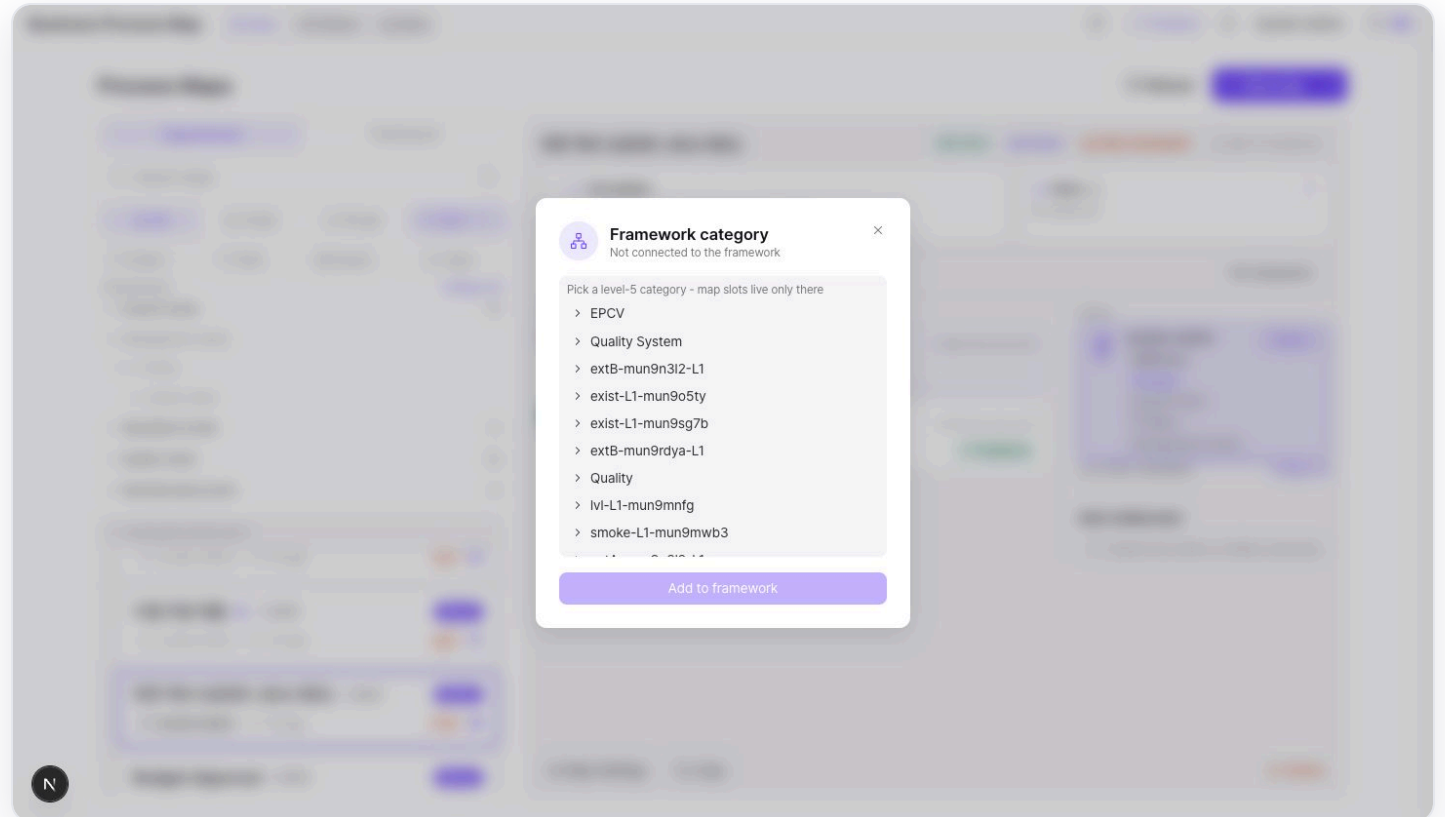

Status board

- The **Status** view lists every L5 in scope — **Path / Latest confirmed / Status** (Ready · Blocked · No canvas) with an **Open** button.
- Blocked canvases carry their failing gates as **negative pills** — Missing L6 · Placeholders · Stale links · Unpublished L6 · Exit-less loop · Direct fan-out.
- The home Framework view's **category summary card** shows the same verdicts under "Subtree confirmation".
- Delegated admins see the status of their own subtree only.

Business Process Map 🗺 Maps 📢 Notices 📧 Inbox 🔍 Feedback 🔔 System Admin 한 EN

Settings

- CONTENT
- Notices
- Manual
- Knowledge base
- AI chat
- AI prompts
- DIRECTORY
- Employees
- Departments
- Catalogs
- Orphaned refs
- FRAMEWORK
- Categories & import**
- DATABASE
- Tables
- Batch jobs
- APPROVALS
- Approval Queue
- GROUPS
- User Groups
- ANALYTICS
- Dashboard
- 🔍
- Scheduled deletion

Categories & import + Add top-level category

Re-imports overwrite category names/structure by code - the last delivery is the source of truth.

Manage Status

Path	Latest confirmed	Status	
EPCV/Facility/계측 보전/Calibration 기획 및 운영/Calibration 수행 및 결과 보고	Not confirmed yet	No canvas	
EPCV/Facility/설비 보전/작업지시 관리/설비 작업지시 운영	Not confirmed yet	No canvas	
EPCV/Facility/유틸리티 운전/정제수 시스템 운전/정제수 일상 점검	Not confirmed yet	Blocked Placeholders (2) Stale links (deleted / handed over / unassigned) (1)	Open
Quality System/배치기록 검토/완제품 배치기록 검토/BRR 수행 및 종결/완제품 배치기록 검토 수행	Not confirmed yet	Ready	Open
Quality System/변경관리/제조 변경관리/변경 실행 및 완료/공정 변경관리 실행	Not confirmed yet	Ready	Open
Quality/품질관리(QC)/시험 운영/완제품 시험/완제품 출하 시험 관리	Not confirmed yet	Ready	Open
Quality/품질관리(QC)/시험 운영/원자재 시험/원자재 입고 시험 관리	Not confirmed yet	Blocked Placeholders (1)	Open
Quality/품질보증(QA)/품질 이벤트 관리/CAPA 관리/CAPA 실행 및 효과성 확인	Not confirmed yet	No canvas	
Quality/품질보증(QA)/품질 이벤트 관리/일탈 관리/시험 일탈-OOS 관리	Not confirmed yet	Blocked Placeholders (2)	Open
exist-L1-mun9o5ty/exist-L2-mun9o5ty/exist-L3-mun9o5ty/exist-L4-mun9o5ty/exist-L5-mun9o5ty	Not confirmed yet	Ready	Open

Interview import — format, dry run, governance

- Pick files (multi-select) in the **Interview JSON** section → file-pill strip → **Dry run** → report → Apply — sysadmin-only.
- Format — interview JSON 0.4 (`relations`) and 0.5 (`externalTasks`); 0.3 rejected. Error files skip whole; re-runs are idempotent.
- Two-column dry-run report — left: Summary, Needs review, External L6, Category admins, Governance changes; right: file cards → L5 canvas → maps. Many files: scrolling list with per-column scroll and a search/sort toolbar.
- Governance changes (re-import) — differing owner, department, approvers or notes become rows with Keep ↔ / Replace ⇌ (notes show a -/+ diff).
- Owner assignment — an empty or unknown owner makes the importing sysadmin interim owner (Owner unconfirmed pill) until Transfer ownership.

Business Process Map | Maps | Notices | Inbox | Feedback | System Admin | 한 EN

Settings

CONTENT

Notices

Manual

Knowledge base

AI chat

AI prompts

DIRECTORY

Employees

Departments

Catalogs

Orphaned refs

FRAMEWORK

Categories & import

Re-imports overwrite category names/structure by code - the last delivery is the source of truth.

Manage | Status

+ Add top-level category

L1 exist-L1-mun9e5ty ui-c8fba38b 2

L1 lvi-L1-mun9mfm ui-86b65663 0

L1 smoke-L1-mun9mwb3 ui-8015d07a 0

L1 extA-mun9n3l2-L1 ui-389f6297 0

L1 ux-L1-mun9nw3r ui-ea751a8b 0

L1 lvi-L1-mun9r229 ui-009c52fc 0

L2 lvi-L2-mun9r229 ui-c6f11e20

L3 lvi-L3-mun9r229 ui-ddef96a8

L4 lvi-L4-mun9r229 ui-917f89f2 L5 3

L5 lvi-L5-mun9r229 ui-135b7a61 0

L5 Taken-mun9r229 ui-03a0973c 0

L5 fresh-mun9r229 ui-d2ec2760 0

Interview JSON

Paste into an external AI with your documents. It returns interview JSON 0.5 for this L5.

Choose interview JSON files | Copy external AI prompt

utility-l5.json x 1 files selected Clear all Dry run

Summary 1 files · dry run

Created 0	Warnings 14	Notes 13
Updated 0 · Unchanged 4	Errors 0 · file issues 0	interview notes
Linkage canvas 0	External L6 0 / 0 / 0	Governance 0
nodes · edges added	linked / placeholder / review	0 replace · 0 keep

Needs attention 2

System not in the catalog - stored as Other with the 4 maps

1 files Search L5 or file name Sort Order Name Issues Maps

Lv5 정제수 일상 점검 utility-l5.json

EPCV > Facility > 유틸리티 운전 > 정제수 시스템 운전 t8

Maps 4 · Notes 13

Linkage canvas · Added to the existing canvas #

Unchanged 정제수 일상 점검 수행 2 #

Unchanged 수질 이상 대응 5 #

Unchanged 정제수 시스템 소독 운전 3 #


Unchanged 점검 기록 검토 및 승인 4 #

Interview import — landing rules, placeholders, notes

- **Department path resolution**, four passes — exact → leading levels dropped → unique suffix → mirror chain. No match registers the delivered path as-is (remap under Settings → Directory → Departments).
- **Landing** — activities (L7) become nodes, flow edges (seq/branch/loop/bypass) become connectors; branch promotes a decision, a self-loop synthesizes a "**Repeat? (auto-generated)**" branch.
- Conditions, times and systems land as map fields with originals kept as **interview source notes**. `ownerRole` lands as the SP designation **Role**; systems are normalized to the catalog (alias → canonical, unknown → **Other + source note**, one report row per map). Annual count and FTE land on both the SP reference and the L5 node.
- Exact output=input matches auto-link as IO links; nodes auto-lay out horizontally; an editable draft is created right after publish. An activity listing the same item as input and output still lands but gets a **warning row** (handoffs exempt).
- **L5 canvas** — built or extended from top-level L6 flows. Redelivery only **adds** nodes and skips a canvas someone else has checked out.
- **External taskId placeholders** — an unknown taskId stays as a placeholder titled with its code; later deliveries or slot assignment resolve it automatically.
- Exceptions, VOC, regulatory basis and open items become map notes; L5 entry/flow/open items become category notes. Settle GMP and conditions on the map's **Conditions & GMP** card (kept across redeliveries).

③ Connections · ④ Register

- Entering Connections, the AI proposes the L6 flow at once — plan predecessors are the backbone, the entry point is a first-stage card, edges against the plan order become loops.
- A full-width **L5 linkage canvas** with a floating feedback chat (drag, resize, minimize to a sparkle chip). Drag nodes, right-click to add a branch; click a connector to select, double-click for its label, right-click for the menu; auto-save.
- A non-branch card has one outgoing connector — a new one marks the old in red dashes and replaces it after confirmation. Chat edits keep the layout; **Propose again** restarts after confirmation.
- **Confirm connections** → Register: the interview-import screen with an automatic Dry run; Back to connections stays available. After Apply, a completion card (open the L5 canvas · download JSON) — maps publish, the canvas stays draft.

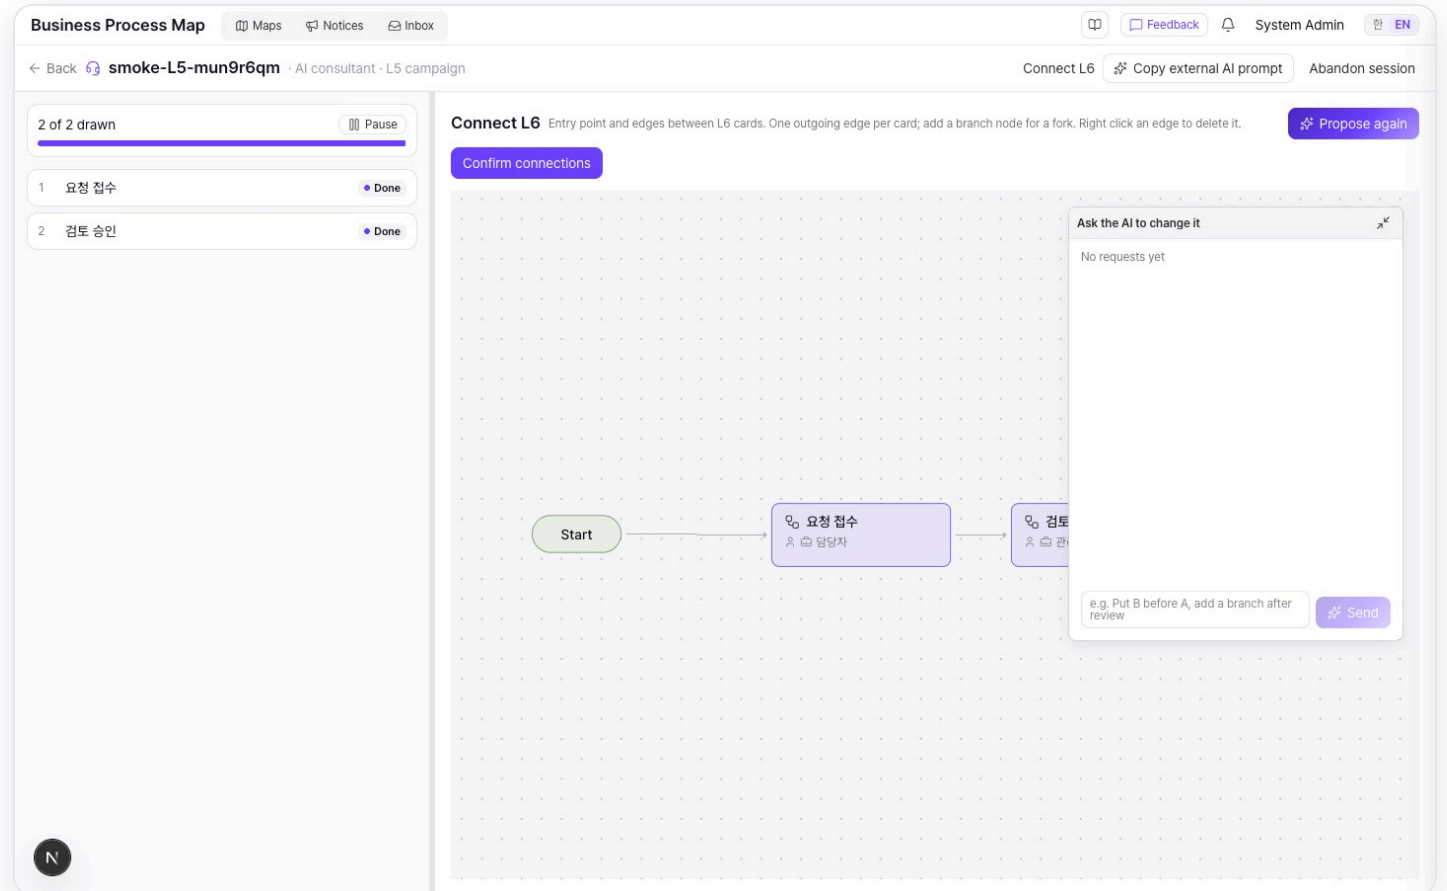

② Questionnaire — settling ambiguity


- Each card gets an AI questionnaire (decisions · exceptions · branches → activities → basics → I/O) settling who decides, branch conditions, rejection returns, parallel vs sequential, exceptions, start/end — one-line reason per question.
- All choice questions are required. Free-text starts blank — **[AI suggestion]** types the proposal in; blank stays unanswered. Single-choice can take several answers; per-question and submission comments.
- No need for detail yet? **Create as placeholder** skips questionnaire and drawing (Draw again with AI before registration). Failed AI cards: Retry or Skip as placeholder.
- Submitting draws that card's flow in the background while the next questionnaire is prepared. Any board row opens its panel (preview · feedback chat) regardless of state.

The screenshot displays the 'Business Process Map' interface. The top navigation bar includes 'Maps', 'Notices', and 'Inbox'. The main header shows the current map 'ux-L5-mun9s6fk' and the role 'AI consultant - L5 campaign'. The interface is divided into several sections:

- Left Panel:** A list of cards with '0 of 2 drawn' and a 'Pause' button. Two cards are visible: '1. 요청 접수' (Ready) and '2. 검토 승인 편집' (Ready).
- Main Content Area:**
 - 1. 요청 접수 (Request Reception):** Contains a section for 'Decisions, exceptions and branches' with two questions: '4. 시작 조건' (Start condition) and '5. 완결성 판정에서 미비하면?' (If incompleteness is identified in the completion judgment?). Below this is an 'Activities' section with a list: '1. 활동 순서' (Activity order) including '요청 확인' (Request confirmation), '완결성 판정' (Completion judgment), and '접수 등록' (Registration), each with a checkbox and a dropdown arrow.
 - Basics:** Includes '2. 담당 역할' (Responsible role) with '담당자' (Responsible person) and '관리자' (Administrator) buttons, and '3. 사용 시스템' (Used system) with 'ERP' (checked) and '메일' (Email) options.
 - Inputs and outputs:** Includes '6. 입력물' (Input) and '7. 산출물' (Output), both with 'AI suggestion' buttons and text input areas.
- Bottom:** A note states 'Submitted cards cannot be reopened. Blank text answers stay unanswered.' and a 'Review answers' button.


① Plan — cards, stages, external L6

- Brief and attachments → **Propose L6 cards**. Three columns: purpose · attachments | stage rows (top-down order, one row in parallel) | card details (name, summary, role, department, predecessors).
- Drag tiles between rows, reorder, or open a new stage (Alt+arrows). Predecessors: **right-click** a tile and check cards of the previous row — dashed curves, and hovering highlights the linked tiles.
- The **External L6** tab, or right-click an empty spot → Add external L6, adds another L5's L6 as an external tile (colored per origin L5; no questionnaire, joins the connections only). Right-click a new card → Browse external L6 converts it in place.
- Removed cards stay as **pending removal** (red tile, restorable) and drop out on save or lock. Existing cards keep (dashed, not draggable) or revise. **Lock** starts questionnaire prep per card.

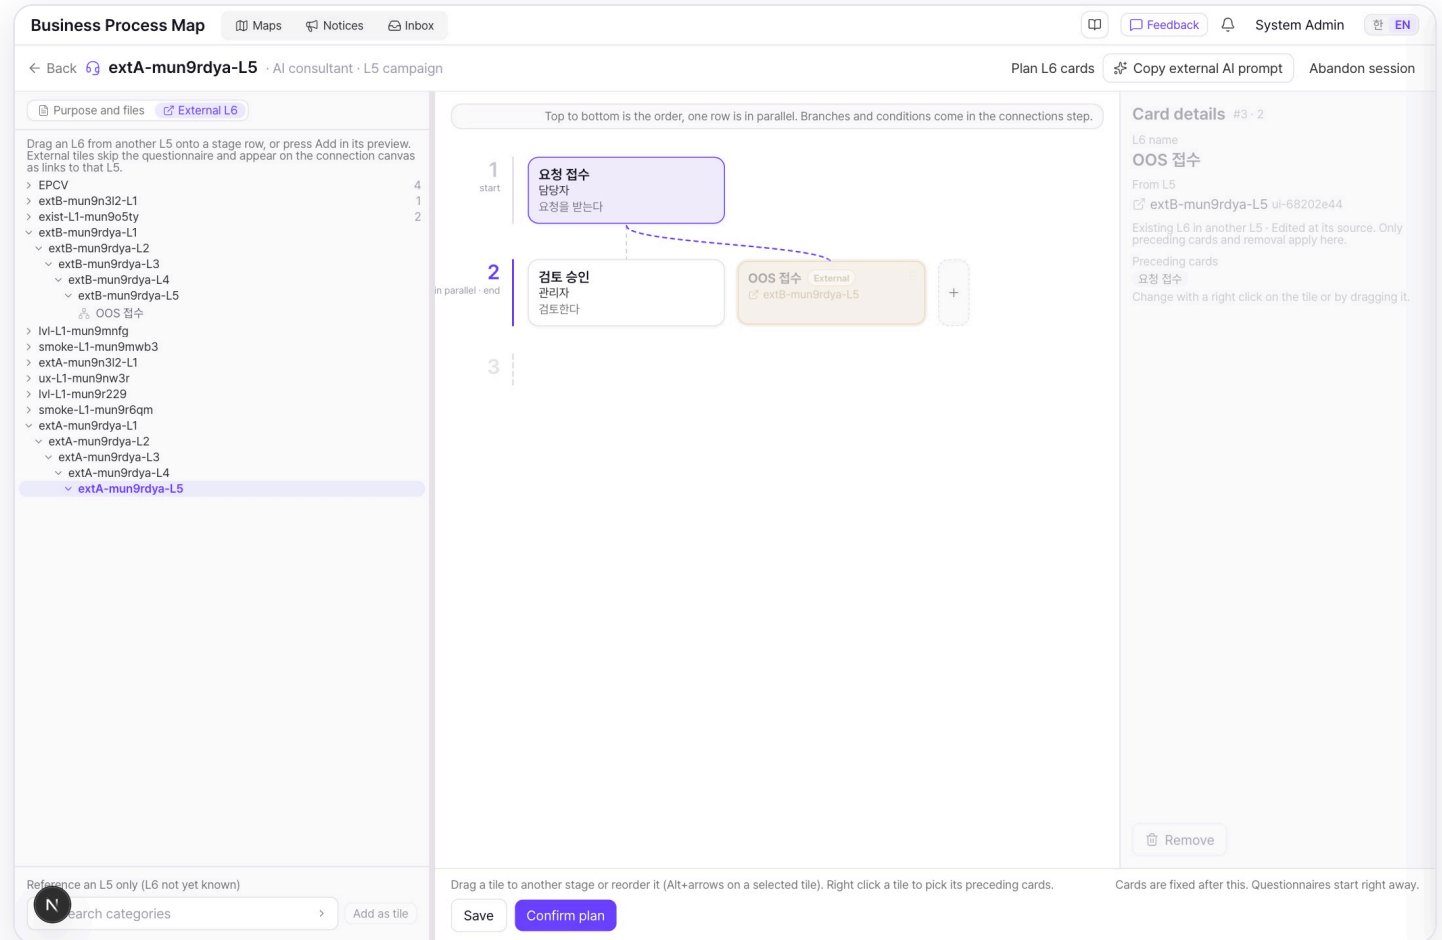

Filling an L5 with AI — entry & sessions

- Fill one L5 by talking to the AI, no documents required (sysadmin-only). Entry is **selecting a row in the category tree** — the detail panel shows **tile actions** for that level.
- L1–L3 — **Go down** tiles (two columns, In progress n badge). L4 — a name field plus **Create L5 and start with AI** (duplicate names refused). L5 — **Work with AI**, or **Resume AI session** when one is running.
- Sessions live in the DB — leaving the screen keeps them; there is no separate list, resume from that L5 row. Pause/resume at the top of the board. Without uploads, **Copy external AI prompt** round-trips a JSON you import.
- Four steps — ① Plan → ② Questionnaire → ③ Connections → ④ Register. Already-registered L6 maps load first as **Existing** cards (Keep by default, switchable to Revise).

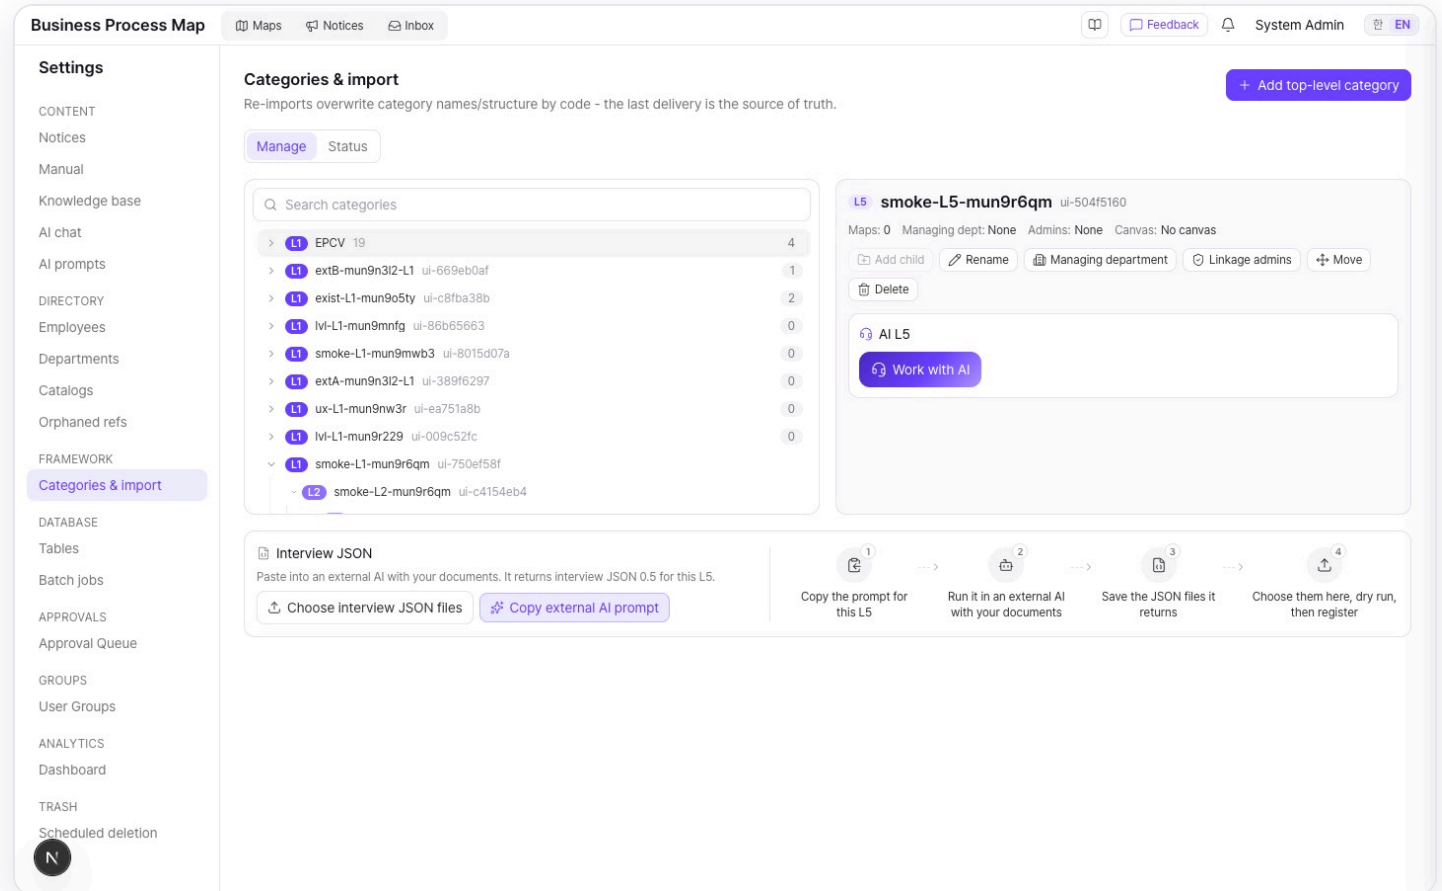

06

Database & Backups

The table viewer, notification purge, batch status, and daily backups.

The table viewer

- A **read-only** browser with server-side paging, sorting, filtering — it never writes.
- **CSV export** streams all rows with the current sort/filter (BOM, formula guard).
- **Login records** — one row per user per day; the audit view.
- Selecting `notifications` adds a **range purge** — grouped preview, then a hard delete (no undo).
- Notification retention is a fixed most-recent-100-per-person policy.

Business Process Map

Maps Notices Inbox 2

Feedback System Admin EN

Settings

CONTENT

Notices

Manual

Knowledge base

AI chat

AI prompts

DIRECTORY

Employees

Departments

FRAMEWORK

Categories & import

DATABASE

Tables

Batch jobs

APPROVALS

Approval Queue 2

GROUPS

User Groups

ANALYTICS

Dashboard

TRASH

Scheduled deletion

Tables

ai_chat_messages 0 ai_chat_sessions 0 ai_prompts 0 ai_usage_events 0 app_settings 0 approval_requests 1 batch_job_runs 3

category_permissions 0 checkout_requests 1 comments 2 dashboard_coverage_depts 0 dashboard_permissions 0 departments 0

edges 206 employees 401 feedback 2 feedback_note_revisions 0 feedback_notes 1 groups 1 interview_attachments 0

interview_checkpoints 0 interview_messages 0 interview_sessions 0 kb_chunks 0 kb_documents 0 local_credentials 0 login_records 3

manual_docs 0 map_approvers 28 map_notes 29 map_permissions 117 map_versions 95 nodes 240 notices 2 **notifications 3**

process_categories 19 process_maps 34 user_group_managers 0 user_group_members 26 user_groups 6 version_approvals 130

version_events 375

notifications

Filter rows... Export CSV 3 rows · 3 shown 연도, 월, 일. - 연도, 월, 일. Delete in range

id	recipient	type	map_id	version_id	message	payload	read	created_at
1	admin.kim	review_requested	14	75	user.lee 님이 'As-Is' 승인을 요청했습니다.		false	2026-08-30T23:59:10.421538
2	admin.kim	review_requested	15	76	user.park 님이 'As-Is' 승인을 요청했습니다.		false	2026-08-30T23:59:10.422816
3	admin.kim	notice	17		새 공지: v2.4 승인 워크플로우 개편 안내가 등록되었습니다.		true	2026-08-30T23:59:10.424745

All rows loaded

Batch job status

- The latest attempts of the DB backup and HR sync, per job — last success and last failure each keep their time and summary.
- A failure newer than the last success is your signal to act.
- **Back up now (on demand)** — a backup outside the daily schedule. On production (postgres) the sidecar picks it up within seconds and runs `pg_dump` ; local sqlite copies instantly.
- **Backup file list & download** — the card lists `${BACKUP_DIR}` and lets you download each file for an off-server copy (sysadmin only).

Business Process Map | Maps | Notices | Inbox | Feedback | System Admin | EN

Settings

- CONTENT
 - Notices
 - Manual
 - Knowledge base
 - AI chat
 - AI prompts
- DIRECTORY
 - Employees
 - Departments
 - Catalogs
 - Orphaned refs
- FRAMEWORK
 - Categories & Import
- DATABASE
 - Tables
 - Batch jobs**
- APPROVALS
 - Approval Queue
- GROUPS
 - User Groups
- ANALYTICS
 - Dashboard
 - Scheduled deletion

Batch jobs

Latest attempt per background job - only the most recent success and failure are kept.

Database backup | Backup now | Success

Last attempt: 2026-09-30 09:29
 Last success: 2026-09-30 09:29 bpm-20260930-092955.sqlite (on-demand by admin.sys)
 Last failure: -

Backup files
 Backup completed.

bpm-20260930-092955.sqlite	1.0 MB	2026-09-30 09:29	Download
bpm-20260930-092732.sqlite	1.0 MB	2026-09-30 09:27	Download
bpm-20260930-092418.sqlite	1.0 MB	2026-09-30 09:24	Download
bpm-20260930-092124.sqlite	1.0 MB	2026-09-30 09:21	Download
bpm-20260930-091713.sqlite	1.0 MB	2026-09-30 09:17	Download
bpm-20260930-091416.sqlite	1.0 MB	2026-09-30 09:14	Download
bpm-20260930-090941.sqlite	1.0 MB	2026-09-30 09:09	Download

HR directory sync | No runs recorded yet

Daily automatic backups (prod)

- The compose `db-backup` sidecar — daily after **04:00 KST**, plus once on boot if today's dump is missing.
- A dump is kept **only after** `pg_restore --list` verification; outcomes land on the Batch jobs tab.
- Stored at `${BACKUP_DIR}` (default `./backups`); `${BACKUP_RETENTION_DAYS}` (default 14) prunes older dumps.
- Server-disk only for now — **off-server copies recommended**. Recovery runbook: `docs/deploy/backup.md`.


07

Approvals • Groups • Trash

The global queue, group approvals, restore, and instant purge.


The global approval queue

- Pending requests across all maps — group creation, permission downgrades, visibility, checkout transfers, and **slot changes (fw_slot)** showing map · action · target · progress n/m.
- Approve/reject — this queue takes no rejection reason. Map-scoped items are also decidable by that map's approvers; this is the catch-all.
- **Slot changes are the exception** — decided by the related L5's direct admin (or a sysadmin); sysadmins decide here as the fallback.
- Renames, SP registrations and Framework **confirm requests** are handled from the Inbox — approving a confirm request confirms on the spot, so a canvas failing its gates can't be approved.

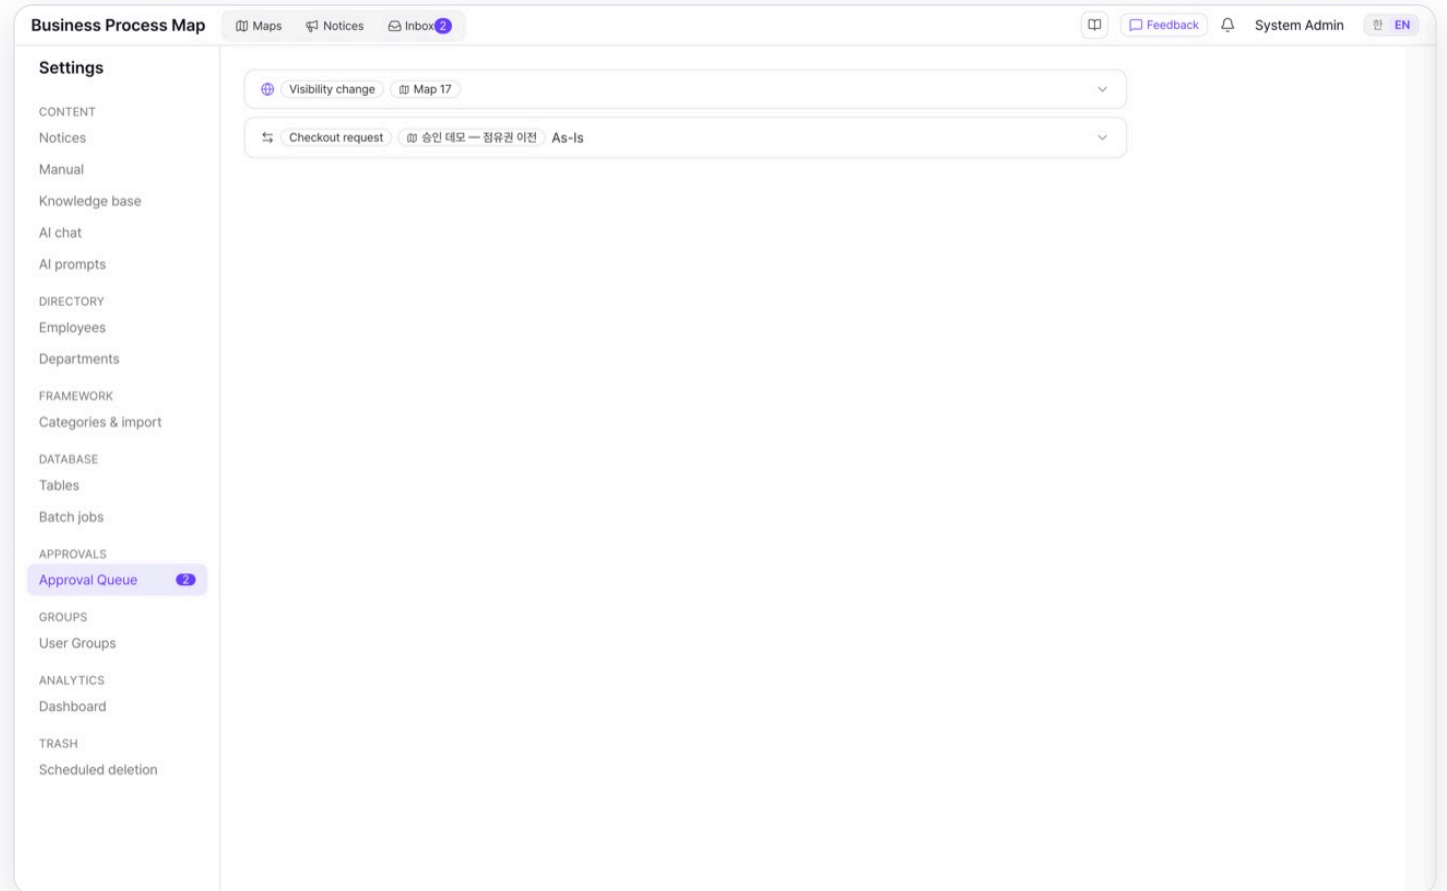


User group administration

- Group creation is request-based — **Active** after sysadmin approval.
- Check the name, members (2+), managers (1+), then decide.
- Sysadmin sees **all groups**, inactive and deleted included.
- Deleted groups purge after 7 days in the trash.

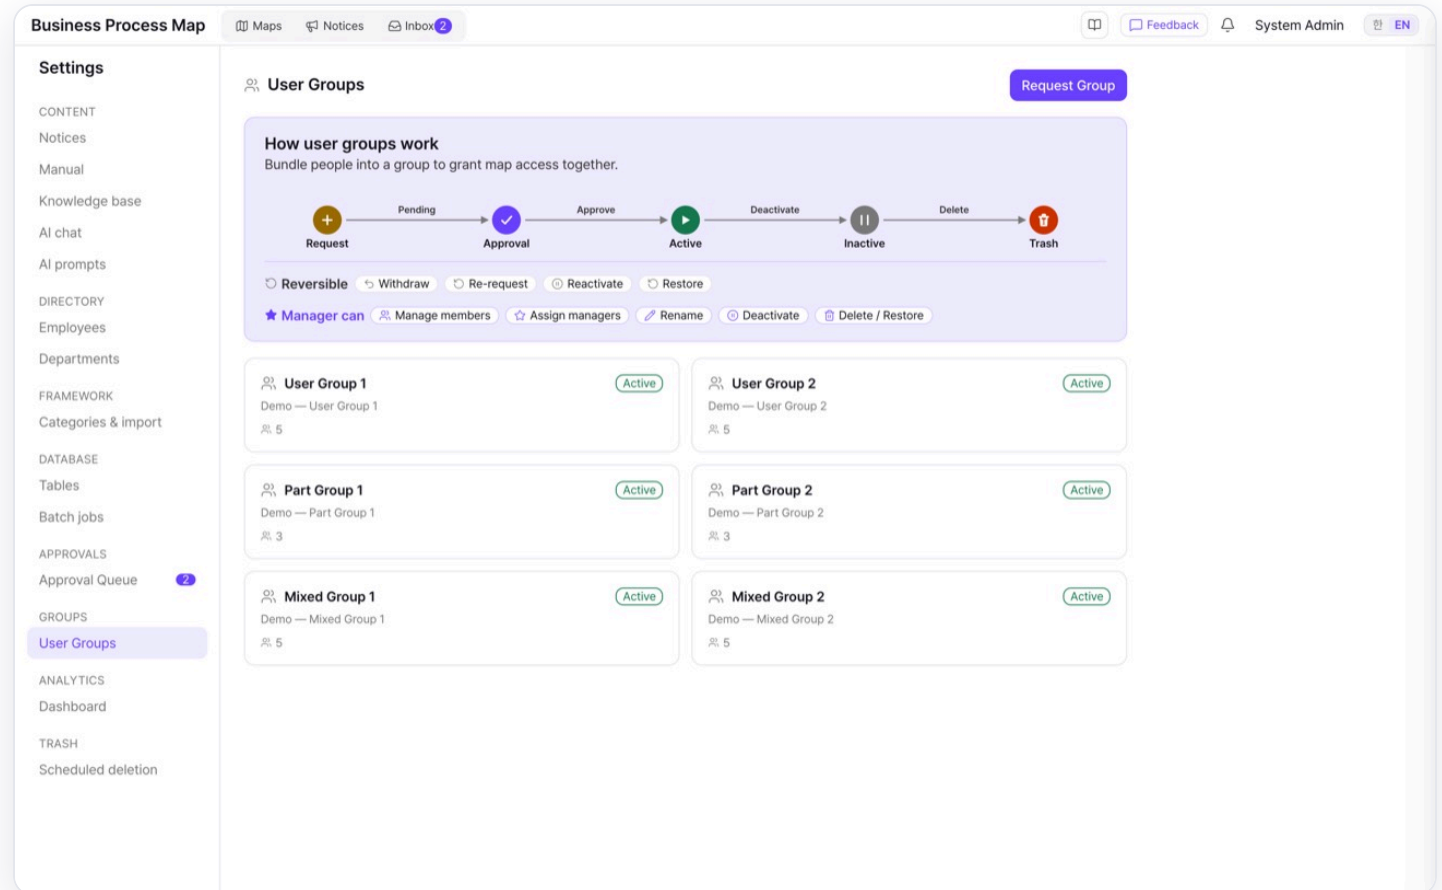

Trash & instant purge

- Deletions are soft — purged after 7 days; **Restore** brings everything back intact.
- Owners see their own; sysadmin sees **everyone's** trash.
- **Instant purge (sysadmin)** — remove immediately without the 7-day wait. Trash-state maps only; **no undo**.

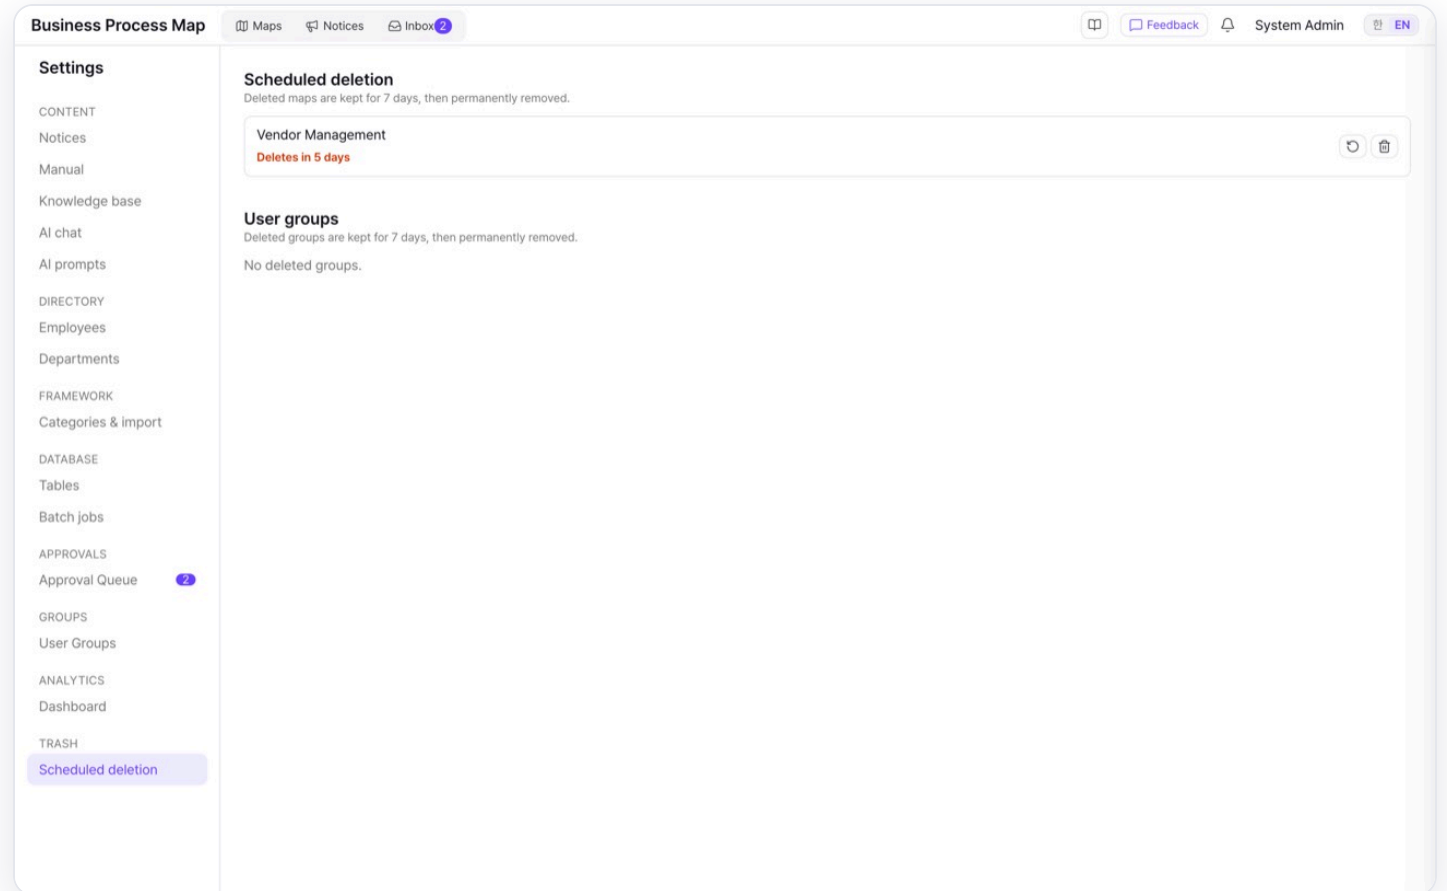

Version workflow — admin powers

- Force checkout — take the lock when the holder is away (their unsaved context is lost). Checkouts never expire on their own, so this is how an absent holder's lock is reclaimed.
- As effective owner you can submit, publish, and decide checkouts anywhere.
- Withdraw is the exception — Pending/Approved only by the submitter.
- Approver reassignment — recover approver-less maps via the forced-reassign flow.
- Publishing expires the previous version (terminal) — continue via Republish.


08

Dashboard

Live operational metrics and delegated access.

The operations dashboard

- Operations — maps, published, in-progress, trash, open comments, your unread notifications, transfer requests.
- Version status distribution and adoption by department (denominator picked in the Coverage sidebar).
- Login & activity, cumulative growth — 7d/1m/3m/custom period filter (snapshot metrics ignore it).
- Recent version events and AI usage (7/30-day calls, top maps).
- Access sidebar — delegate viewing to people, departments, groups (sysadmins always can).

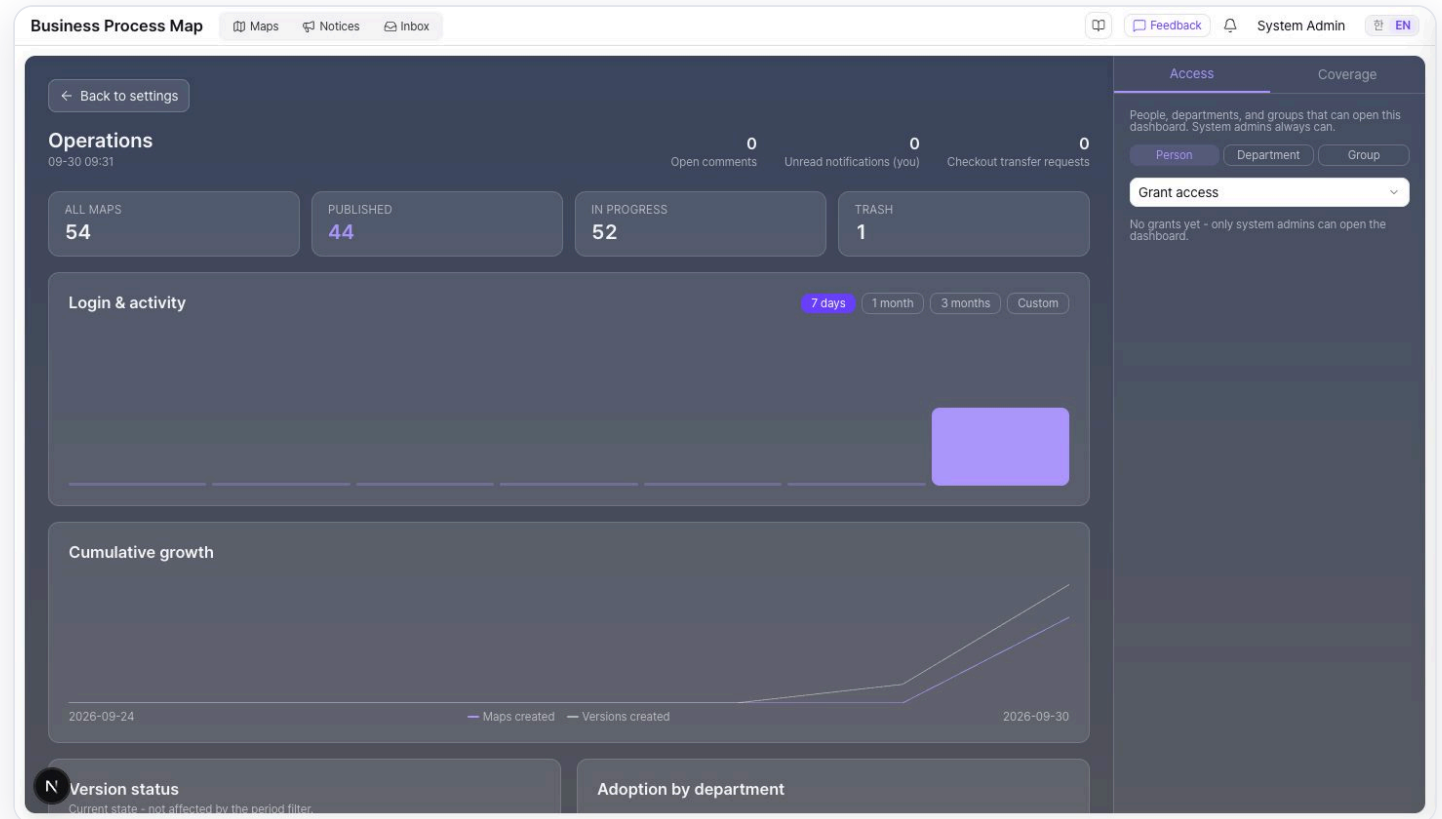

09

Configuration Reference

backend .env and compose variables. Changes need a backend restart.

Env — auth, permissions, AI

Variable	Effect
<code>BPM_SYSADMINS</code>	Comma-separated sysadmin login IDs
<code>AUTH_MODE</code>	<code>keycloak</code> <code>ldap</code> <code>dev</code> — the frontend reads it at boot via <code>GET /api/auth/mode</code>
<code>AUTH_JWT_SECRET</code> / <code>AUTH_JWT_TTL_HOURS</code>	ldap session signing key (rotate = kill switch) · lifetime (default 8 h)
<code>DEV_ENFORCE_PERMISSIONS</code>	Enforce RBAC locally even with auth off
<code>AI_BASE_URL</code> / <code>AI_MODEL</code>	AI server (OpenAI-compatible) and model id — the in-house GPU uses just <code>glm-5.2</code>
<code>AI_MAX_TOKENS</code> / <code>AI_TIMEOUT_SECONDS</code>	Response token cap (too low = empty replies) · per-call timeout (120–180 s recommended)

Env — HR, backups, misc

Variable	Effect
<code>N8N_HR_URL</code> / <code>N8N_HR_TOKEN</code>	HR webhook URL & secret — sync activates only with both
<code>N8N_POSITION_URL</code>	EDW head-position webhook — empty disables collection
<code>HR_SYNC_INTERVAL_HOURS</code>	Auto-sync interval (default 24, 0 = off) — keep 0 for the first migration
<code>HR_SYNC_DELETE_CAP_PCT</code>	Sync deletion cap % (default 20, 0 = off)
<code>BACKUP_DIR</code> / <code>BACKUP_RETENTION_DAYS</code>	Backup path (default ./backups — point at a NAS for off-server) · retention days (default 14)
<code>MANUAL_URL</code>	Editor-toolbar manual button — hidden when empty

Env changes need a backend restart (`--reload` does not re-read .env). All deployment values live in .env — never hardcoded.

Run it steady

Check the **Batch jobs tab** each morning, **AI prompt overrides** after deploys, and **department remaps** after reorgs.