




PERSON		
ID	NAME	SURNAME
1	jhon	mac
2	mason	stoneman
3	mason	norman

UNIQUE COLUMN **name** TABLE **person**;


⊆ **RESULT**

1	jhon	mac
1	mason	stoneman


SELECT TABLE

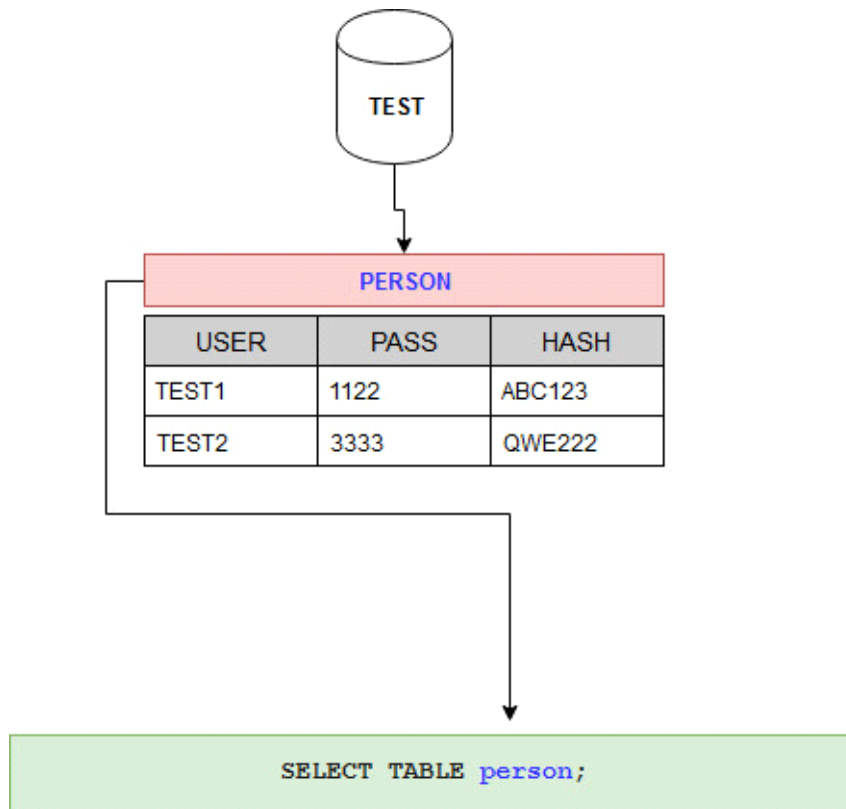


SELECT TABLE COUNT

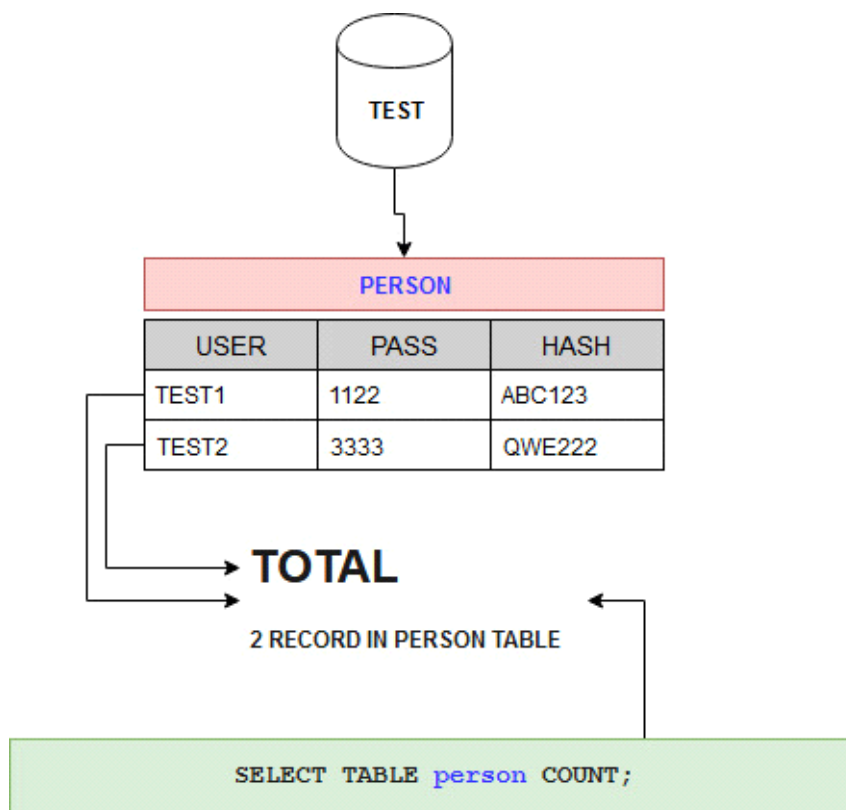


SELECT TABLE COLUMN

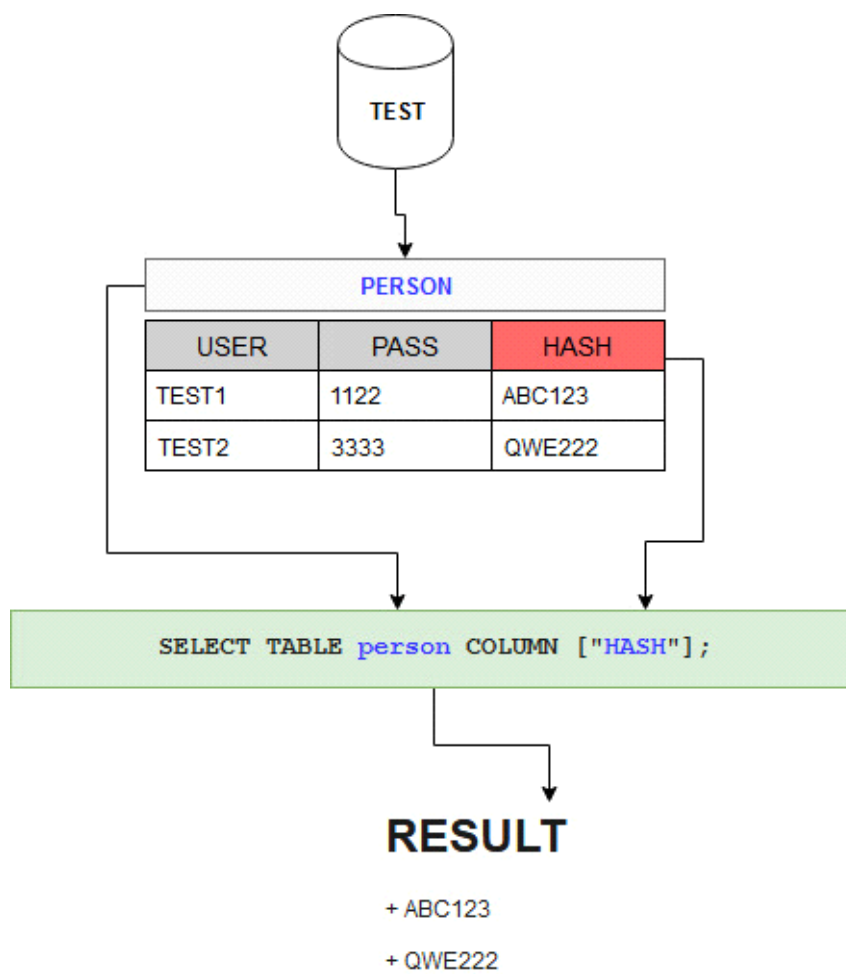


SELECT TABLE FIND

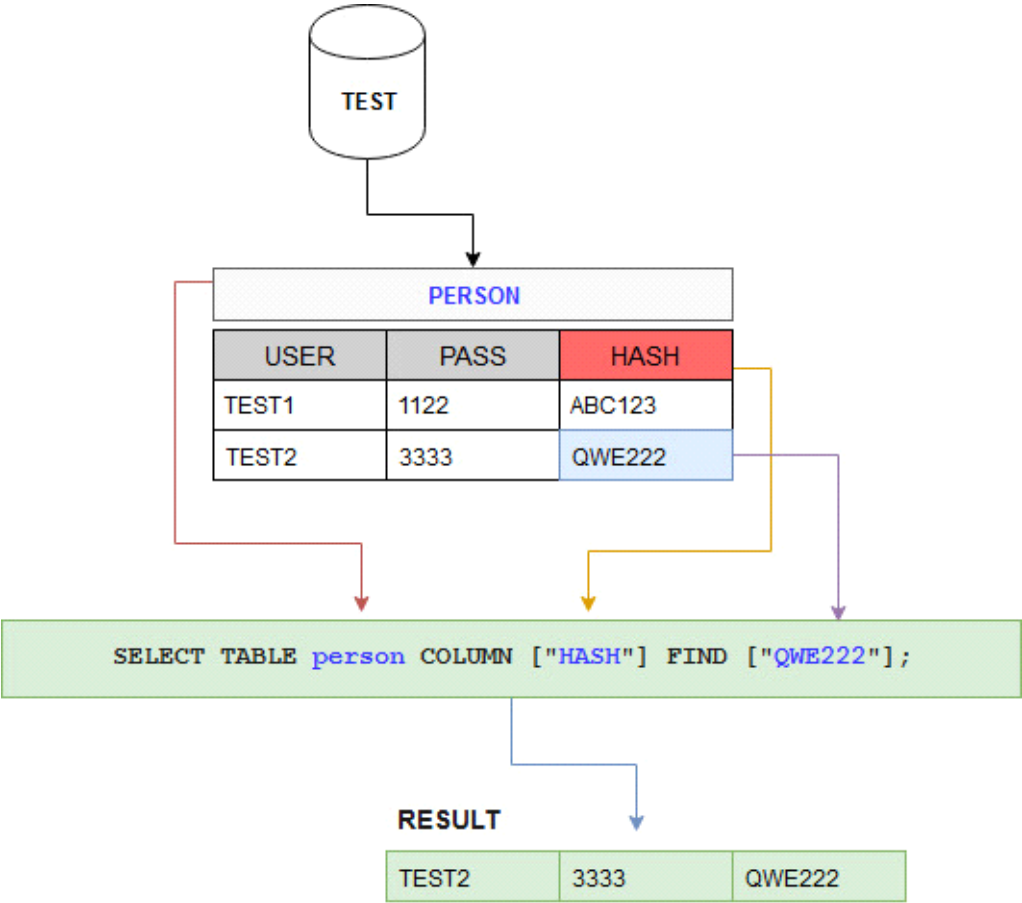


UPDATE ROW

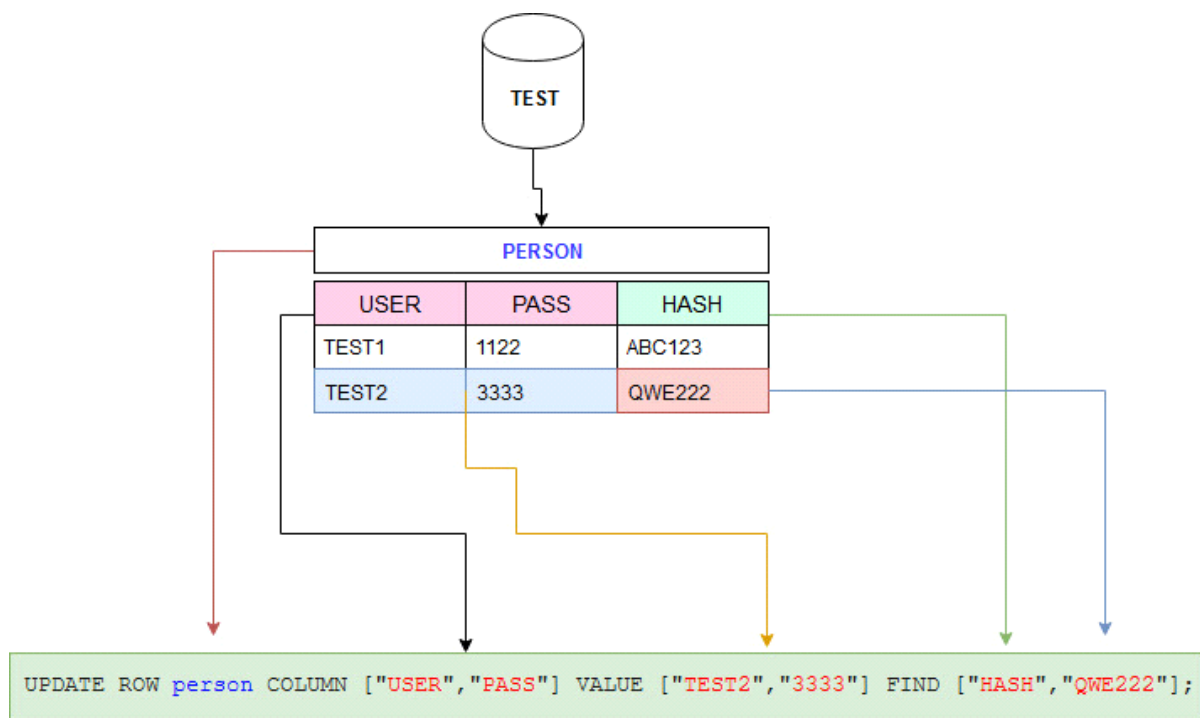


ADD ROW

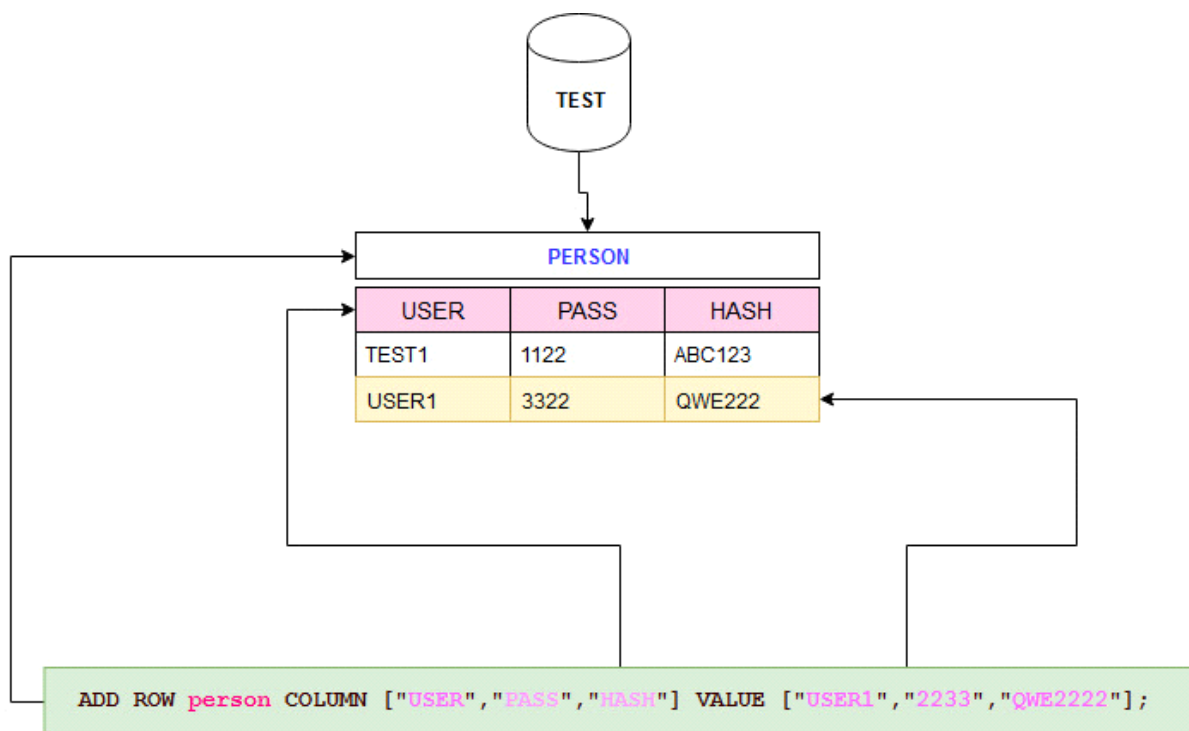


ADD COLUMN

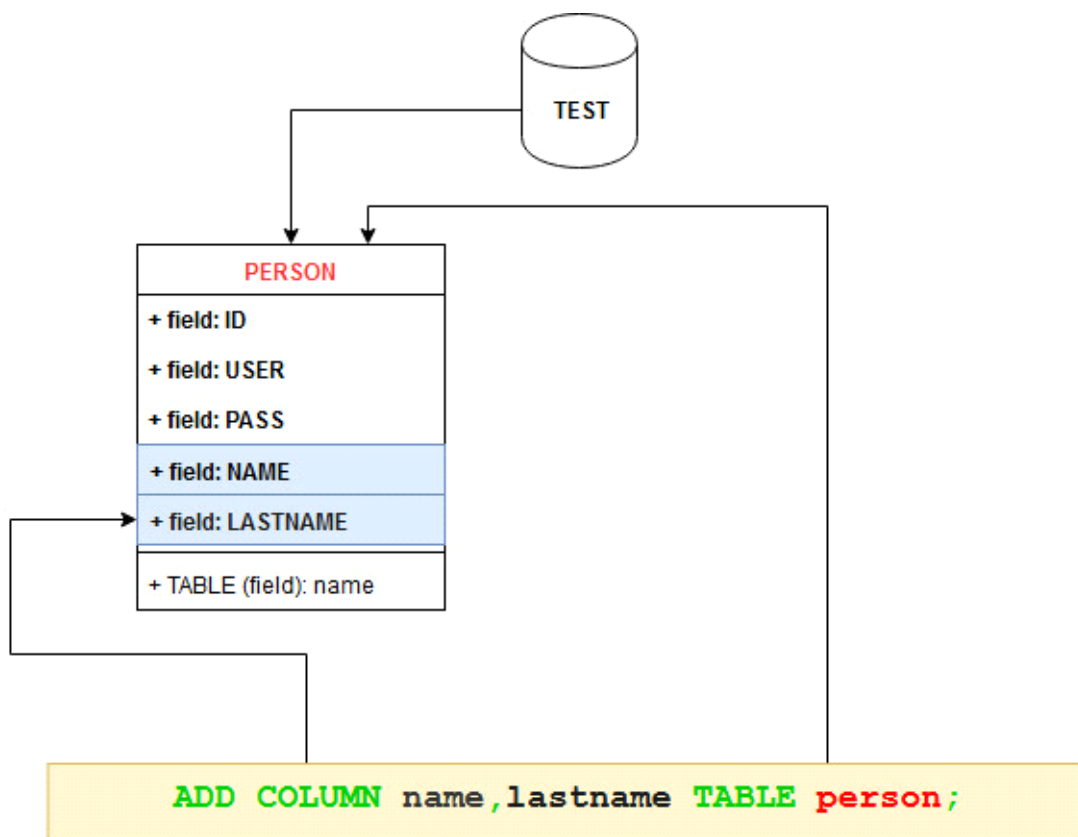


RENAME TABLE

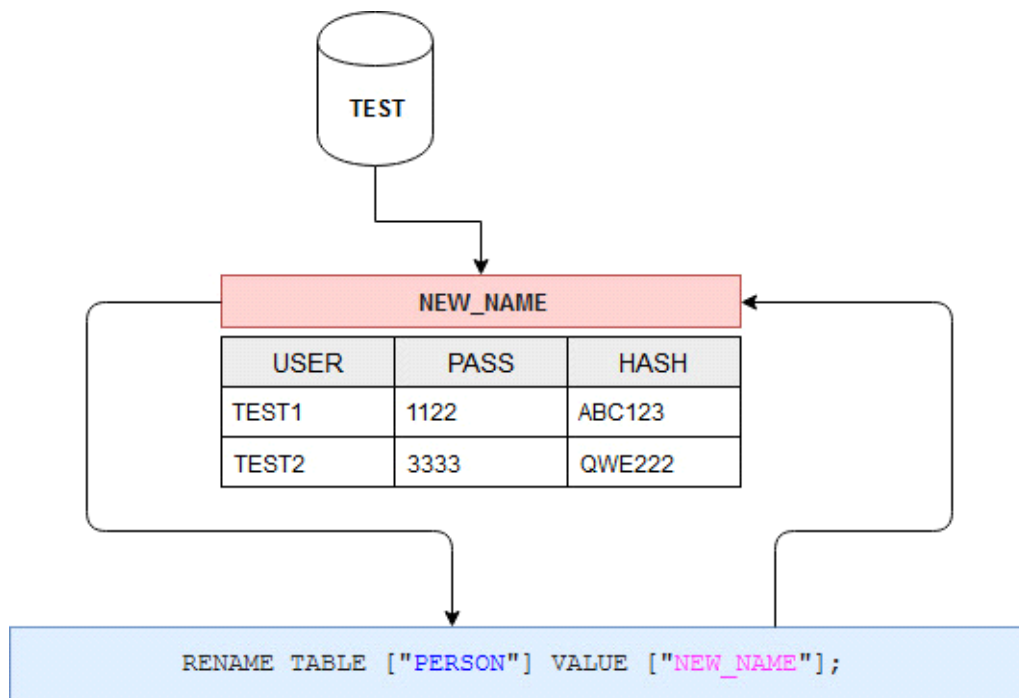


RENAME DATABASE

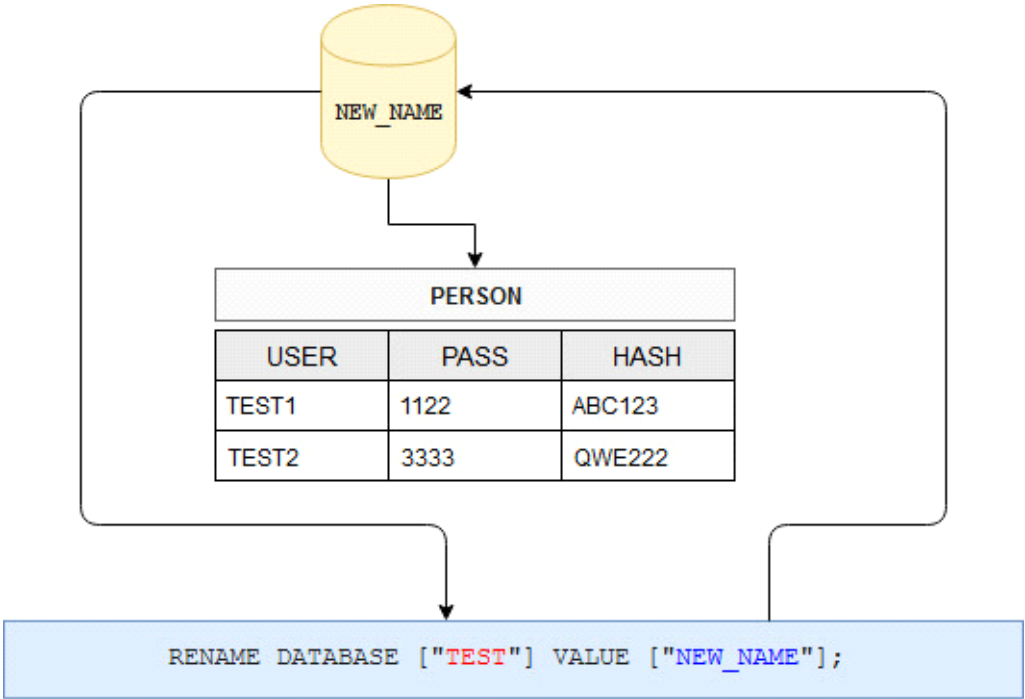


RENAME COLUMN

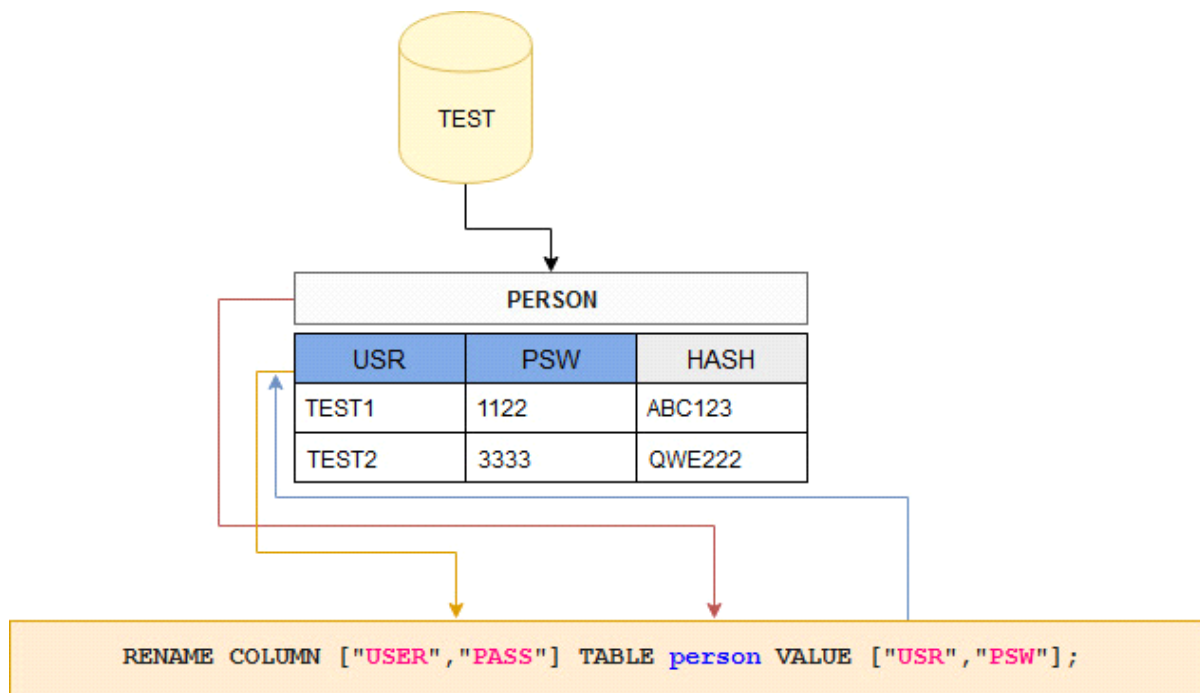


DELETE COLUMN

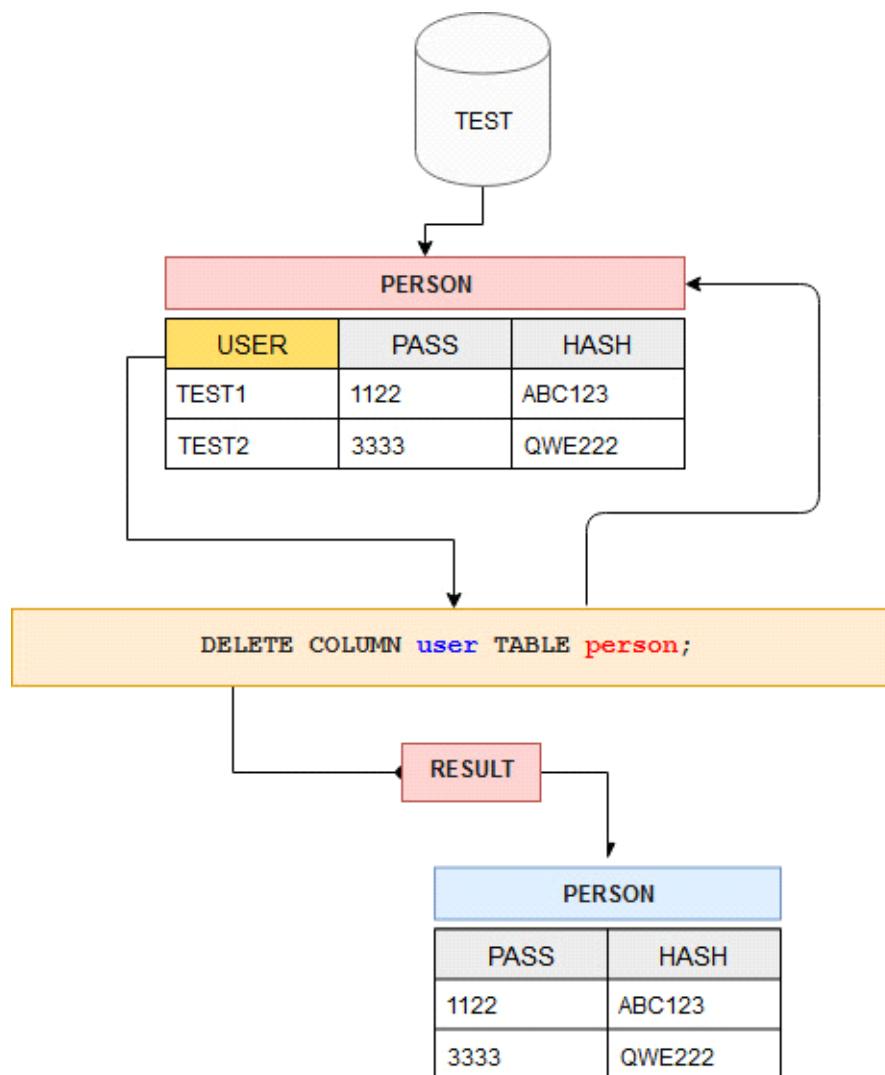

DELETE ROW

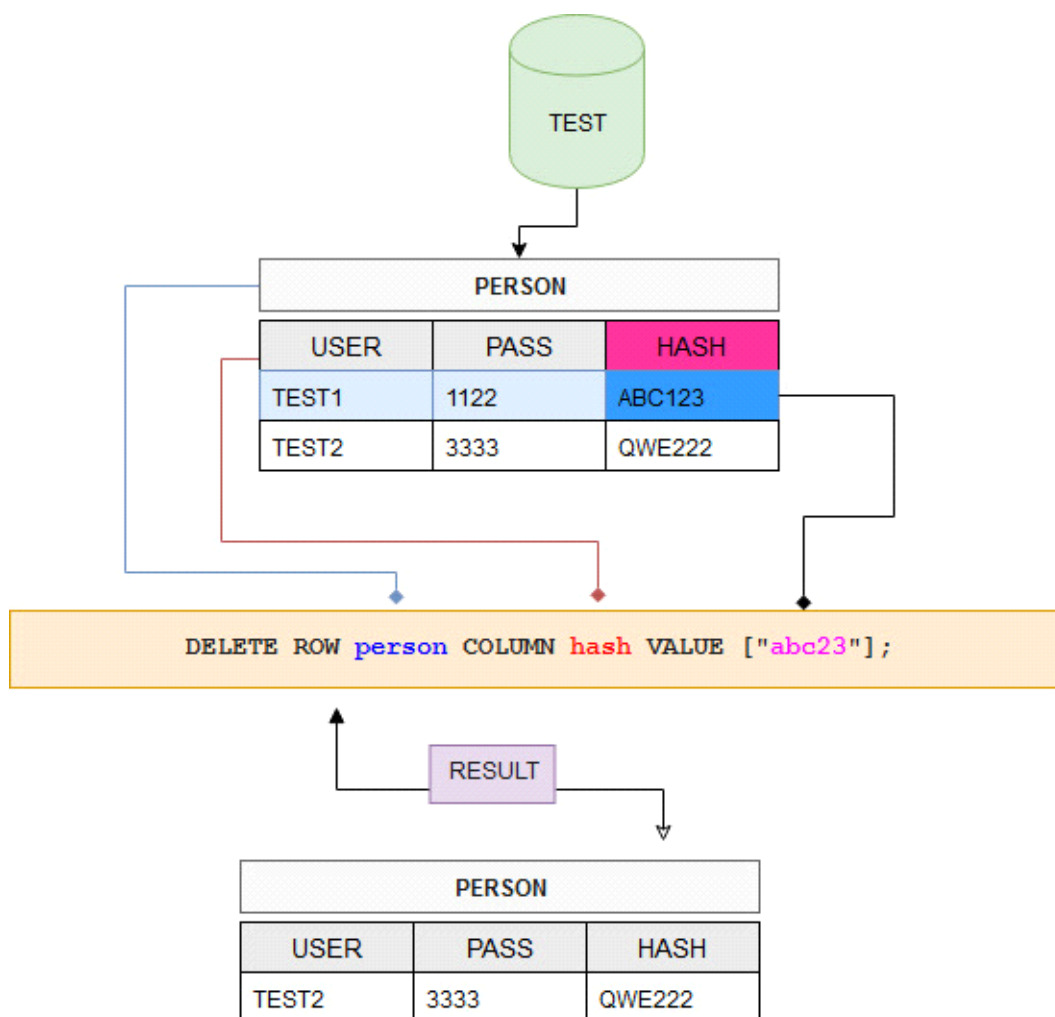

CREATE TABLE

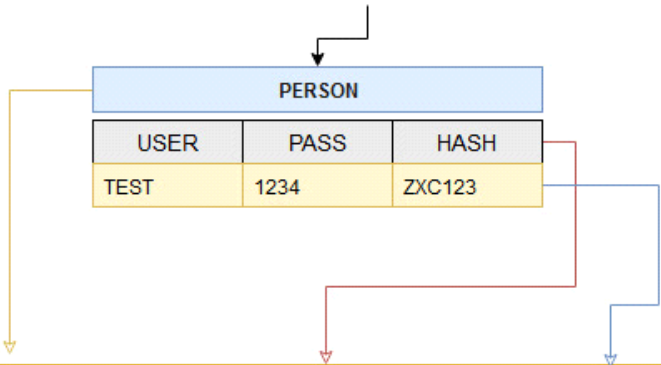

```
CREATE TABLE person COLUMN ["user", "pass", "hash"] VALUE ["test", "1234", "zxc123"];
```

CREATE DATABASE

