



Imágenes

Post

1)

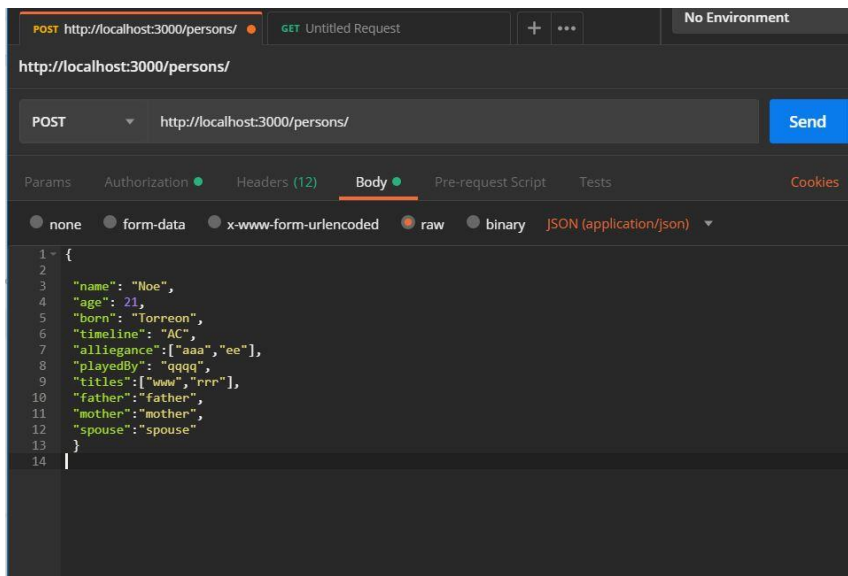

2)

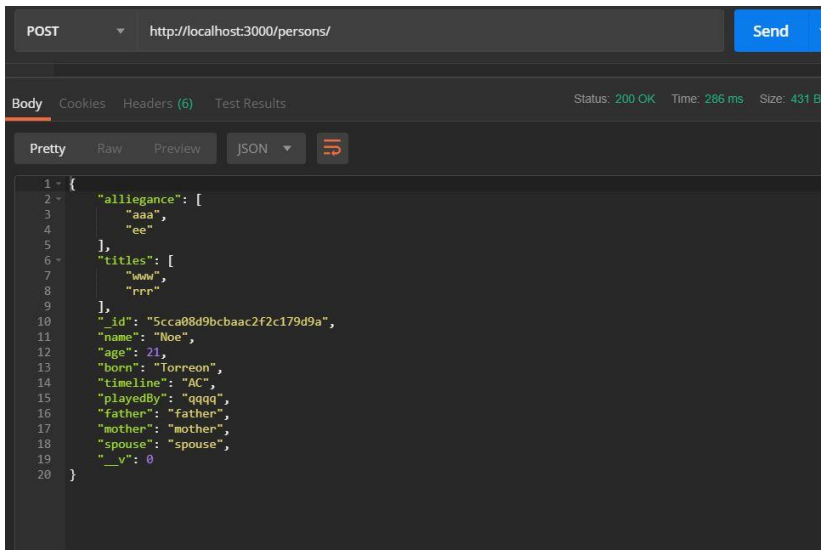


3)

QUERY RESULTS 1-1 OF 1

```
  _id: ObjectId("5cca08d9bcbaac2f2c179d9a")
  > allegiance: Array
  > titles: Array
    name: "Noe"
    age: 21
    born: "Torreon"
    timeline: "AC"
    playedBy: "qqqq"
    father: "father"
    mother: "mother"
    spouse: "spouse"
    __v: 0
```

Get

4)

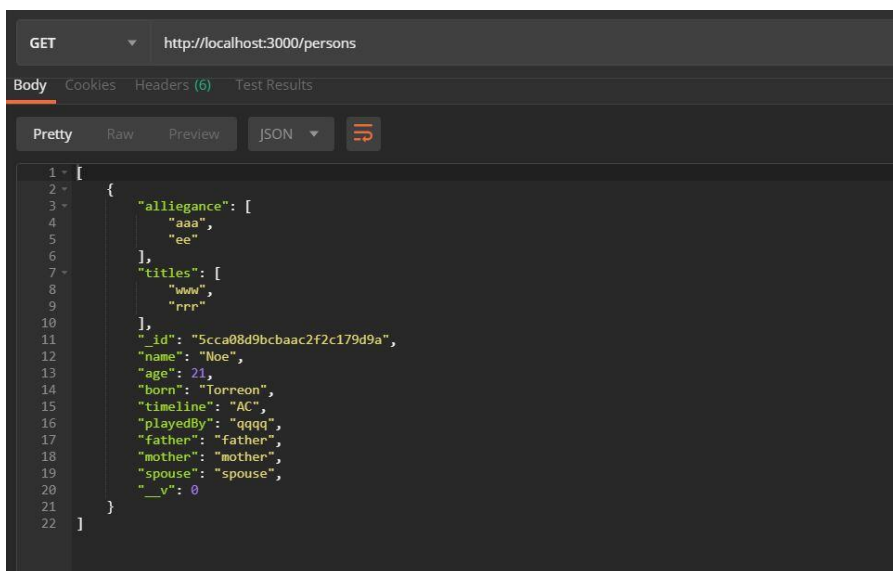

```
1 + [
2 +   {
3 +     "alliance": [
4 +       "aaa",
5 +       "ee"
6 +     ],
7 +     "titles": [
8 +       "www",
9 +       "rrr"
10 +    ],
11 +    "_id": "5cca08d9bcbaac2f2c179d9a",
12 +    "name": "Noe",
13 +    "age": 21,
14 +    "born": "Torreon",
15 +    "timeline": "AC",
16 +    "playedBy": "qqqq",
17 +    "father": "father",
18 +    "mother": "mother",
19 +    "spouse": "spouse",
20 +    "__v": 0
21 +  }
22 + ]
```

5)


Get by id

The screenshot shows a REST client interface with a GET request to `http://localhost:3000/persons/5cca08d9bcbaac2f2c179d9a`. The response is displayed in the 'Body' tab, formatted as JSON. The JSON object contains an 'alliegance' array with 'aaa' and 'ee', a 'titles' array with 'www' and 'rrr', and various personal attributes including '_id', 'name', 'age', 'born', 'timeline', 'playedBy', 'father', 'mother', 'spouse', and '__v'.

```
1 {
2   "alliegance": [
3     "aaa",
4     "ee"
5   ],
6   "titles": [
7     "www",
8     "rrr"
9   ],
10  "_id": "5cca08d9bcbaac2f2c179d9a",
11  "name": "Noe",
12  "age": 21,
13  "born": "Torreon",
14  "timeline": "AC",
15  "playedBy": "qqqq",
16  "father": "father",
17  "mother": "mother",
18  "spouse": "spouse",
19  "__v": 0
20 }
```

Edit

6)

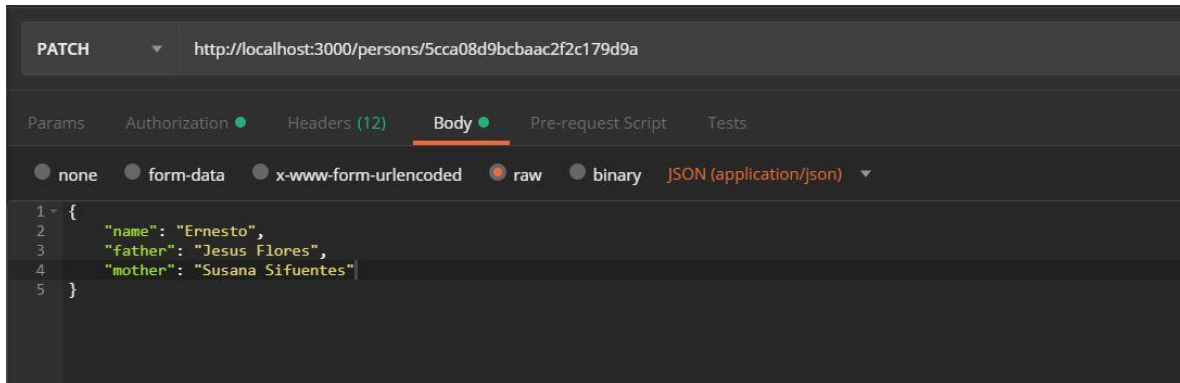


7)

```
_id: ObjectId("5cca08d9bcbaac2f2c179d9a")
> allegiance: Array
> titles: Array
  name: "Ernesto"
  age: 21
  born: "Torreon"
  timeline: "AC"
  playedBy: "qqqq"
  father: "Jesus Flores"
  mother: "Susana Sifuentes"
  spouse: "spouse"
  __v: 0
```

Delete

8)

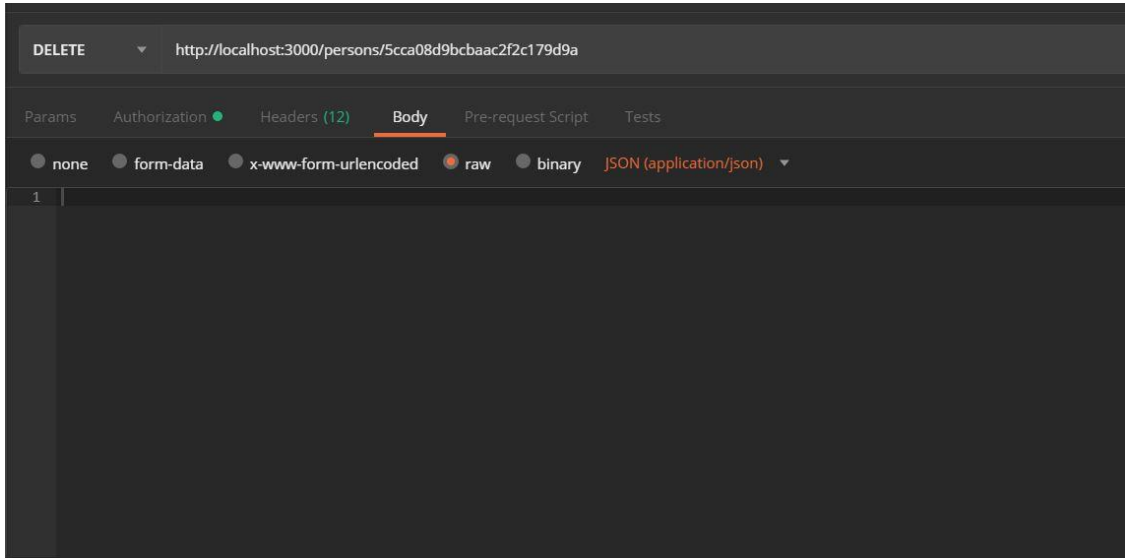

9)

