

ISYS2110

Analysis and Design of Web Information Systems

Lecture 6


Data and Process Modeling

Semester 1, 2018

Dr Rabiul Hasan



THE UNIVERSITY OF
SYDNEY

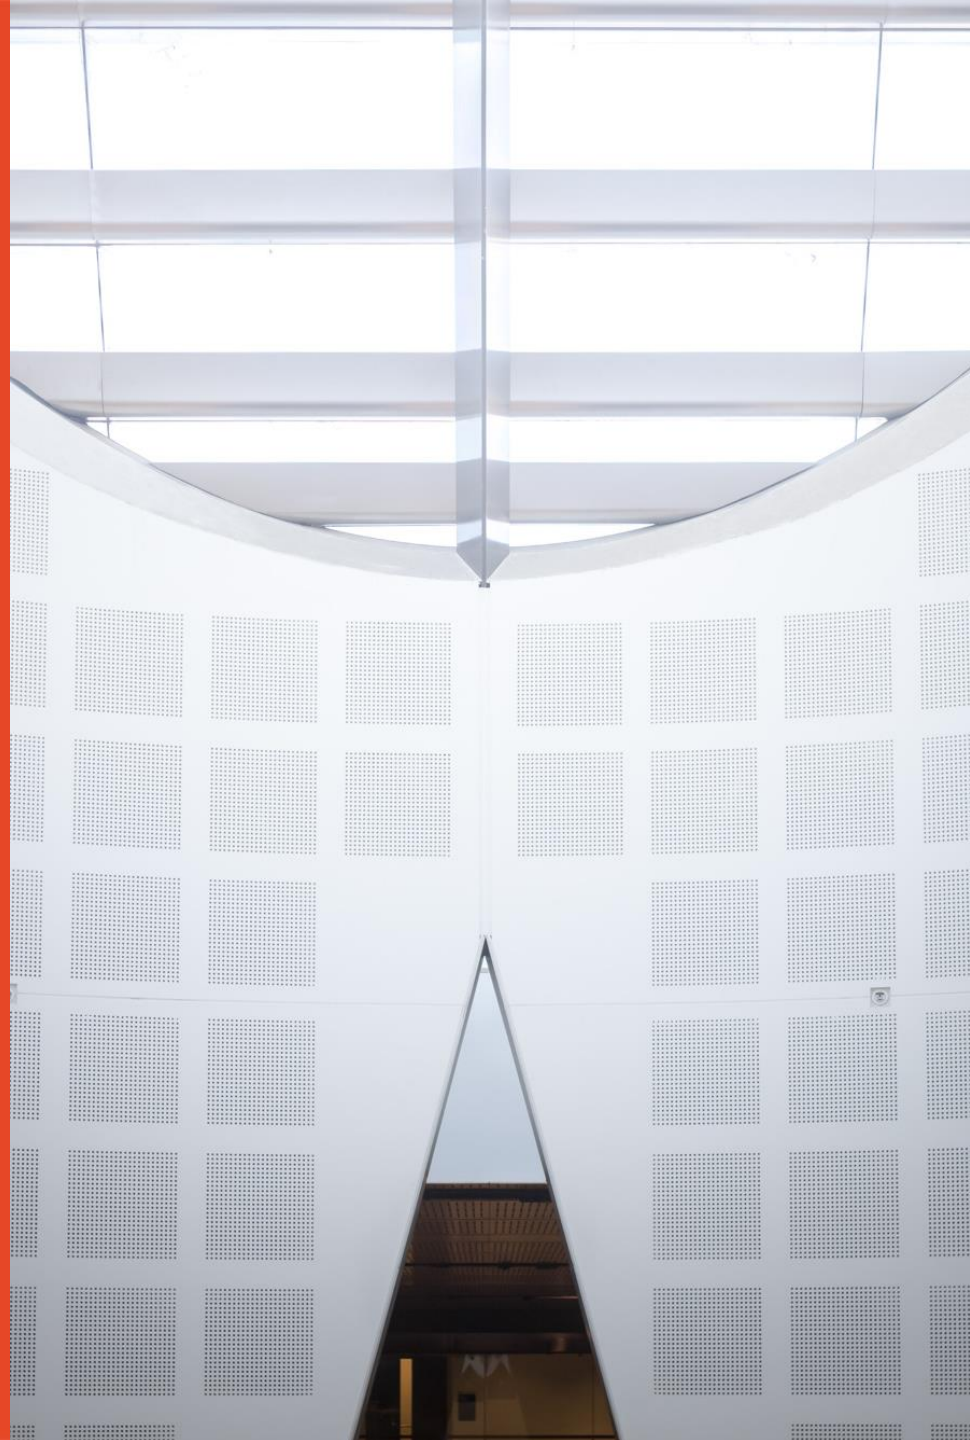

Recapture From Lecture 5

What we have covered on the topic:

Requirements Modeling

- Requirements Prioritization
- Team-based techniques (JAD, RAD, Agile)
- Modeling Tools and Techniques
- System Requirements

What Will We Do Today ?

- Lecture
 - Data and process modeling concepts and tools
 - Data flow diagrams
 - Data dictionary
 - Process descriptions
- Class activities
 - **Critical Thinking** / No Problem Solving Today
 - <https://padlet.com>
 - <https://answer garden.ch>
- Tutorial: ?
- Assessment
 - Quiz 1: **Today, Friday, during the lecture**
- Announcement (if any):

Learning Objectives

- Describe data and process modeling concepts and tools, including data flow diagrams, a data dictionary, and process descriptions
- Describe the symbols used in data flow diagrams and explain the rules for their use
- Draw data flow diagrams in a sequence, from general to specific

Learning Objectives

- Explain how to level and balance a set of data flow diagrams
- Describe how a data dictionary is used and what it contains
- Use process description tools, including structured English, decision tables, and decision trees
- Describe the relationship between logical and physical models

Overview of Data and Process Modeling Tools

- Systems analysts use graphical techniques to describe an information system
- Data flow diagram (DFD) - Uses various symbols to show how the system transforms input data into useful information

Data Flow Diagrams


- A data flow diagram (DFD) shows how data moves through an information system but does not show program logic or processing steps
- A set of DFDs provides a logical model that shows what the system does, not how it does

Data Flow Diagrams (Cont. 1)

■ DFD Symbols

- Four basic symbols represent processes, data flows, data stores, and entities
- **Gane and Sarson:** Used in data flow diagrams
 - Processes, data flows, data stores, and external entities all have a unique symbol
- **Yourdon:** Used in data flow diagrams
 - Processes, data flows, data stores, and external entities each have a unique symbol

Data Flow Diagrams (Cont. 1)

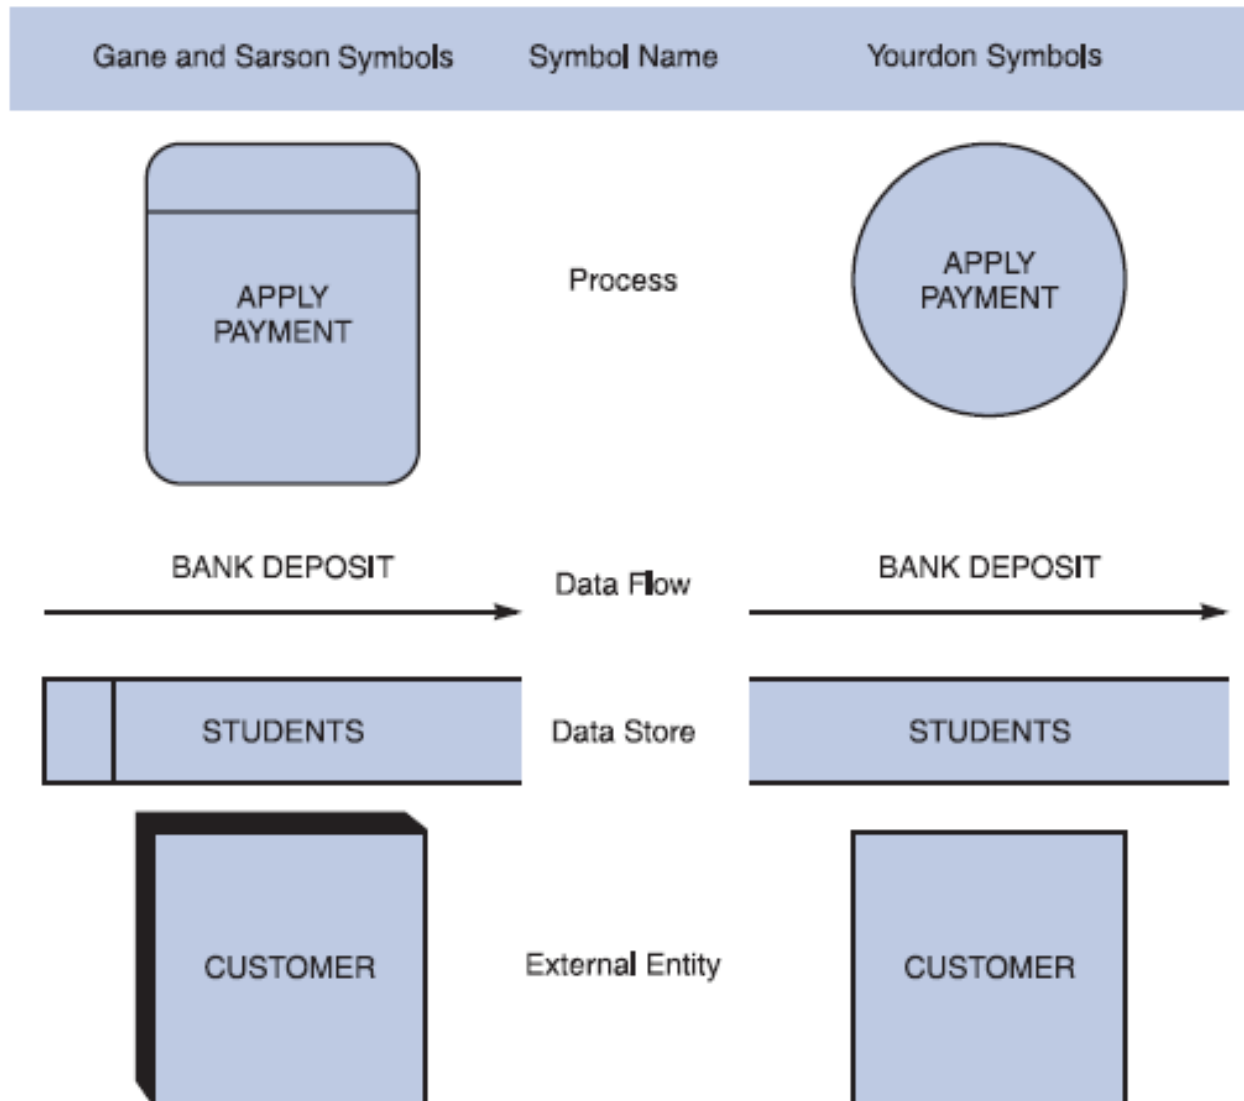


Data flow diagram symbols, symbol names, and examples of the Gane and Sarson and Yourdon symbol sets

Data Flow Diagrams (Cont. 2)

Process Symbol

- Must have at least one input and at least one output
- Contains **business logic** that transforms the data
- Process name identifies its function (verb)
- Examples” : “apply rent payment” or “calculate commission
- In DFDs, a process symbol can be referred to as a **black box**

Data Flow Diagrams (Cont. 3)

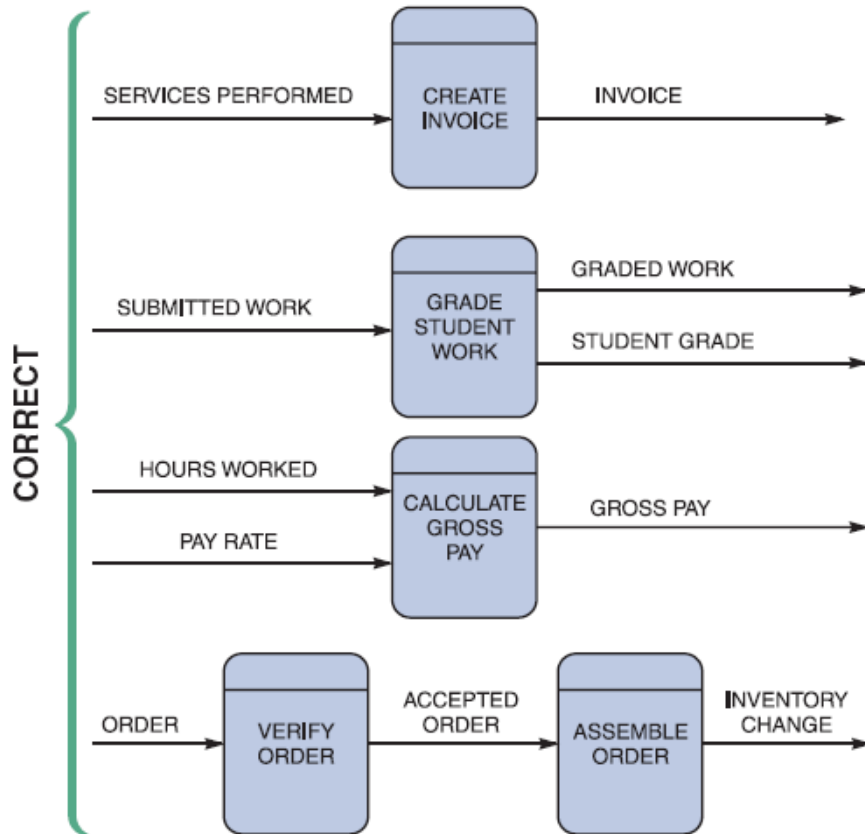

► Data Flow Symbol

- Represents one or more data items
- The symbol for a data flow is a line with a single or double arrowhead

FIGURE 5-3 Examples of correct combinations of data flow and process symbols


Data Flow Diagrams (Cont. 4)

■ Data Flow Symbol

- Following data flow and process combinations must be avoided

- **Spontaneous generation**
- **Black holes**
- **Gray holes**

- Examples of incorrect combinations of data flow and process symbols.
- APPLY INSURANCE PREMIUM has no input and is called a spontaneous generation process.
- CALCULATE GROSS PAY has no outputs and is called a black hole process.
- CALCULATE GRADE has an input that is obviously unable to produce the output. This process is called a gray hole

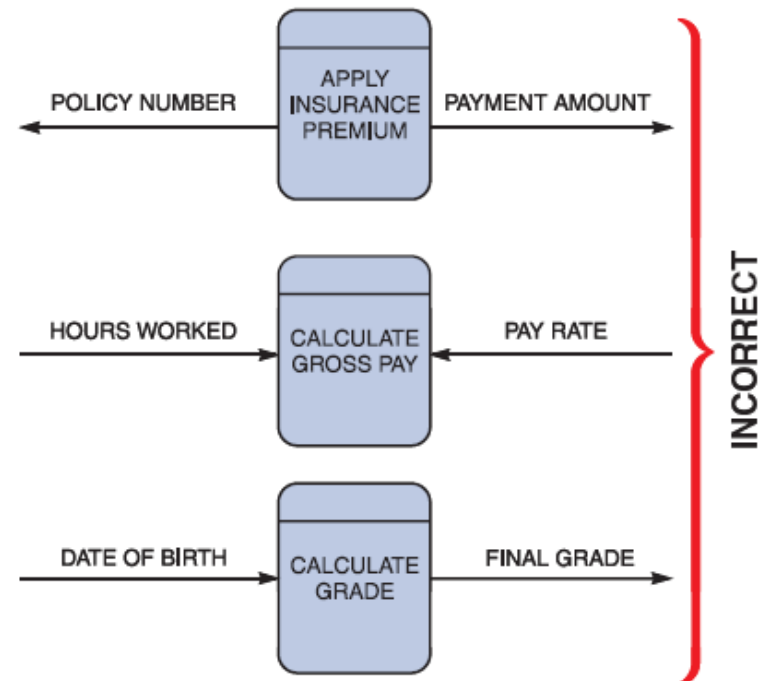


Data Flow Diagrams (Cont. 5)

Data Store symbol


- Represent data that the system stores
- A DFD does not show the detailed contents of a data store — the specific structure and data elements are defined in the data dictionary
- A data store must be connected to a process with a data flow

Data Flow Diagrams

INCORRECT

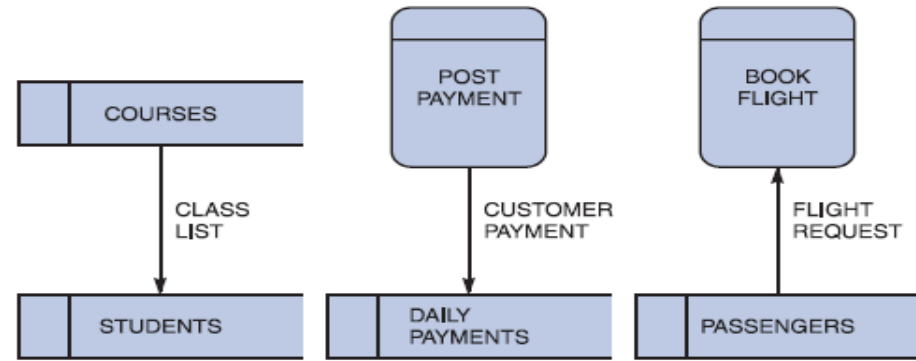

CORRECT

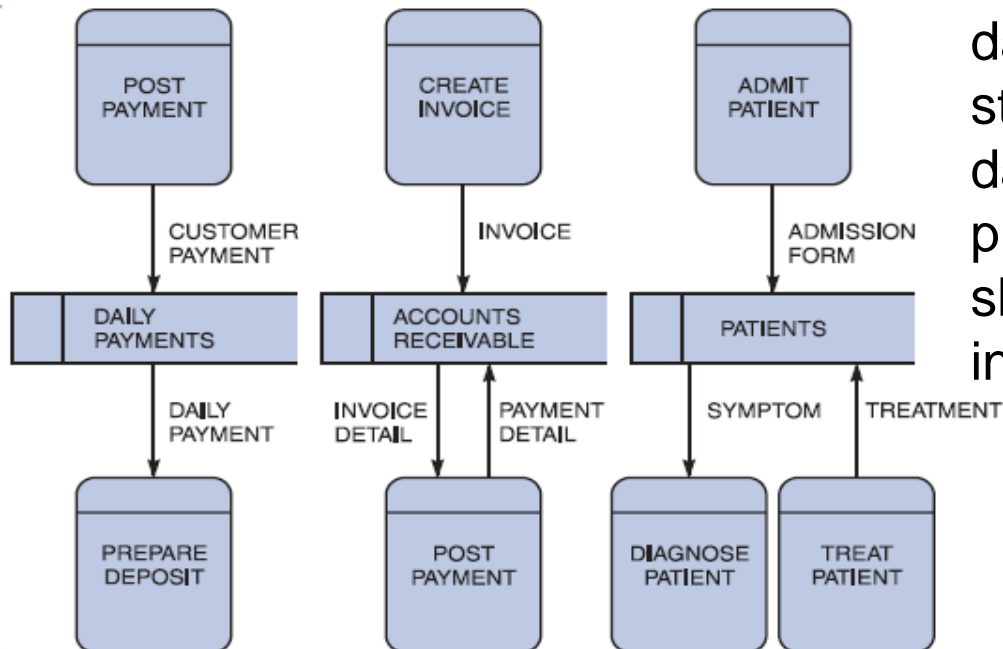

Examples of incorrect uses of data store symbols: Two data stores cannot be connected by a data flow without an intervening process, and each data store should have an outgoing and incoming data flow


Examples of correct uses of data store symbols in a data flow diagram

Data Flow Diagrams (Cont. 7)

Entity Symbol


- Shows how the system interfaces with the outside world
- A DFD shows only external entities that provide data to the system or receive output from the system
- DFD entities also are called **terminators** because they are data origins or final destinations
- Each entity must be connected to a process by a data flow

Data Flow Diagrams (Cont. 8)

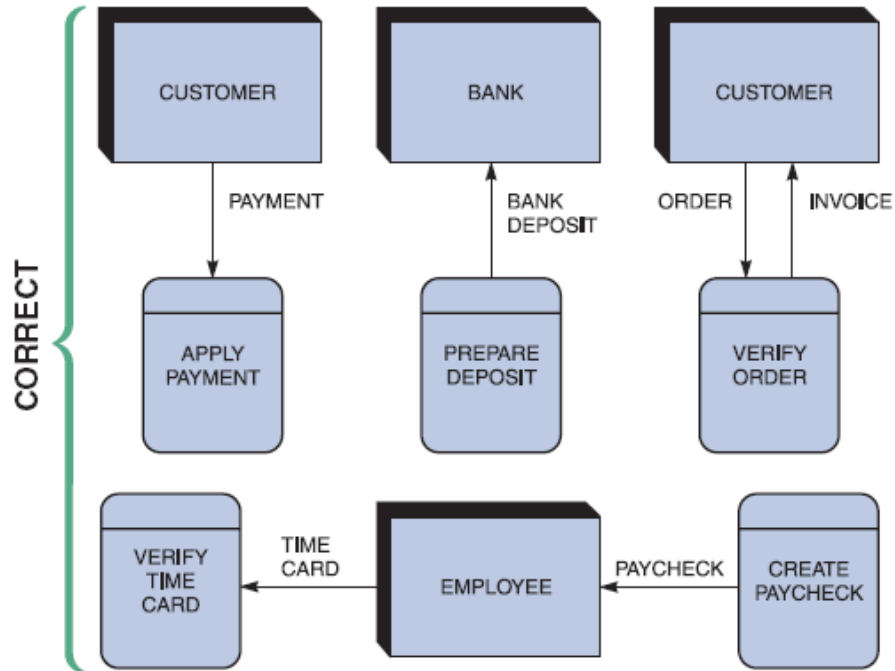

Examples of correct uses of external entities in a data flow diagram

Examples of incorrect uses of external entities. An external entity must be connected by a data flow to a process, and not directly to a data store or to another external entity

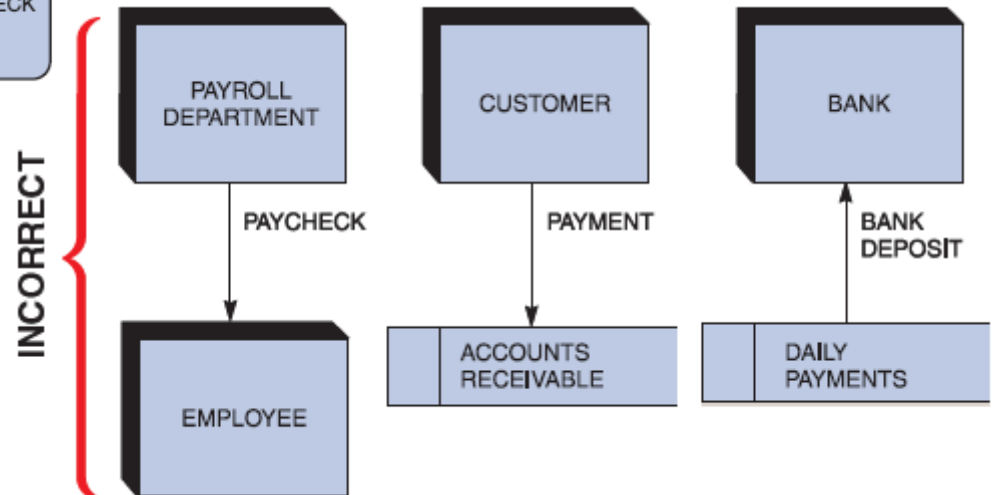

Data Flow Diagrams (Cont. 9)

► Keep in mind:

- All flow lines must be labeled
- Large processes can be broken down into smaller components

Examples of correct and incorrect uses of data flows

Correct and Incorrect Examples of Data Flows		
	Process to Process	✓
	Process to External Entity	✓
	Process to Data Store	✓
	External Entity to External Entity	✗
	External Entity to Data Store	✗
	Data Store to Data Store	✗


Creating a Set of DFDs

- Create a graphical model of the information system based on your fact-finding results
 - First, you will review a set of guidelines for drawing DFDs
 - Then you will learn how to apply these guidelines and create a set of DFDs using a three-step process

Creating a Set of DFDs (Cont. 1)

- Guidelines for Drawing DFDs
 - Draw the context diagram so that it fits on one page
 - Use the name of the information system as the process name in the context diagram
 - Use unique names within each set of symbols
 - Do not cross lines
 - Provide a unique name and reference number for each process
 - Ensure that the model is accurate, easy to understand, and meets the needs of its users


Creating a Set of DFDs (Cont.2)

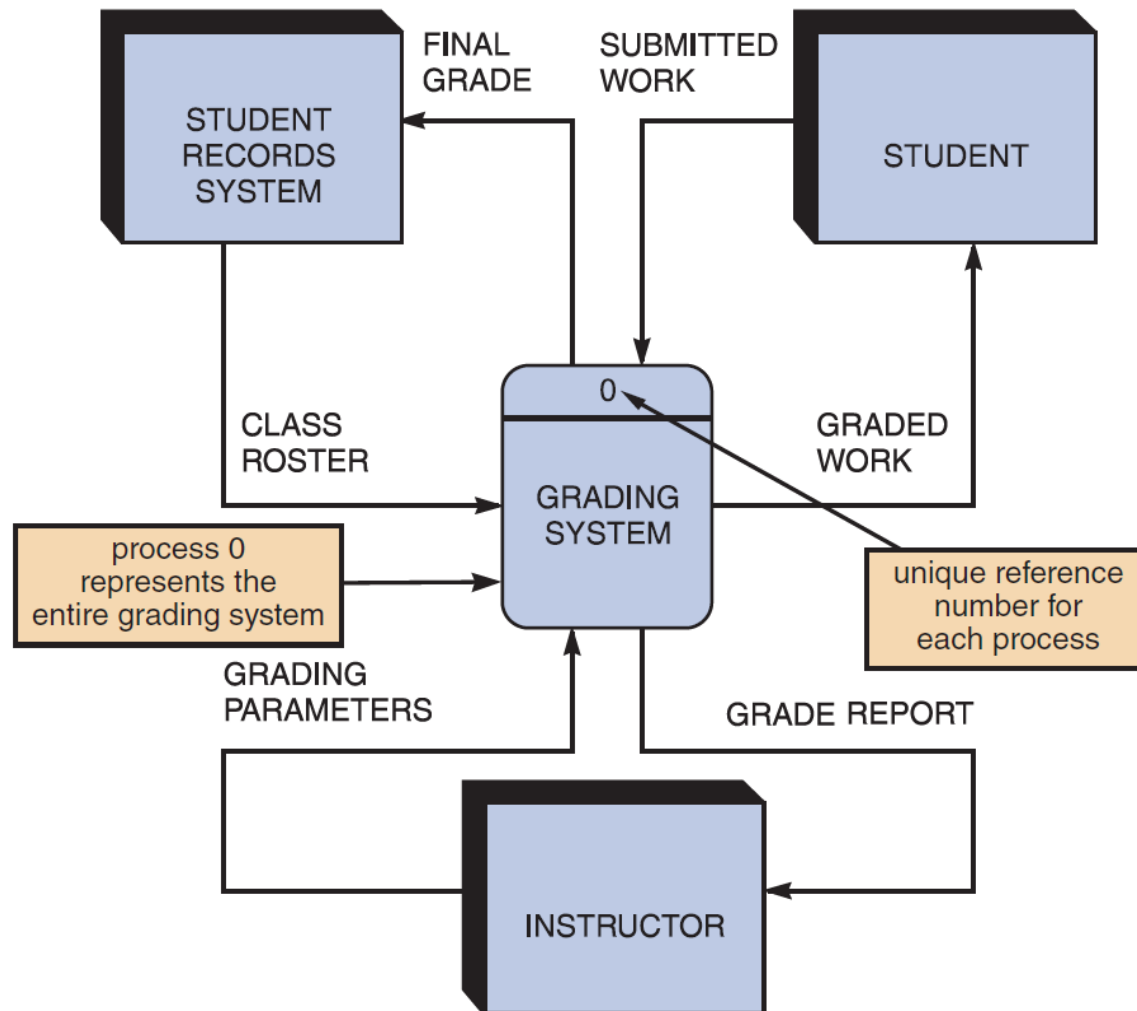

Context diagram DFD for grading system

Creating a Set of DFDs (Cont. 3)

- Step 1: Draw a Context Diagram

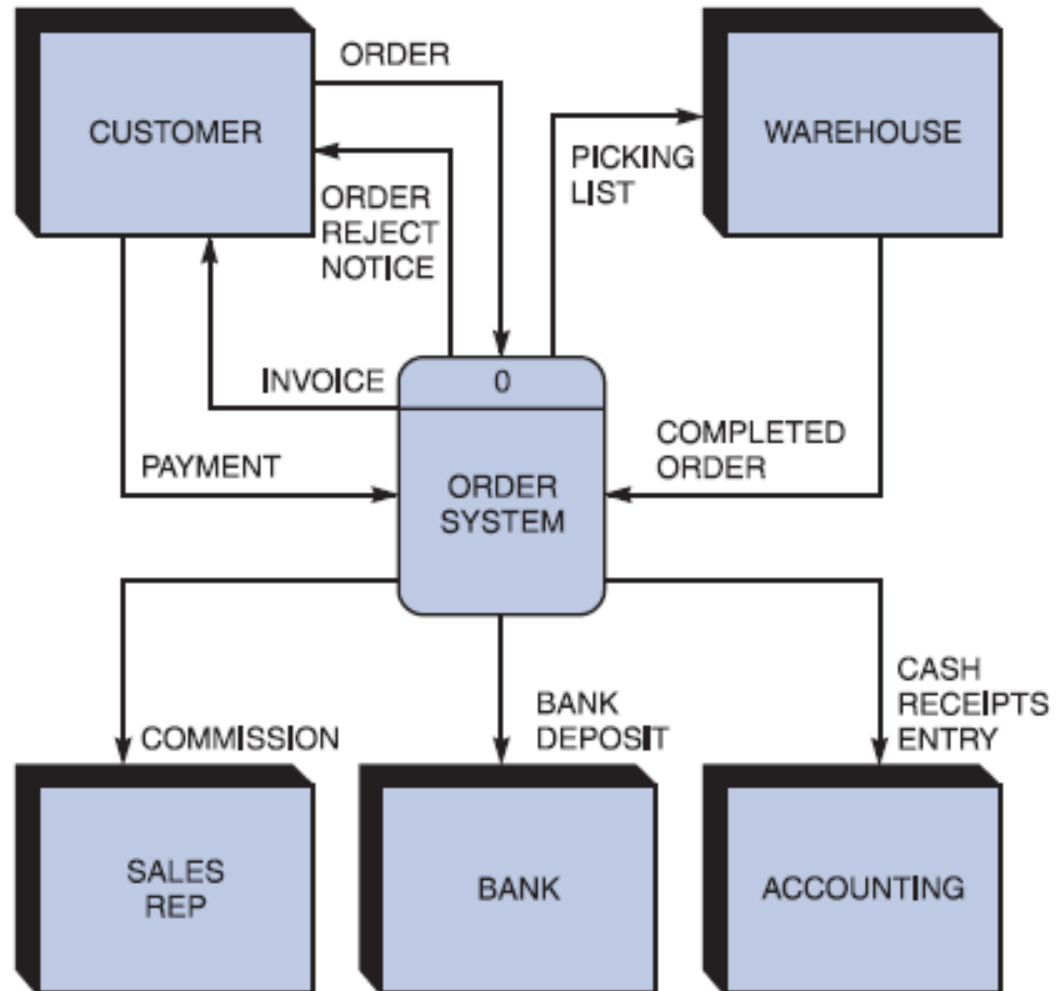

Creating a Set of DFDs (Cont. 4)

■ Step 2: Draw a Diagram 0 DFD

- If same data flows in both directions, you can use a double-headed arrow
- Diagram 0 is an exploded view of process 0
- Parent diagram
- Child diagram
- Functional primitive

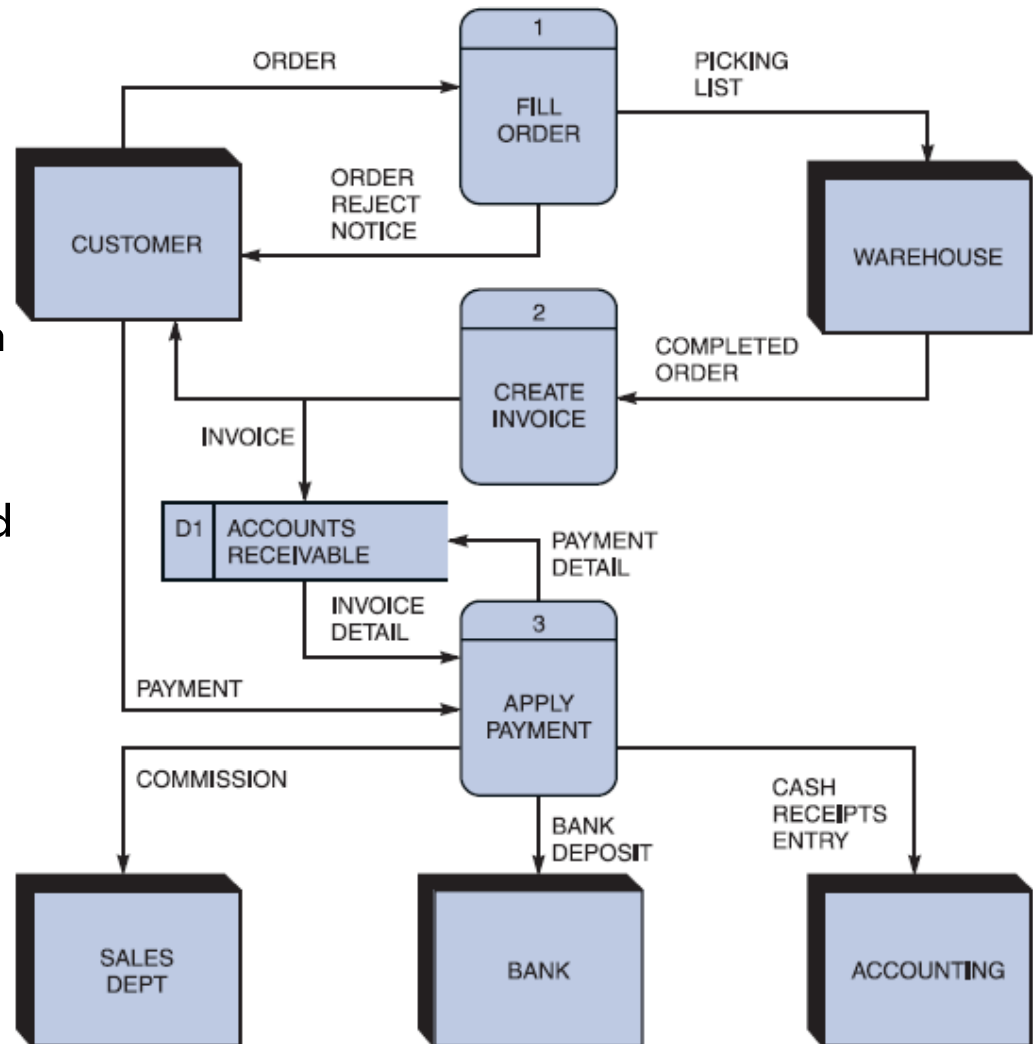


Diagram 0 DFD for the order system

Creating a Set of DFDs (Cont. 5)

- Step 3: Draw the Lower Level Diagrams


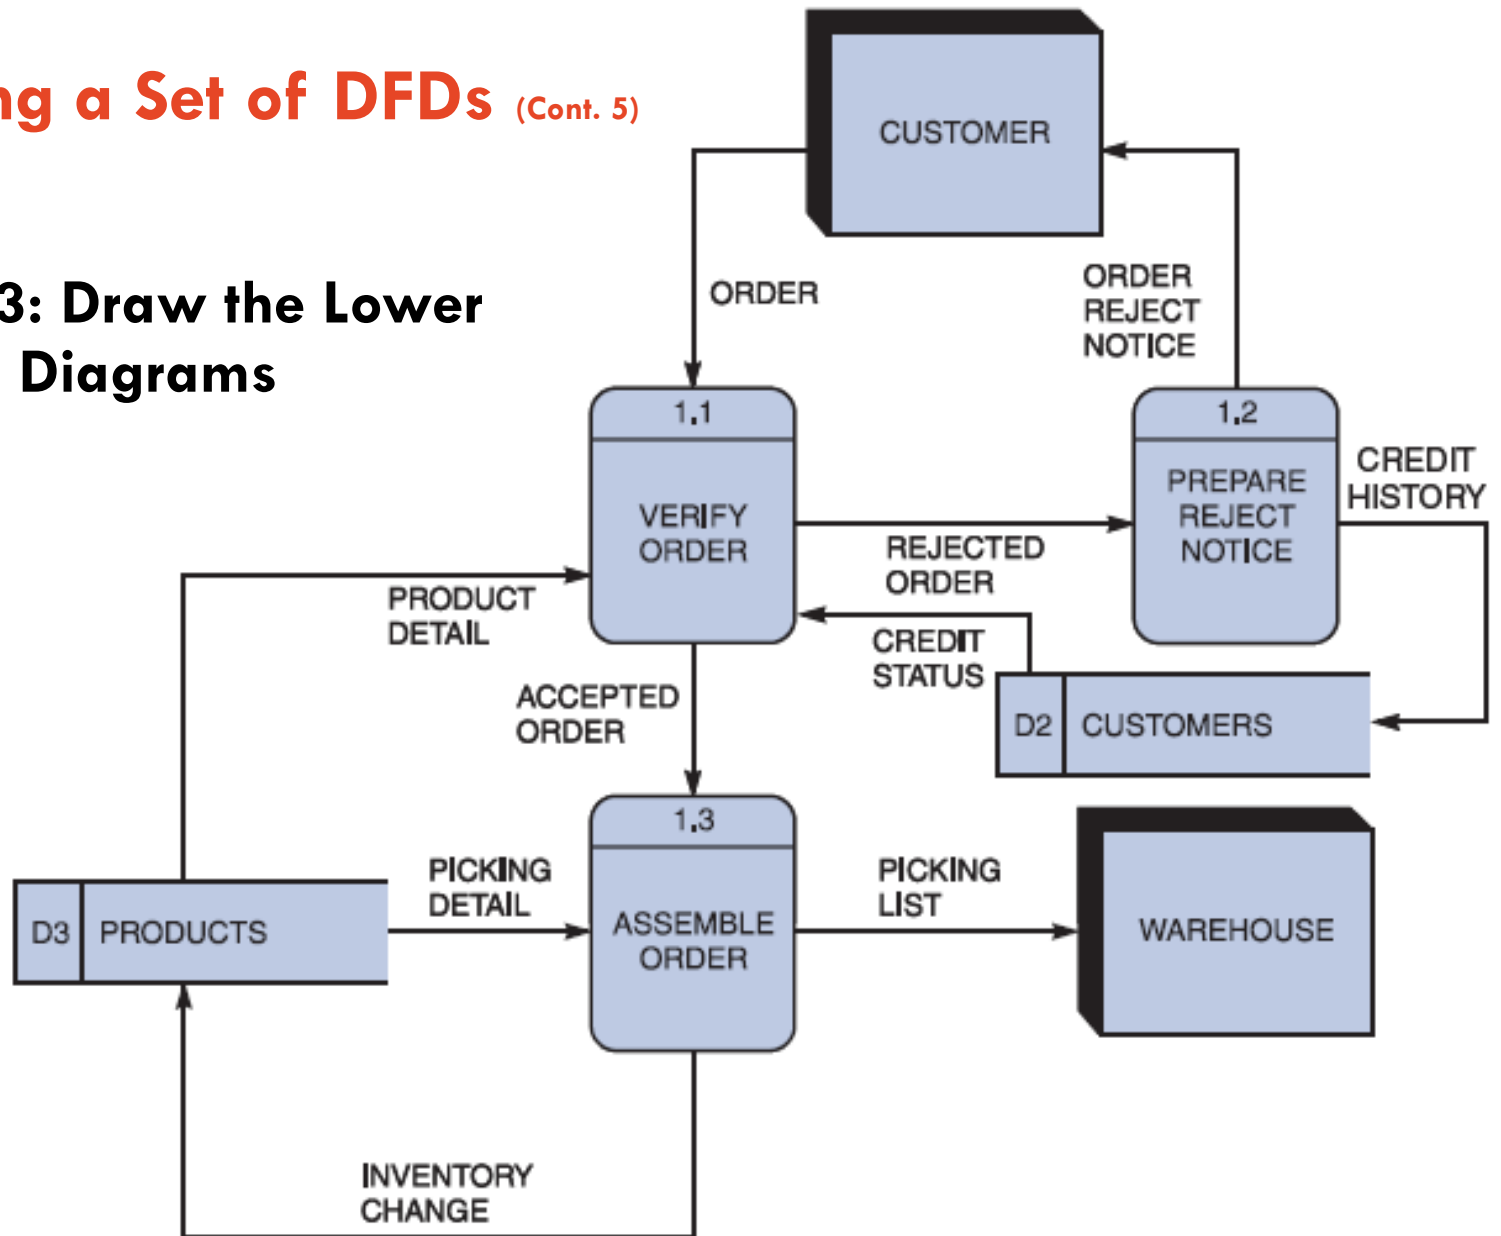


Diagram 1 DFD shows details of the FILLORDER process in the order system

Creating a Set of DFDs (Cont. 6)

- Must use **leveling** and **balancing** techniques
- Leveling examples
 - Uses a series of increasingly detailed DFDs to describe an information system
 - Exploding, partitioning, or decomposing

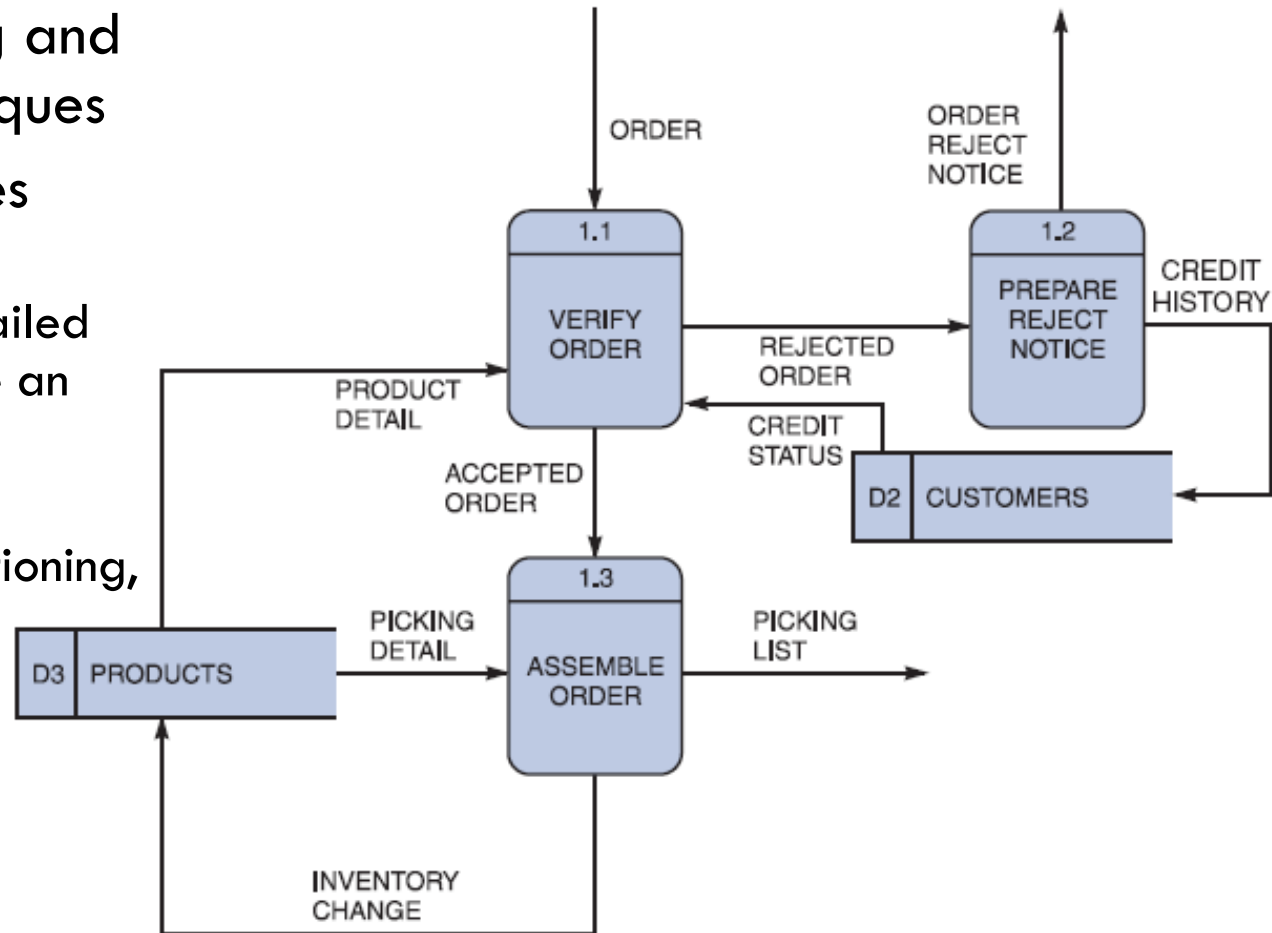

This diagram does not show the symbols that connect to data flows entering or leaving FILL ORDER on the context diagram


Creating a Set of DFDs

(Cont. 7)


The order system diagram 0 is shown at the top of the figure, and exploded diagram 3 DFD (for the APPLY PAYMENT process) is shown at the bottom.

The two DFDs are balanced because the child diagram at the bottom has the same input and output flows as the parent process 3 shown at the top

Order System Diagram 0 DFD

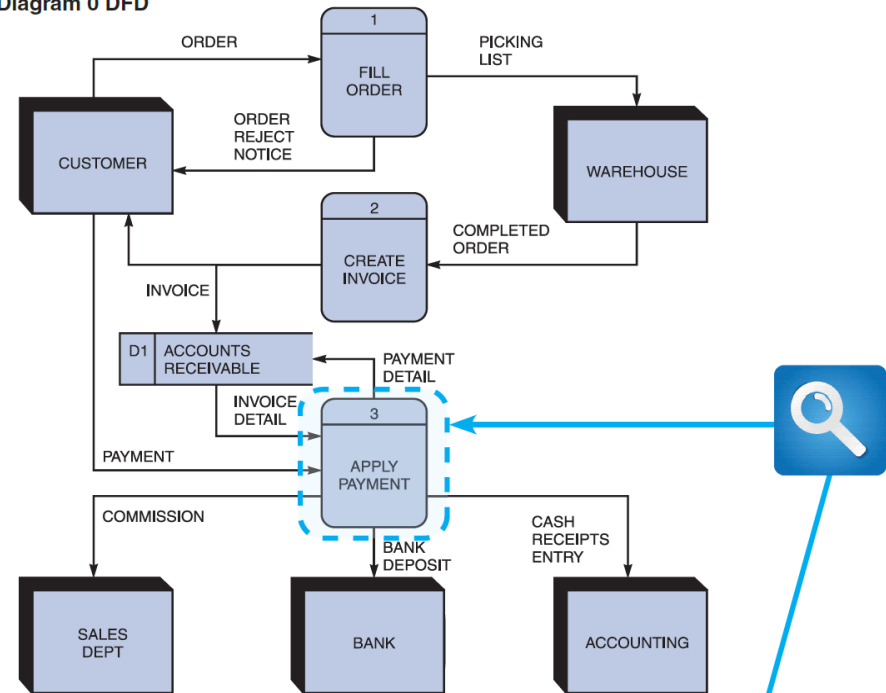

Order System Diagram 3 DFD

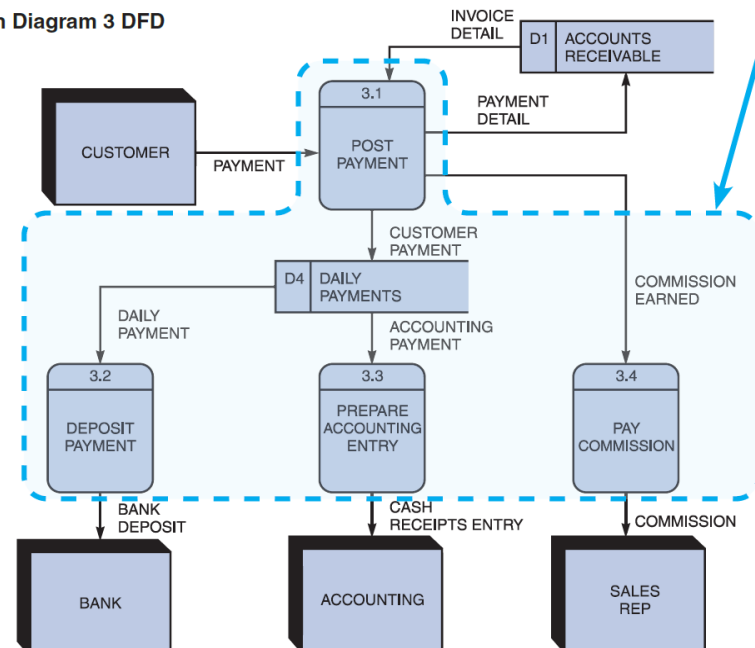


Creating a Set of DFDs


(Cont. 8)



Example of a parent DFD diagram, showing process 0 as a black box

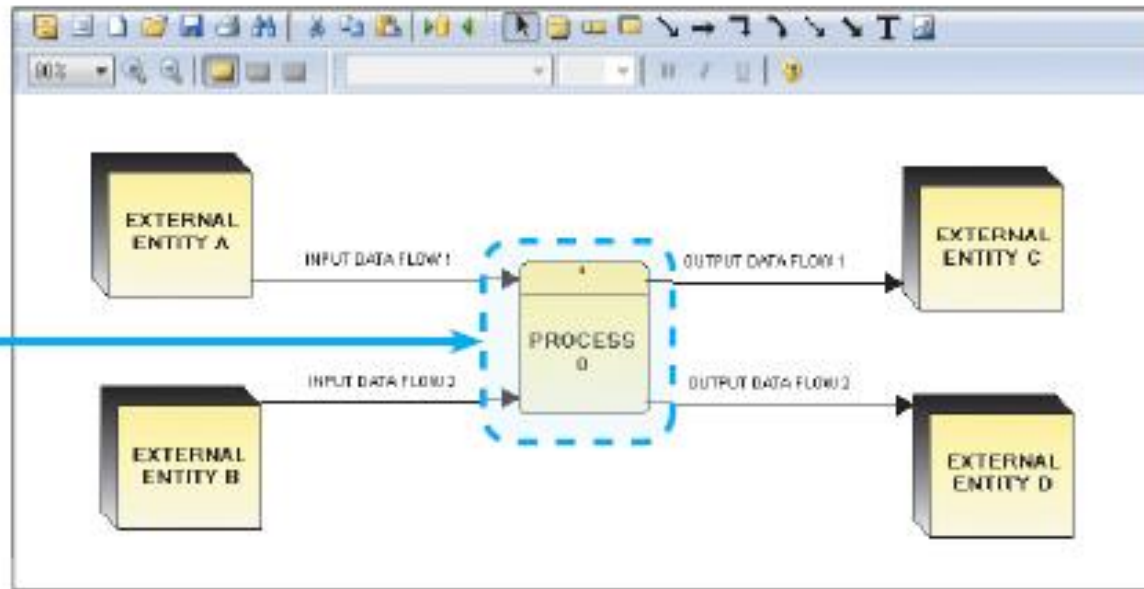

In the next level of detail, the process 0 black box reveals three processes, two data stores, and four internal data flows — all of which are shown inside the dashed line

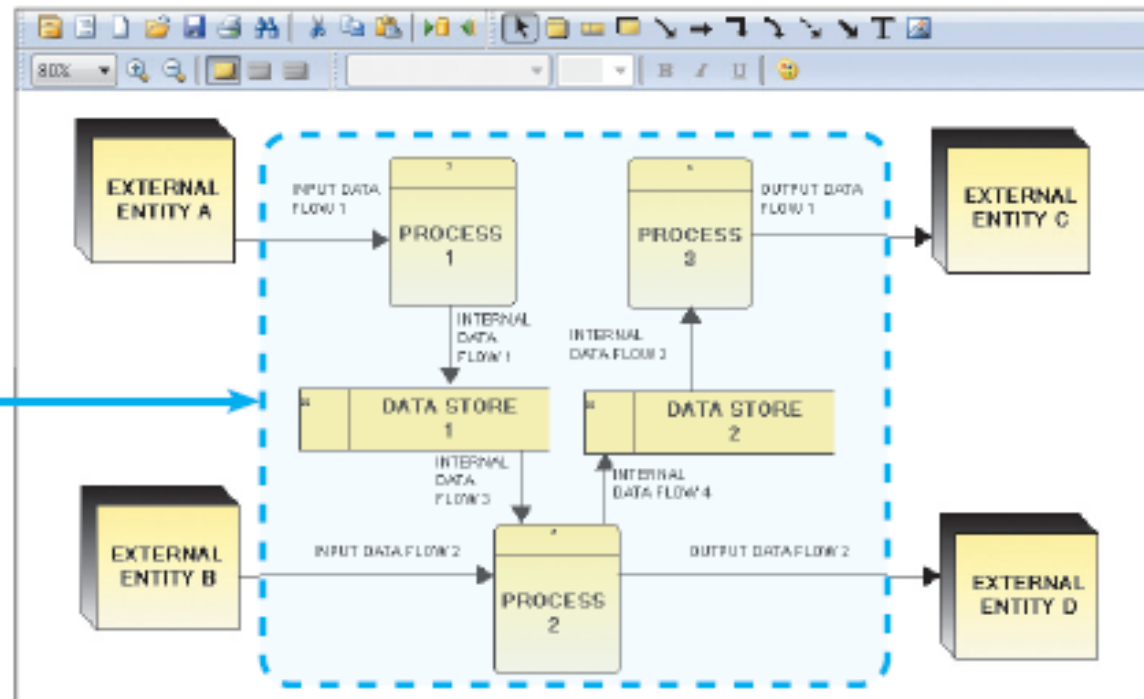

Data Dictionary

- A data dictionary, or data repository, is a central storehouse of information about a system's data
- An analyst uses the data dictionary to collect, document, and organize specific facts about a system
- Defines and describes all data elements and meaningful combinations of data elements

Data Dictionary (Cont. 1)

- **Data element:** Smallest piece of data that has meaning within an information system
 - Called **data item** or **field**
 - Are combined into records, also called data structures
- **Record:** Meaningful combination of related data elements that is included in a data flow or retained in a data store
 - Called **data structures**

Data Dictionary (Cont. 2)

- **Using CASE Tools for Documentation**
 - More complex the system, more difficult it is to maintain full and accurate documentation
 - Modern CASE tools simplify the task
 - A CASE repository ensures data consistency

Data Dictionary (Cont. 3)

- **Documenting the Data Elements**
 - Every data element in the data dictionary should be documented
 - **Objective:** To provide clear, comprehensive information about the data and processes that make up a system

Data Dictionary (Cont. 4)

■ Documenting the Data Elements

- Data element name and label
- **Alias**
- Type and length
- Default value
- Acceptable values - **Domain** and **validity rules**
- Source
- Security
- Responsible user(s)
- Description and comments

The screenshot shows a software interface for defining data elements. It has four tabs: 'Description', 'Physical Characteristics', 'Links', and 'Extended Attributes'. The 'Description' tab is active. The 'Label' field contains 'SOCIAL SECURITY NUMBER' and '1 of 4' is shown to its right. The 'Entry Type' is set to 'Data Element'. The 'Description' field contains 'Social Security Number'. The 'Alias' field contains 'SSN'. Below these, a section titled 'Values & Meanings' contains a table with three rows: 'Type and length: SN', 'Default value: None', and 'Acceptable values: Any nine digit number'. A 'Notes' section below that contains 'Source: Application form', 'Security: Payroll department', and 'Responsible user: Payroll department'. At the bottom, there is a 'Long Name' field and a row of buttons: 'SQL', 'Delete', 'Next', 'Save' (highlighted in blue), 'Search', 'Jump', 'File', 'History', and '?'. Below the buttons is another row: 'Dialect...', 'Clear', 'Prior', 'Exit', 'Expand', 'Back', 'Copy', and 'Search Criteria'. A small note at the very bottom states: 'A repository object label can be up to 128 characters long, and the first character must be a letter.'

Source: Visible Systems Corporation.

A Visible Analyst screen describes the data element named SOCIAL SECURITY NUMBER.

Data Dictionary (Cont. 5)

■ Documenting the Data Flows

- Data flow name or label
- Description
- Alternate name(s)
- Origin
- Destination
- Record
- Volume and frequency

Data Dictionary (Cont. 6)

■ Documenting the Data Stores

- Data store name or label
- Description
- Alternate name(s)
- Attributes
- Volume and frequency

1. This data store has an alternative name, or alias.
2. For consistency, data flow names are standardized throughout the data dictionary.
3. It is important to document these estimates because they will affect design decisions in subsequent SDLC phases.

1

2

3

Name	Type	Length	Null
INVENTORY CHANGE	Undefined	Yes	Yes
PICKING DETAIL	Undefined	Yes	Yes
PRODUCT DETAIL	Undefined	Yes	Yes

Source: Visible Systems Corporation.

Visible Analyst screen that documents a data store named IN STOCK

Data Dictionary (Cont. 7)

■ Documenting the Processes

- Process name or label
- Description
- Process number
- Process description

1. The process number identifies this process. Any sub-processes are numbered 1.1, 1.2, 1.3, and so on.
2. These data flows will be described specifically elsewhere in the data dictionary.

The screenshot shows a software interface for documenting a process. It has three tabs at the top: 'Description' (selected), 'Locations', and 'Links'. The 'Description' tab contains the following fields:

- Label:** A text box containing 'VERIFY ORDER' and a '1 of 3' indicator.
- Entry Type:** A dropdown menu set to 'Process'.
- Description:** A text box containing 'Accept or reject customer order based on credit status and product availability'.
- Process #:** A text box, indicated by a purple circle with the number '1' and an arrow.
- Process Description:** A section with two rows:
 - Input data flows:** 'ORDER, CREDIT STATUS, PRODUCT DETAIL' (indicated by a purple circle with the number '2' and an arrow).
 - Output data flows:** 'REJECTED ORDER, ACCEPTED ORDER'.
- Notes:** A large text area.
- Long Name:** A text box.

At the bottom, there is a row of buttons: 'SQL', 'Delete', 'Next', 'Save', 'Search' (highlighted in blue), 'Jump', 'File', 'History', and '?'. Below these are more buttons: 'Dialect...', 'Clear', 'Print', 'Exit', 'Expand', 'Back', 'Copy', and 'Search Criteria'. A small note at the very bottom states: 'A repository object label can be up to 128 characters long, and the first character must be a letter.'

Source: Visible Systems Corporation.

Visible Analyst screen that describes a process named VERIFY ORDER

Data Dictionary (Cont. 8)

- **Documenting the Entities** - Data dictionary describes all external entities that interact with the system
 - Characteristics include
 - Entity name
 - Description
 - Alternate name(s)
 - Input data flows
 - Output data flows

Data Dictionary (Cont. 9)

■ Documenting the Records

- Record or data structure name
- Definition or description
- Alternate name(s)
- Attributes

The screenshot shows the 'Description' tab of the Visible Analyst Data Dictionary. The 'Label' field contains 'CREDIT STATUS' (annotated with a circled '1'). The 'Entry Type' is 'Data Structure'. The 'Description' field contains 'Customer credit data'. The 'Attributes' table lists two attributes: 'CUSTOMER NUMBER' and 'CUSTOMER STATUS ...', both of type 'Char' and length 'Yes' (annotated with a circled '2'). The 'Notes' field is empty. The 'Long Name' field is empty. The bottom of the window contains a toolbar with buttons: SQL, Delete, Next, Save, Search, Jump, File, History, 7, Detail..., Clear, Prior, Exit, Expand, Back, Copy, and Search Criteria. A prompt at the bottom says 'Enter a brief description about the object.'

Name	Type	Length	Null
CUSTOMER NUMBER	Char	Yes	Yes
CUSTOMER STATUS ...	Char	Yes	Yes

Source: Visible Systems Corporation.

1. This data structure is named CREDIT STATUS.

2. The CREDIT STATUS data structure consists of two data elements: CUSTOMER NUMBER and CUSTOMER STATUS CODE.

Visible Analyst screen that documents a record, or data structure named CREDIT STATUS

Data Dictionary (Cont. 10)

■ Data Dictionary Reports

Following can be obtained

- Alphabetized list of all data elements by name
- Report describing each data element and indicating the user or department that is responsible for data entry, updating, or deletion
- Report of all data flows and data stores that use a particular data element
- Detailed reports showing all characteristics of data elements, records, data flows, processes, or any other selected item stored in the data

Process Description Tools

- **Process description:** Documents the details of a functional primitive (at the lowest level of the DFDs and can be decomposed no further) and represents a specific set of processing steps and business logic
- Tools - structured English, decision tables, and decision trees
- Used in object-oriented development
 - O-O analysis - combines data and the processes that act on the data into things called objects, and similar objects can be grouped together into classes
 - O-O processes are called methods

Process Description Tools (Cont. 1)


■ Modular Design

- Based on combinations of three **logical structures**, sometimes called **control structures**, which serve as building blocks for the process


- Sequence
- Selection
- Iteration - looping



Sequence structure

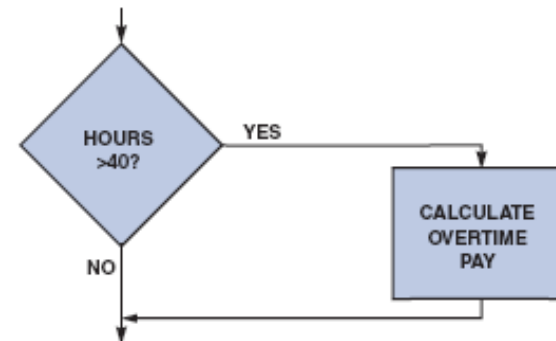

Selection structure

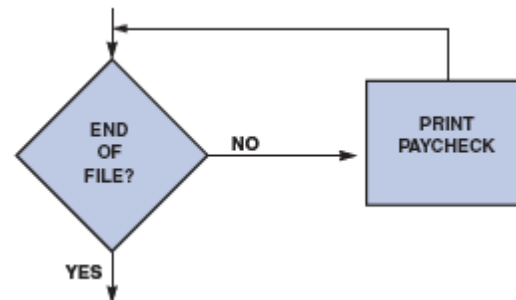

Iteration structure

Process Description Tools (Cont. 2)

■ Structured English

— Rules

- Use only the **three building blocks of sequence, selection, and iteration**
- Use indentation for readability
- Use a limited vocabulary
 - standard terms used in the data dictionary
 - Specific words that describe the processing rules

The screenshot shows a software interface for defining process descriptions. It has three tabs: 'Description', 'Locations', and 'Links'. The 'Description' tab is active. The 'Label' field contains 'VERIFY ORDER' and '1 of 3' is shown to its right. The 'Entry Type' is set to 'Process'. The 'Description' field contains the text: 'Accept or reject customer order based on credit status and product availability'. The 'Process #' field is empty. The 'Process Description' field contains the following structured English logic:

```
Input data flows: ORDER, CREDIT STATUS, PRODUCT DETAIL
Output data flows: REJECTED ORDER, ACCEPTED ORDER

For each ORDER
  If CUSTOMER STATUS CODE = Y and if PRODUCT DETAIL = OK
    Output ACCEPTED ORDER
  Else
    Output REJECTED ORDER
```

An arrow points from a yellow box labeled 'structured English statements' to the logic in the 'Process Description' field. Below this field is a 'Notes' field. At the bottom, there is a 'Long Name' field and a row of buttons: SQL, Delete, Next, Save, Search (highlighted), Jump, File, History, and ?. Below the buttons is another row: Detect..., Clear, Prior, Exit, Expand, Back, Copy, and Search Criteria. A small note at the bottom states: 'A repository object label can be up to 128 characters long, and the first character must be a letter.' The source is cited as 'Source: Visible Systems Corporation.'

The VERIFY ORDER process description includes logical rules and a structured English version of the policy. Notice the alignment and indentation of the logic statements

Process Description Tools (Cont. 3)

■ Decision Tables

- Show a logical structure, with all possible combinations of conditions and resulting actions
 - Every possible outcome should be considered to ensure that nothing has been overlooked
- Number of rules doubles each time a condition is added
- Can have more than two possible outcomes
- Are the best way to describe a complex set of conditions

Process Description Tools (Cont. 4)

1. Place the name of the process in a heading at the top left.
2. Enter the conditions under the heading, with one condition per line, to represent the customer status and availability of products.
3. Enter all potential combinations of Y/N (for yes and no) for the conditions. Each column represents a numbered possibility called a rule.
4. Place an X in the action entries area for each rule to indicate whether to accept or reject the order.

VERIFY ORDER Business Process with Two Conditions

- An order will be accepted only if the product is in stock and the customer's credit status is OK.
- All other orders will be rejected.

The Verify Order business process has two conditions. For an order to be accepted, the product must be in stock and the customer must have an acceptable credit status

1

VERIFY ORDER Process

2

Credit status is OK
Product is In stock

Accept order
Reject order

1 2 3 4

Y Y N N
Y N Y N

X
X X X

3

4

Example of a simple decision table showing the processing logic of the VERIFY ORDER process

Process Description Tools (Cont. 5)

VERIFY ORDER Business Process with Three Conditions

- An order will be accepted only if the product is in stock and the customer's credit status is OK.
- The credit manager can waive the credit status requirement.
- All other orders will be rejected.

A third condition has been added to the Verify Order business process. For an order to be accepted, the product must be in stock and the customer must have an acceptable credit status. However, **the credit manager now has the authority to waive the credit status requirement**

VERIFY ORDER Process with Credit Waiver (initial version)

	1	2	3	4	5	6	7	8
Credit status is OK	Y	Y	Y	Y	N	N	N	N
Product is in stock	Y	Y	N	N	Y	Y	N	N
Waiver from credit manager	Y	N	Y	N	Y	N	Y	N
Accept order	X	X			X			
Reject order			X	X		X	X	X

This table is based on the Verify Order conditions. With three conditions, **there are eight possible combinations, or rules**. With two conditions, **there are four possible combinations, or rules**.

Process Description Tools (Cont. 6)

VERIFY ORDER Process with Credit Waiver (with rules marked for combination)

	1	2	3	4	5	6	7	8	
Credit status is OK	Y	Y	-	-	N	N	-	-	1
Product is in stock	Y	Y	N	N	Y	Y	N	N	
Waiver from credit manager	-	-	-	-	Y	N	-	-	
Accept order	X	X			X				2
Reject order			X	X		X	X	X	

1. Because the product is not in stock, the other conditions do not matter.

2. Because the other conditions are met, the waiver does not matter.

VERIFY ORDER Process with Credit Waiver (after rule combination and simplification)

	1 (COMBINES PREVIOUS 1, 2)	2 (PREVIOUS 5)	3 (PREVIOUS 6)	4 (COMBINES PREVIOUS 3, 4, 7, 8)
Credit status is OK	Y	N	N	-
Product is in stock	Y	Y	Y	N
Waiver from credit manager	-	Y	N	-
Accept order	X	X		
Reject order			X	X

In the first table, dashes have been added to indicate that a condition is not relevant. In the second version, rules have been combined. Notice that **in second version, only four combination rules remain out of eight.** These rules document the logic, and will be transformed into program code when the system is developed

Process Description Tools (Cont. 7)

SALES PROMOTION POLICY – Holiday Season, 2014

- Preferred customers who order \$1,000 or more are entitled to a 5% discount, and an additional 5% discount if they use our charge card.
- Preferred customers who do not order \$1,000 or more will receive a \$25 bonus coupon.
- All other customers will receive a \$5 bonus coupon.

A sales promotion policy **with three conditions**. Notice that the first statement contains two *separate* conditions – one for the 5% discount, and another for the additional discount

Sales Promotion Policy (initial version)

	1	2	3	4	5	6	7	8
Preferred customer	Y	Y	Y	Y	N	N	N	N
Ordered \$1,000 or more	Y	Y	N	N	Y	Y	N	N
Used our charge card	Y	N	Y	N	Y	N	Y	N
5% discount	X	X						
Additional 5% discount	X							
\$25 bonus coupon			X	X				
\$5 bonus coupon					X	X	X	X

This decision table is based on the sales promotion policy in Figure 5-33. This is the initial version of the table, before simplification

Process Description Tools (Cont. 8)

Sales Promotion Policy (final version)

	1	2	3	4	5	6	7	8
Preferred customer	Y	Y	Y	Y	N	N	N	N
Ordered \$1,000 or more	Y	Y	N	N	-	-	-	-
Used our charge card	Y	N	-	-	-	-	-	-
5% discount	X	X						
Additional 5% discount	X							
\$25 bonus coupon			X	X				
\$5 bonus coupon					X	X	X	X


In this version, dashes have been added to indicate that a condition is not relevant. At this point, it appears that **several rules can be combined (how many?)**

Process Description Tools (Cont. 9)

■ Decision Trees

- Graphical representation of the conditions, actions, and rules found in a decision table
- Show the logic structure in a horizontal form that resembles a tree
- Provide the same results as decision tables, but in different forms

Process Description Tools (Cont. 9)

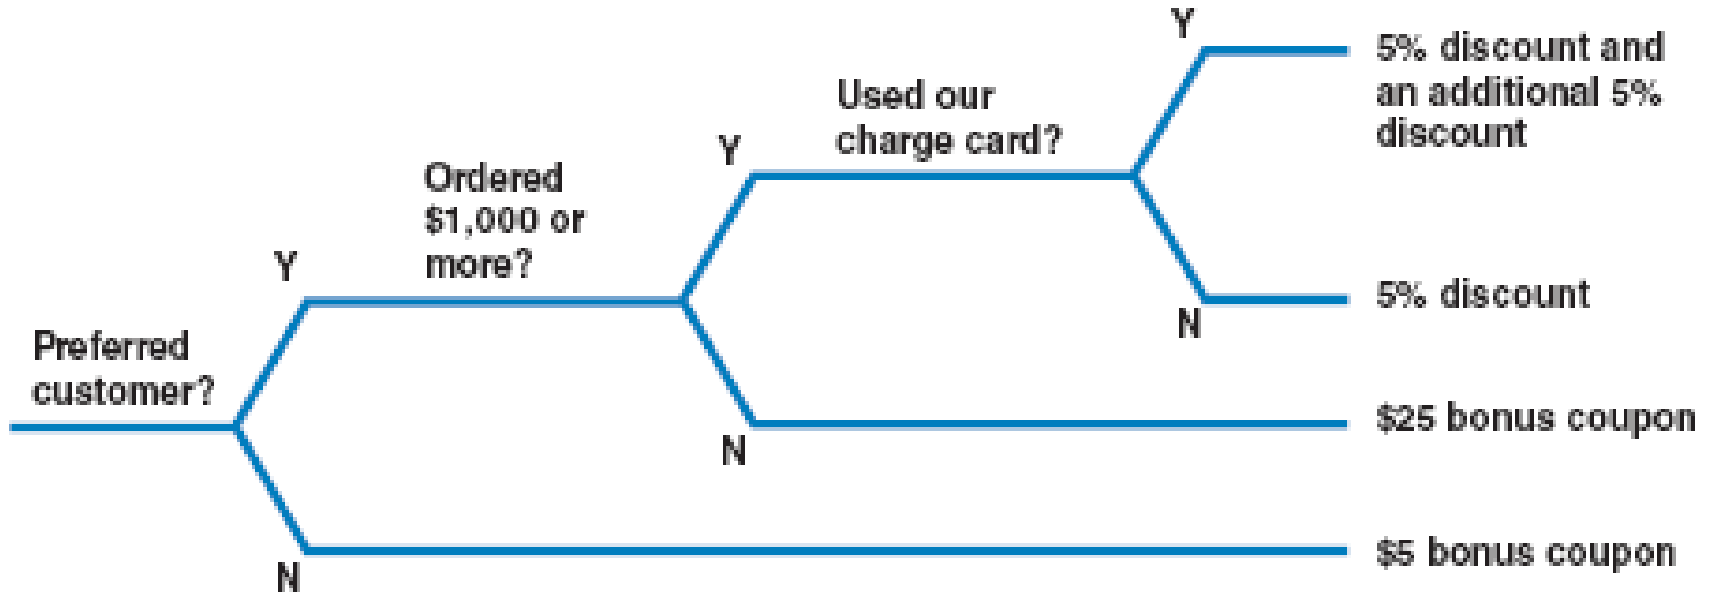

This example is based on the same Sales Promotion Policy shown in the decision tables.

Like a decision table, a decision tree shows all combinations of conditions and outcomes. The main difference is the graphical format, which many viewers find easier to interpret

Logical and Physical Models

- **Logical Model:** Shows what the system must do, regardless of how it will be implemented physically
- **Physical Model:** Describes how the system will be constructed

Logical versus Physical Models

- While structured analysis tools are used to develop a logical model for a new information system, such tools also can be used to develop physical models of an information system
- A physical model shows **how** the system's requirements are implemented

Logical versus Physical Models (Cont. 1)

■ Sequence of Models

- Systems analysts create a physical model of the current system and then develop a logical model of the current system before tackling a logical model of the new system
 - Performing an extra step allows to understand the current system better

Logical versus Physical Models (Cont. 2)

■ Four-Model Approach

- Develop:
 - A physical model of the current system
 - A logical model of the current system
 - A logical model of the new system
 - A physical model of the new system
- Disadvantage - Additional time and cost

Lecture Summary

- Data and process modeling involves three main tools: data flow diagrams, a data dictionary, and process descriptions
- The data dictionary is the central documentation tool for structured analysis
- Each functional primitive process is documented using structured English, decision tables, and decision trees
- Structured analysis tools can be used to develop a logical model during the systems analysis phase, and a physical model during the systems design phase

Mid-Semester Survey

Quiz 1: Are You Ready ?

Announcement (if any)

Q &A?

Thanks everyone !