


# Connection Dialog

This is the first window that will appear if Ricochet Refresh is managing its owned own Tor provider (versus using a system-owned Tor or Arti instance). If we are using an external Tor provider, we will go directly to the Main window.


TODO: This UI implies a single Tor provider for potentially multiple Ricochet Refresh profiles. Does it make sense for them to all have the same guard?

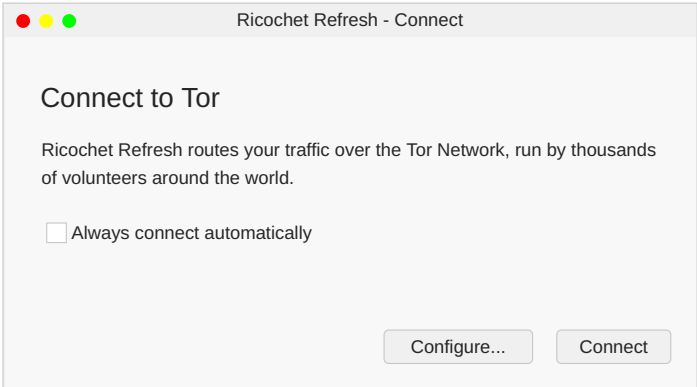

We will try to follow a desktop'ified version of Tor Browser's [about:torconnect](#) page here

Configure opens the Preferences dialog

Connect begins bootstrapping tor

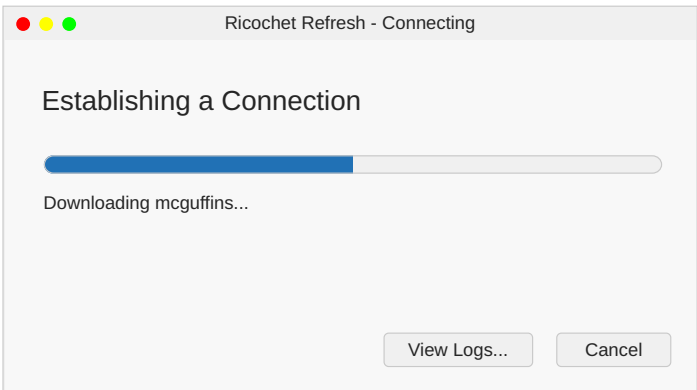


Open the Tor Logs dialog

Cancel current bootstrap attempt

# Preferences (General) Dialog

The General section of the Preferences dialog. Should enable configuring general application behaviour that are not specific to the other sections

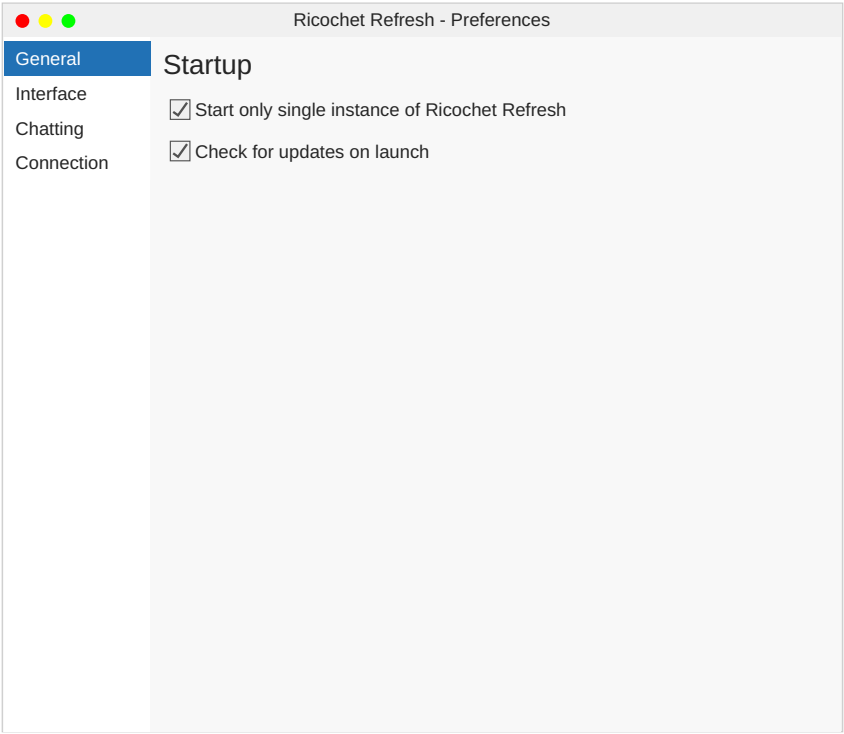

# Preferences (Interface) Dialog

The Interface section provides users with UI customisation options

General

Interface

Chatting

Connection

Ricochet Refresh - Preferences

Language

Select interface language:

English (en-US)

Toolbars

Button style:

Icon only

Alerts

☒ Show desktop notifications

☒ Blink taskbar icon

☒ Enable audio notifications

Tray Icon

☒ Minimize to system tray

☒ Close to system tray

Languages sorted by language code

- Icon only

- Text only

- Text beside icon

NOTE: probably paltform-specific

# Preferences (Chatting) Dialog

The Chatting section provides users with conversation-related options.

TODO: Chat  
formatting/density

TODO: Timestamp  
formatting/localisation

Ricochet Refresh - Preferences

General

Interface

Chatting

Connection

Logging

☒ Enable conversation logging

☒ Display conversation scrollback

Scrollback lines:

1000

<

Logs are stored in the encrypted profile file

Timestamps should be stored in un-localised format

# Preferences (Connection) Dialog

The Connection section provides users with Tor Provider related options. This page may vary a lot depending on which Tor Provider is selected. For instance, a System Tor Daemon Tor Provider (eg on Tails) would have this section almost entirely empty. For now let's have this mostly mirror about:preferences#connection in Tor Browser.

TODO: Bridge Card support

General

Interface

Chatting

Connection

Quickstart

Bridges

Network Settings

Advanced

Quickstart connects Ricochet Refresh to the Tor Network automatically when launched, based on your last used connection settings

☒ Always connect automatically

Bridges

Bridges help you securely access the Tor Network in places where Tor is blocked. Depending on where you are, one bridge may work better than another

☒ Use Bridges

Add bridges

☒ Chose from one of Ricochet Refresh's built-in bridges

☒ obfs4

Makes your Tor traffic look like random data. May not work in heavily censored regions.

☐ Snowflake

Routes your connection through Snowflake proxies to make it look like you're placing a video call, for example.

☐ meek-azure

Makes it look like you're connected to a Microsoft website, instead of using Tor. May work in heavily censored regions, but is usually very slow.

☐ Enter bridge addresses you already know

Paste your bridge addresses here

Network Settings

☐ I use a proxy to connect to the internet

Proxy Type

SOCKS5

Address

IP address or hostname

Port

Username

Optional

Password

Optional

☐ This computer goes through a firewall that only allows connections to

Allowed Ports

80,443

Advanced

View the Tor logs

View Logs...

Backend

Select which Tor client implementation to use. Changing requires an application restart.

☒ Out-of-Process Tor daemon (default)

☐ System Tor daemon

☐ In-Process Arti

Add bridges region collapses if Use bridges is not ticked

TODO: Maybe Backend should be the \*first\* configurable item in the list?



This dialog should match layout of Tor Browser's about:preferences#connection Tor Logs dialog

TODO: New profile flow

Ricochet Refresh

File

Profile

Contacts

Chat

Tools

Help

Bob.rrprofile x

Alice.rrprofile x

Load Ricochet Refresh Profile

/path/to/Alice.rrprofile

Enter password:

Close

Login

Users will always 'login' into the 'offline' state, they will opt-in to less private visibility states

File:	Profile:	Contacts:	Chat:	Tools:	Help:
- New Profile	- Set Visibility >	- Add Contact...	- Export Logs...	- Downloads...	- Manual
- Open Profile...	- Online	- Delete Contact	- Delete Logs...	- Tor logs...	- Licenses
- Close Profile	- Restricted	- Connect/Disconnect		- Preferences...	---
- Save Profile As...	- Hidden	Contact			- Check for Updates...
---	- Copy Ricochet Id	- Ban/Unban Contact			- Changelog...
- Logout	- Edit Profile...				- About
- Logout All Profiles					
---					
- Quit					

TODO: Downloads dialog

TODO: About dialog

Toolbar: New Profile, Save Profile As, Logout | Add Contact, Delete Contact, Ban Contact, Connect/Disconnect Contact | Export Logs, Delete Logs

- Hide a conversation by clicking on a user entry again to unselect

- Per-contact context menu will have all the per-contact commands from the Contacts menu


User groups:

- Connected: users which have connected to our, or which we have connected to their endpoint server

- Disconnected: no active connection; 'offline' to us

- Requesting: in-progress outgoing friend requests

- Banned: no endpoint server, actively blocking attempts when accessing our identity server

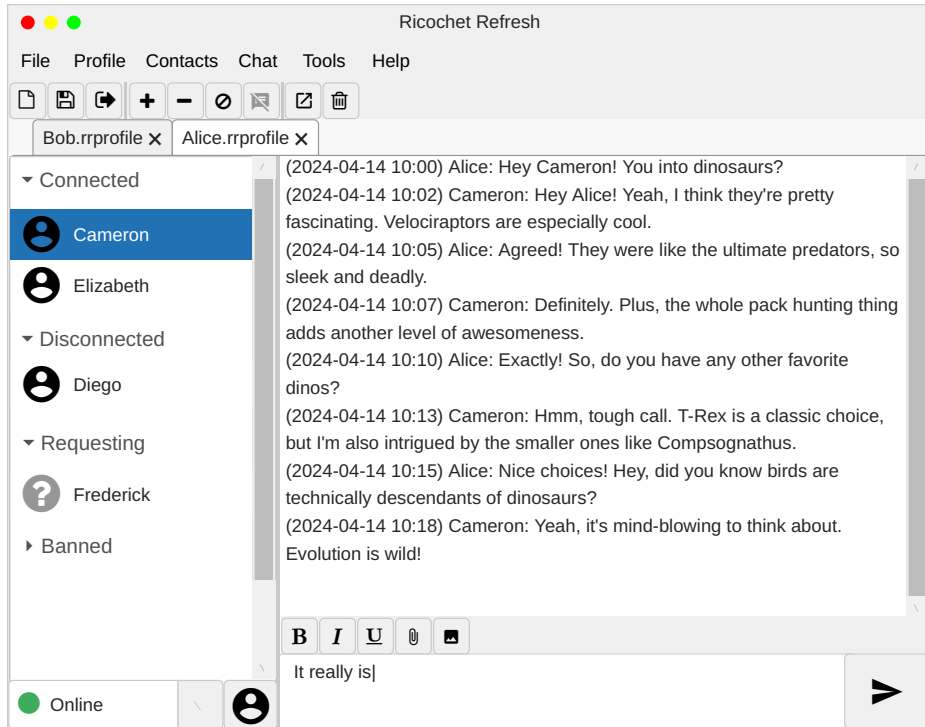

- URLs will never open a browser, only open a context menu with the option to copy the URL to clipboard

- exported conversations should be standardised to avoid leaking user's locale re timestamps, any potential formatting options, etc

- user status (connect/disconnect) messages will appear in chat

TODO: Chat Thumbnail and Image UI; images should have be optionally spoiler'd and have text descriptions

TODO: Chat Attachment UI

TODO: Incoming Friend Request flow

Visibility Modes:

Online - identity and endpoint servers are enabled  
 Restricted - endpoint servers are enabled  
 Hidden - no endpoints enabled, but outgoing connections can occur  
 Offline - no endpoints enabled, no outgoing connections either

NOTE: Online should really communicate 'most risk', users can be cyberstalked if they always stay in Online mode

Profile button:

Open a dialog where user can:

- get Ricochet id
- set display name
- set profile image
- set profile info
- w/e else metadata users opt into

TODO: Edit profile dialog

Minor text formatting:

- Bold
- Italic
- Underline
- Add Attachment
- Inline-image



NOTE:

- Attachments are sent as-is, but are not rendered/previewed by the application.
- Inline-images will be somehow re-encoded to hopefully avoid malformed image decoder bugs/exploits


In 'Online' mode identity and endpoint servers are enabled, anyone can cyberstalk the user if they know the user's Identity Server Service ID



In 'Restricted' mode (identity server disabled, endpoint servers enabled) only confirmed/allowed contacts may contact us. New contacts will not be able to access the public identity server to get through the gosling handshake to get their own endpoint server. This way strangers will not be able to cyber-stalk a user based off of their (potentially) public identity server

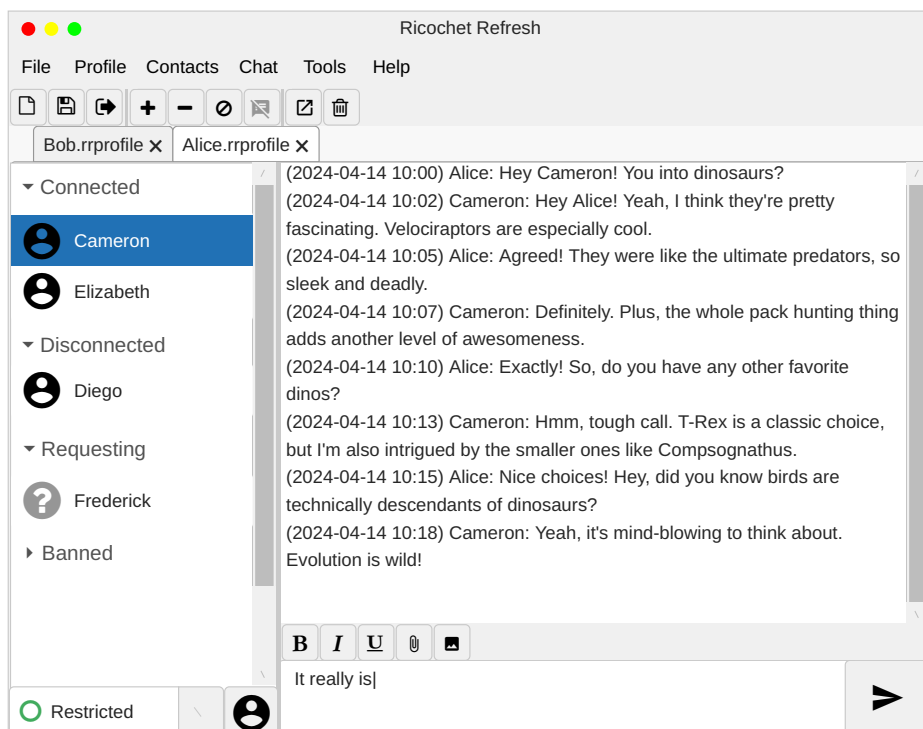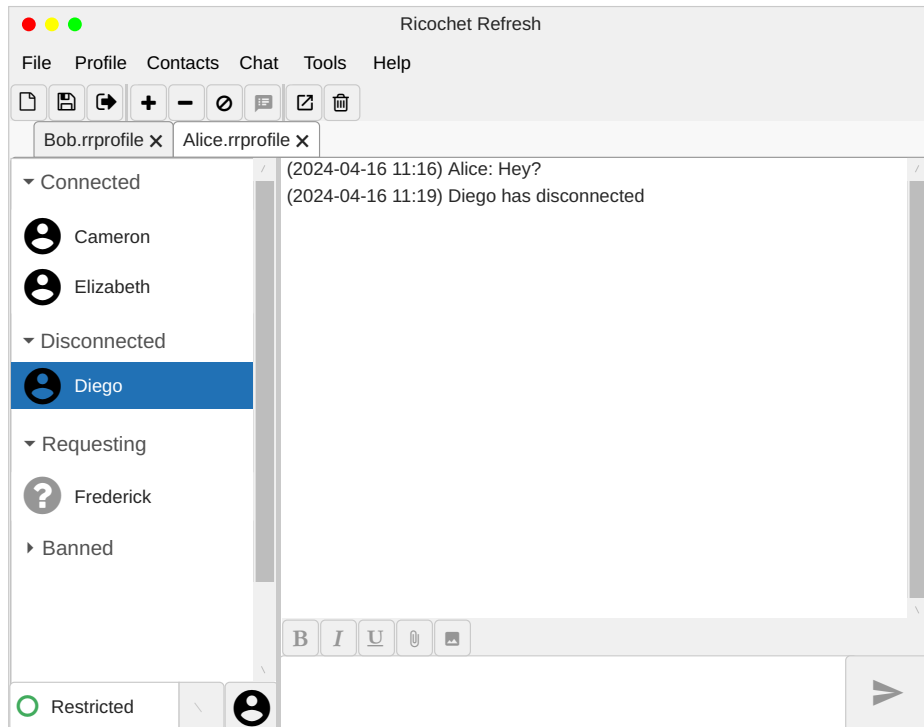


In 'Hidden' mode we do not enable any of our endpoint servers or identity servers, so even contacts do not gain our online/offline metadata. Connections are outgoing only and must be explicitly initiated by the user. This does imply that two users which are both in 'Hidden' mode will not be able to ever connect to each other!

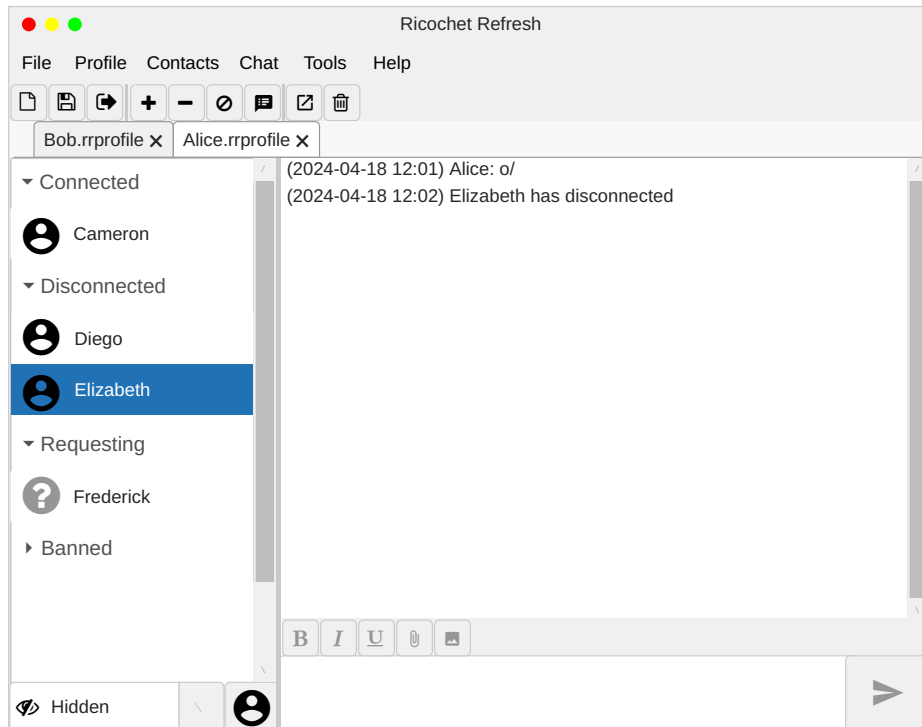


- Chat input widgets are disabled if the user is not connected



- User must opt-in to connecting to contacts when in Hidden mode using the chat icon in the toolbar or connect action in the contacts menu

- Contact goes into Connecting... group when connect is initiated  
- Once a user reaches Connected, then chat can happen

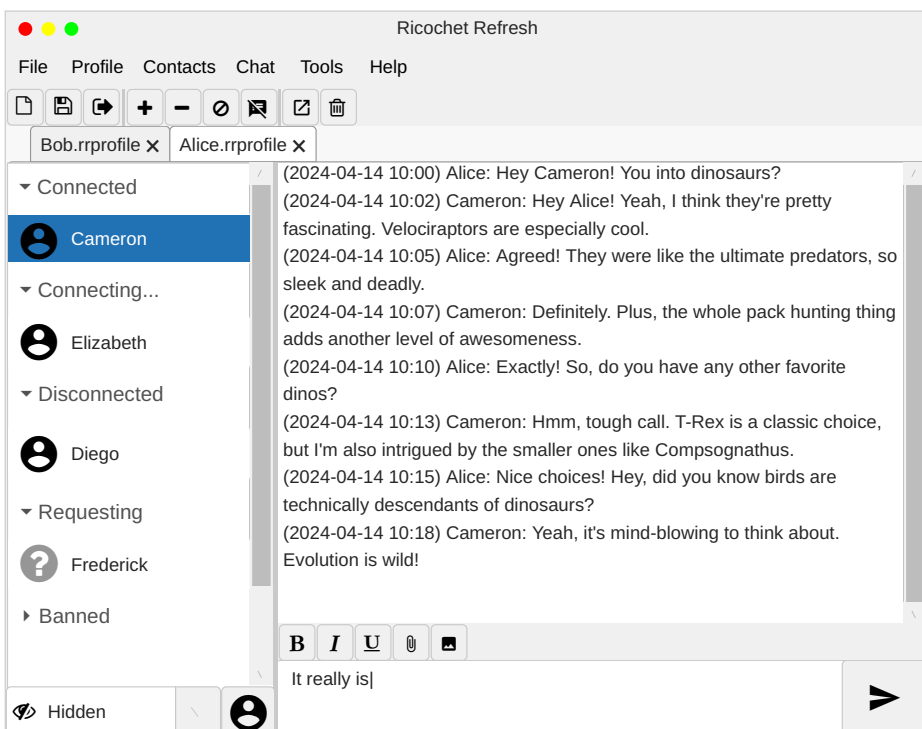

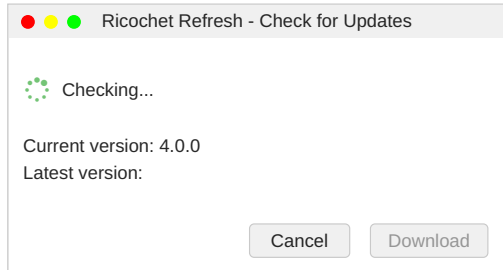

- Check happens over Tor to Onion Service endpoint
- Will need some to maintain some update jsons

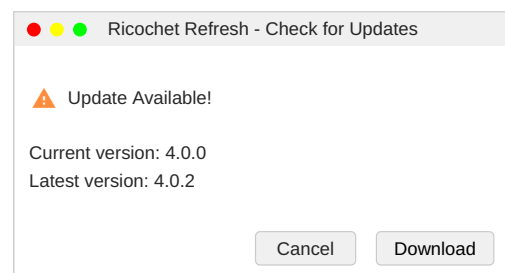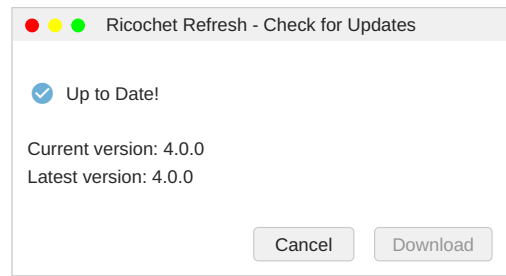

- Download the correct package based on the current installed version (eg a deb, appimage, dmg, windows installer, etc)
- Download button will open Downloads dialog

# Changelog Dialog

Accessed via the Help > Changelog... menu item, will display the most recent changelog.

TODO: Alternatively, we could open the folder containing shipped changelog file and let tije user open it in their preferred text editor

Ricochet Refresh - Changelog

4.0.2-stable    November 1st, 2025

All Platforms

- Lorem ipsum dolor sit amet, consectetur adipiscing elit.

- Fusce fermentum semper est, vel tempor risus venenatis ac.

- Nullam ultricies justo vitae elit consectetur, id luctus nisi vestibulum.

macOS

- Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas.

- Phasellus quis velit sed est ultricies scelerisque nec ac nulla.

Build System

- Curabitur condimentum ligula sed nibh laoreet, nec viverra ex luctus.

- Praesent nec ex nec est accumsan suscipit.

- Integer aliquet odio sit amet ex vestibulum, at malesuada sapien tempor.

Windows

- Sed convallis odio eu scelerisque rutrum.

- Nam id tellus sit amet eros pellentesque tristique.

macOS

- Integer posuere justo ac risus facilisis, eget elementum justo sodales.

Linux

- Vestibulum eget libero nec mi vehicula dapibus eget id leo.