


DR NON'S VIBECODING SYSTEM

How one person + AI agents ship, verify, run, design, and remember real software.




19 INFOGRAPHIC PAGES

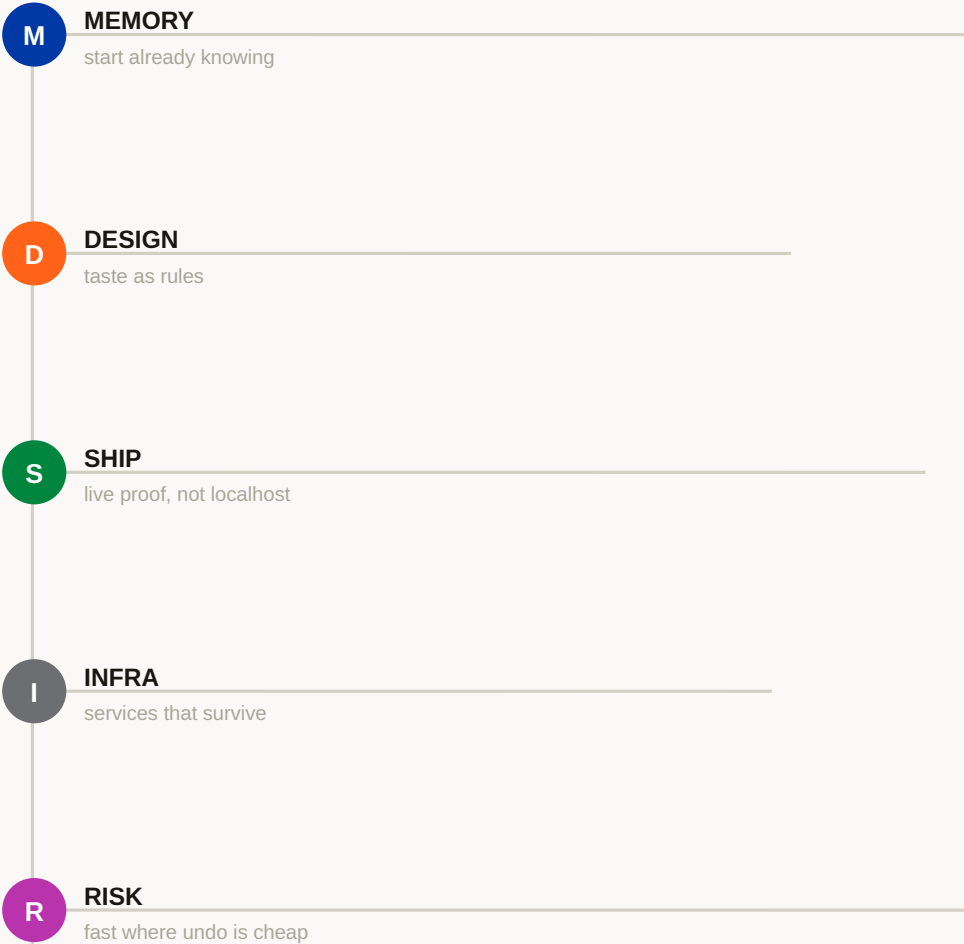

The repo is a working operating system

4 artifact types → 14 skills → one agent practice

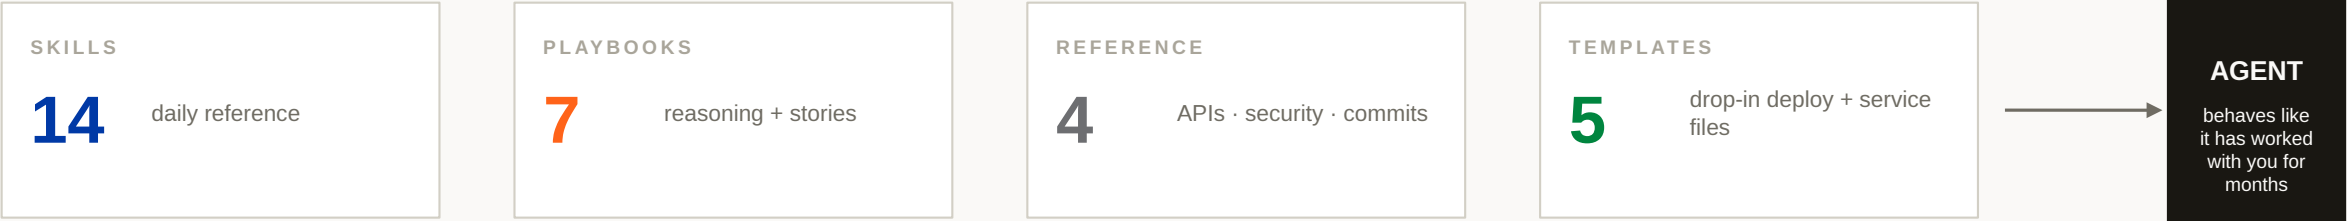

FULL STACK

FRONT END	axiom-design-core · design-dna
APPLICATION	karpathy-guidelines · golden-rules
DATA	data-catalog
SHIP	ship-discipline · deploy-verification
INFRA	always-on-services

WRAPS EVERY LAYER

- M AGENT MEMORY**
context survives sessions
- R RISK POSTURE**
speed calibrated to blast radius
- B BOOTSTRAP**
build the scaffold in one pass




The actual daily loop

one coherent intention → live ship → written lesson

ONE PASS · 60-180 MINUTES



DIVISION OF LABOUR

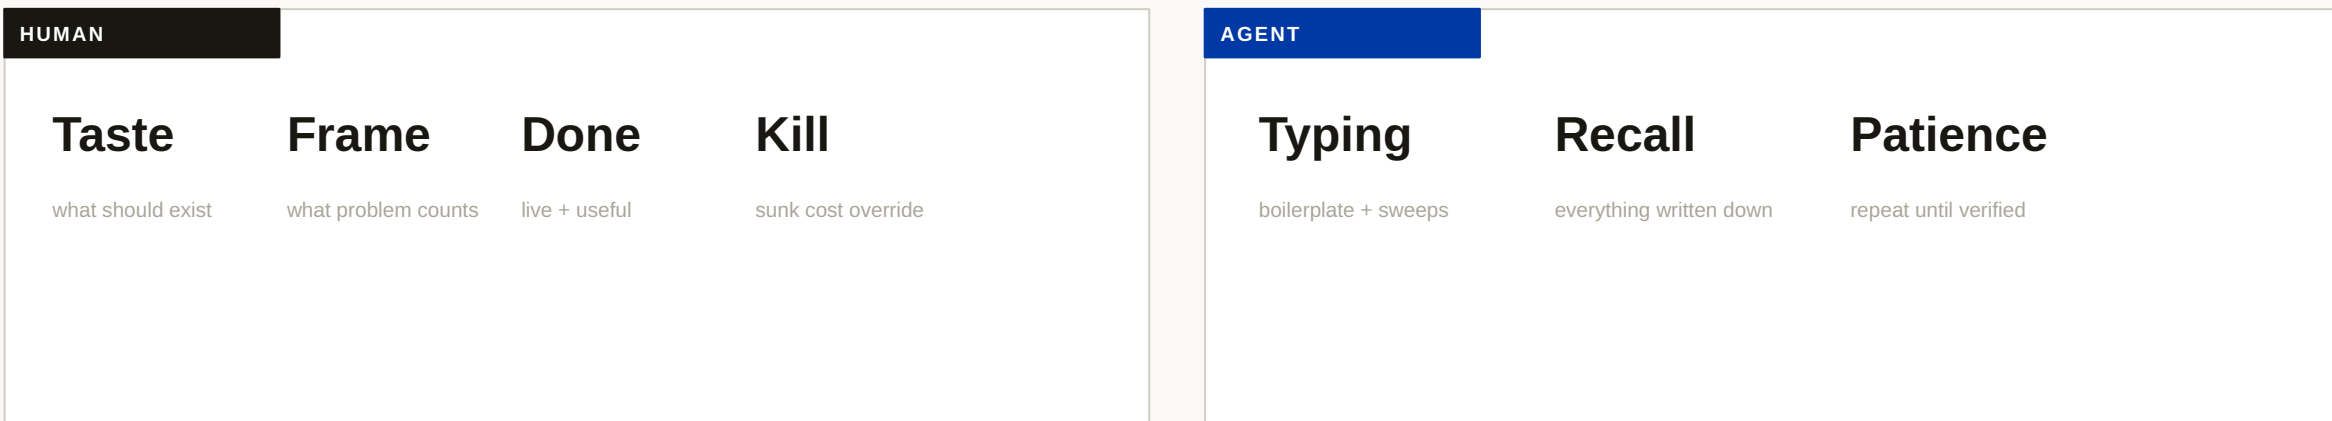


Speed is not typing faster. It is fewer decisions being re-made.



Fourteen rules, five operating laws

a transit map for the decision system

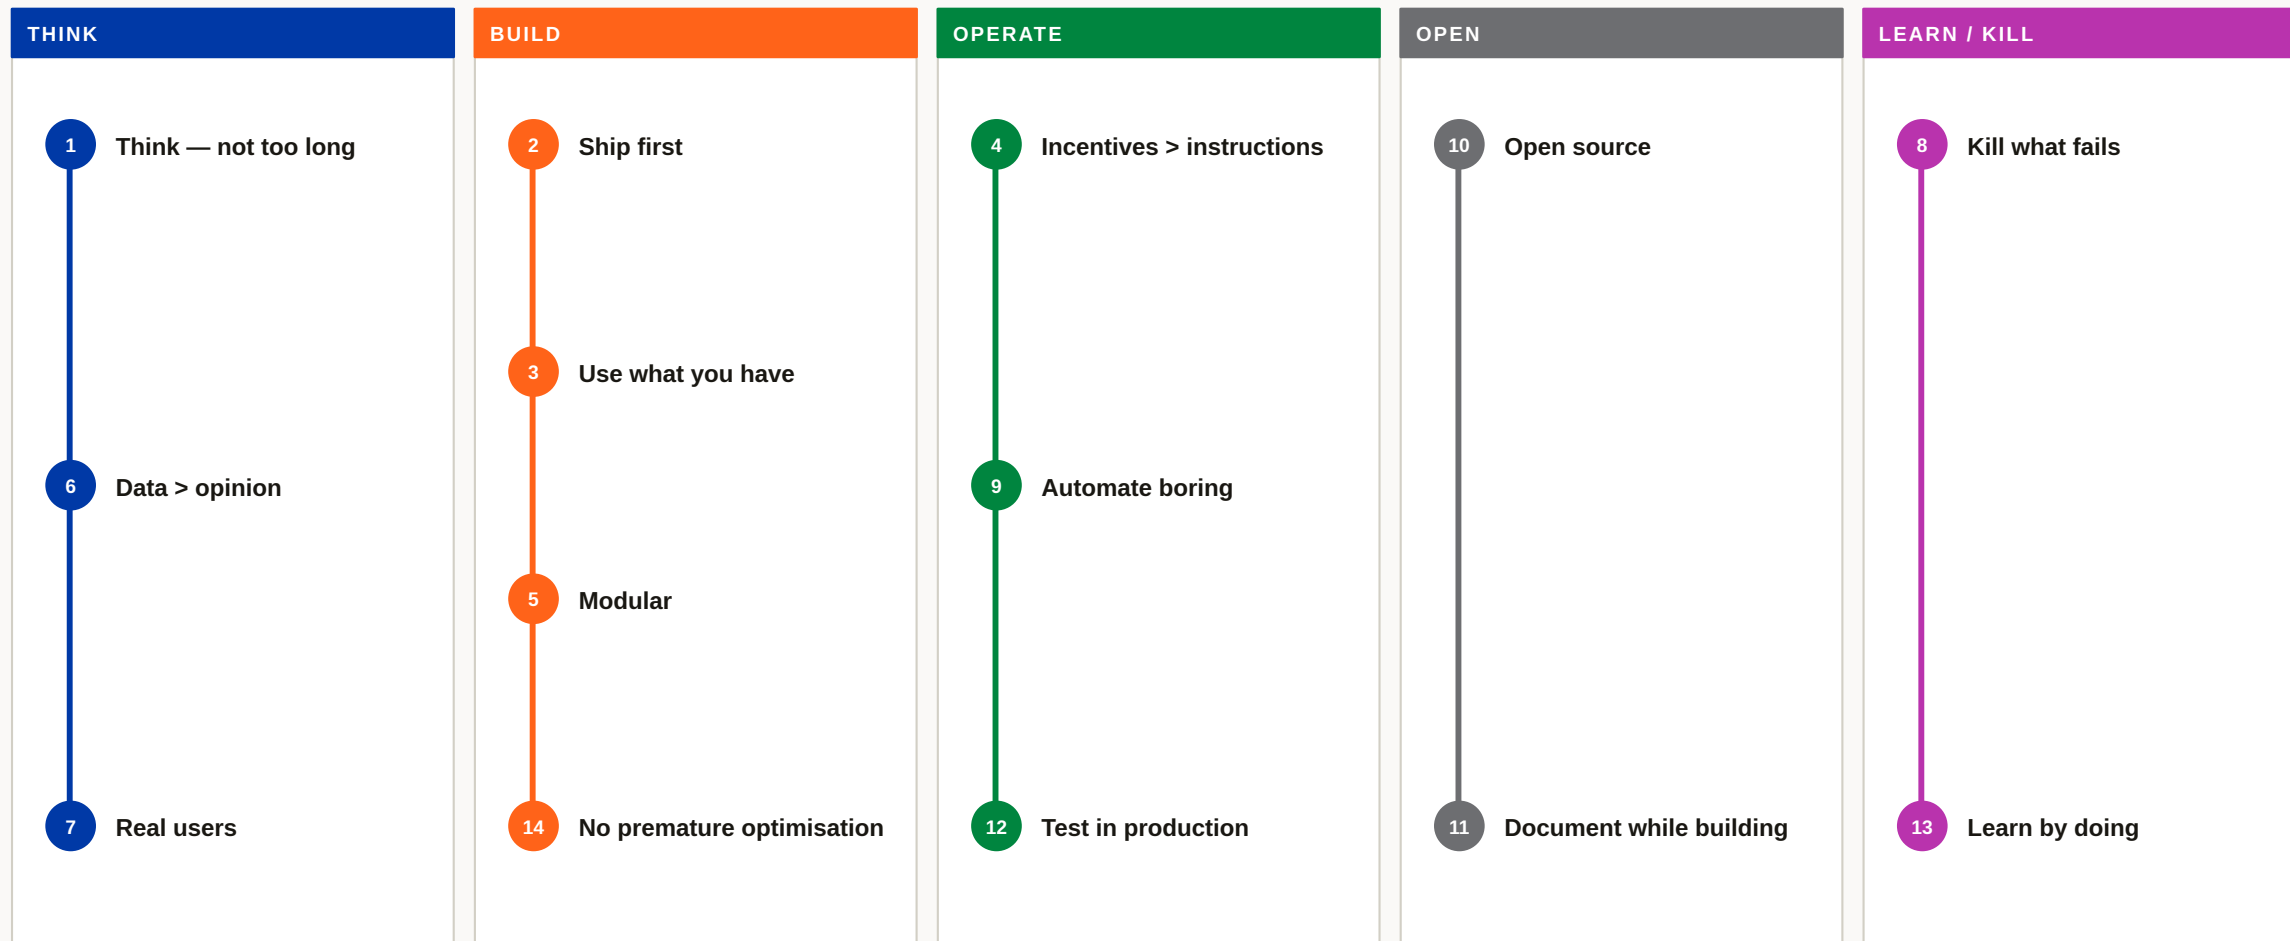

THE GOLDEN RULE → THE BEST STACK IS THE ONE THAT SHIPS.



Guardrails against LLM coding drift

caution where agents are predictably overconfident

1 · THINK BEFORE CODING

Surface assumptions

If unclear, name it. If simpler, say it.

2 · SIMPLICITY FIRST

Minimum code

No speculative features. No abstraction for one use.

3 · SURGICAL CHANGES

Touch only what you must

Every changed line should trace to the request.

4 · GOAL-DRIVEN


Define proof first

Turn “make it work” into checks you can verify.

The agent may be fast. The diff must still be explainable.




The context window resets. The project does not.

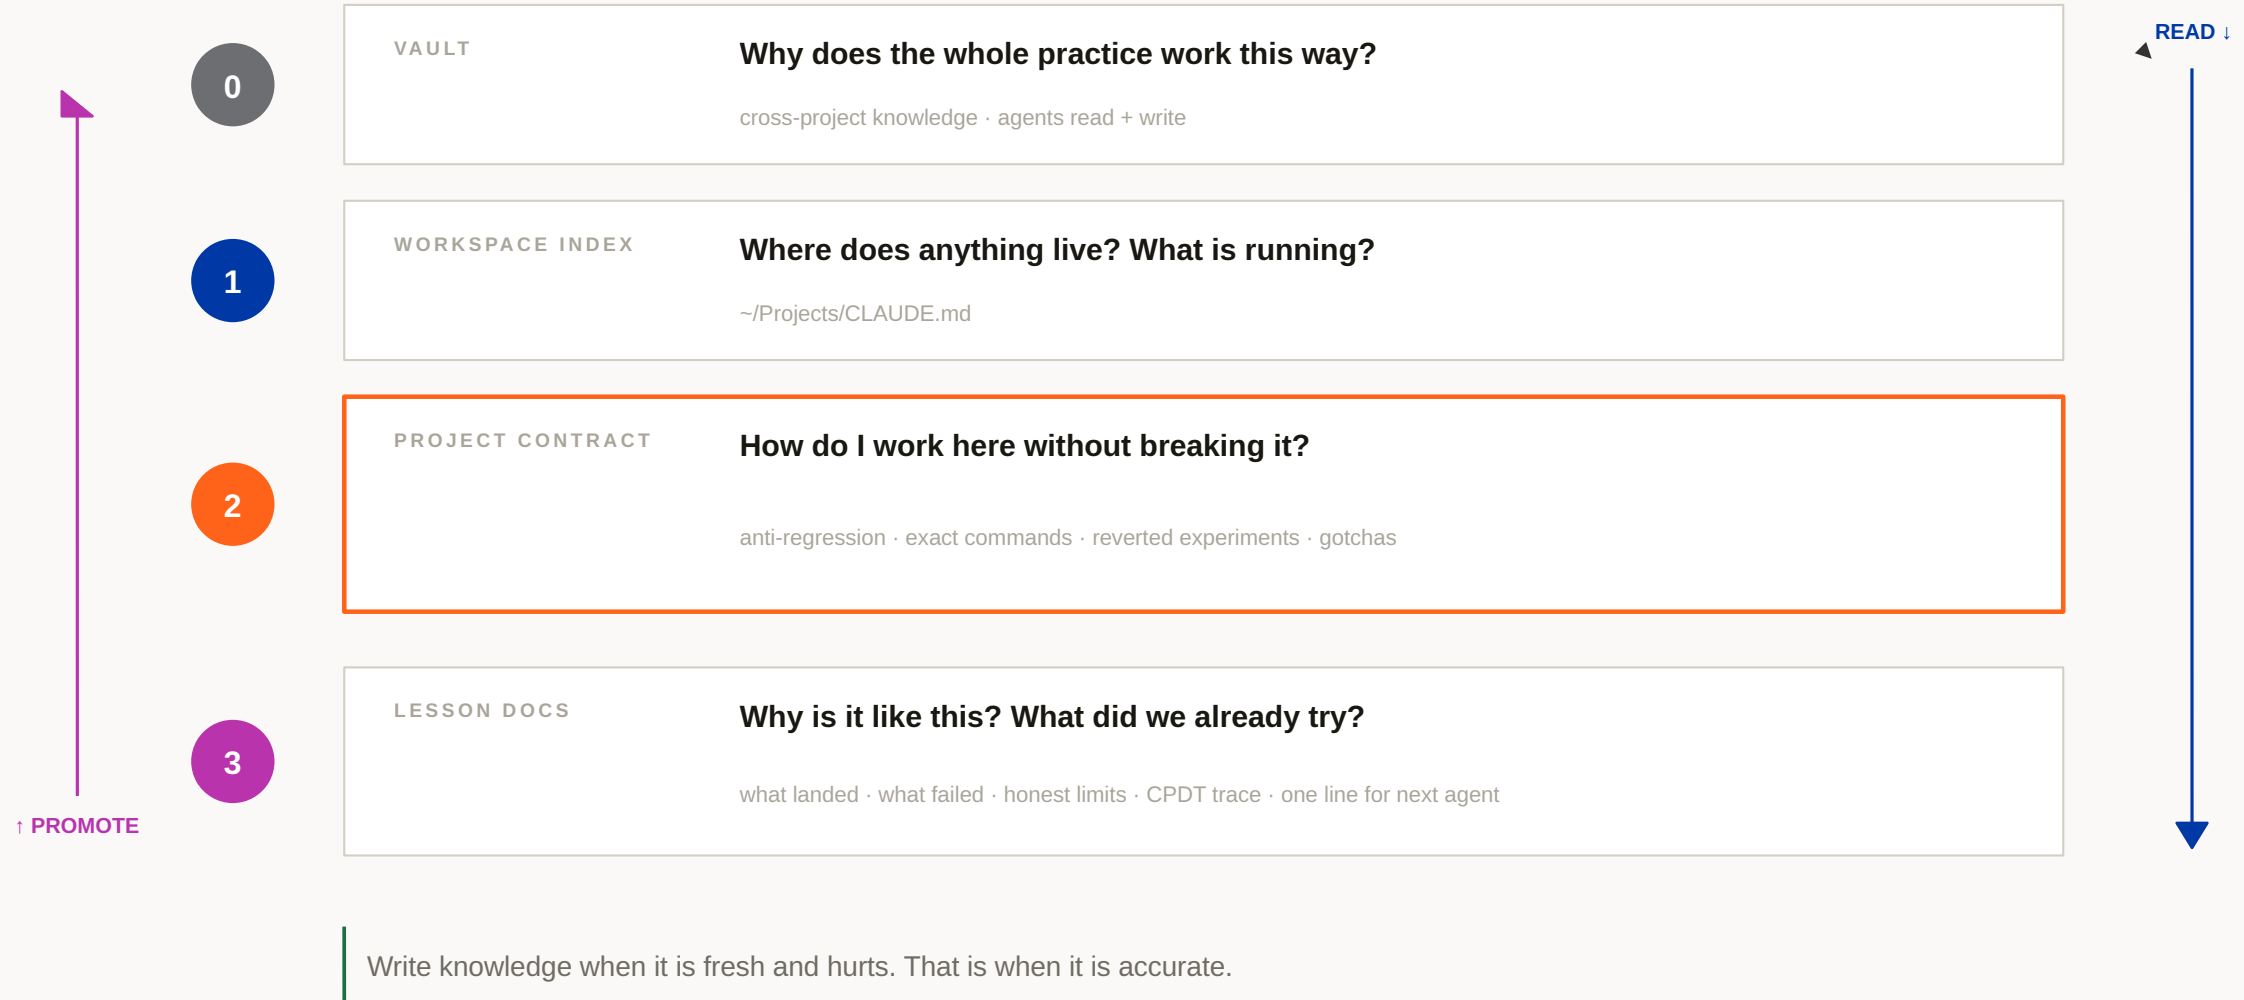


One document bootstraps the whole practice

4 questions → conditional setup → a project that remembers itself

ASK ONCE

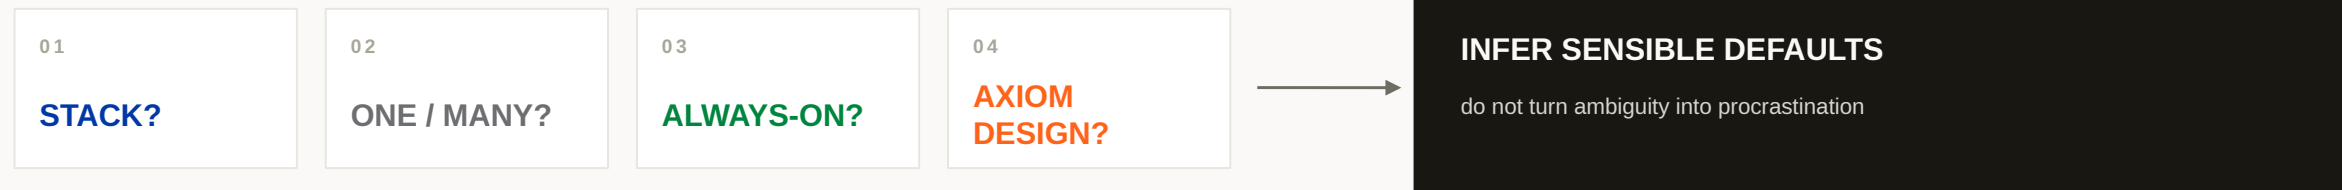

BUILD IN NINE STEPS

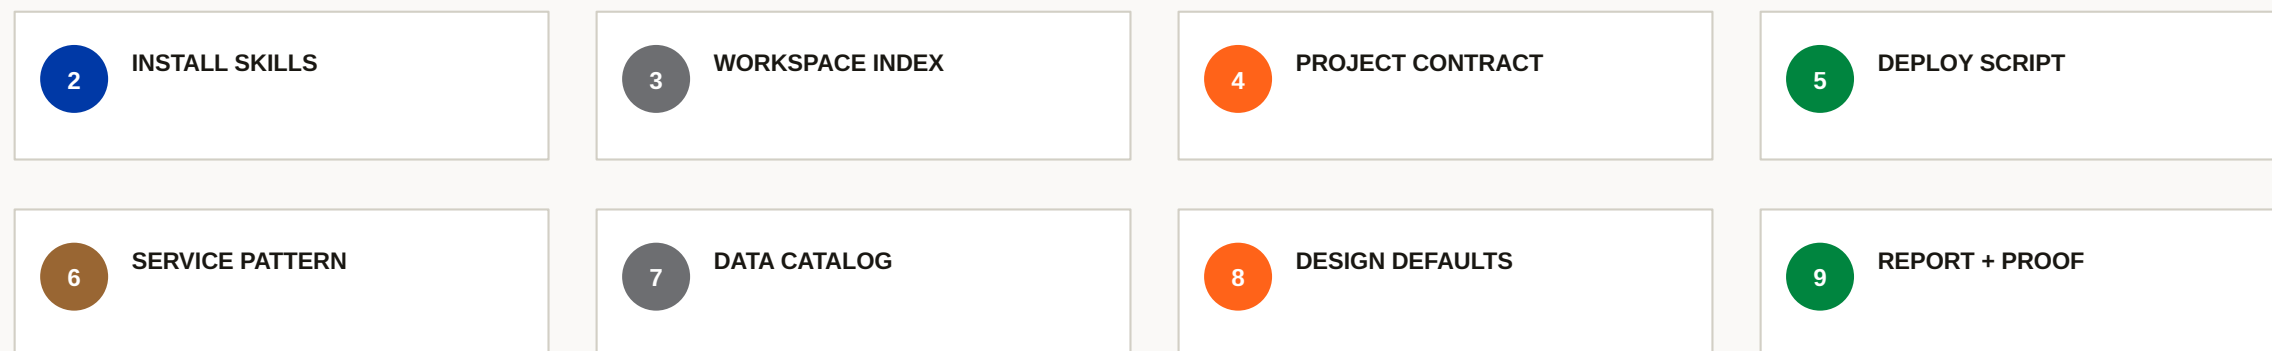

Conditional by design: no backend pattern for a static site; no design system forced onto a pure API.

Taste becomes executable when reasons become constraints

why → rules → enforcement

1

LINEAGE

Rams · Vignelli · Tufte · Swiss — pick a real ancestor, not “clean & modern”

2

PSYCHOLOGY

affordance · signifier · feedback · anchoring · defaults · disclosure

3

CONSTRAINT

3 type sizes · closed fonts · one absolute geometry rule

4

TOKEN ROLES

one token → one job → no semantic bleed

5

NAMED REGRESSIONS

“if you see X, that is a regression” → grep-able taste

THE TEST

Would this fit the lineage?

Can a new agent
make the same
decision without you?

YES → SHIP

Constraint is a speed technique: it turns repeated design debates into lookups.

Color has grammar, not mood

enclosed = identity · bare = data

TWO COLOR SYSTEMS — NEVER BLUR THEM



IDENTITY

Always enclosed

Which family / board am I in?

disc · station plate · fixed route color

+14.8%

SIGNAL

Always bare

Is the value good / bad / live?

green / red only because the data changed

SHOULD THIS BE COLORED?

DATA?

bare green / red

IDENTITY?

enclose in route disc

DIRECTION?

greyscale triangle

NONE?


no color — use grey + size

Color only at the point of decision. Never before. Never after.


Catalogue once. Port the known-good adapter forever.

the shared layer belongs to no single project

REUSE FLOW

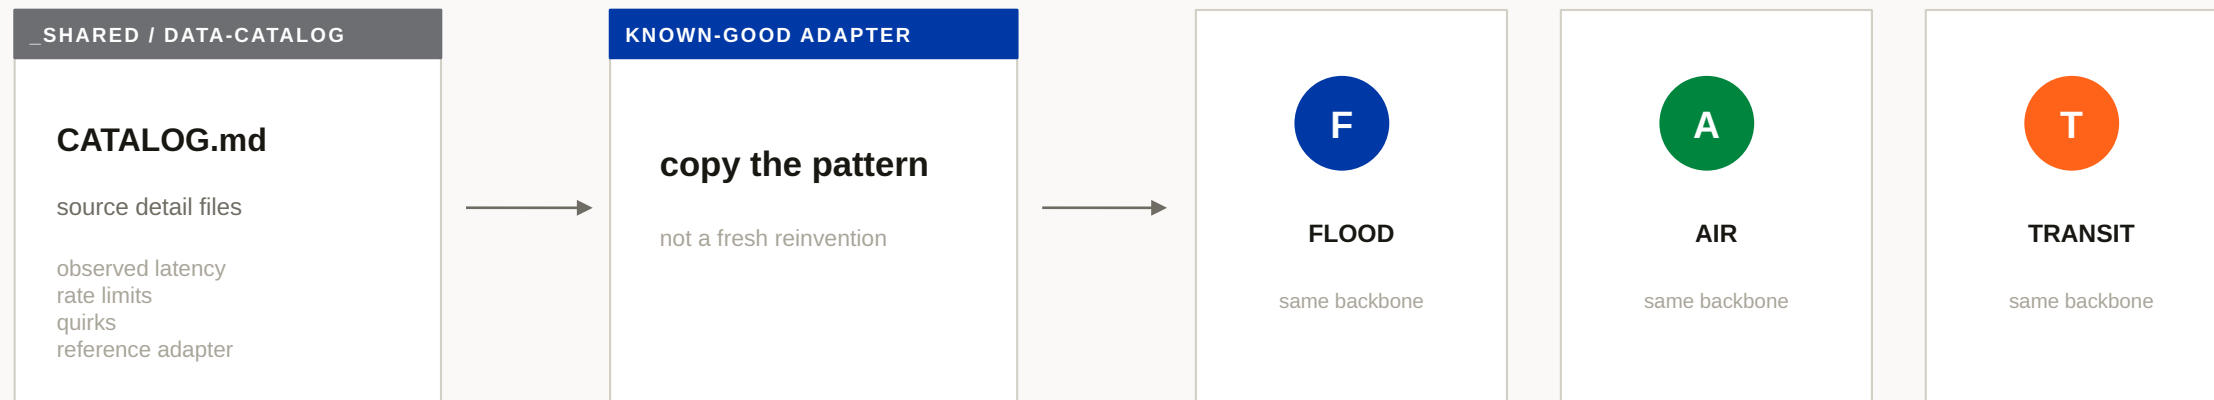

FRESHNESS IS EXPLICIT

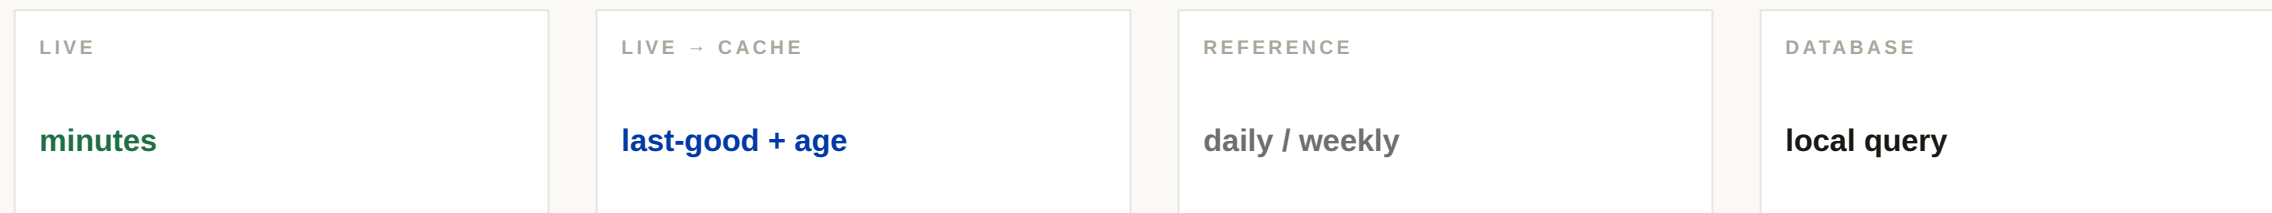

Trustworthy stale data says “47 minutes old.” Silent staleness is a liability.



Localhost is never a deliverable

done = live URL + command-level proof

THE CPDT LOOP



NOT ENOUGH

npm test ✓ proves code; not delivery

ACTUALLY DONE

curl https://live... | grep NEW_THING

the bytes reached a human

Tests prove correctness. T proves existence.

A deploy is not an upload. It is a human receiving new bytes.

CDN verification must not poison the key it is trying to test

NAIVE VERIFICATION

- 1 UPLOAD v1.2.1
- 2 NEW HTML
- 3 STALE JS
- 4 REAL KEY POISONED
- 5 USER GETS OLD BYTES

curling the real asset too
early
can create the outage

PROBE-FIRST VERIFICATION

- 1 CANONICAL ALIAS FIRST
- 2 THROWAWAY ?probe=N
- 3 MD5 ACTUAL BYTES
- 4 REQUIRE 3 / 3 STREAK
- 5 TOUCH REAL KEY LAST

3 / 3 MATCH


One green response is one edge node. A streak is evidence of convergence.




Prototype → dependable service, without turning into DevOps

static edge + tunnel + supervised local service

THE REQUEST PATH

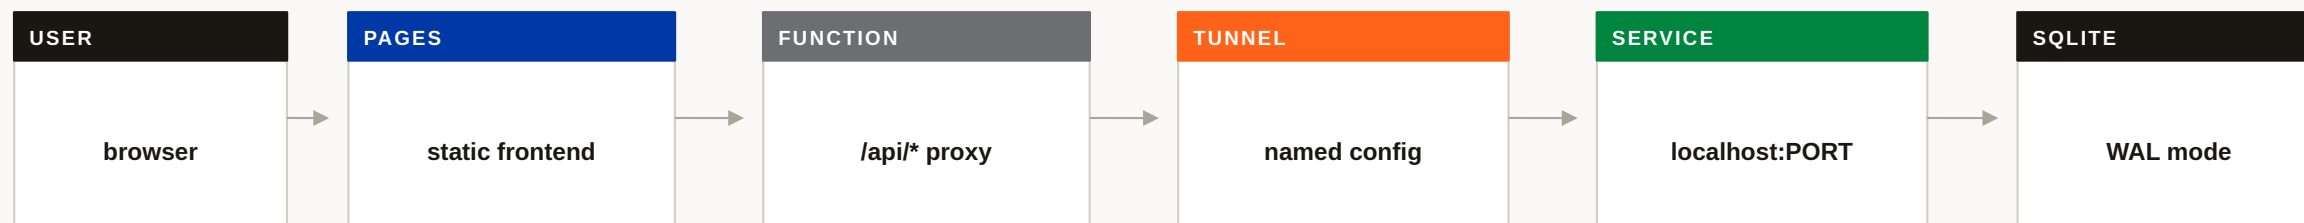

ONE SERVICE = FOUR SMALL JOBS

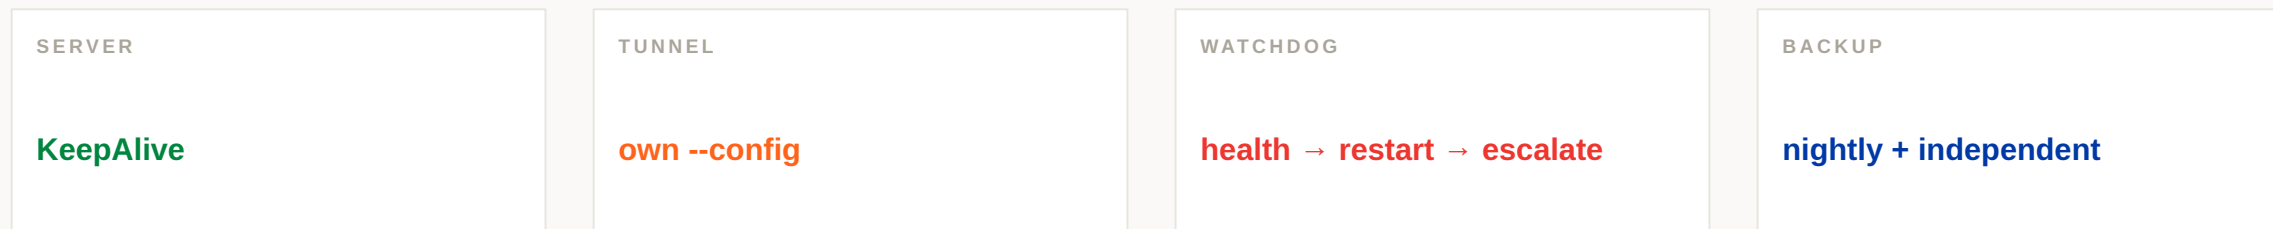

HEALTH CONTRACT

`/api/health → status · timestamp · last successful ingest per source`

If it cannot answer this in one line, it is a script — not a service.

Take risk with the code. Never with the recovery path.



Move fast where mistakes are cheap to undo

ceremony only where the blast radius demands it

THE ASYMMETRY

CHEAP TO UNDO

MOVE FAST

small commits · flags · mock fallback
last-good cache · watchdogs · backups

EXPENSIVE TO UNDO

ADD CEREMONY

anything that shouts at people
holds personal data · cannot be
restored

FOUR HARD LINES

1

LIFE-SAFETY

hold-to-confirm · auto-expire · corroborate

2

AGGREGATE ONLY

never individual data

3

HONEST LABELS

DEMO · PROTOTYPE · model, not forecast

4

SECRETS


never repo · note · prompt

Dominant solo risk: building something nobody wanted, slowly.

Several agents, one repo, no merge hell

isolate generation; centralise judgement and shipping


ISOLATION PRIMITIVE

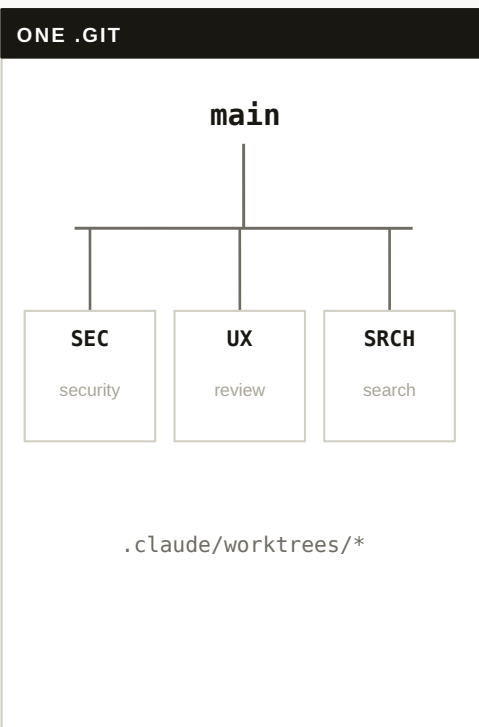

GOOD PARALLELISM



DO NOT PARALLELISE

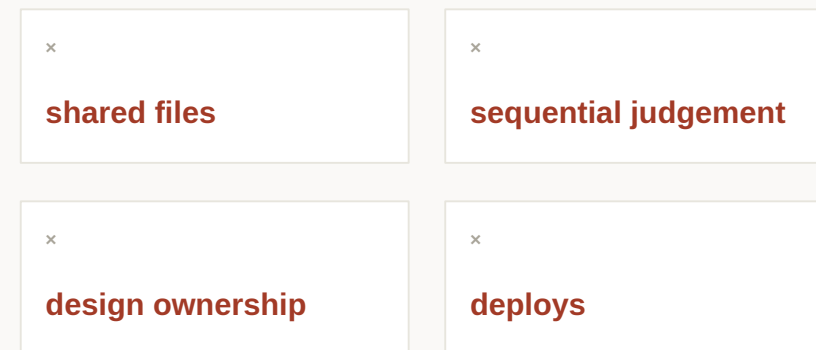

UNIFY PASS

read union of diffs → collapse duplicates → unify naming/errors → design audit → ONE deploy

Verification scales worse than generation. Ten agents can make ten changes faster than you can safely verify two.

Two kinds of 3D city — keep them separate

deep twin for exploration · native extrusion for operations

TIER 1 · DEEP TWIN

ARNIS → MINECRAFT

walk-through · storytelling · offline




OSM + Overture → playable world

manifest keeps bounds + regen coordinates

TIER 2 · LIVE WEB

MAPLIBRE NATIVE

fill-extrusion · one depth buffer

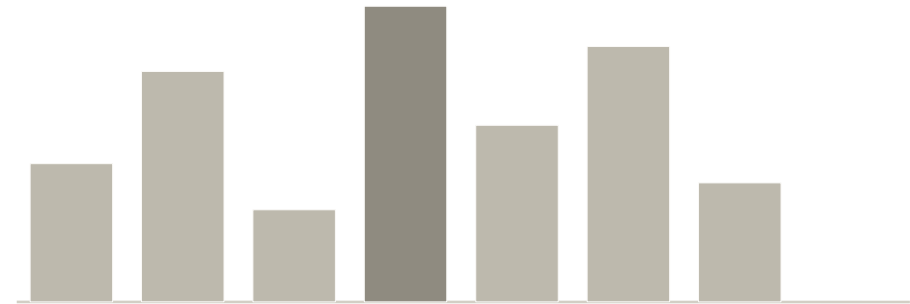

< 15k buildings → GeoJSON


100k+ → PMTiles

Never deck.gl as a second 3D canvas over the map.

One depth buffer. No procedural filler. Always test the 2D fallback on a real phone.

Clean a crowded workspace without deleting a live system

map liveness first · two gates · never force

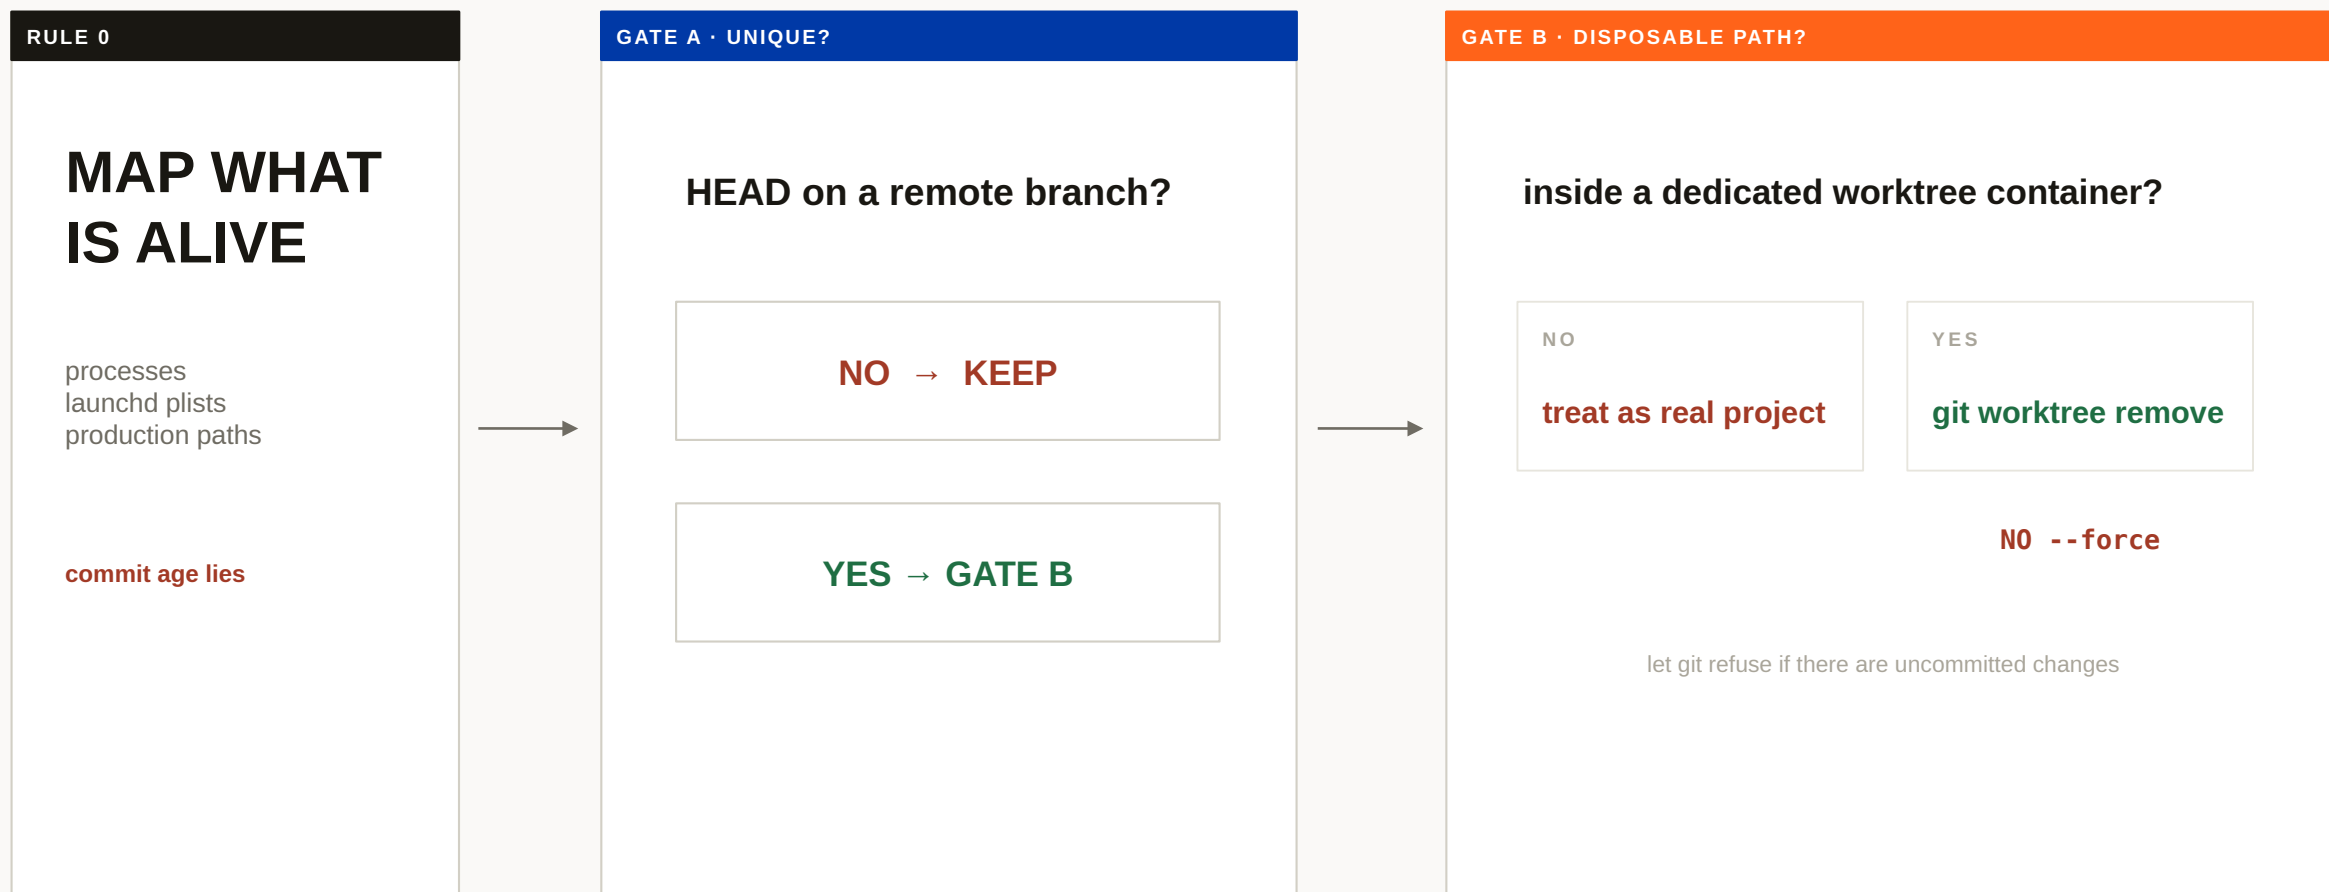

After cleanup, rerun the liveness check. Same services in; same services out.

T READINESS 17

Sometimes the blocker is technology maturity, not effort

wait on readiness; kill only when the value case is dead

TECHNOLOGY READINESS LEVEL



safe to build something else on top

YOU MAY BE TRL-BLOCKED IF...

3x

"ONE MORE PATCH"
on same mechanism



RESOURCE COST
scales the wrong way

<1

PRE-1.0
everywhere

>

WORKAROUND >
FEATURE


WAIT = document attempt → ship TRL-9 fallback → define a measurable revisit trigger

A good idea can be too early. A dead idea has no value. Those are different diagnoses.



Speed is a consequence of cheap mistakes + decisions made once

the compounding loop behind the whole practice

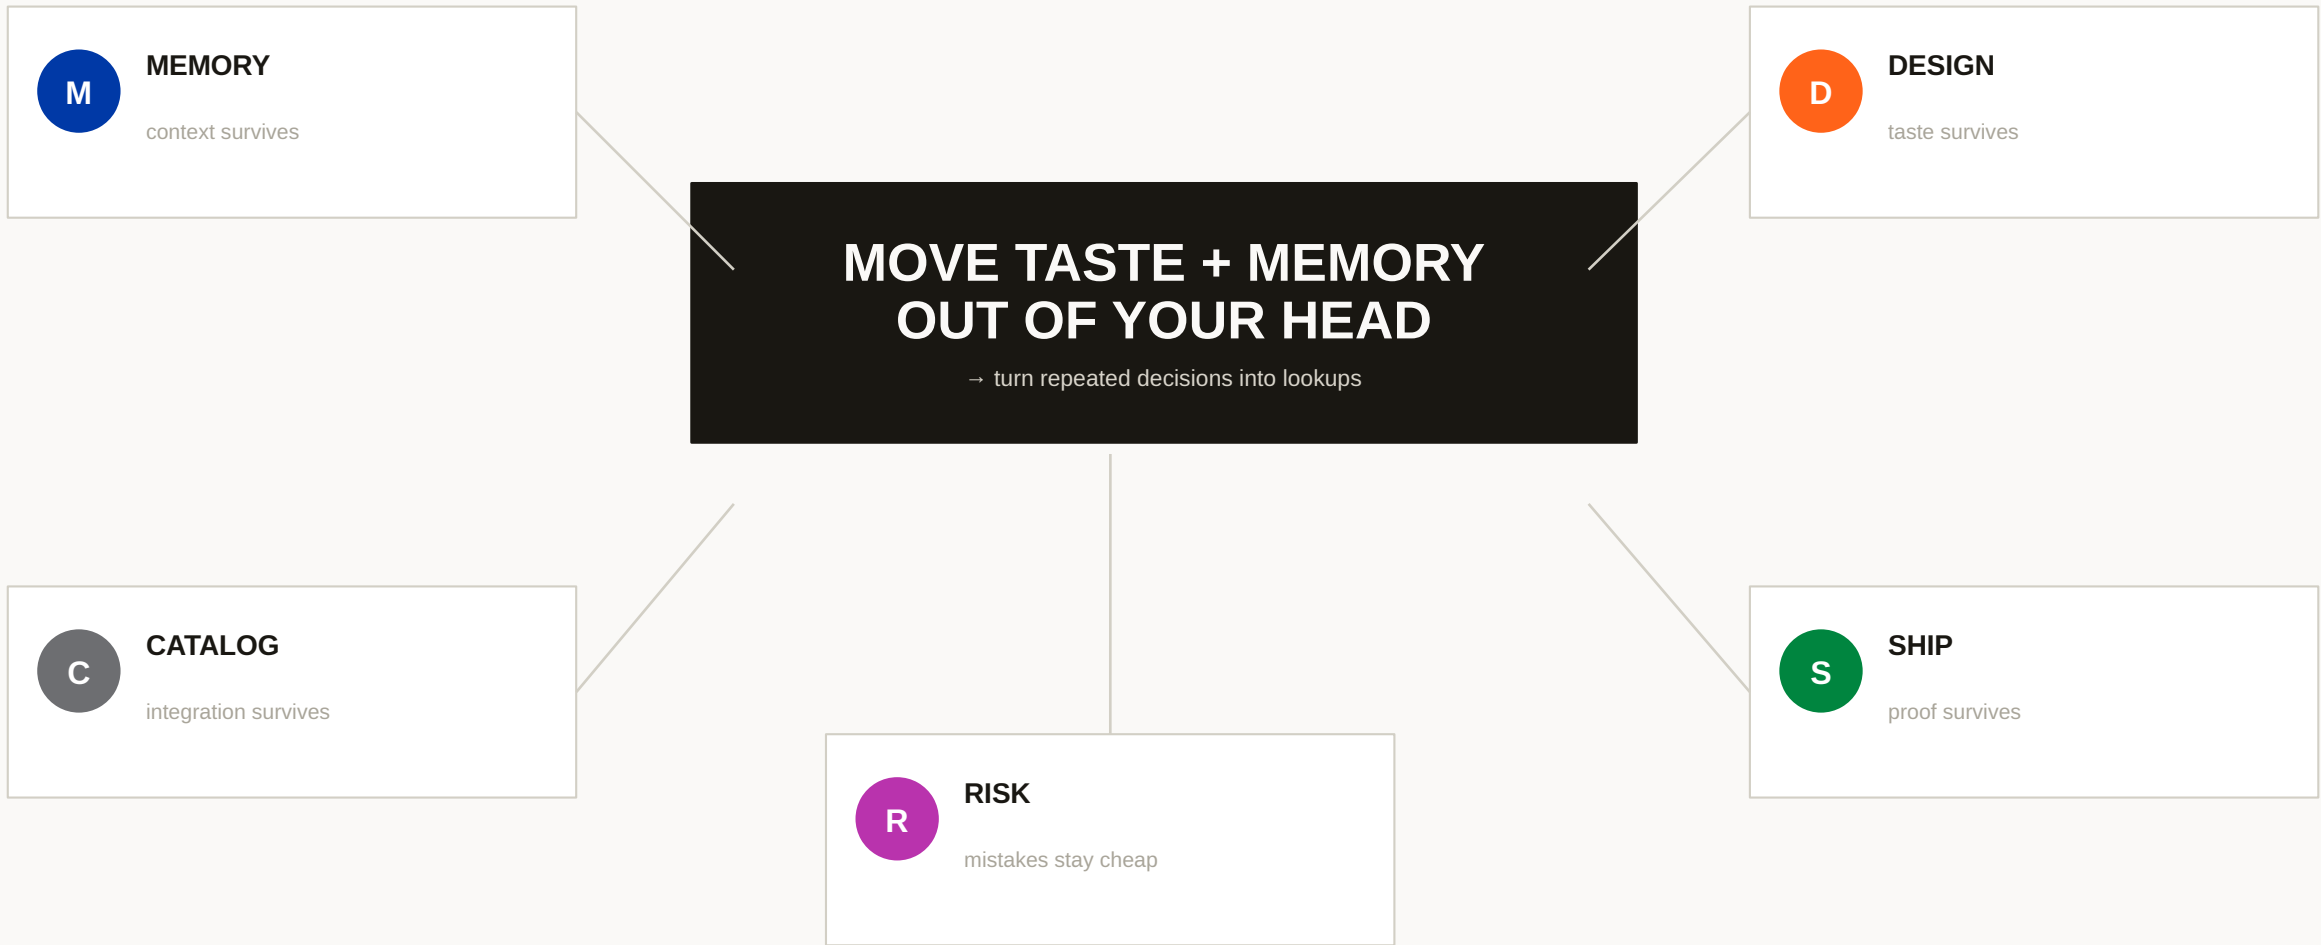

THE BEST STACK IS THE ONE THAT SHIPS.