

ابتدا DB به نام phone_book در پایگاه داده ساخته شود.

سپس تغییرات لازم در env داده شود.

دستوری که قبل اجرای برنامه باید اجرا شود :

Composer update

Php artisan migrate

php artisan key:generate

Php artisan storage:link

برای داده سازی ابتدا


Php artisan db:seed

ران شود اگر ارور (به علت یونیک بودن FK ها PK ها) داد، دو سه بار دیگر دستور زیر اجرا شود تا تعداد خوبی داده در پایگاه داده ساخته شود:

Php artisan db:seed --class= ContactGroupSeeder

برای اجرای برنامه دستور زیر وارد شود:

Php artisan serve

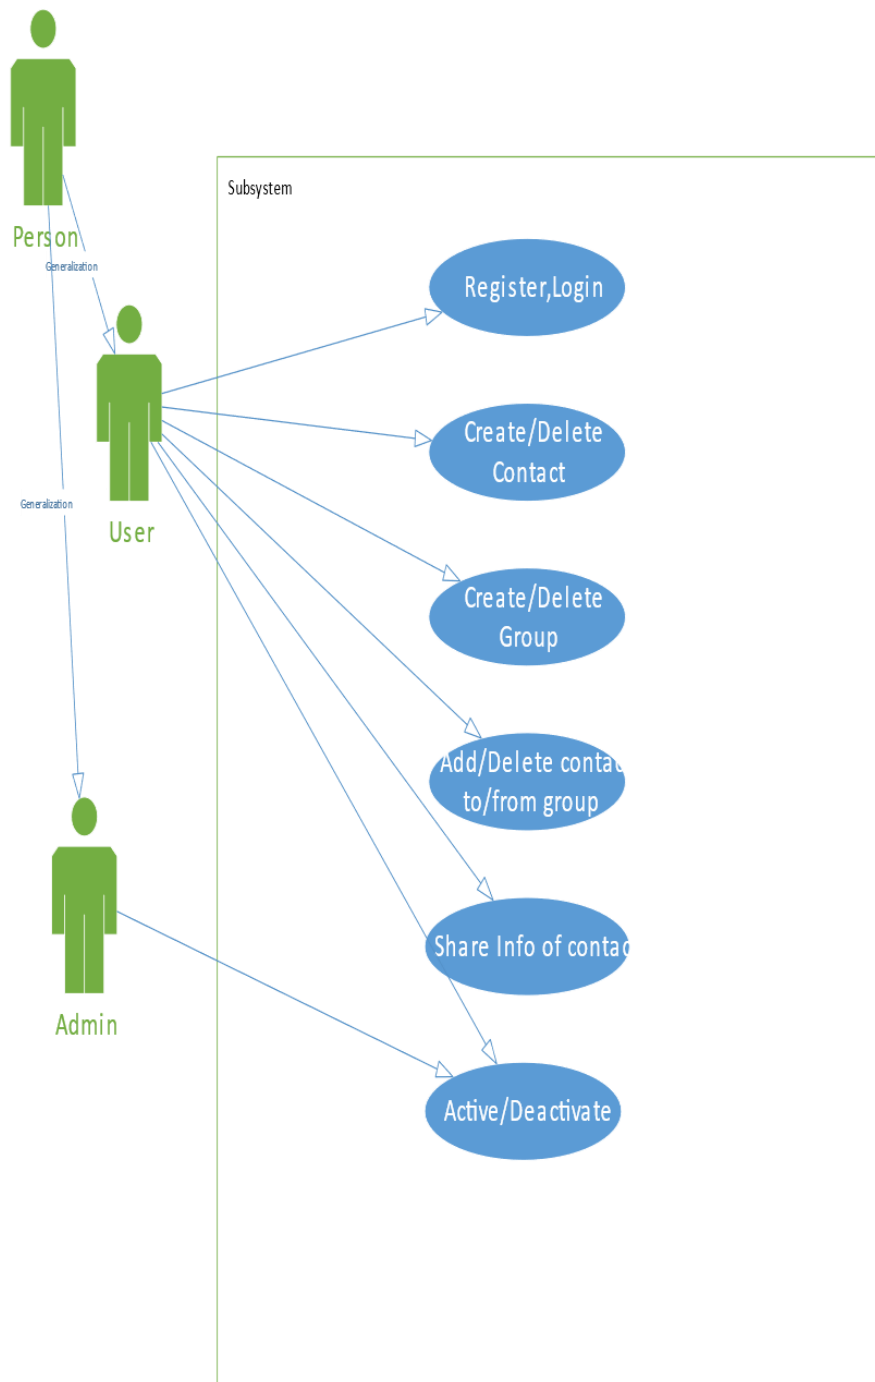

phone_book users	
id	bigint(20) unsigned
first_name	varchar(25)
last_name	varchar(45)
email	varchar(191)
phone	varchar(13)
is_admin	tinyint(1)
is_active	tinyint(1)
password	varchar(191)
two_factor_secret	text
two_factor_recovery_codes	text
remember_token	varchar(100)
email_verified_at	timestamp
current_team_id	bigint(20) unsigned
profile_photo_path	text
created_at	timestamp
updated_at	timestamp

phone_book groups	
id	bigint(20) unsigned
name	varchar(30)
user_id	bigint(20) unsigned
created_at	timestamp
updated_at	timestamp

phone_book contacts	
id	bigint(20) unsigned
first_name	varchar(25)
last_name	varchar(45)
phone	varchar(13)
image_path	varchar(191)
user_id	bigint(20) unsigned
created_at	timestamp
updated_at	timestamp

phone_book contact_group	
id	bigint(20) unsigned
group_id	bigint(20) unsigned
contact_id	bigint(20) unsigned
created_at	timestamp
updated_at	timestamp