

Lab 3

Name : Khoo Teong Lee

Matric No : A22EC0174

Section : 08

SQL3-DML2 PART 1

Section 6 Lesson 6 Exercise 1: Retrieving Data Using SELECT

Write and Execute SELECT statements (S6L6 Objective 2)


In this exercise you will retrieve data that is stored in the database system by using a SELECT statement.

Part 1: Retrieving all columns from a table.

Using the SELECT * statement show all data stored in the following tables:

1. customers

Ans :

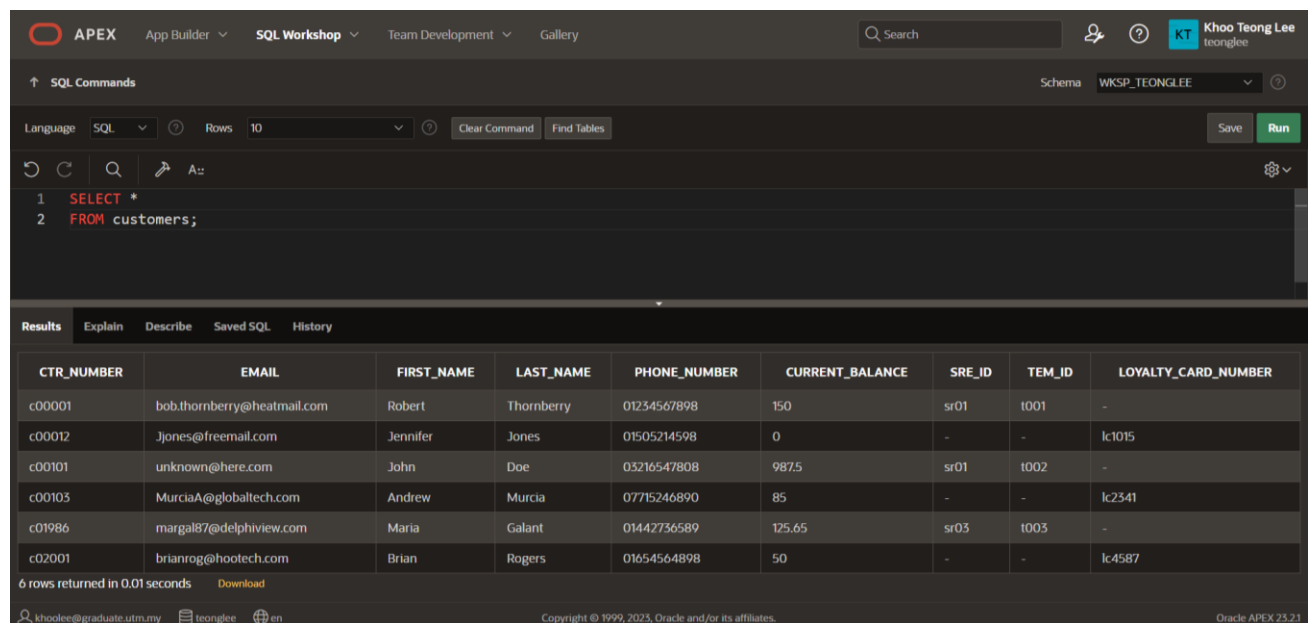

The screenshot shows the Oracle APEX SQL Workshop interface. The SQL Commands pane contains the following query:

```
1 SELECT *
2 FROM customers;
```


The Results pane displays the following data:

CTR_NUMBER	EMAIL	FIRST_NAME	LAST_NAME	PHONE_NUMBER	CURRENT_BALANCE	SRE_ID	TEM_ID	LOYALTY_CARD_NUMBER
c00001	bob.thornberry@heatmail.com	Robert	Thornberry	01234567898	150	sr01	t001	-
c00012	Jjones@freemail.com	Jennifer	Jones	01505214598	0	-	-	lc1015
c00101	unknown@here.com	John	Doe	03216547808	987.5	sr01	t002	-
c00103	MurciaA@globaltech.com	Andrew	Murcia	07715246890	85	-	-	lc2341
c01986	margal87@delphiview.com	Maria	Galant	01442736589	125.65	sr03	t003	-
c02001	brianrog@hoootech.com	Brian	Rogers	01654564898	50	-	-	lc4587

6 rows returned in 0.01 seconds

2. teams

Ans :

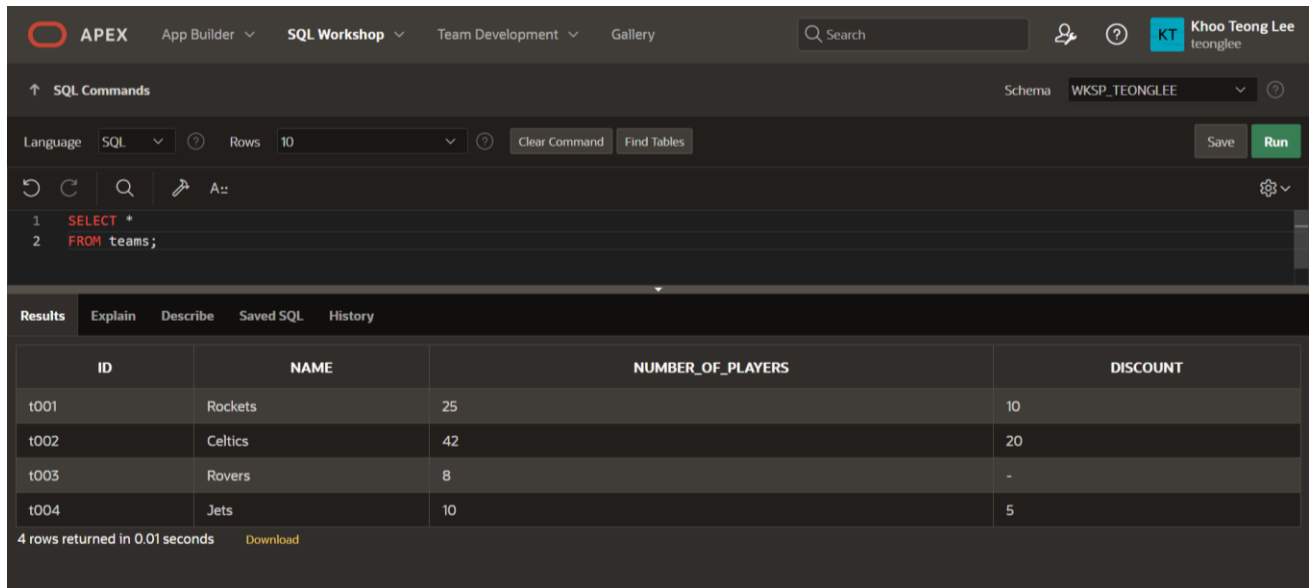


The screenshot shows the APEX SQL Workshop interface. The top navigation bar includes 'APEX', 'App Builder', 'SQL Workshop', 'Team Development', and 'Gallery'. A search bar and user profile 'Khoon Teong Lee' are on the right. The 'SQL Commands' section shows a query: `SELECT * FROM teams;`. The 'Results' tab displays a table with 4 rows and 4 columns: ID, NAME, NUMBER_OF_PLAYERS, and DISCOUNT.

ID	NAME	NUMBER_OF_PLAYERS	DISCOUNT
t001	Rockets	25	10
t002	Celtics	42	20
t003	Rovers	8	-
t004	Jets	10	5

4 rows returned in 0.01 seconds [Download](#)

3. items

Ans :

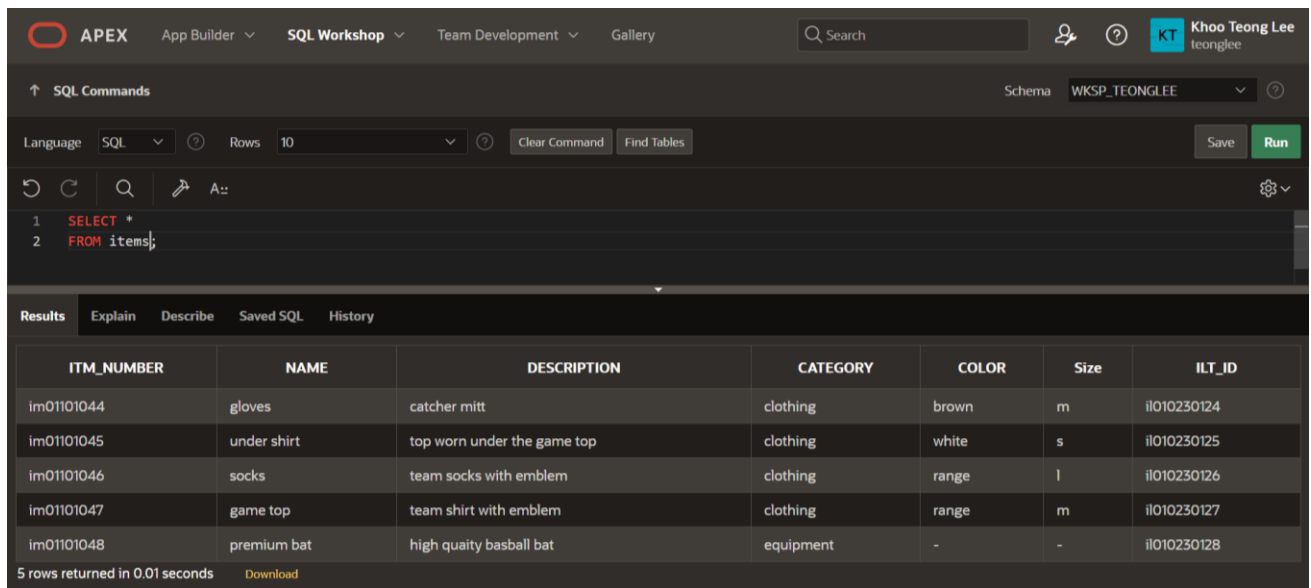

The screenshot shows the APEX SQL Workshop interface. The top navigation bar includes 'APEX', 'App Builder', 'SQL Workshop', 'Team Development', and 'Gallery'. A search bar and user profile 'Khoon Teong Lee' are on the right. The 'SQL Commands' section shows a query: `SELECT * FROM items;`. The 'Results' tab displays a table with 5 rows and 7 columns: ITM_NUMBER, NAME, DESCRIPTION, CATEGORY, COLOR, Size, and ILT_ID.


ITM_NUMBER	NAME	DESCRIPTION	CATEGORY	COLOR	Size	ILT_ID
im01101044	gloves	catcher mitt	clothing	brown	m	il010230124
im01101045	under shirt	top worn under the game top	clothing	white	s	il010230125
im01101046	socks	team socks with emblem	clothing	range	l	il010230126
im01101047	game top	team shirt with emblem	clothing	range	m	il010230127
im01101048	premium bat	high quality baseball bat	equipment	-	-	il010230128

5 rows returned in 0.01 seconds [Download](#)

Part 2: Selecting Specific Columns

1. Display the customer number, first name, last name, email and phone number of the customers.

Ans :

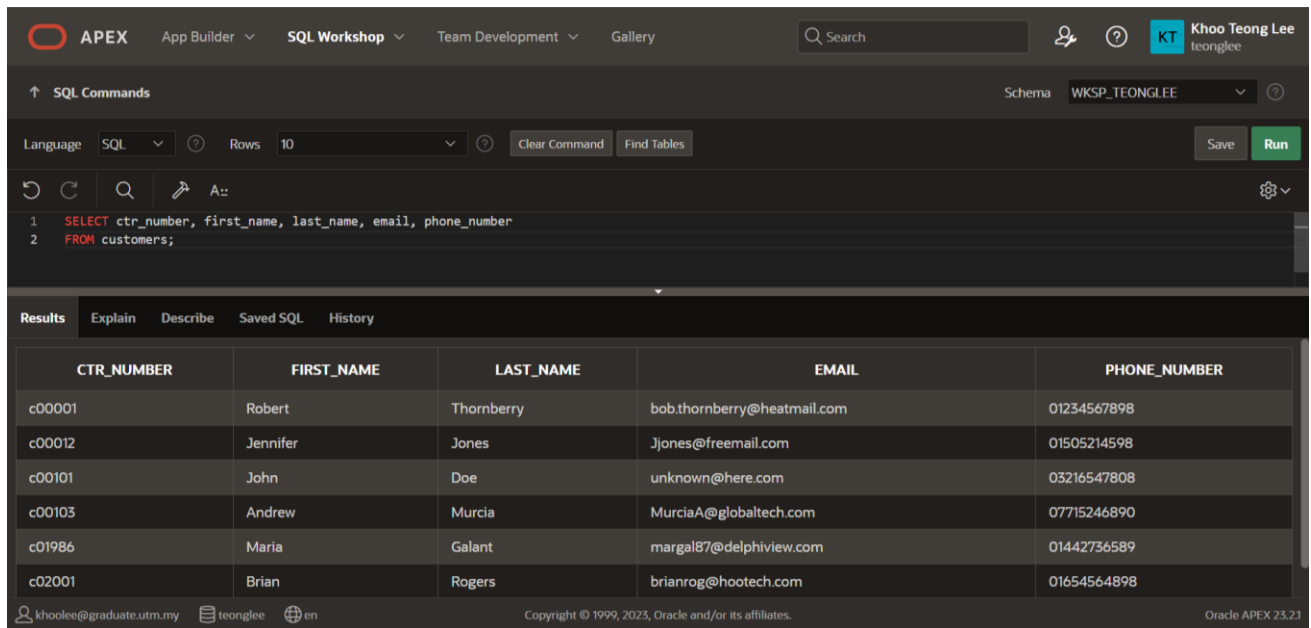

The screenshot shows the APEX SQL Workshop interface. The SQL command entered is:


```
1 SELECT ctr_number, first_name, last_name, email, phone_number
2 FROM customers;
```

The results are displayed in a table with the following columns: CTR_NUMBER, FIRST_NAME, LAST_NAME, EMAIL, and PHONE_NUMBER. The data is as follows:

CTR_NUMBER	FIRST_NAME	LAST_NAME	EMAIL	PHONE_NUMBER
c00001	Robert	Thornberry	bob.thornberry@heatmail.com	01234567898
c00012	Jennifer	Jones	Jjones@freemail.com	01505214598
c00101	John	Doe	unknown@here.com	03216547808
c00103	Andrew	Murcia	MurciaA@globaltech.com	07715246890
c01986	Maria	Galant	margal87@delphiview.com	01442736589
c02001	Brian	Rogers	brianrog@hootech.com	01654564898

2. Display the name and number of players for each team.

Ans :

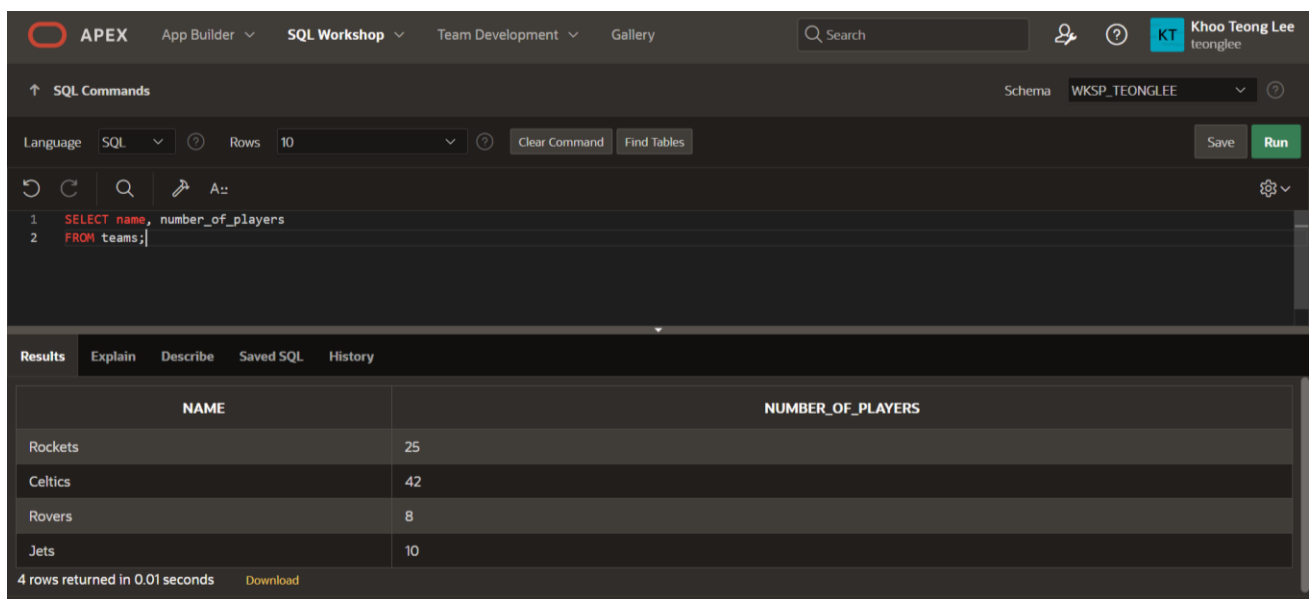

The screenshot shows the APEX SQL Workshop interface. The SQL command entered is:

```
1 SELECT name, number_of_players
2 FROM teams;
```

The results are displayed in a table with the following columns: NAME and NUMBER_OF_PLAYERS. The data is as follows:

NAME	NUMBER_OF_PLAYERS
Rockets	25
Celtics	42
Rovers	8
Jets	10

4 rows returned in 0.01 seconds

Ans :

SQL3-DML2 PART 2

Write and Execute SELECT statements (S6L6 Objective 2)

Part 1: Using Arithmetic Operators

Ans :

[illegible]

Ans :

3. What would be the problem with implementing this scheme?

Part 2 : Using Column Aliases

Ans :

[illegible]

Part 3: Using Literal Character Strings

1. Write a query that will display the team information in the following format:

The Rockets team has 25 players and receives a discount of 10 percent.

Use **Team Information** as the column alias.

Ans :

```
SELECT  
    'The ' || name || ' team has ' || number_of_players || ' players and receives a discount of ' || discount || ' percent.' AS "Team Information"  
FROM teams;
```

Results	Explain	Describe	Saved SQL	History
Team Information				
The Rockets team has 25 players and receives a discount of 10 percent.				
The Celtics team has 42 players and receives a discount of 20 percent.				
The Rovers team has 8 players and receives a discount of percent.				
The Jets team has 10 players and receives a discount of 5 percent.				
4 rows returned in 0.01 seconds Download				

2. Why does the last team not show a discount?

Ans : The Rovers team does not show a discount because the discount column for the Rovers team in the teams table has a NULL value. In SQL, a NULL value represents the absence of a value or an undefined value.

SQL3-DML2 PART 3

Section 6 Lesson 7 Exercise 1: Restricting Data Using WHERE

Limit rows using WHERE (S6L7 Objective 1)

In this exercise you will refine the data that is returned in your query by adding a WHERE clause to your SELECT statement.

Part 1: Using the WHERE Clause.

1. Using the unique customer number in the where clause display all columns for Maria Galant.

Ans :

The screenshot shows the APEX SQL Workshop interface. The SQL command area contains the following query:

```
1 SELECT *
2 FROM customers
3 WHERE ctr_number = 'c01986';
4
```

The Results tab is selected, displaying a table with the following data:

CTR_NUMBER	EMAIL	FIRST_NAME	LAST_NAME	PHONE_NUMBER	CURRENT_BALANCE	SRE_ID	TEM_ID	LOYALTY_CARD_NUMBER
c01986	margal87@delphiview.com	Maria	Galant	01442736589	125.65	sr03	t003	-

1 rows returned in 0.01 seconds

2. Display the first name, last name and customer number for all customers who have a current balance of greater than 100. Use an appropriate alias for your column headings.

Ans :

The screenshot shows the APEX SQL Workshop interface. The SQL command area contains the following query:

```
1 SELECT first_name,last_name,ctr_number
2 FROM customers
3 WHERE current_balance > 100;
4
```

The Results tab is selected, displaying a table with the following data:

FIRST_NAME	LAST_NAME	CTR_NUMBER
Robert	Thornberry	c00001
John	Doe	c00101
Maria	Galant	c01986

3 rows returned in 0.01 seconds

3. Display the order id, date and time of all orders that were placed before the 28th of May 2019. Use an appropriate alias for your column headings.

Ans :

The screenshot shows the APEX SQL Workshop interface. The SQL command area contains the following query:

```
1 SELECT id,odr_date,odr_time
2 FROM orders
3 WHERE odr_date < TO_DATE('28-May-2019', 'DD-Mon-YYYY');
4
```

The Results tab is active, displaying a table with 5 rows. The columns are ID, ODR_DATE, and ODR_TIME.

ID	ODR_DATE	ODR_TIME
or0101250	04/17/2017	04/17/2017
or0101350	05/24/2017	05/24/2017
or0101425	05/28/2017	05/28/2017
or0101681	06/02/2017	06/02/2017
or0101750	06/18/2017	06/18/2017

5 rows returned in 0.01 seconds

Part 2: Range Conditions: BETWEEN Operator

1. Display the inventory id, cost and number of units using appropriate aliases for all items that have a trade cost of between 3.00 and 15.00.

Ans :

The screenshot shows the APEX SQL Workshop interface. The SQL command area contains the following query:

```
1 SELECT id, cost, units
2 FROM inventory_list
3 WHERE cost BETWEEN 3.00 AND 15.00;
4
```

The Results tab is active, displaying a table with 2 rows. The columns are ID, COST, and UNITS.

ID	COST	UNITS
il010230125	7.99	250
il010230126	5.24	87

2 rows returned in 0.03 seconds

Part 3: Membership Conditions: IN Operator

1. Display the inventory id, cost and number of units using appropriate aliases for all items that have 50, 100, 150 or 200 units in stock.

Ans :

The screenshot shows the APEX SQL Workshop interface. The SQL command area contains the following query:

```
1 SELECT
2     id AS "Inventory ID",
3     cost AS "Trade Cost",
4     units AS "Number of Units"
5 FROM inventory_list
6 WHERE units IN (50, 100, 150, 200);
```

The Results tab shows the following data:

Inventory ID	Trade Cost	Number of Units
il010230124	2.5	100

1 rows returned in 0.01 seconds

Part 4: Membership Conditions: NOT IN Operator

1. Display the inventory id, cost and number of units using appropriate aliases for all items that do not have 50, 100, 150 or 200 units in stock.

Ans :

The screenshot shows the APEX SQL Workshop interface. The SQL command area contains the following query:

```
1 SELECT
2     id AS "Inventory ID",
3     cost AS "Trade Cost",
4     units AS "Number of Units"
5 FROM inventory_list
6 WHERE units NOT IN (50, 100, 150, 200);
```

The Results tab shows the following data:


Inventory ID	Trade Cost	Number of Units
il010230125	7.99	250
il010230126	5.24	87
il010230127	18.95	65
il010230128	97.46	8

4 rows returned in 0.01 seconds

Part 5: Pattern Matching: LIKE Operator

1. Display item number and name of all items that have a name that begins with g. Use an appropriate alias for your column headings.

Ans :

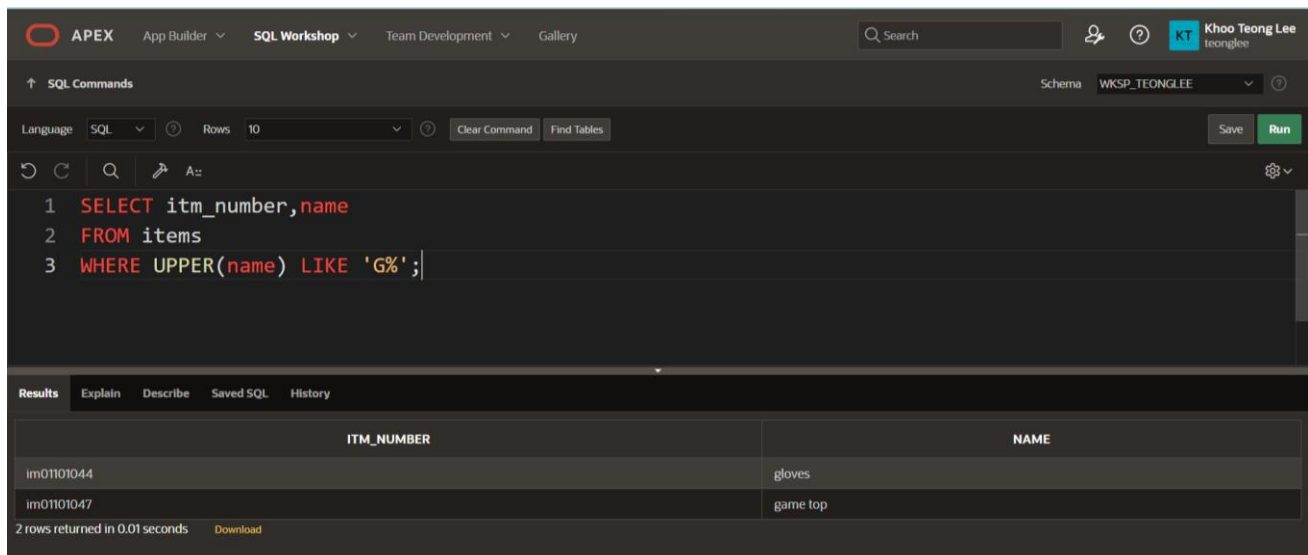

The screenshot shows the APEX SQL Workshop interface. The SQL command area contains the following query:

```
1 SELECT itm_number,name
2 FROM items
3 WHERE UPPER(name) LIKE 'G%';
```

The Results tab is selected, displaying a table with two columns: ITM_NUMBER and NAME. The table contains two rows of data.


ITM_NUMBER	NAME
im01101044	gloves
im01101047	game top

2 rows returned in 0.01 seconds

Part 6 : Pattern Matching: Combining Wildcard Characters with the LIKE Operator

1. Display item number and name of all items that have a name that contain a lowercase o. Use an appropriate alias for your column headings.

Ans :

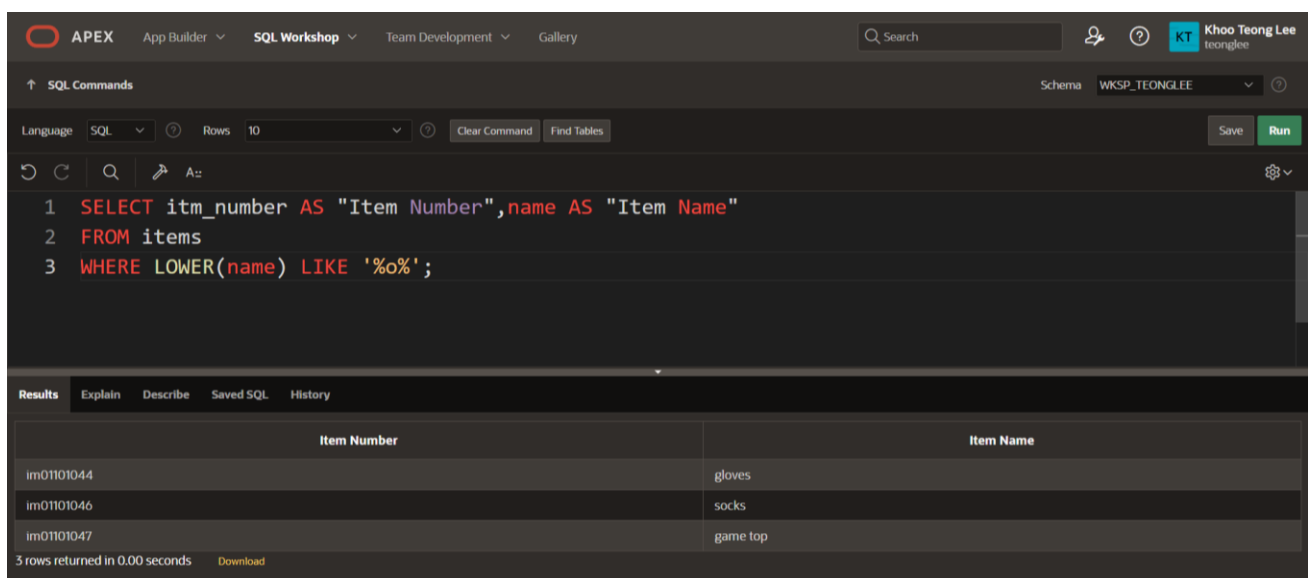

The screenshot shows the APEX SQL Workshop interface. The SQL command area contains the following query:

```
1 SELECT itm_number AS "Item Number",name AS "Item Name"
2 FROM items
3 WHERE LOWER(name) LIKE '%o%';
```

The Results tab is selected, displaying a table with two columns: Item Number and Item Name. The table contains three rows of data.

Item Number	Item Name
im01101044	gloves
im01101046	socks
im01101047	game top

3 rows returned in 0.00 seconds

SQL3-DML2 PART 4

Section 6 Lesson 7 Exercise 2: Restricting Data Using WHERE

Limit rows using WHERE (S6L7 Objective 1)

In this exercise you will refine the data that is returned in your query by adding a WHERE clause to your SELECT statement.


Part 1: Using the NULL Conditions

1. Write a query that will display information for teams that don't receive a discount in the following format:

The Rovers team has 25 players and does not receive a discount.

Use Team Information as the column alias.

Ans :

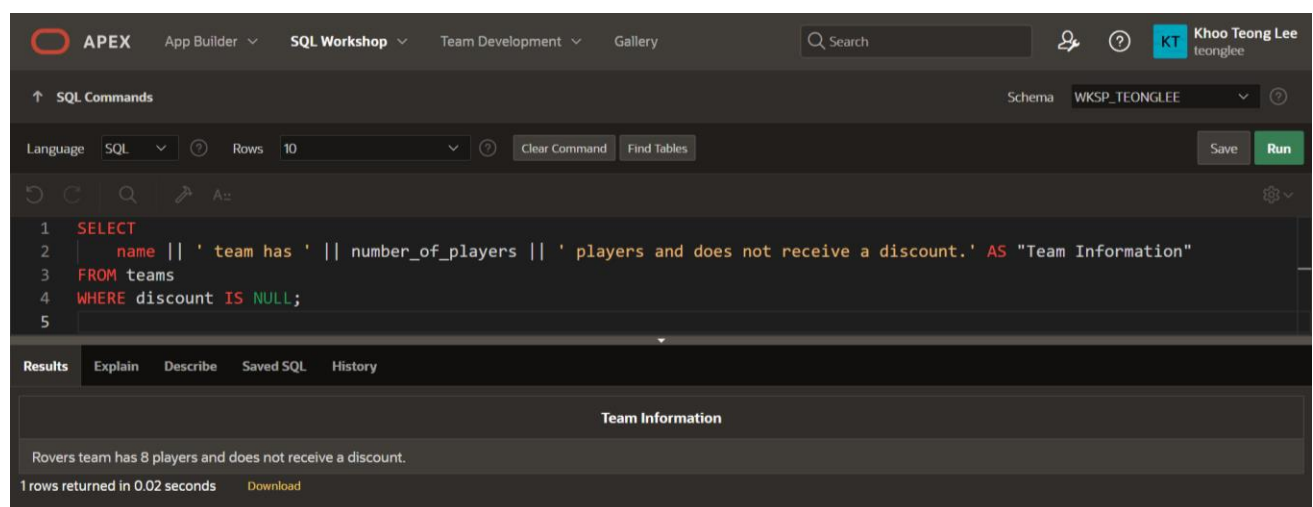

The screenshot shows the APEX SQL Workshop interface. The top navigation bar includes 'APEX', 'App Builder', 'SQL Workshop', 'Team Development', and 'Gallery'. A search bar and user profile 'Khoi Teong Lee' are also visible. The 'SQL Commands' section shows a query with the following lines:

```
1 SELECT
2   name || ' team has ' || number_of_players || ' players and does not receive a discount.' AS "Team Information"
3 FROM teams
4 WHERE discount IS NULL;
5
```

The 'Results' section shows a single row of data:

Team Information
Rovers team has 8 players and does not receive a discount.

At the bottom, it indicates '1 rows returned in 0.02 seconds' and provides a 'Download' link.

2. Write a query that will display information for only teams that receive a discount in the following format:

The Rockets team has 25 players and receives a discount of 10 percent.

Use Team Information as the column alias.

Ans :

The screenshot shows the APEX SQL Workshop interface. The SQL command is as follows:

```
1 SELECT
2     name || ' team has ' || number_of_players || ' players and receives a discount of ' || discount || ' percent.' AS "Team Information"
3 FROM teams
4 WHERE discount IS NOT NULL;
```

The results are displayed in a table with the column alias "Team Information".

Team Information
Rockets team has 25 players and receives a discount of 10 percent.
Celtics team has 42 players and receives a discount of 20 percent.
Jets team has 10 players and receives a discount of 5 percent.

3 rows returned in 0.01 seconds

Part 2: Logical Operators: AND

1. Write a query that will display the customer number, address line 1 and postal code for customers that live in the starford area of Liverpool. Use Customer Number, Street Address and Postal Code as the column aliases.

Ans :

The screenshot shows the APEX SQL Workshop interface. The SQL command is as follows:

```
1 SELECT
2     ctr_number AS "Customer Number",
3     address_line_1 AS "Street Address",
4     zip_code AS "Postal Code"
5 FROM customers_addresses
6 WHERE address_line_2 = 'Starford' AND city = 'Liverpool';
```

The results are displayed in a table with columns "Customer Number", "Street Address", and "Postal Code".

Customer Number	Street Address	Postal Code
c00001	17 Gartsquare Road	LP89JHK

1 rows returned in 0.03 seconds

Part 3: Logical Operators: OR

1. Write a query that will display the customer number, address line 1 and postal code for customers that live in either starford or Liverpool in general. Use Customer Number, Street Address and Postal Code as the column aliases.

Ans :

The screenshot shows the APEX SQL Workshop interface. The SQL command area contains the following query:

```
1 SELECT
2     ctr_number AS "Customer Number",
3     address_line_1 AS "Street Address",
4     zip_code AS "Postal Code"
5 FROM customers_addresses
6 WHERE address_line_2 = 'Starford' OR city = 'Liverpool';
7
```

The Results tab shows the following data:

Customer Number	Street Address	Postal Code
c00001	17 Gartsquare Road	LP89JHK
c00001	63 Acacia Drive	LP85JHR

2 rows returned in 0.01 seconds

Part 4: Logical Operators: NOT Equal To

1. Write a query that will display the customer number, address line 1 and postal code for customers that do not live in Liverpool. Use Customer Number, Street Address and Postal Code as the column aliases.

Ans :

The screenshot shows the APEX SQL Workshop interface. The SQL command area contains the following query:

```
1 SELECT
2     ctr_number AS "Customer Number",
3     address_line_1 AS "Street Address",
4     zip_code AS "Postal Code"
5 FROM customers_addresses
6 WHERE city != 'Liverpool';
```

The Results tab shows the following data:

Customer Number	Street Address	Postal Code
c00101	54 Ropehill Crescent	ST45AGV
c01986	36 Watercress Lane	JP23YTH

2 rows returned in 0.01 seconds

SQL3-DML2 PART 5


Section 6 Lesson 8 Exercise 1: Sorting Data Using ORDER BY

Use the ORDER BY Clause to Sort SQL Results (S6L8 Objective 1)

In this exercise you will sort the order of the data that is returned in your query by adding an **ORDER BY** clause to the end of your SELECT statement.

1. Display the team name and number of players alphabetically in order of team name. Use an appropriate alias for your column headings.

Ans :

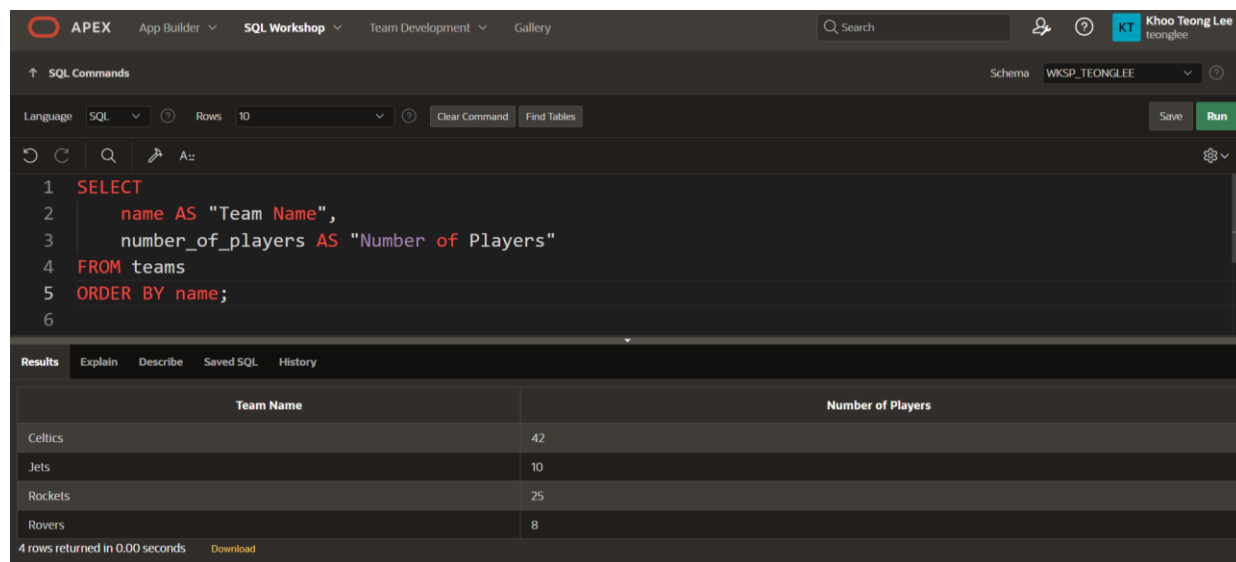

The screenshot shows the APEX SQL Workshop interface. The SQL command area contains the following query:

```
1 SELECT
2     name AS "Team Name",
3     number_of_players AS "Number of Players"
4 FROM teams
5 ORDER BY name;
```


The Results tab is selected, displaying a table with the following data:

Team Name	Number of Players
Celtics	42
Jets	10
Rockets	25
Rovers	8

4 rows returned in 0.00 seconds

2. Display the team name and number of players in descending order of number of players. Use an appropriate alias for your column headings.

Ans :

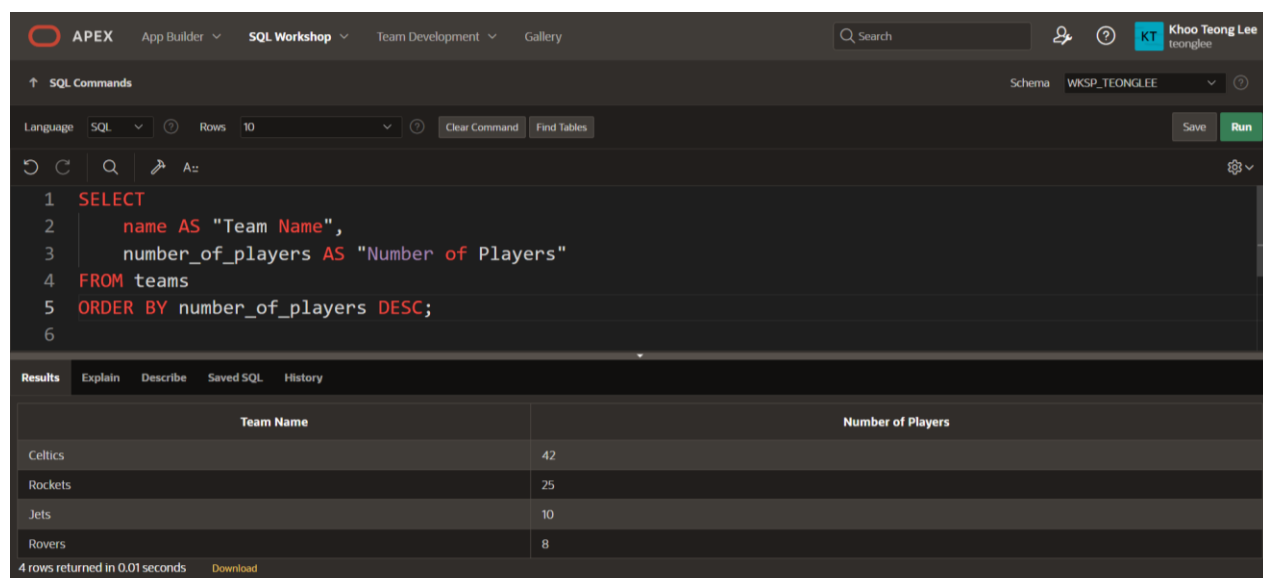

The screenshot shows the APEX SQL Workshop interface. The SQL command area contains the following query:

```
1 SELECT
2     name AS "Team Name",
3     number_of_players AS "Number of Players"
4 FROM teams
5 ORDER BY number_of_players DESC;
```


The Results tab is selected, displaying a table with the following data:

Team Name	Number of Players
Celtics	42
Rockets	25
Jets	10
Rovers	8

4 rows returned in 0.01 seconds

3. Display the team name and number of players alphabetically in order of team name. Use Team Name for the name alias and Players for the number of players. Sort the output in descending order of name using the alias in the ORDER BY clause.

Ans :

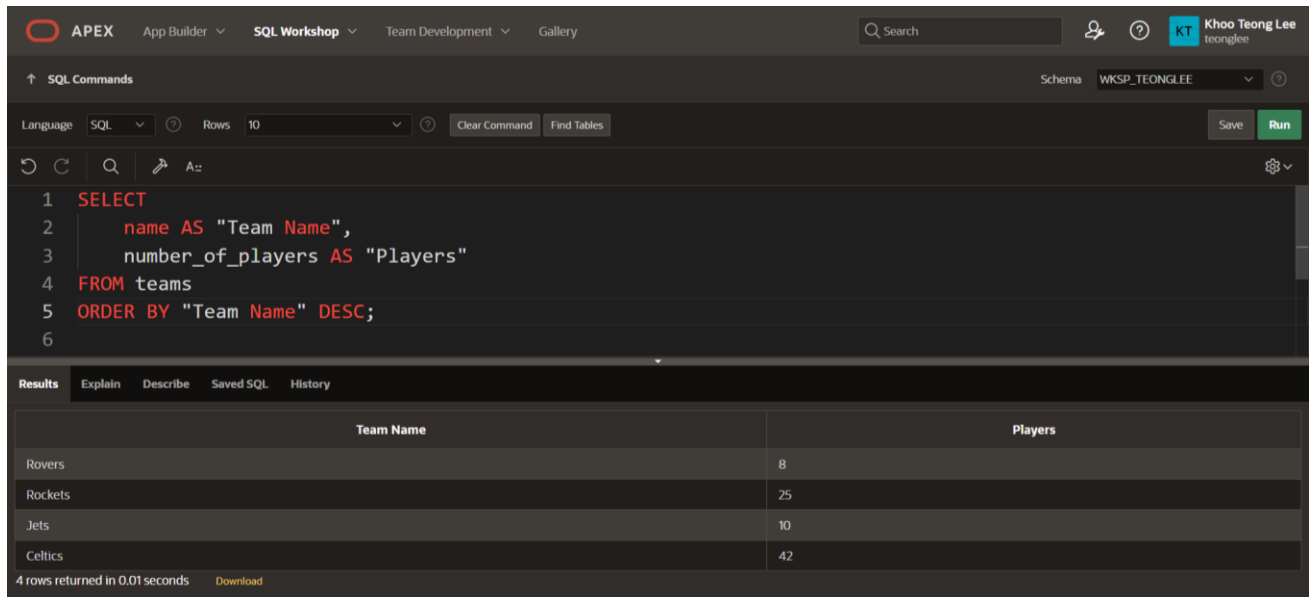

The screenshot shows the APEX SQL Workshop interface. The top navigation bar includes 'APEX', 'App Builder', 'SQL Workshop', 'Team Development', and 'Gallery'. A search bar and user profile 'Khoo Teong Lee' are on the right. The 'SQL Commands' tab is active, showing a query editor with the following SQL code:

```
1 SELECT
2     name AS "Team Name",
3     number_of_players AS "Players"
4 FROM teams
5 ORDER BY "Team Name" DESC;
6
```

Below the editor, the 'Results' tab is selected, displaying a table with 4 rows. The table has two columns: 'Team Name' and 'Players'. The data is sorted in descending order of 'Team Name'.

Team Name	Players
Rovers	8
Rockets	25
Jets	10
Celtics	42

At the bottom, it states '4 rows returned in 0.01 seconds' with a 'Download' link.


SQL3-DML2 PART 6

Section 6 Lesson 8 Exercise 2: Sorting Data Using ORDER BY

Part 1 : TOP-N-ANALYSIS (S6L8 Objective 3)

1. The customers are numbered sequentially with each new customer being assigned a higher customer number. Use TOP-N-ANALYSIS to only show the First and last name of the first three customers. Show the customers first and last name in the same column using Customer Name as the column alias.

Ans :

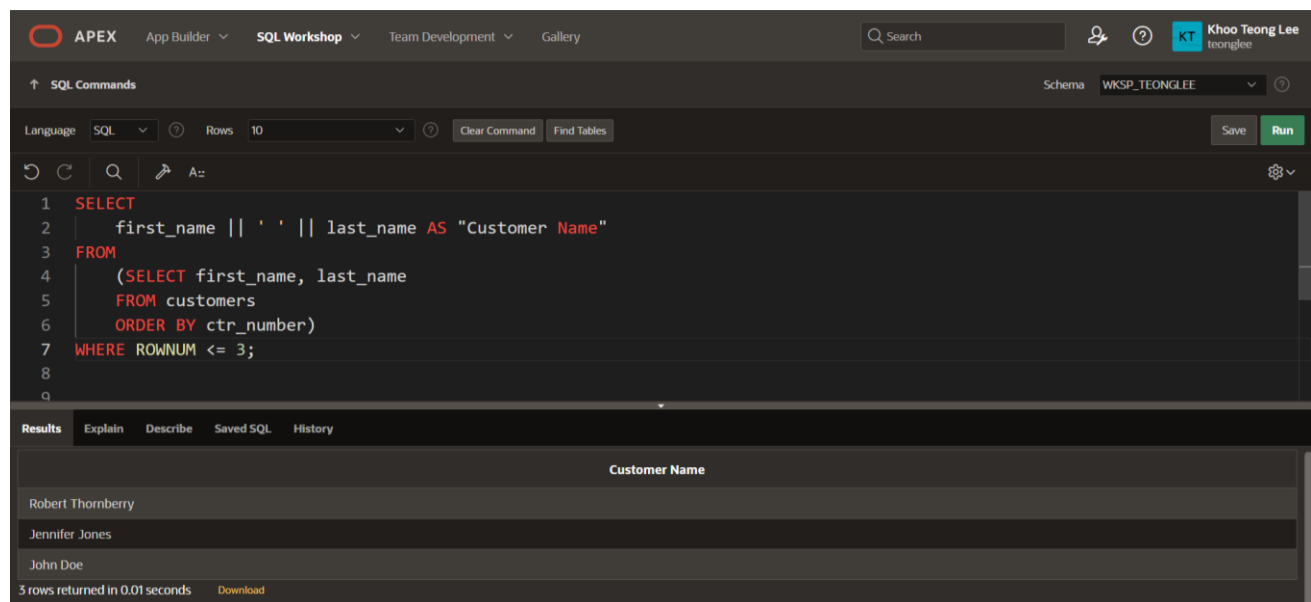

The screenshot shows the APEX SQL Workshop interface. The SQL Commands pane contains the following query:

```
1 SELECT
2     first_name || ' ' || last_name AS "Customer Name"
3 FROM
4     (SELECT first_name, last_name
5      FROM customers
6      ORDER BY ctr_number)
7 WHERE ROWNUM <= 3;
```

The Results pane shows the output of the query:

Customer Name
Robert Thornberry
Jennifer Jones
John Doe

3 rows returned in 0.01 seconds


Part 2 : Using a Substitution Variable (S6L8 Objective 4)

1. Use a substitution variable that will allow you to enter the commission rate for the sales representatives. The first and last names should be displayed to screen for any sales representatives that earn that commission rate and the output should be ordered by their last name. Use an appropriate alias for your column headings.

a) Code :

```
1 SELECT
2     first_name AS "First Name",
3     last_name AS "Last Name",
4     commission_rate AS "Commission Rate"
5 FROM sales_representatives
6 WHERE commission_rate = :CommissionRate
7 ORDER BY last_name;
```


b) Input:

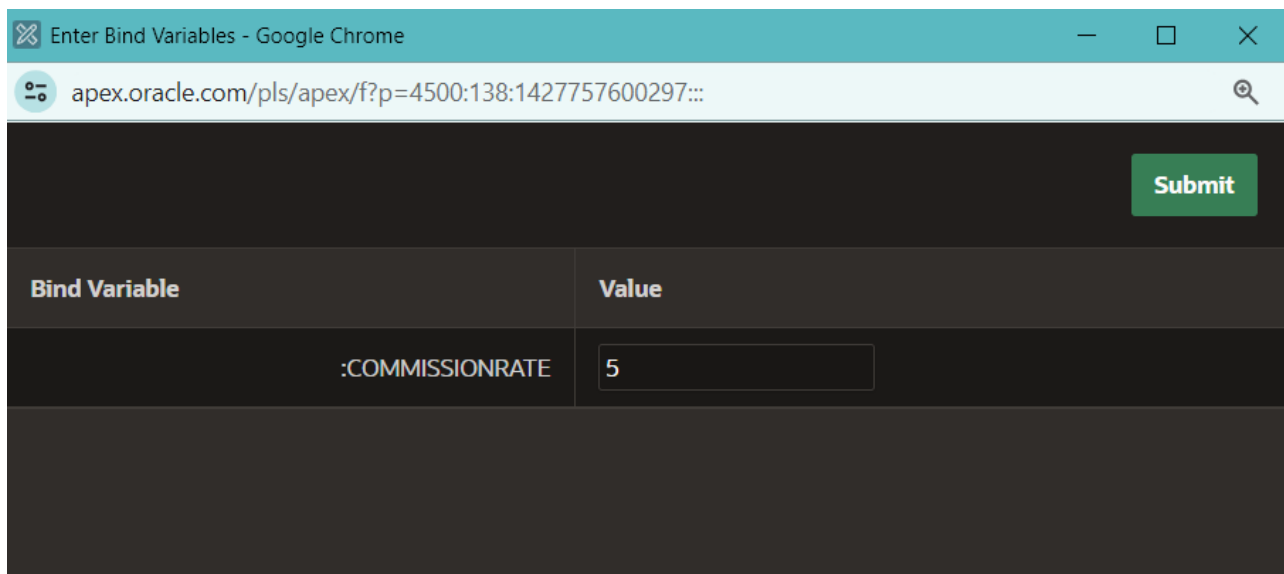

Bind Variable	Value
:COMMISSIONRATE	5

c) Result :

Results	Explain	Describe	Saved SQL	History
First Name	Last Name	Commission Rate		
Barry	Speed	5		
Victoria	Wright	5		
2 rows returned in 0.01 seconds		Download		