



UTM
UNIVERSITI TEKNOLOGI MALAYSIA

SECD 2523 DATABASE

LAB 2 : DML 1

NAME : TAHNUSSRI A/P MORTHY
MATRIC NUMBER : B23CS0071
SECTION : 08
LECTURER NAME : DR NOOR HIDAYAH ZAKARIA

Database Design Project

Oracle Baseball League Store Database

Project Scenario:

You are a small consulting company specializing in database development. You have just been awarded the contract to develop a data model for a database application system for a small retail store called Oracle Baseball League (OBL).

The Oracle Baseball League store serves the entire surrounding community selling baseball kit. The OBL has two types of customer, there are individuals who purchase items like balls, cleats, gloves, shirts, screen printed t-shirts, and shorts. Additionally customers can represent a team when they purchase uniforms and equipment on behalf of the team.

Teams and individual customers are free to purchase any item from the inventory list, but teams get a discount on the list price depending on the number of players. When a customer places an order we record the order items for that order in our database.

OBL has a team of three sales representatives that officially only call on teams but have been known to handle individual customer complaints.

Section 6 Lesson 4 Exercise 1: Data Manipulation Language

Use DML operations to manage database tables (S6L4 Objective 2)

In this exercise you will populate and work with the data that is stored in the database system tables.

Part 1 : Running a script to populate the tables.

You have to consider the order of the tables when populating them. A table that has a foreign key field cannot be populated before the related table with the primary key.

1. Use the table mapping document and list the order that you would use to populate the tables.
 - inventory_list
 - items
 - price_history
 - sales_representatives
 - sales_rep_addresses
 - teams
 - customers
 - customers_addresses
 - orders
 - ordered_items
2. Open the “sports data.sql” and look at the order the data is being added there, does your list match? This file can be found in the Section 6 Lesson 4 interaction (sports data.zip) and must first be extracted.

Yes, it does match

3. Run the “sports data.sql” script in APEX to populate your tables
4. Check that no errors occurred when you ran the script.

Part 2- Inserting rows to the system

1. Add a new team to the system

id	name	Number_of_players	discount
t004	Jets	10	5

```
1  INSERT INTO teams (id, name, number_of_players, discount)
2  VALUES ('t004', 'Jets', 10, 5);
3
```

2. Add a new Customer with the following details to the system

ctr number	email	First name	Last name	Phone number	Current balance	Loyalty card number	tem id	sre id
c02001	brianrog@hootech.com	Brian	Rogers	01654564898	-5	lc4587		

```
1 INSERT INTO customers (ctr_number, email, first_name, last_name, phone_number, current_balance, sre_id, tem_id, loyalty_card_number)
2 VALUES('c02001', 'brianrog@hootech.com', 'Brian', 'Rogers', '01654564898', -5, '', '', 'lc4587');
```

3. This information violates the check constraint that the current balance must not be less than zero. Change the current balance to 50 and rerun the query.

```
1 INSERT INTO customers (ctr_number, email, first_name, last_name, phone_number, current_balance, sre_id, tem_id, loyalty_card_number)
2 VALUES('c02001', 'brianrog@hootech.com', 'Brian', 'Rogers', '01654564898', 50, '', '', 'lc4587');
```

Database Design Project

Oracle Baseball League Store Database

Project Scenario:

You are a small consulting company specializing in database development. You have just been awarded the contract to develop a data model for a database application system for a small retail store called Oracle Baseball League (OBL).

The Oracle Baseball League store serves the entire surrounding community selling baseball kit. The OBL has two types of customer, there are individuals who purchase items like balls, cleats, gloves, shirts, screen printed t-shirts, and shorts. Additionally customers can represent a team when they purchase uniforms and equipment on behalf of the team.

Teams and individual customers are free to purchase any item from the inventory list, but teams get a discount on the list price depending on the number of players. When a customer places an order we record the order items for that order in our database.

OBL has a team of three sales representatives that officially only call on teams but have been known to handle individual customer complaints.

Section 6 Lesson 4 Exercise 2: Data Manipulation Language


Use DML operations to manage database tables (S6L4 Objective 2)

In this exercise you will populate and work with the data that is stored in the database system.

Part 1- Updating rows to the system

1. Run the following query to view the content of the price_history table:

```
SELECT start_date, TO_CHAR (start_time, 'HH24:MI:SS'), price, end_date, TO_CHAR  
(end_time, 'HH24:MI:SS')  
FROM price_history;
```

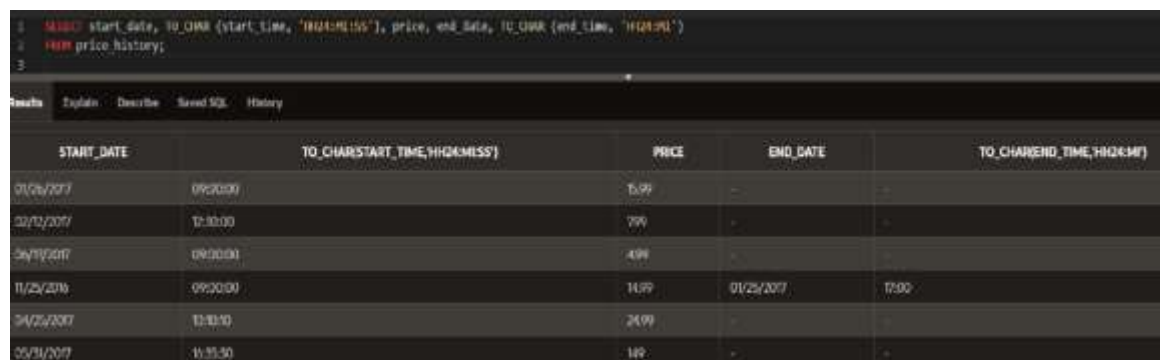


The screenshot shows a SQL query window with the following SQL code:

```
1 SELECT start_date, TO_CHAR (start_time, 'HH24:MI:SS'), price, end_date, TO_CHAR  
2 FROM price_history;  
3
```

Below the code, the results are displayed in a table with the following columns: START_DATE, TO_CHAR(START_TIME, HH24:MI:SS), PRICE, END_DATE, and TO_CHAR(END_TIME, HH24:MI:SS). The data rows are as follows:

START_DATE	TO_CHAR(START_TIME, HH24:MI:SS)	PRICE	END_DATE	TO_CHAR(END_TIME, HH24:MI:SS)
01/06/2017	09:00:00	5.99	-	-
02/07/2017	12:00:00	7.99	-	-
06/10/2017	09:00:00	4.99	-	-
11/25/2016	09:00:00	14.99	01/25/2017	17:00
04/25/2017	13:00:30	24.99	-	-
05/19/2017	16:00:30	14.99	-	-

2. Obl is going to update the price of the premium bat so you will need to write a query that will close off the current price by adding the system date values to the end_date and end_time fields. To run this query you will need to both match the item number and identify that the end date is null. This ensures that you are updating the latest price.

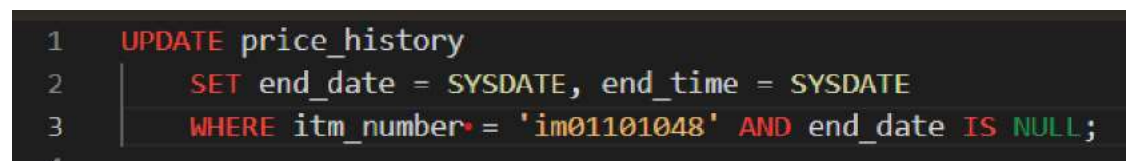

The screenshot shows a SQL query window with the following SQL code:

```
1 UPDATE price_history  
2 SET end_date = SYSDATE, end_time = SYSDATE  
3 WHERE itm_number = 'im01101048' AND end_date IS NULL;  
4
```

3. Rerun the select statement on the price_history table to ensure that the statement has been executed.



The screenshot shows a SQL query window with the following SQL code:

```
1 SELECT start_date, TO_CHAR (start_time, 'HH24:MI:SS'), price, end_date, TO_CHAR  
2 FROM price_history;  
3
```

Below the code, the results are displayed in a table with the following columns: START_DATE, TO_CHAR(START_TIME, HH24:MI:SS), PRICE, END_DATE, and TO_CHAR(END_TIME, HH24:MI:SS). The data rows are as follows:

START_DATE	TO_CHAR(START_TIME, HH24:MI:SS)	PRICE	END_DATE	TO_CHAR(END_TIME, HH24:MI:SS)
01/06/2017	09:00:00	5.99	-	-
02/07/2017	12:00:00	7.99	-	-
06/10/2017	09:00:00	4.99	-	-
11/25/2016	09:00:00	14.99	01/25/2017	17:00
04/25/2017	13:00:30	24.99	-	-
05/19/2017	16:00:30	14.99	12/16/2023	12:48

- Insert a new row that will use the current date and time to set the new price of the premium bat to be 99.99.

```
1 INSERT INTO price_history (start_date, start_time, price, itm_number)
2 VALUES (SYSDATE, SYSDATE, 99.99, 'im01101048');
```

- Rerun the select statement on the price_history table to ensure that the statement has been executed.

```
1 SELECT start_date, TO_CHAR(start_time, 'HH24:MM:SS'), price, end_date, TO_CHAR(end_time, 'HH24:MM:SS')
2 FROM price_history;
```

START_DATE	TO_CHAR(START_TIME, 'HH24:MM:SS')	PRICE	END_DATE	TO_CHAR(END_TIME, 'HH24:MM:SS')
12/16/2018	12:49:48	99.99	-	-
06/26/2017	09:00:00	11.99	-	-
02/14/2017	11:30:00	79%	-	-
09/12/2017	09:00:00	4.99	-	-
11/25/2016	09:00:00	14.99	01/25/2017	11:00
04/25/2017	10:15:10	24.99	-	-
05/23/2017	16:35:50	140	07/14/2017	12:48

Part 2: Deleting rows from the system

- Bob Thornberry has contacted Obl to ask that the 83 Barrhill Drive address be removed from the system as he can no longer receive parcels at this address. Write a SQL statement that will remove this address from the system.

```
1 DELETE FROM customers_addresses
2 WHERE address_line_1 = '83 Barhill Drive';
```

- Run a select statement on the customers_addresses table to ensure that the statement has been executed.

```
1 SELECT * FROM customers_addresses;
```

ID	ADDRESS_LINE_1	ADDRESS_LINE_2	CITY	ZIP_CODE	CTR_NUMBER
ca0103	17 Cartwright Road	Starford	Liverpool	LP83JH	100001
ca0104	54 Roperhill Crescent	Georgetown	Star	ST45AD	100001
ca0104	56 Walmetree Lane	-	Jump	JP23YTH	100001
ca0105	65 Acacia Drive	Star	Liverpool	LP83JH	100001