



UTM
UNIVERSITI TEKNOLOGI MALAYSIA

Lab 3 - DML 2
SECD2523 - DATABASE

SEMESTER I, SESSION 2023/2024

Lecturer: Dr. Noor Hidayah Zakaria
Section 08

Name	Matric No.
NIPUHAWANJ LAI ZE MIN	A22EC0233

SQL3-DML2 PART 1

Part 1: Retrieving all columns from a table.

Using the SELECT * statement show all data stored in the following tables:

1. customers

```
1 SELECT * FROM customers
```

CTR_NUMBER	EMAIL	FIRST_NAME	LAST_NAME	PHONE_NUMBER	CURRENT_BALANCE	SRE_ID	TEM_ID	LOYALTY_CARD_NUMBER
c00001	bob.thornberry@heatmail.com	Robert	Thornberry	01234567898	150	sr01	t001	-
c00012	JJones@freemail.com	Jennifer	Jones	01505214598	0	-	-	lc1015
c00101	unknown@here.com	John	Doe	03216547808	987.5	sr01	t002	-
c00103	MurciaA@globaltech.com	Andrew	Murcia	07715246890	85	-	-	lc2341
c01986	margali87@delphiview.com	Maria	Galant	01442736589	125.65	sr03	t003	-
c02001	brianrog@hotech.com	Brian	Rogers	01654564898	50	-	-	lc4587

6 rows returned in 0.04 seconds [Download](#)

2. teams

```
1 SELECT * FROM TEAMS
```

ID	NAME	NUMBER_OF_PLAYERS	DISCOUNT
t001	Rockets	25	10
t002	Celtics	42	20
t003	Rovers	8	-
t004	Jets	10	5

4 rows returned in 0.03 seconds [Download](#)

3. items

```
1 SELECT * FROM ITEMS
```

ITM_NUMBER	NAME	DESCRIPTION	CATEGORY	COLOR	Size	ILT_ID
im01101044	gloves	catcher mitt	clothing	brown	m	il010230124
im01101045	under shirt	top worn under the game top	clothing	white	s	il010230125
im01101046	socks	team socks with emblem	clothing	range	l	il010230126
im01101047	game top	team shirt with emblem	clothing	range	m	il010230127
im01101048	premium bat	high quaity baseball bat	equipment	-	-	il010230128

5 rows returned in 0.03 seconds [Download](#)

Part 2: Selecting Specific Columns

1. Display the customer number, first name, last name, email and phone number of the customers.

```
1 SELECT ctr_number, first_name, last_name, email, phone_number FROM customers
```

CTR_NUMBER	FIRST_NAME	LAST_NAME	EMAIL	PHONE_NUMBER
c00001	Robert	Thornberry	bob.thornberry@heatmail.com	01234567898
c00012	Jennifer	Jones	Jjones@freemail.com	01505214598
c00101	John	Doe	unknown@here.com	03216547808
c00103	Andrew	Murcia	MurciaA@globaltech.com	07715246890
c01986	Maria	Galant	margal87@delphiview.com	01442736589
c02001	Brian	Rogers	brianrog@hootech.com	01654564898

6 rows returned in 0.00 seconds [Download](#)

2. Display the name and number of players for each team.

```
1 SELECT name, number_of_players FROM teams
2
```

NAME	NUMBER_OF_PLAYERS
Rockets	25
Celtics	42
Rovers	8
Jets	10

4 rows returned in 0.03 seconds [Download](#)

3. Display the name, description and category for every item in the table

```
1 SELECT name, description, category FROM items
2
```

NAME	DESCRIPTION	CATEGORY
gloves	catcher mitt	clothing
under shirt	top worn under the game top	clothing
socks	team socks with emblem	clothing
game top	team shirt with emblem	clothing
premium bat	high quaity baseball bat	equipment

5 rows returned in 0.00 seconds [Download](#)

SQL3-DML2 PART 2

Part 1: Using Arithmetic Operators

1. Every customer has been told they can pay off their current balance over a 12 month period. Display the customer's first name, last name, current balance and monthly payment.

[illegible]

2. Obl is considering giving a gift card to all its customers of 5.00 that can be used to reduce their current balance. Write a query that will show the customers first name, last name, customer number, current balance and the value of their balance minus the gift value.

```
1 SELECT first_name, last_name, ctr_number, current_balance, current_balance-5 FROM customers;
```

Results Explain Describe Saved SQL History

FIRST_NAME	LAST_NAME	CTR_NUMBER	CURRENT_BALANCE	CURRENT_BALANCE-5
Robert	Thornberry	c00001	150	145
Jennifer	Jones	c00012	0	-5
John	Doe	c00101	987.5	982.5
Andrew	Murcia	c00103	85	80
Maria	Galant	c01986	125.65	120.65
Brian	Rogers	c02001	50	45

6 rows returned in 0.01 seconds [Download](#)

3. What would be the problem with implementing this scheme?

The current balance cant go under zero.

Part 2: Using Column Aliases

1. You previously wrote a query that display the customer's first name, last name, current balance and monthly payment. Rewrite the query to use First Name, Last Name, Balance and Monthly Repayments as the column aliases. The aliases are to be shown exactly as described (case sensitive).

```
1 SELECT first_name "First Name", last_name "Last Name", current_balance "Balance", current_balance/12 "Monthly Repayments"
2 FROM customers;
3
```

FIRST_NAME	LAST_NAME	CTR_NUMBER	CURRENT_BALANCE	CURRENT_BALANCE-5
Robert	Thornberry	c00001	150	145
Jennifer	Jones	c00012	0	-5
John	Doe	c00101	987.5	982.5
Andrew	Murcia	c00103	85	80
Maria	Galant	c01986	125.65	120.65
Brian	Rogers	c02001	50	45

6 rows returned in 0.01 seconds [Download](#)

Part 3: Using Literal Character Strings

1. Write a query that will display the team information in the following format:

The Rockets team has 25 players and receives a discount of 10 percent. Use **Team Information** as the column alias.

```
1 SELECT 'The '||name||' team has '||number_of_players||' players and receives a discount of '||discount||' percent.' AS "Team Information"
2 FROM teams
3
```

Team Information
The Rockets team has 25 players and receives a discount of 10 percent.
The Celtics team has 42 players and receives a discount of 20 percent.
The Rovers team has 8 players and receives a discount of percent.
The Jets team has 10 players and receives a discount of 5 percent.

4 rows returned in 0.01 seconds [Download](#)


2. Why does the last team not show a discount?

Rovers team does not show a discount because it contains a null value which is not the same as zero or a blank space.

SQL3-DML2 PART 3

Part 1: Using the WHERE Clause.

1. Using the unique customer number in the where clause display all columns for Maria Galant.

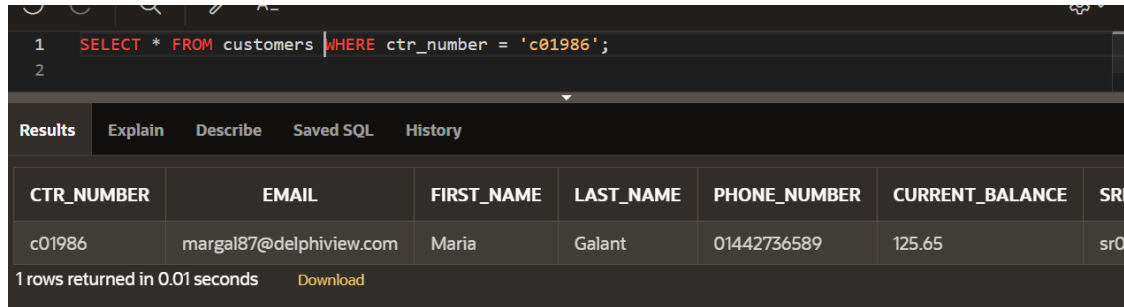


The screenshot shows a SQL query in a dark-themed editor: `1 SELECT * FROM customers WHERE ctr_number = 'c01986';`. Below the query, the 'Results' tab is active, displaying a table with 7 columns: CTR_NUMBER, EMAIL, FIRST_NAME, LAST_NAME, PHONE_NUMBER, CURRENT_BALANCE, and SRE. The first row contains the data for Maria Galant. At the bottom, it states '1 rows returned in 0.01 seconds' and has a 'Download' link.

CTR_NUMBER	EMAIL	FIRST_NAME	LAST_NAME	PHONE_NUMBER	CURRENT_BALANCE	SRE
c01986	margal87@delphiview.com	Maria	Galant	01442736589	125.65	sr03

1 rows returned in 0.01 seconds [Download](#)

2. Display the first name, last name and customer number for all customers who have a current balance of greater than 100. Use an appropriate alias for your column headings

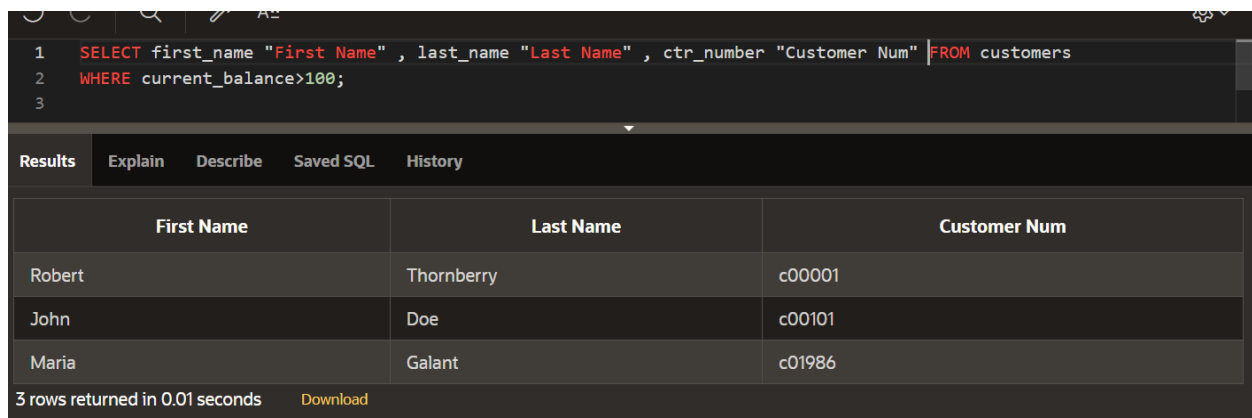


The screenshot shows a SQL query: `1 SELECT first_name "First Name" , last_name "Last Name" , ctr_number "Customer Num" FROM customers`
`2 WHERE current_balance>100;`
`3`. The 'Results' tab shows a table with 3 columns: First Name, Last Name, and Customer Num. Three rows are displayed. At the bottom, it states '3 rows returned in 0.01 seconds' and has a 'Download' link.

First Name	Last Name	Customer Num
Robert	Thornberry	c00001
John	Doe	c00101
Maria	Galant	c01986

3 rows returned in 0.01 seconds [Download](#)

3. Display the order id, date and time of all orders that were placed before the 28th of May 2019. Use an appropriate alias for your column headings.

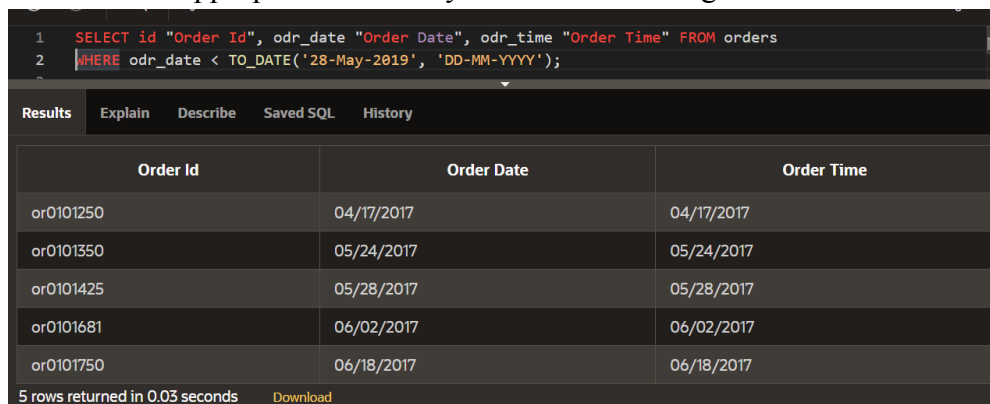

The screenshot shows a SQL query: `1 SELECT id "Order Id", odr_date "Order Date", odr_time "Order Time" FROM orders`
`2 WHERE odr_date < TO_DATE('28-May-2019', 'DD-MM-YYYY');`. The 'Results' tab shows a table with 3 columns: Order Id, Order Date, and Order Time. Five rows are displayed. At the bottom, it states '5 rows returned in 0.03 seconds' and has a 'Download' link.

Order Id	Order Date	Order Time
or0101250	04/17/2017	04/17/2017
or0101350	05/24/2017	05/24/2017
or0101425	05/28/2017	05/28/2017
or0101681	06/02/2017	06/02/2017
or0101750	06/18/2017	06/18/2017

5 rows returned in 0.03 seconds [Download](#)

Part 2: Range Conditions: BETWEEN Operator

1. Display the inventory id, cost and number of units using appropriate aliases for all items that have a trade cost of between 3.00 and 15.00.

```
1 SELECT id "Inventory Id", cost "Cost", units "Number of Units" FROM inventory_list
2 WHERE cost BETWEEN 3 AND 15;
```

Inventory Id	Cost	Number of Units
il010230125	7.99	250
il010230126	5.24	87

2 rows returned in 0.02 seconds [Download](#)

Part 3: Membership Conditions: IN Operator

1. Display the inventory id, cost and number of units using appropriate aliases for all items that have 50, 100, 150 or 200 units in stock.

```
1 SELECT id "Inventory Id", cost "Cost", units "Number of Units" FROM inventory_list
2 WHERE units IN (50, 100, 150, 200);
```

Inventory Id	Cost	Number of Units
il010230124	2.5	100

1 rows returned in 0.01 seconds [Download](#)

Part 4: Membership Conditions: NOT IN Operator

1. Display the inventory id, cost and number of units using appropriate aliases for all items that do not have 50, 100, 150 or 200 units in stock.

1SELECT id "Inventory Id", cost "Cost", units "Number of Units" FROM inventory_list

2WHERE units NOT IN (50, 100, 150, 200);

Results

ExplainDescribeSaved SQLHistory

Inventory Id	Cost	Number of Units
il010230125	7.99	250
il010230126	5.24	87
il010230127	18.95	65
il010230128	97.46	8

Part 5: Pattern Matching: LIKE Operator

1. Display item number and name of all items that have a name that begins with g. Use an appropriate alias for your column headings.

1	SELECT itm_number "Item Number", name "Item Name" FROM items
2	WHERE name LIKE 'g%';
3	
Results Explain Describe Saved SQL History	
Item Number	Item Name
im01101044	gloves
im01101047	game top

2 rows returned in 0.03 seconds [Download](#)

SQL3-DML2 PART 4

Part 1: Using the NULL Conditions

1. Write a query that will display information for teams that don't receive a discount in the following format:

The Rovers team has 25 players and does not receive a discount.

Use **Team Information** as the column alias.

```
1 SELECT 'The '||name||' team has '||number_of_players||' players and does not receive a discount.'
2 AS "Team Information" FROM teams WHERE discount IS NULL;
3
```

Team Information
The Rovers team has 8 players and does not receive a discount.

1 rows returned in 0.00 seconds [Download](#)

2. Write a query that will display information for only teams that receive a discount in the following format:

The Rockets team has 25 players and receives a discount of 10 percent. Use

Team Information as the column alias.

```
1 SELECT 'The '||name||' team has '||number_of_players||' players and receives a discount of '||discount||' percent.'
2 AS "Team Information" FROM teams WHERE discount IS NOT NULL;
3
```

Team Information
The Rockets team has 25 players and receives a discount of 10 percent.
The Celtics team has 42 players and receives a discount of 20 percent.
The Jets team has 10 players and receives a discount of 5 percent.

3 rows returned in 0.01 seconds [Download](#)

Part 2: Logical Operators: AND

1. Write a query that will display the customer number, address line 1 and postal code for customers that live in the starford area of Liverpool. Use Customer Number, Street Address and Postal Code as the column aliases.

```
1 SELECT ctr_number "Customer Number", Address_line_1 "Street Address", zip_code "Postal Code"
2 FROM customers_addresses WHERE city = 'Liverpool' AND address_line_2 = 'Starford';
3
```

Customer Number	Street Address	Postal Code
c00001	17 Gartsquare Road	LP89JHK

1 rows returned in 0.04 seconds [Download](#)

Part 3: Logical Operators: OR

1. Write a query that will display the customer number, address line 1 and postal code for customers that live in either starford or Liverpool in general. Use Customer Number, Street Address and Postal Code as the column aliases.

```
1 SELECT ctr_number "Customer Number", Address_line_1 "Street Address", zip_code "Postal Code"
2 FROM customers_addresses WHERE city = 'Liverpool' OR address_line_2 = 'Starford';
3
```

Customer Number	Street Address	Postal Code
c00001	17 Gartsquare Road	LP89JHK
c00001	63 Acacia Drive	LP83JHR

2 rows returned in 0.01 seconds [Download](#)

Part 4: Logical Operators: NOT Equal To

1. Write a query that will display the customer number, address line 1 and postal code for customers that do not live in Liverpool. Use Customer Number, Street Address and Postal Code as the column aliases.

```
1 SELECT ctr_number "Customer Number", Address_line_1 "Street Address", zip_code "Postal Code"
2 FROM customers_addresses WHERE city NOT IN ( 'Liverpool' );
3
```

Customer Number	Street Address	Postal Code
c00101	54 Ropehill Crescent	ST45AGV
c01986	36 Watercress Lane	JP23YTH

2 rows returned in 0.02 seconds [Download](#)

SQL3-DML2 PART 5

Section 6 Lesson 8 Exercise 1: Sorting Data Using ORDER BY

Use the ORDER BY Clause to Sort SQL Results (S6L8 Objective 1)

In this exercise you will sort the order of the data that is returned in your query by adding an ORDER BY clause to the end of your SELECT statement.

1. Display the team name and number of players alphabetically in order of team name. Use an appropriate alias for your column headings.

```
1 SELECT name "Team Name", number_of_players "Number of Players" FROM teams ORDER BY name;
```

Team Name	Number of Players
Celtics	42
Jets	10
Rockets	25
Rovers	8

4 rows returned in 0.01 seconds [Download](#)

2. Display the team name and number of players in descending order of number of players. Use an appropriate alias for your column headings.

```
1 SELECT name "Team Name", number_of_players "Players Num" FROM teams
2 ORDER BY number_of_players DESC;
```

Team Name	Players Num
Celtics	42
Rockets	25
Jets	10
Rovers	8

4 rows returned in 0.00 seconds [Download](#)

3. Display the team name and number of players alphabetically in order of team name. Use Team Name for the name alias and Players for the number of players. Sort the output in descending order of name using the alias in the ORDER BY clause.

```
1 SELECT name "Team Name", number_of_players "Players Num" FROM teams ORDER BY "Team Name" DESC;
```

Team Name	Players Num
Rovers	8
Rockets	25
Jets	10
Celtics	42

4 rows returned in 0.01 seconds [Download](#)

SQL3-DML2 PART 6

Part 1 : TOP-N-ANALYSIS (S6L8 Objective 3)

1. The customers are numbered sequentially with each new customer being assigned a higher customer number.

Use TOP-N-ANALYSIS to only show the First and last name of the first three customers. Show the customers first and last name in the same column using Customer Name as the column alias.

```
1 SELECT ROWNUM AS "Order for Customers No", first_name||' '||last_name "Customers Name"
2 FROM customers WHERE ROWNUM<=3 ORDER BY ctr_number;
3
```

Order for Customers No	Customers Name
1	Robert Thornberry
2	Jennifer Jones
3	John Doe

3 rows returned in 0.01 seconds [Download](#)

Part 2 : Using a Substitution Variable (SL8 Objective 4)

1. Use a substitution variable that will allow you to enter the commission rate for the sales representatives. The first and last names should be displayed to screen for any sales representatives that earn that commission rate and the output should be ordered by their last name. Use an appropriate alias for your column headings.

Bind Variable	Value
:COMMISSION_RATE	10

```
1 SELECT first_name||' '||last_name "Name of Sales Representative" FROM sales_representatives
2 WHERE commission_rate = :commission_rate ORDER BY last_name;
3
```

Name of Sales Representative
Charles Raymond

1 rows returned in 0.01 seconds [Download](#)