EXPERIMENT – 03

AIM:

To write a basic Servlet program that demonstrates the use of Java Servlets by printing "Hello, World!" when accessed through a browser.

ALGORITHM:

1. Input:

The user makes an HTTP request (usually by entering a URL) through a browser.

2. Servlet Program Flow:

1. Create a Servlet Class:

o Define a Java class that extends the HttpServlet class.

o Override the doGet() method, which handles HTTP GET requests from the client (browser).

2. Handle HTTP Request:

o In the doGet() method:

Get the PrintWriter object to write the response to the browser.

Set the response content type to text/html.

Write the "Hello, World!"; message to the response

3. Compile the Servlet Class

o Compile the Java Servlet file using the javac command to generate a .class file.

4. Deploy the Servlet:

o Place the compiled servlet class file in the appropriate directory of the web application (typically in the /WEB-INF/classes folder).

o Configure the servlet in the web.xml file of the web application or use annotations.

5. Access the Servlet via Browser:

o Start the Apache Tomcat or another servlet container.

o Access the servlet by entering the appropriate URL (e.g., http://localhost:8080/your-webapp/hello).

PROGRAM:

Servlet file:

```
import java.io.*; import javax.servlet.*; import javax.servlet.http.*; public class
HostelWelcomeServlet extends HttpServlet { protected void doGet(HttpServletRequest request,
```

```
HttpServletResponse response) throws ServletException, IOException {
response.setContentType("text/html"); PrintWriter pw = response.getWriter();
pw.println("<html><body>"); pw.println("<h1>Welcome to Hostel Management System</h1>");
pw.println("<p>Manage rooms, students, and facilities with ease.</p>");
pw.println("</body></html>"); } }
```

OUTPUT:

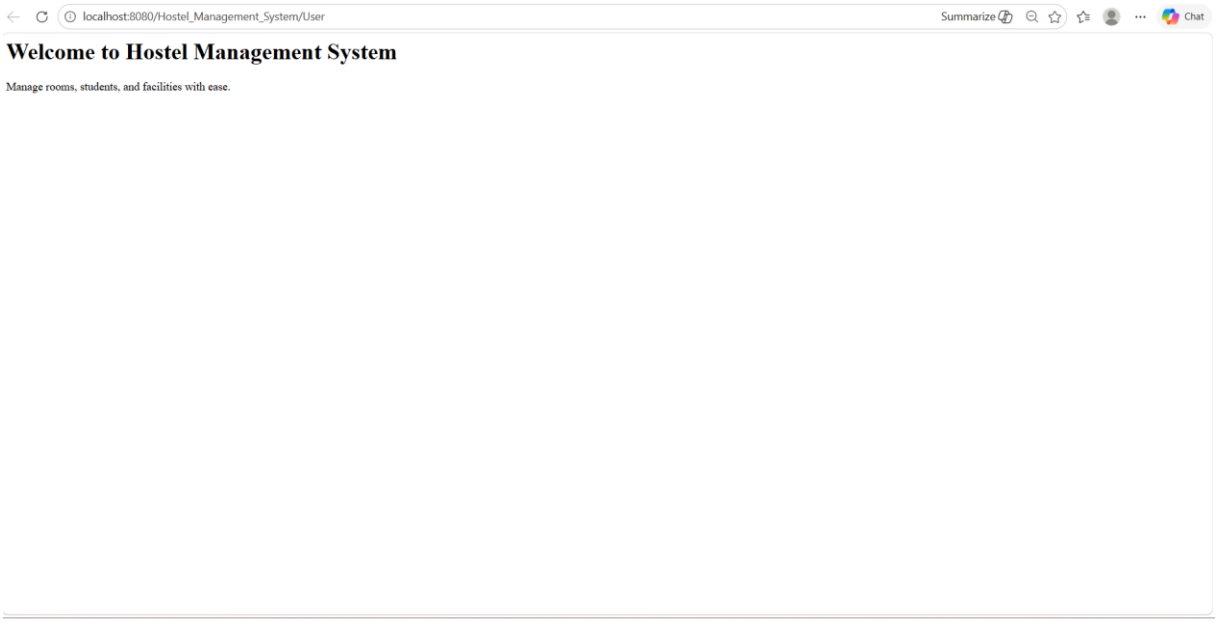

Result: A Servlet is created to process the HTML form data and display it back on the browser.