

Lab: Building a Basic Chatbot Using ChatGPT



Estimated Time: 90 minutes

In this lab, you will get familiar with the process of developing a basic chatbot capable of responding to software development-related questions. We'll be utilizing OpenAI's API along with Node.js using the Express.js framework to build this interactive chatbot. Let's get started!

Learning Objectives:

After completing this exercise, you should be able to perform the following tasks:

- Build a basic chatbot using the free Skills Network-provided OpenAI APIs.
- Converse with the chatbot to ask any questions related to software development and receive the appropriate response.

Please note Generative AI is an evolving field. As you attempt the labs, your experience and output might be different than what is seen here.

Pre-requisites

Understanding the basics of Node.js and Express.js

- Node and Express are two technologies that are commonly used to create web applications.
- Node is a runtime environment that allows you to run JavaScript code on the server side, without a browser.
- Express is a framework that provides a set of features and tools to simplify the development of web applications with Node.


Some of the benefits of using Node and Express are:

- They are fast and scalable, as they use an event-driven, non-blocking I/O model that can handle many concurrent requests.
- They are flexible and modular, as they allow you to use various libraries and middleware to customize your application according to your needs.
- They are easy to learn and use, as they are based on JavaScript, which is a popular and widely used programming language.

Task 1: Set Up Your Project

- Here, we are setting up a Node.js project using the Express.js framework.
- Node.js is a JavaScript runtime that allows you to run JavaScript on the server, while Express.js is a web application framework for Node.js.
- Follow the below instructions and refer to the screenshots for creating a Node.js Project.

Step 1: Open a terminal, click on "Terminal", and then select the "New Terminal" option.

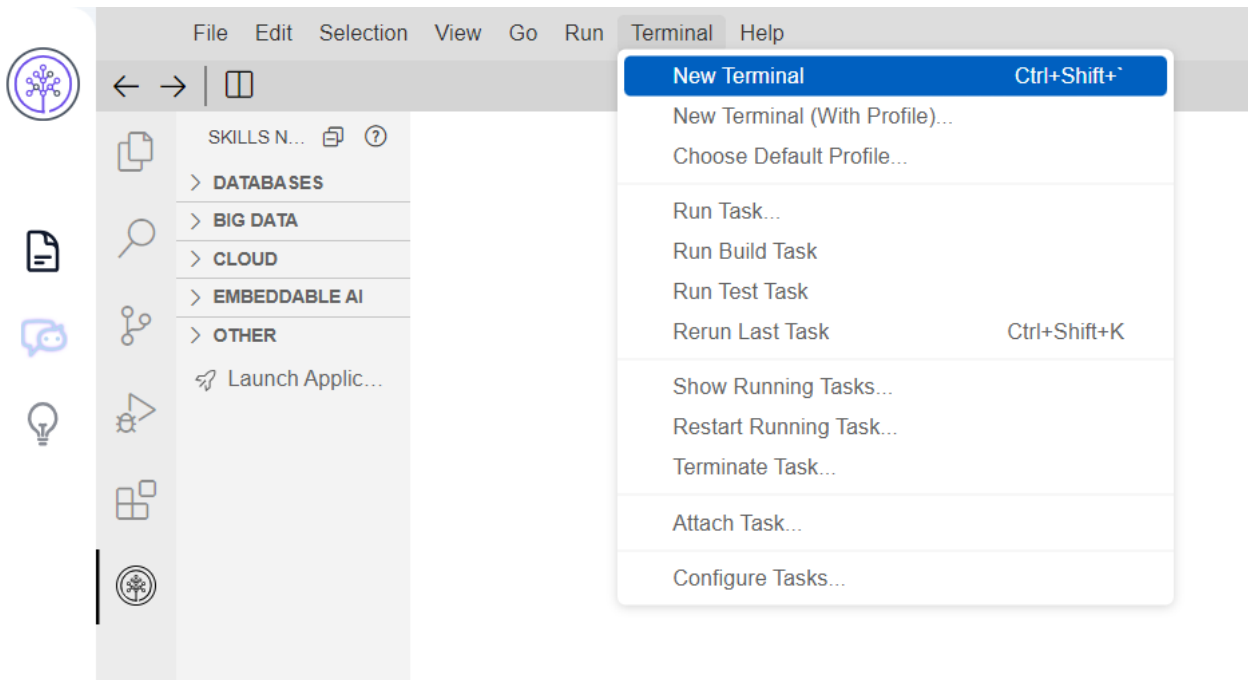

Step 2: Create a new directory for your project named `software-dev-chatbot`, navigate to the directory, and initialize a Node.js project using the commands below.

```
mkdir software-dev-chatbot
cd software-dev-chatbot
npm init -y
```

The screenshot shows the Visual Studio Code (VS Code) interface. The Explorer sidebar on the left displays the file structure of a project named 'software-dev-chatbot', with 'package.json' selected. The main editor area shows the content of 'package.json' with the following JSON structure:

```
{
  "name": "software-dev-chatbot",
  "version": "1.0.0",
  "description": "",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "keywords": [],
  "author": "",
  "license": "ISC"
}
```

Below the editor, a terminal window shows the command prompt for 'theia@theiaopenshift-ritikaj' in the directory '/home/project/software-dev-chatbot'. The terminal output shows the successful execution of 'npm init -y' and the resulting 'package.json' file:

```
theia@theiaopenshift-ritikaj: /home/project/software-dev-chatbot$ npm init -y
Wrote to /home/project/software-dev-chatbot/package.json:

{
  "name": "software-dev-chatbot",
  "version": "1.0.0",
  "description": "",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "keywords": [],
  "author": "",
  "license": "ISC"
}
```

The terminal prompt is currently at 'theia@theiaopenshift-ritikaj: /home/project/software-dev-chatbot\$'.

Step 3: Install express and openai dependencies by executing the following command.

```
npm install express openai
```

```
theia@theiaopenshift-ritikaj:/home/project/software-dev-chatbot$ npm install express openai
added 89 packages, and audited 90 packages in 3s

12 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities

npm notice
npm notice New major version of npm available! 9.6.3 -> 10.2.5
npm notice Changelog: https://github.com/npm/cli/releases/tag/v10.2.5
npm notice Run npm install -g npm@10.2.5 to update!
npm notice
theia@theiaopenshift-ritikaj:/home/project/software-dev-chatbot$
```


Step 4: Create a new directory named `public` inside a project directory using the below command.

```
mkdir public
```

To download the project directory, right-click on the directory and choose the “Download” option, as shown in the screenshot below. This will download a zipped folder.



- Create an `index.html` file within the `public` directory, right-click on the `public` folder, and select the "New File" option, as shown in the screenshot below. This file will function as the user interface for your chatbot.



- Here are the steps to set a chatbot logo of your choice:

- Page 5 of 21

- The styling is applied through an external CSS file (style.css)
- The implementation of chatbot logic is done through an external JavaScript file named main.js
- You can type a message, and click the send button, to interact with the chatbot.

Insert the provided code into the newly created HTML file.

index.html:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link rel="stylesheet" href="style.css">
  <title>Software Dev Chatbot</title>
</head>
<body>
  <div class="main-container">
    <div class="chat-container">
      <div class="header">
        
        <h2 class="name">Chat Window</h2>
      </div>
      <div class="chat-log" id="chat-log"></div>
      <div class="input-container">
        <input type="text" id="user-input" placeholder="Ask me anything...">
        <button onclick="sendMessage()">Send</button>
      </div>
    </div>
  </div>
  <script src="main.js"></script>
</body>
</html>
```

- Create a style.css file in the public directory and insert the following code into the CSS file.

style.css:

```
.chat-container {
  max-width: 600px;
  margin: 20px auto;
  border-radius: 10px;
  box-shadow: 0 0 10px rgba(0, 0, 0, 0.1);
  overflow: hidden;
  display: flex;
  flex-direction: column;
  justify-content: space-between;
  height: 80vh;
  position: relative;
  background: linear-gradient(to bottom, #1e5799, #2989d8);
}
.logo {
  width: auto;
  height: 50px;
  margin-left: 10px;
  margin-top: 10px;
  margin-bottom: 10px;
  border-radius: 50px;
}
.name {
  font-size: 20px;
  font-weight: bold;
  margin: 10px;
  color: #fff;
  margin-left: 10px;
  margin-right: 10px;
}
.chat-window {
  flex-grow: 1;
  display: flex;
  flex-direction: column;
  align-items: flex-end;
  padding: 20px;
  background-color: #fff;
  overflow-y: auto;
}
.input-container {
  display: flex;
  align-items: center;
  padding: 20px;
  background-color: #fff;
}
input[type="text"] {
  width: 100%;
```

```


padding: 10px;
border: none;
border-radius: 5px;
outline: none;
font-size: 16px;
box-shadow: 0 0 5px rgba(0, 0, 0, 0.1);
}
.chat-log {
  height: 400px;
padding: 20px;
overflow-y: auto;
background-color: rgba(255, 255, 255, 0.8);
}
/* Added space between user prompts */
.chat-log p {
  margin: 10px 0;
}
.input-container input[type="text"] {
  flex: 1;
  height: 40px;
padding: 5px 10px;
border: 1px solid #ccc;
border-radius: 5px;
font-size: 16px;
outline: none;
}
.input-container button {
  margin-left: 10px;
padding: 8px 16px;
border: none;
border-radius: 5px;
background-color: #4CAF50;
color: #fff;
font-size: 16px;
cursor: pointer;
}
.input-container button:hover {
  background-color: #45a049;
}
html, body {
  margin: 0;
padding: 0;
font-family: Arial, sans-serif;
}

```


Launch live server

You can check the user-interface of your chatbot by launching the live server.


- Please right-click on the index.html and select the "Open with Live server" option.

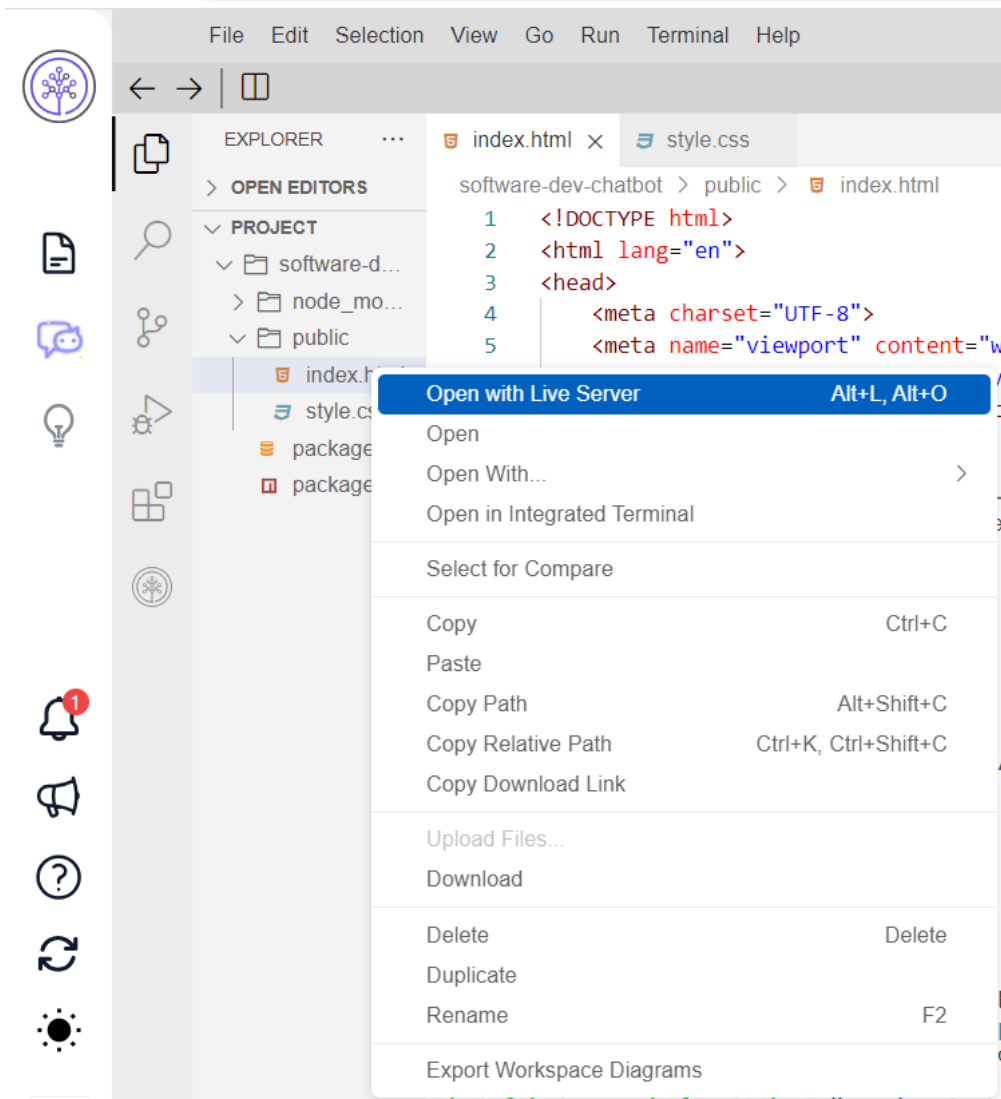

- Click on the "Skills Network" button on the left, which will open the "Skills Network Toolbox"
- Next, select "Launch Application" and enter the port as 5500 and launch the server. Please refer to the screenshot below.

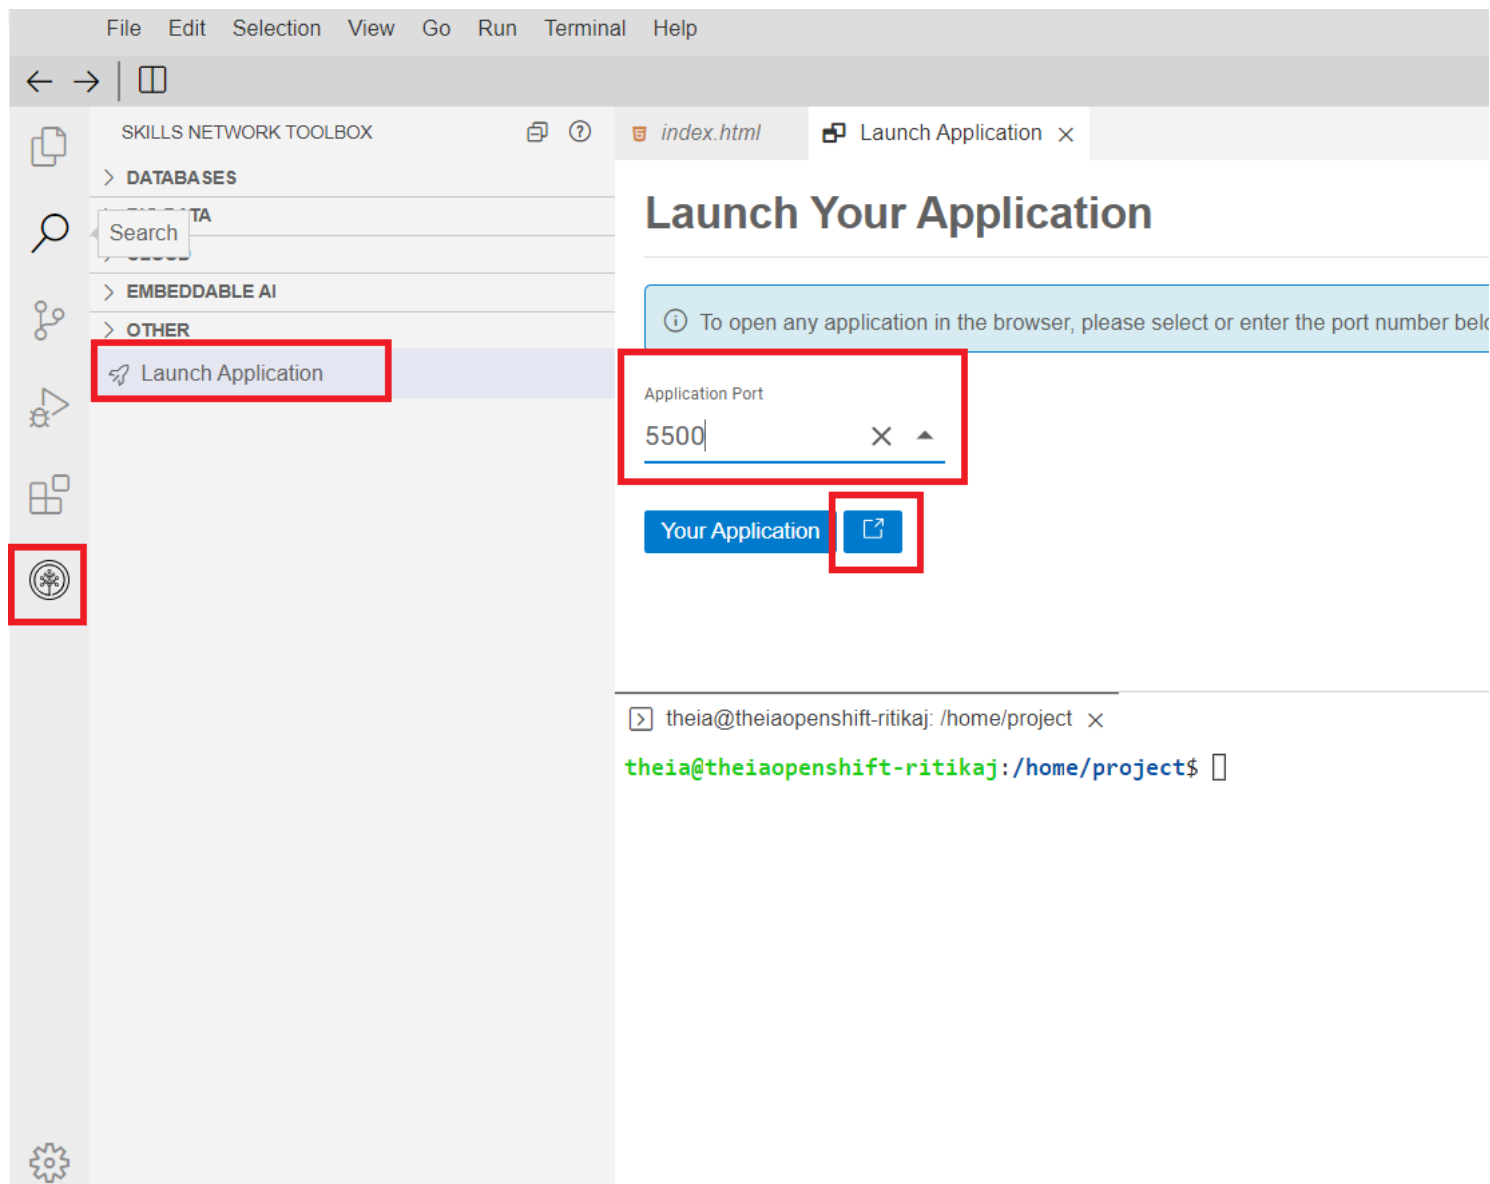

- Select the `software-dev-chatbot` folder and then select the `public` folder to view the HTML page as shown in the screenshots below.

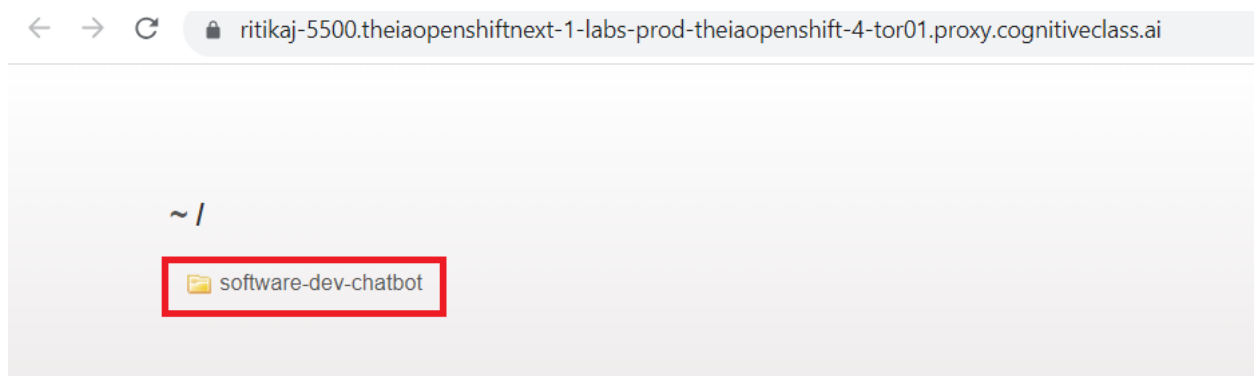



ritikaj-5500.theiaopshiftnext-1-labs-prod-theiaopshift-4-tor01.proxy.cognitiveclass.ai/software-dev-chatbot/

~ / software-dev-chatbot /




package-lock.json

node_modules

package.json

- You should be able to see the chat interface as below:

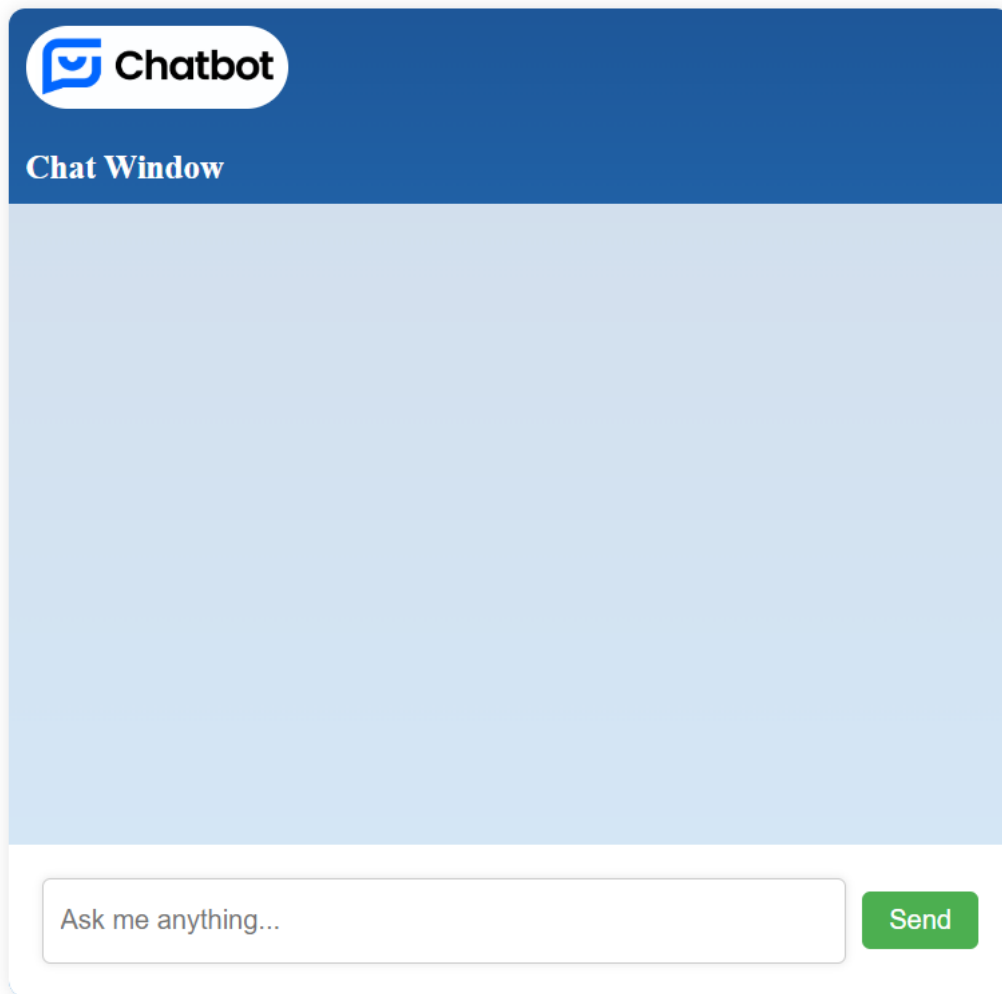

Task 3: Create a JavaScript file to implement the functionality of the Chatbot

- Create a `main.js` file in the public directory to implement the functionality.
- In the `main.js` file, the JavaScript code is designed to handle user input and initiate an API call to the OpenAI API.
- An event listener is attached to the submit button so that when the user clicks it, the code is executed.
- In the event listener callback function, we retrieve the user's input from the text input element and display their message in the chat log.
- Next, we make an API request to the server with the user's message using the `fetch()` function, specifying the appropriate endpoint on the server to receive this request.
- After receiving the response from the OpenAI API, we send it back to the client and display the chatbot's response in the text area of the `index.html` file.

```
const chatLog = document.getElementById('chat-log');
const userInput = document.getElementById('user-input');
function sendMessage() {
  const message = userInput.value;
  // Display user's message
  displayMessage('user', message);
  // Call OpenAI API to get chatbot's response
  getChatbotResponse(message);
  // Clear user input
  userInput.value = '';
}

function displayMessage(sender, message) {
  const messageElement = document.createElement('div');
  messageElement.classList.add('message', sender);
  // Wrap the message in a <p> tag
  const messageParagraph = document.createElement('p');
  messageParagraph.innerText = message;
  // Append the <p> tag to the message element
  messageElement.appendChild(messageParagraph);
  chatLog.appendChild(messageElement);
}

function getChatbotResponse(userMessage) {
  // Make a request to your server with the user's message
  fetch('/getChatbotResponse', {
    method: 'POST',
    headers: {
      'Content-Type': 'application/json',
    },
    body: JSON.stringify({ userMessage }),
  })
    .then(response => response.json())
    .then(data => {
      // Display chatbot's response
      displayMessage('chatbot', data.chatbotResponse);
    })
    .catch(error => console.error('Error:', error));
}
```

- Create a new file named `server.js` within your project directory (software-dev-chatbot)
- This file will be responsible for managing API requests and integrating with OpenAI.
- This code sets up a basic Express.js server that serves static files from a `public` directory.
- It includes a route for the root path (`/`) to serve an HTML file.
- Additionally, there is a POST endpoint `/getChatbotResponse` that receives a user message, utilizes an OpenAI API wrapper (`openAIAPI`), generates a chatbot response using the OpenAI API, and sends the response back to the client.
- The server listens on a specified port 3000, and a message is logged to the console when the server is successfully running.

```
process.env["NODE_TLS_REJECT_UNAUTHORIZED"]=0;
const express = require('express');
const path = require('path');
const { OpenAIAPI } = require('./openai');
const app = express();
const port = process.env.PORT || 3000;
app.use(express.static(path.join(__dirname, 'public')));
app.use(express.json());
app.get('/', (req, res) => {
  res.sendFile(path.join(__dirname, 'public', 'index.html'));
});
app.post('/getChatbotResponse', async (req, res) => {
  const userMessage = req.body.userMessage;
  // Use OpenAI API to generate a response
  const chatbotResponse = await OpenAIAPI.generateResponse(userMessage);
  // Send the response back to the client
  res.json({ chatbotResponse });
});
app.listen(port, () => {
```

```
console.log(`Server is running on port ${port}`);
});
```

Task 5: Create OpenAI API Module

- Create an `openai.js` file within the project directory to encapsulate the OpenAI API logic.
- This code facilitates communication with the OpenAI API, specifically the gpt-3.5-turbo Codex engine, allowing developers to generate responses based on user input through a secure configuration using an API key.


Insert the following code into the newly created `openai.js` file.

openai.js:

```
class OpenAIAPI {
  static async generateResponse(userMessage, conversationHistory = []) {
    const apiKey = process.env.OPENAI_API_KEY;
    const endpoint = 'https://api.openai.com/v1/chat/completions';
    const response = await fetch(endpoint, {
      method: 'POST',
      headers: {
        'Content-Type': 'application/json',
        'Authorization': `Bearer ${apiKey}`,
      },
      body: JSON.stringify({
        model: "gpt-3.5-turbo-1106",
        messages: conversationHistory.concat([
          { role: 'user', content: userMessage }
        ]),
        max_tokens: 150
      })
    });
    const responseData = await response.json();
    // Log the entire API response for debugging
    console.log('Response from OpenAI API:', responseData.choices[0].message);
    // Check if choices array is defined and not empty
    if (responseData.choices && responseData.choices.length > 0 && responseData.choices[0].message) {
      return responseData.choices[0].message.content;
    } else {
      // Handle the case where choices array is undefined or empty
      console.error('Error: No valid response from OpenAI API');
      return 'Sorry, I couldn\'t understand that.';
    }
  }
}
module.exports = { OpenAIAPI };
```

Task 6: Run Your Application

- The Project folder structure should be organized as shown in the screenshot below.

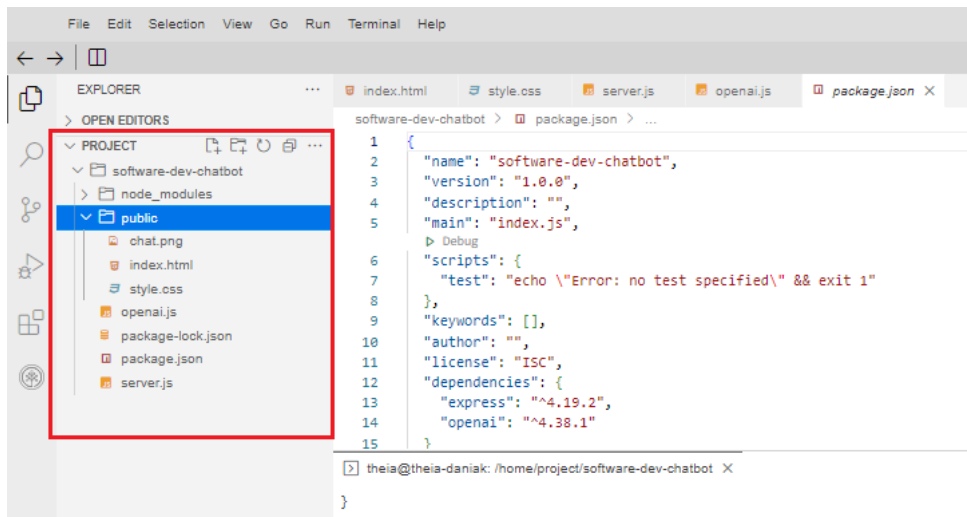

Follow the steps below to run the application

Step 1: Run your Express server by executing the below command in the Terminal

```
node server.js
```

```
> theia@theiaopenshift-ritikaj: /home/project/software-dev-chatbot X
```

```
theia@theiaopenshift-ritikaj: /home/project/software-dev-chatbot$ mkdir public
theia@theiaopenshift-ritikaj: /home/project/software-dev-chatbot$ node server.js
Server is running on port 3000
□
```

Step 2: Click on the "Skills Network" button on the left, which will open the "Skills Network Toolbox". Next, select "Launch Application" and enter the port as 3000 and launch the server. Please refer the screenshot below.

File Edit Selection View Go Run Terminal Help

SKILLS NETWORK TOOLBOX

> DATABASES

> BIG DATA

> CLOUD

> EMBEDDABLE AI

> OTHER

Launch Application

Launch Application

Application Port

3000

Your Application


theia@theiaopenshift-ritikaj: /home/project/software-dev-chatbot

theia@theiaopenshift-ritikaj: /home/project/software-dev-c

theia@theiaopenshift-ritikaj: /home/project/software-dev-c


Server is running on port 3000

You should be able to see the chat interface as below:

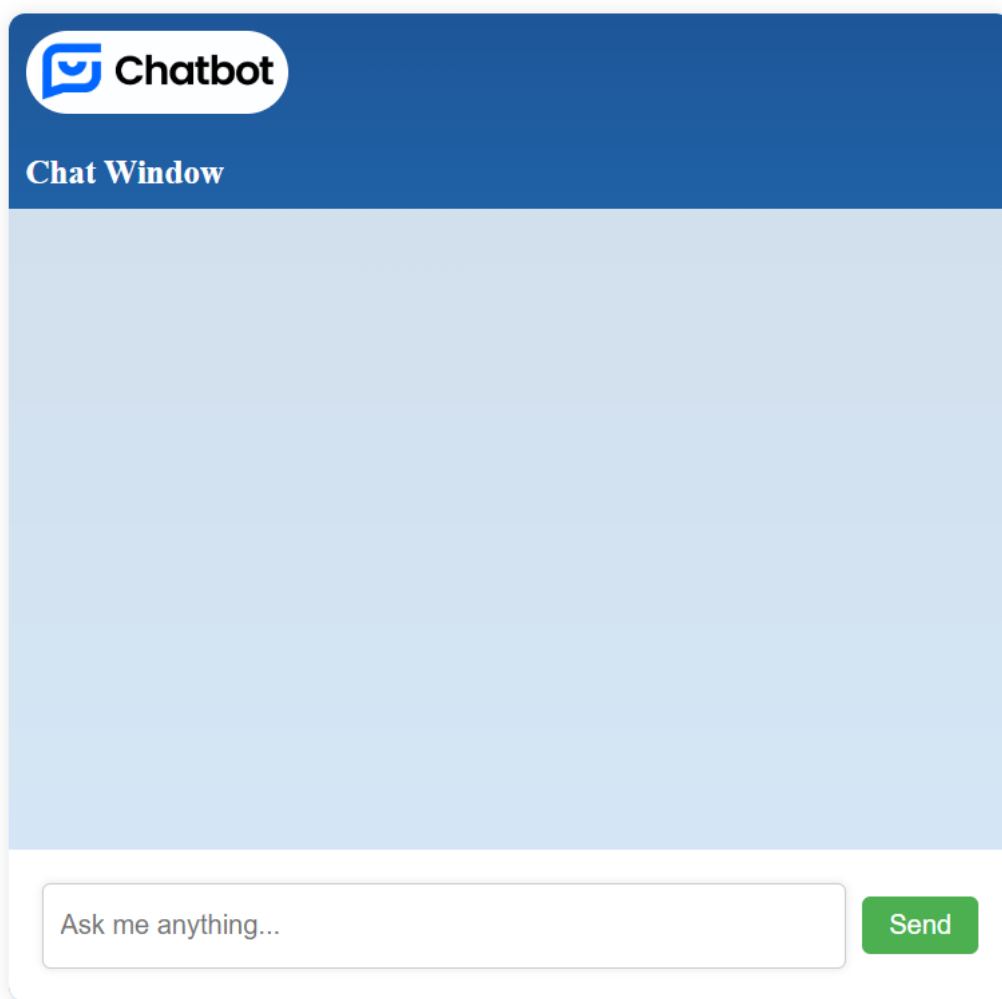

Step 3: When you enter a question and click send the chatbot will respond to your question using the OpenAI API.


Please refer to the screenshot below, where the question "What is agile methodology?" is posed, and the chatbot has provided an appropriate response.

 Chatbot

Chat Window

What is agile methodology?

Send

 Chatbot

Chat Window

what is agile methodology?

Agile methodology is a type of project management that focuses on iterative and incremental development, where requirements and solutions evolve through collaboration between self-organizing, cross-functional teams. Agile methodology focuses on responsiveness to customer needs, delivering working software in short timelines, and allowing for continual improvement and adaptive planning.

Send

Step 4: You can submit the following software development-related questions one at a time to the chatbot by entering them in the Ask me anything text box.

Click send to receive a response from the chatbot.

Q1. What is the difference between a compiler and an interpreter?

Your output may be similar to the responses shown below:



Chat Window

What is the difference between a compiler and an interpreter?


A compiler is a program that translates code written in a high-level programming language into a low-level language. Compiled code can then be executed quickly and easily at runtime. An interpreter is a program that executes instructions written in a high-level language one line at a time. It does not create a compiled version of the code, so it takes longer to execute.

Ask me anything...

Send

Q2. What is the difference between a stack and a queue?

Your output may be similar to the responses shown below:

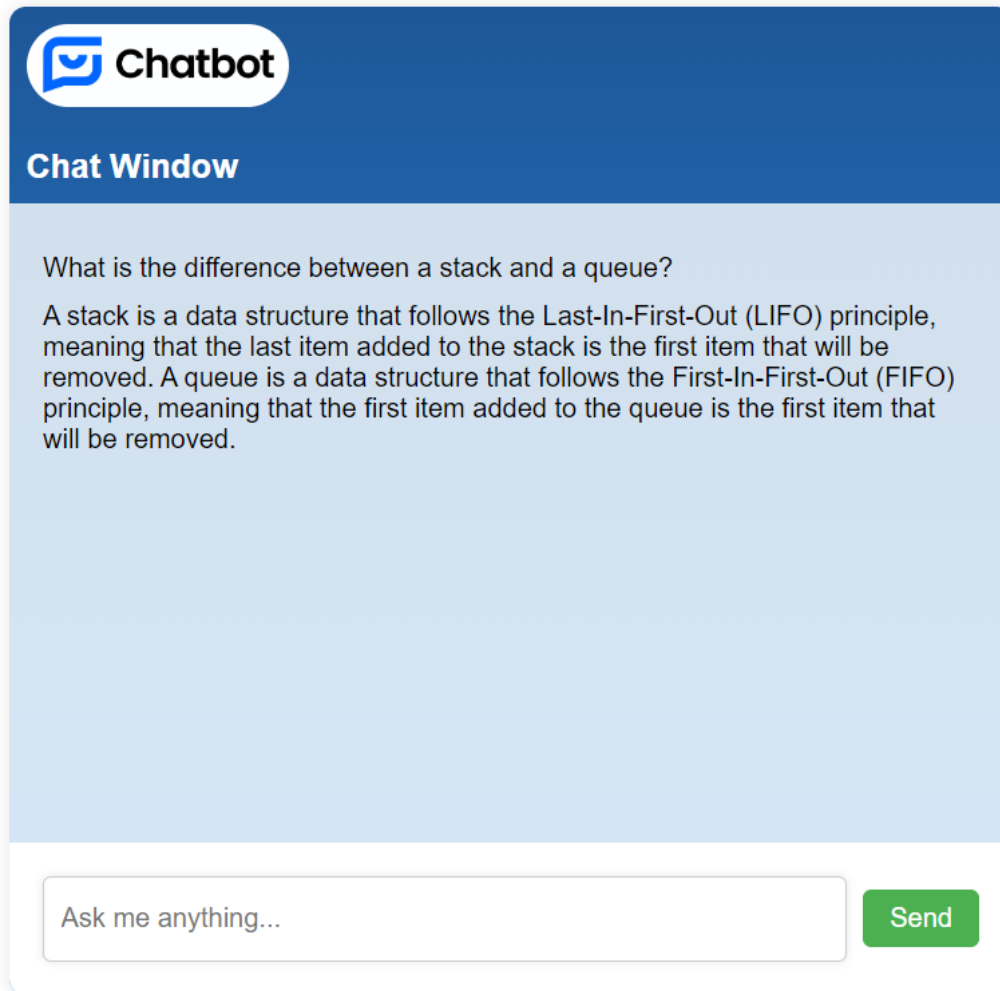

Q3. What is the difference between a linked list and an array?

Your output may be similar to the responses shown below:



Chat Window

What is the difference between a linked list and an array?

A linked list is a data structure where individual elements are connected to each other. It does not require any particular order, so elements can be added or removed from the beginning, middle, or end of a linked list without needing to move elements around. In contrast, an array is an ordered collection of elements, and elements must be removed or added in a specific order in order for the array to remain ordered. Additionally, a linked list can easily be expanded to store an unknown number of elements, while arrays have a fixed size determined when they are first created.

Ask me anything...

Send

Note: In case you want to use your own API Key instead of the lab environment's free access then you need to make a few changes to the configuration and `openai.js` file. Also, to run the code outside of Skills network labs you will need to add your own API key.

▼ Click here to see the configuration changes:

- Create a file named `config.js` within the project directory.

To prioritize security, it is recommended to store your API key in this separate `config.js` file.

- Subsequently, replace `YOUR_API_KEY` in the provided code with your specific API key.

config.js

```
module.exports = {
  OpenAIAPIKey: 'YOUR_API_KEY'
};
```

openai.js:

```
const { OpenAIAPIKey } = require('./config'); // Create config.js with your API key
class OpenAIAPI {
  static async generateResponse(userMessage) {
    const apiKey = OpenAIAPIKey;
    const endpoint = 'https://api.openai.com/v1/engines/gpt-3.5-turbo/completions';
    const response = await fetch(endpoint, {
      method: 'POST',
      headers: {
        'Content-Type': 'application/json',
        'Authorization': `Bearer ${apiKey}`,
      },
      body: JSON.stringify({
        prompt: userMessage,
        max_tokens: 150,
      })
    });
    return response.json();
  }
}
```

```

    }},
  });
  const responseData = await response.json();
  // Log the entire API response for debugging
  console.log('Response from OpenAI API:', responseData);
  // Check if choices array is defined and not empty
  if (responseData.choices && responseData.choices.length > 0) {
    return responseData.choices[0].text.trim();
  } else {
    // Handle the case where choices array is undefined or empty
    console.error('Error: No valid response from OpenAI API');
    return 'Sorry, I couldn\'t understand that.';
  }
}
}
module.exports = { OpenAIAPI };

```

Summary:

This hands-on lab is designed to assist in the creation of a basic chatbot proficient in responding to queries related to software development. The project uses the free Skills Network-provided OpenAI APIs, along with Node.js and the Express.js framework.

Congratulations! You have completed the lab on Building a Basic Chatbot using ChatGPT.

Author(s)

Rajashree Patil
Ritika Joshi

© IBM Corporation. All rights reserved.