HTML Forms

❑ Form Tag:

```
<form>
  <!-- Here goes form fields and HTML -->
</form>
```

❑ Attributes:

- action=address
- method=post or get

HTML Forms (Cont.)

- **Form Fields:**
  - Text field
  - Password field
  - Text area
  - Check box
  - Radio button
  - Drop-down menu
  - Submit button
  - Reset button
  - Image button

Text Field

- **Attributes :**
  - size
  - maxlength
  - name
  - value
  - align
  - Tabindex

Some text...

- **Ex.:**

```
<input type="text" size="25" value="Enter your name here!">
```

Hidden Field

- **A control that is not displayed but whose value is submitted to the server.**
- **Attributes :**
  - name
  - value

- **Ex.:**

```
<input type=“hidden" " value=“”>
```

Password field

- **Attributes :**
  - Size
  - Maxlength
  - Name
  - Value
  - Align
  - tabindex

Password: ••••••••

- **Ex.:**

```
Enter Password : <input type="password" size="25">
```

Text area

- **Attributes:**
  - Rows
  - Cols
  - Name
  - tabindex

```
text area...
this is a text area
```

- **Ex.:**

```
<textarea cols="40" rows="5" name="myname">
        Now we are inside the area - which is nice.
</textarea>
```

Check box

- **Attributes:**
  - Name
  - value
  - align
  - tabindex
  - Checked

☑ choice 1 ☐ choice 2 ☑ choice 3 ☐ choice 4

- **Ex.:**

```
<input type="checkbox" name="option1" value="1">
        choice 1
    <br>
 <input type="checkbox" name="option2" value="2"
checked>
        choice 2
    <br>
```

Radio button

- **Attributes:**
  - name
  - Value
  - Align
  - Tabindex
  - checked

Male Female

- **Ex.:**

```
<input type="radio" name="group1" value=“m“checked >
Male
<input type="radio" name="group1" value=“f" >
Female
```

Drop-down menu

- **Attributes:**
  - select
    - ✓ name
    - ✓ size
    - ✓ multiple
  - option
    - ✓ Selected
    - ✓ Value



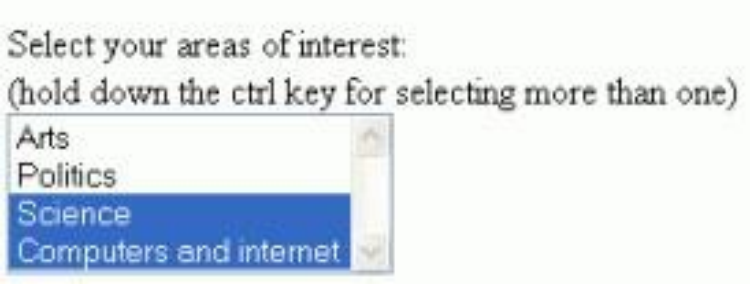

- **Ex.:**

```
<select name="favDrink">
        <option value="M">Milk</option>
        <option value="C"> Coffee</option>
        <option value="T"> Tea</option>
</select>
```

file

- Allow user to upload file

- Ex.:

```
<input type="file“ name="myFile" >
```

Submit button / Reset button

- **Attributes:**
  - Name
  - Value
  - Align
  - Tabindex

- **Ex.:**

```
<input type="submit" value="Send me your name!">
<input type=“reset" value=“CLEAR!">
```

Image button

- Image buttons have the same effect as submit buttons.

- **Attributes:**
  - name
  - src
  - align
  - border
  - width
  - height
  - Tabindex

- **Ex.:**

```
<input type="image" src="rainbow.gif" name="image"
width="60" height="60">
```

button

- Will act as a submit button if it’s inside a form

- **Ex.:**

```
<input type=“button" value=“Click me!“ />
```

```
<button name=“b1”> click me </button>
```

Form Fieldset

- <fieldset> is used to enclose a group of related form fields together.
- The <legend> is the fieldset's title.

- **Ex.:**

login

Name: Password:

```
<form method="post" action="main.html">
    <fieldset>
        <legend>login</legend>
        Name:<input type="text" id="Name" />
        Password:<input type="password" id="Pswd" />
    </fieldset>
</form>
```

Form Labels

- Form labels are used to associate an explanatory text to a form field using the field's ID.
- Clicking on a label focuses its associated field (checkboxes are toggled, radio buttons are checked)
- **Ex.:**

```
<form>
    <label for="fn">First Name</label>
    <input type="text" id="fn" />
</form>
```

Tabindex and Access Key

- tabindex attribute define a sequence that users follow when they use the Tab key to navigate through a page.
- access keys allow easier navigation by assigning a keyboard shortcut to a link. It can be used on any HTML element

Browser	Shortcut
Internet Explorer	[Alt] + *accesskey*
Chrome	
Safari	
Firefox	[Alt] [Shift] + *accesskey*
Opera 15 or newer Opera 12.1 or older	[Alt] + *accesskey* [Shift] [Esc] + *accesskey*

- if more than one element has the same access key differs:
  - IE, Firefox: The next element with the pressed access key will be activated
  - Chrome, Safari: The last element with the pressed access key will be activated
  - Opera: The first element with the pressed access key will be activated

Self Study

- **Self Study Topics:**
  - What are HTTP Verbs? And what's the difference between POST and GET?
  - How does HTML send form data in POST method?
  - What's new in Forms in HTML 5?

<Questions> ? </Questions>

Thank You…