Encrypted coverage through the full ResNet-18 structure

Binary mask forward pass • Modified pooling convolution + 8 residual blocks • 224 × 224 input

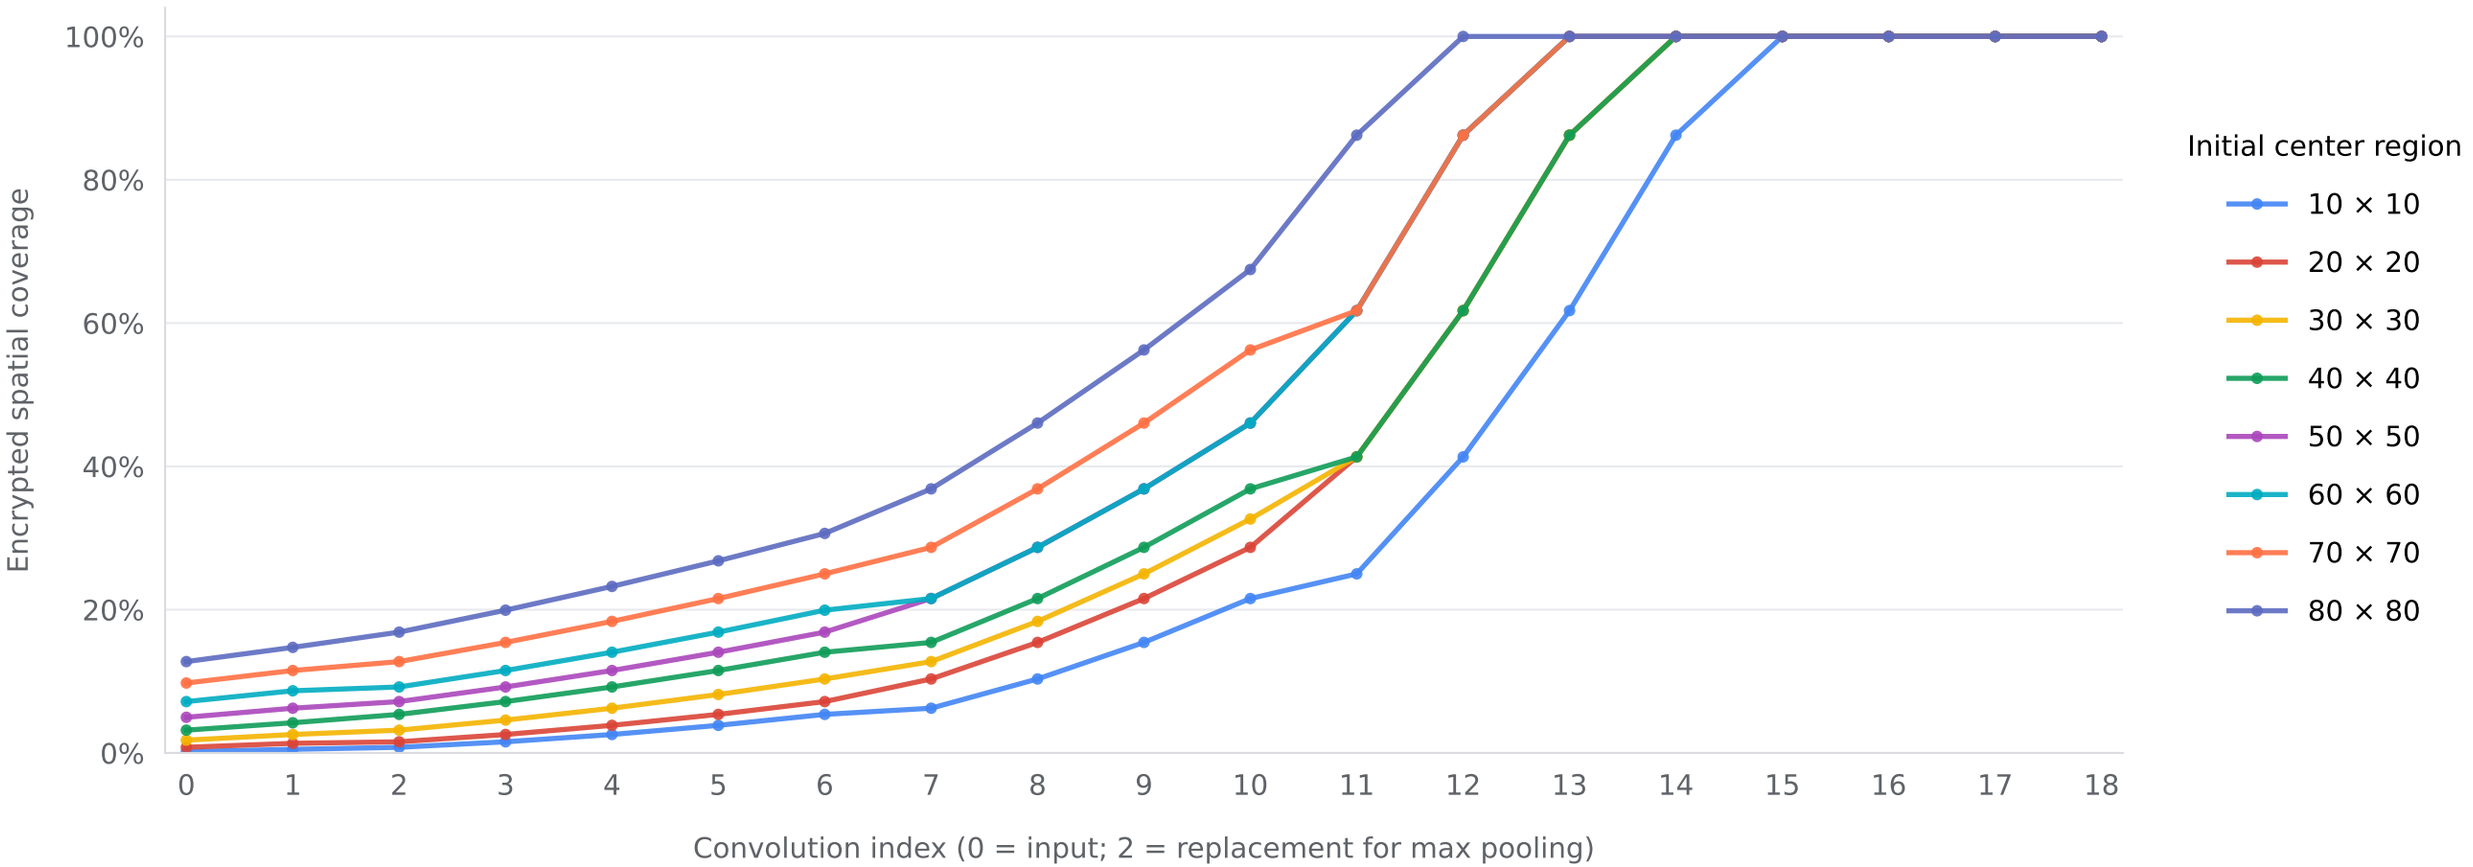

Unit positive convolution kernels; threshold after every operation; residual branches combined by OR.
Coverage = nonzero spatial positions / all spatial positions. All channels share the mask.
Indices 1–18 count main-path convolutions in this modified model; global pooling and the classifier follow index 18.