

Class 6: R functions

Yinuo Song

4/21/23

In this class we will develop our own **R function** to calculate average grades in a fictional class.

We will start with a simplified version of the problem, just calculating the average grade of one student.

Simplified version

```
# Example input vectors to start with
student1 <- c(100, 100, 100, 100, 100, 100, 100, 90)
student2 <- c(100, NA, 90, 90, 90, 90, 97, 80)
student3 <- c(90, NA, NA, NA, NA, NA, NA, NA)
```

We are going to start by calculating the average score of the homeworks.

```
mean(student1)
```

```
[1] 98.75
```

To get the minimum score we can use `which.min`

```
student1
```

```
[1] 100 100 100 100 100 100 100 90
```

```
which.min(student1)
```

```
[1] 8
```

I can do the average of the first homework scores:

```
mean(student1[1:7])
```

```
[1] 100
```

Another way to select the first 7 homeworks:

```
student1[1:7]
```

```
[1] 100 100 100 100 100 100 100
```

```
student1[-8]
```

```
[1] 100 100 100 100 100 100 100
```

Another way to select drop the lowest score:

```
student1_drop_lowest=student1[-which.min(student1)]  
student1_drop_lowest
```

```
[1] 100 100 100 100 100 100 100
```

I can get the mean of the home work scores after dropping the lowest score by doing:

```
mean(student1_drop_lowest)
```

```
[1] 100
```

We have our first working snippet of code!

Let's try to generalize it the student2:

```
student2_drop_lowest=student2[-which.min(student2)]
student2_drop_lowest
```

```
[1] 100 NA 90 90 90 90 97
```

There is a way to calculate the mean dropping missing values (or NA)

```
mean(student2,na.rm=TRUE)
```

```
[1] 91
```

This looks good for student2. however, for student3

```
mean(student3,na.rm=TRUE)
```

```
[1] 90
```

We want to know the position of the NAs. So for student2 we can use the following.

```
which(is.na(student2))
```

```
student2[which(is.na(student2))] <- 0
student2
```

```
[1] 100 0 90 90 90 90 97 80
```

If I use the same for student3

```
student3[which(is.na(student3))] <- 0
student3
```

```
[1] 90 0 0 0 0 0 0 0
```

For student3:

```
which(is.na(student3))
```

```
integer(0)
```

For considering missing values, we can mask the NA value with zeros.

This is going to be our final working snippet of code for all students (with and without NA values)

```
student3 <- c(90, NA, NA, NA, NA, NA, NA, NA)
student3[which(is.na(student3))] <- 0
student3_drop_lowest=student3[-which.min(student3)]
mean(student3_drop_lowest)
```

```
[1] 12.85714
```

Let's build a function now:

```
x <- c(100,75,50,NA)
x[which(is.na(x))] <- 0
x_drop_lowest=x[-which.min(x)]
mean(x_drop_lowest)
```

```
[1] 75
```

Q1

We can write it as a function:

```
#' Calculate the average score for a vector of homework
#' scores,dropping the lowest score, and considering
#' NA values as zeros.
#'
#' @param x A numeric vecot of homework scores
#'
#' @return The average value of homework scores
#' @export
#'
#' @examples
#' student <- c('100','50',NA)
#' grade(student)
grade <- function(x){
  # Mask NA values with zero
```

```

    x[which(is.na(x))] <- 0
    # Drop lowest score
    x_drop_lowest=x[-which.min(x)]
    mean(x_drop_lowest)
  }

```

Let's apply the function

```

student1 <- c(100, 100, 100, 100, 100, 100, 100, 90)
student2 <- c(100, NA, 90, 90, 90, 90, 97, 80)
student3 <- c(90, NA, NA, NA, NA, NA, NA, NA)
grade(student1)

```

```
[1] 100
```

```
grade(student2)
```

```
[1] 91
```

```
grade(student3)
```

```
[1] 12.85714
```

Let's apply our function to a grade book from this URL:

"https://tinyurl.com/gradeinput"

```

URL <- "https://tinyurl.com/gradeinput"
gradebook <- read.csv(URL,row.names=1)
head(gradebook)

```

	hw1	hw2	hw3	hw4	hw5
student-1	100	73	100	88	79
student-2	85	64	78	89	78
student-3	83	69	77	100	77
student-4	88	NA	73	100	76
student-5	88	100	75	86	79
student-6	89	78	100	89	77

Let's apply my function `grade` to the gradebook using `apply` and running it by rows using `MARGIN=1`

```
apply(gradebook,1,grade)
```

student-1	student-2	student-3	student-4	student-5	student-6	student-7
91.75	82.50	84.25	84.25	88.25	89.00	94.00
student-8	student-9	student-10	student-11	student-12	student-13	student-14
93.75	87.75	79.00	86.00	91.75	92.25	87.75
student-15	student-16	student-17	student-18	student-19	student-20	
78.75	89.50	88.00	94.50	82.75	82.75	

Q2. Using your `grade()` function and the supplied gradebook, Who is the top scoring student overall in the gradebook? [3pts]

```
max(apply(gradebook,1,grade))
```

```
[1] 94.5
```

The maximum score is 94.5.

```
which.max(apply(gradebook,1,grade))
```

```
student-18  
18
```

The student getting the maximum overall score was student 18.

Q3. From your analysis of the gradebook, which homework was toughest on students (i.e. obtained the lowest scores overall)? [2pts]

First, we are going to mask NA values with zeros.

```
gradebook[is.na(gradebook)] <- 0
```

Now, apply the mean function to the gradebook.

```
apply(gradebook,2,mean)
```

```
hw1 hw2 hw3 hw4 hw5
89.00 72.80 80.80 85.15 79.25
```

The toughest homework will be hw 2 considering the mean and considering missing homework as 0.

Maybe having zeros for missing homework is too strict and is not a good representation of the homework difficulty,

One thing we can do is remove the missing values.

```
gradebook <- read.csv(URL,row.names=1)
apply(gradebook,2,mean,na.rm=TRUE)
```

```
hw1 hw2 hw3 hw4 hw5
89.00000 80.88889 80.80000 89.63158 83.42105
```

Instead of assigning zeros to missing values,if we directly don't consider missing values, the toughest homework will be hw3(according to the mean).


If we use the median instead of the mean as a measure of overall score...

```
apply(gradebook,2,median,na.rm=TRUE)
```

```
hw1 hw2 hw3 hw4 hw5
89.0 72.5 76.5 88.0 78.0
```

If we use some plots...

```
boxplot(gradebook)
```

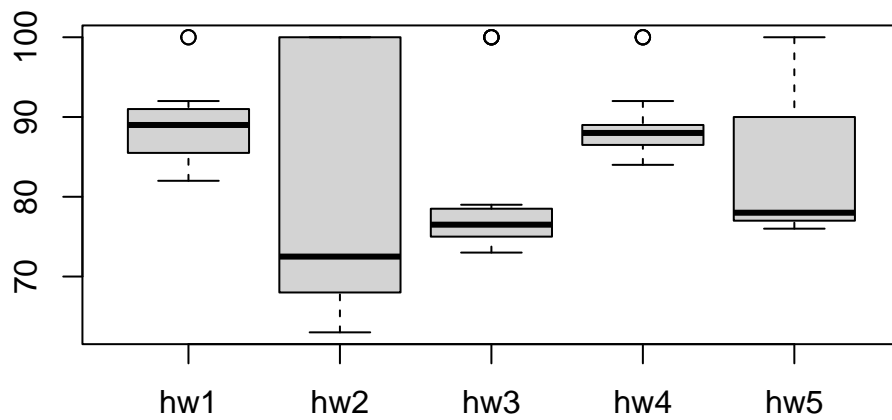

Q4. From your analysis of the gradebook, which homework was most predictive of overall score (i.e. highest correlation with average grade score)? [1pt]

```
overall_grades <- apply(gradebook,1,grade)
overall_grades
```

student-1	student-2	student-3	student-4	student-5	student-6	student-7
91.75	82.50	84.25	84.25	88.25	89.00	94.00
student-8	student-9	student-10	student-11	student-12	student-13	student-14
93.75	87.75	79.00	86.00	91.75	92.25	87.75
student-15	student-16	student-17	student-18	student-19	student-20	
78.75	89.50	88.00	94.50	82.75	82.75	

```
cor(gradebook$hw1,overall_grades)
```

```
[1] 0.4250204
```

```
gradebook[is.na(gradebook)] <- 0
apply(gradebook,2,cor,y=overall_grades)
```


	hw1	hw2	hw3	hw4	hw5
	0.4250204	0.1767780	0.3042561	0.3810884	0.6325982

The maximum value is...

```
which.max(apply(gradebook,2,cor,y=overall_grades))
```

```
hw5  
5
```

HW 5 was the most predictive.