

# IF330 – Pemrograman Web

## 09 - Controller & View

Fenina Adline Twince Tobing

I Putu Ananta Yogiswara

PROGRAM STUDI INFORMATIKA  
FAKULTAS TEKNIK DAN INFORMATIKA  
UNIVERSITAS MULTIMEDIA NUSANTARA  
SEMESTER GANJIL TAHUN AJARAN 2022/2023

# REVIEW



- Introduction to Laravel Framework
- Laravel Installation
- Laravel Project Structure
- Laravel Routing

# TODAY's OUTLINE


- Controller
- Routing Controller
- Views
- Passing Data to View
- Blade Templating Engine
- Display Multiple Data using Looping

# Controllers

- Documentation: <https://laravel.com/docs/9.x/controllers>
- Controllers used to group related request handling logic into a single class.
- Example: UserController class might handle all incoming requests related to users, including showing, creating, updating and deleting users.
- Controllers are stored in the **app/Http/Controllers** directory.
- Create controller using php artisan:

```
php artisan make:controller SomeController
```

```
php artisan make:controller AnotherController --resource
```

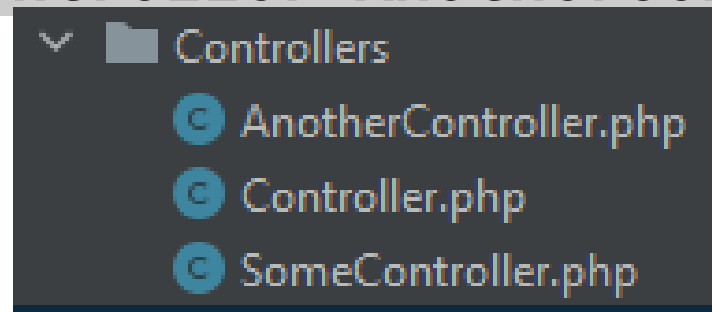


```
SomeController.php x
1  <?php
2
3  namespace App\Http\Controllers;
4
5  use Illuminate\Http\Request;
6
7  class SomeController extends Controller
8  {
9      //
10 }
11

AnotherController.php x
1  <?php
2
3  namespace App\Http\Controllers;
4
5  use Illuminate\Http\Request;
6
7  class AnotherController extends Controller
8  {
9      /** Display a listing of the resource. ...*/
14 public function index()
15 {
16     //
17 }
18
19 /** Show the form for creating a new resource. ...*/
24 public function create()
25 {
26     //
27 }
28
29 /** Store a newly created resource in storage. ...*/
35 public function store(Request $request)
36 {
37     //
```


# Routing Controller



```
18 Route::get( uri: '/', function () {
19     return view( view: 'welcome' );
20 });
21
22 Route::get( uri: '/some-route', [SomeController::class, 'index'] );
23
```

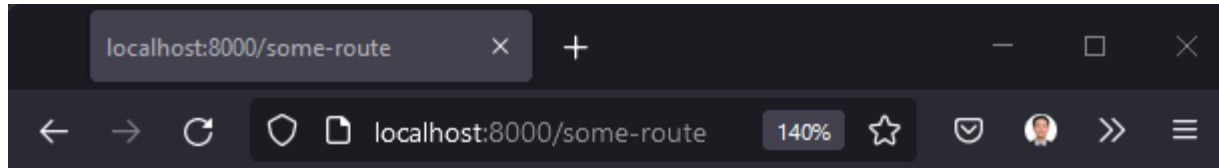


Hello Some

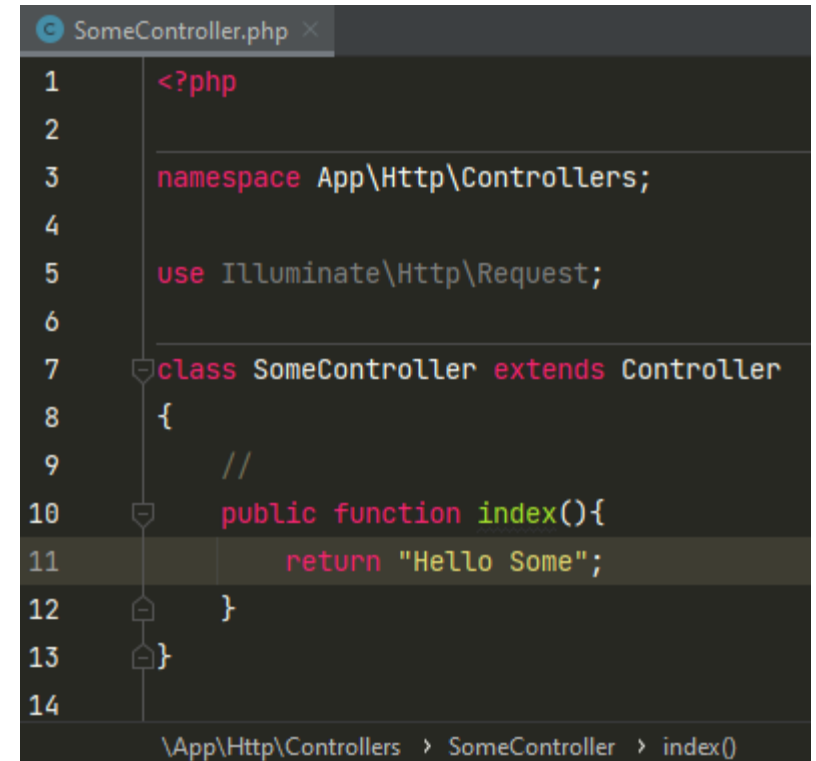

```
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6
7 class SomeController extends Controller
8 {
9     //
10     public function index(){
11         return "Hello Some";
12     }
13 }
14
```

\App\Http\Controllers > SomeController > index()

# Routing Controller

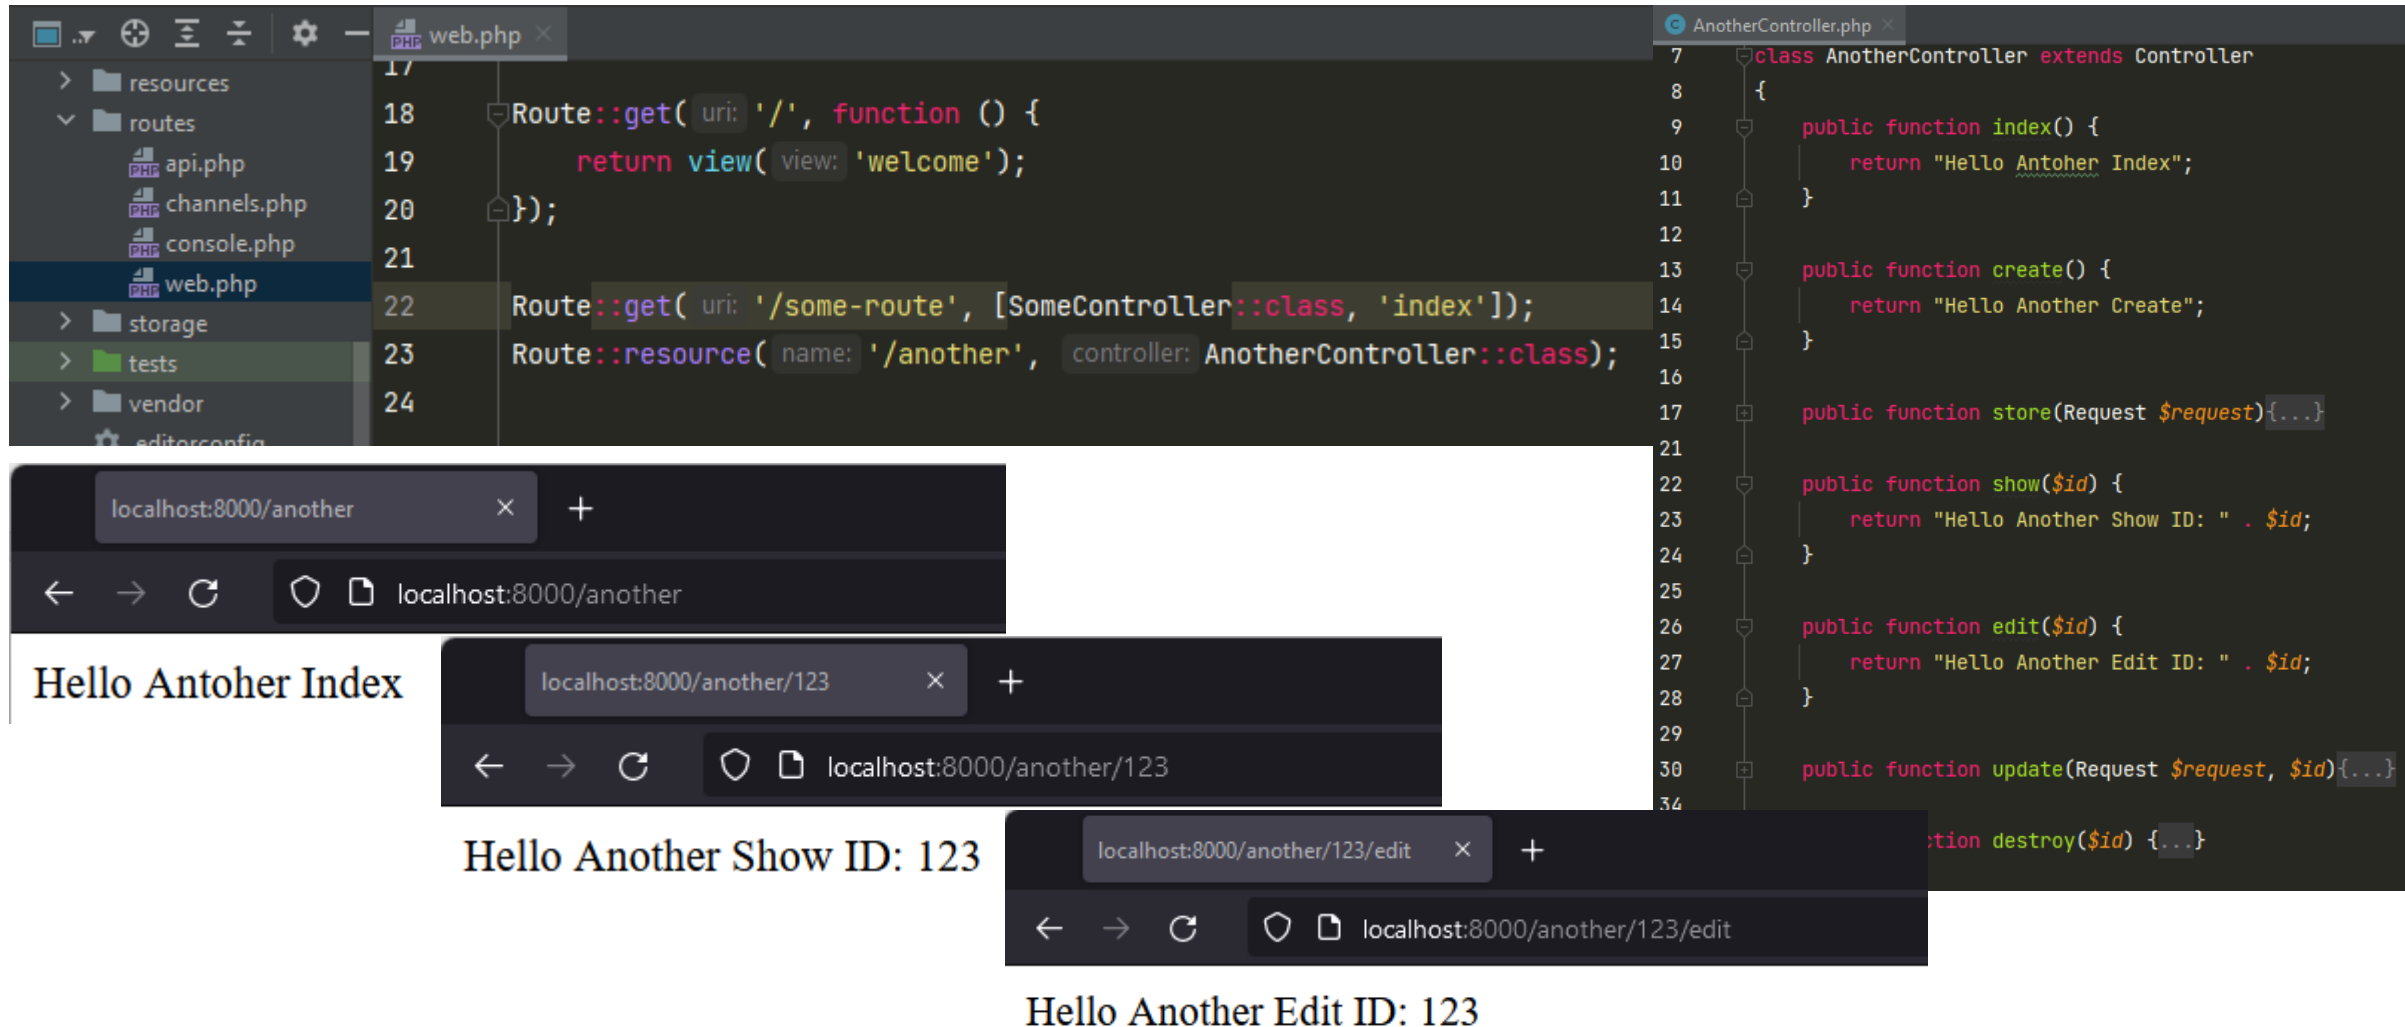

The image displays a code editor with two files: `web.php` and `AnotherController.php`.

**web.php** (lines 17-24):

```
17  
18 Route::get( uri: '/', function () {  
19     return view( view: 'welcome');  
20 });  
21  
22 Route::get( uri: '/some-route', [SomeController::class, 'index']);  
23 Route::resource( name: '/another', controller: AnotherController::class);  
24
```

**AnotherController.php** (lines 7-34):

```
7 class AnotherController extends Controller  
8 {  
9     public function index() {  
10         return "Hello Antoher Index";  
11     }  
12  
13     public function create() {  
14         return "Hello Another Create";  
15     }  
16  
17     public function store(Request $request){...}  
18  
19  
20  
21  
22     public function show($id) {  
23         return "Hello Another Show ID: " . $id;  
24     }  
25  
26     public function edit($id) {  
27         return "Hello Another Edit ID: " . $id;  
28     }  
29  
30     public function update(Request $request, $id){...}  
31  
32  
33  
34     public function destroy($id) {...}
```



Below the code editor, three browser windows are shown, demonstrating the routing results:

- Browser 1: `localhost:8000/another` displays "Hello Antoher Index".
- Browser 2: `localhost:8000/another/123` displays "Hello Another Show ID: 123".
- Browser 3: `localhost:8000/another/123/edit` displays "Hello Another Edit ID: 123".

# Routing Controller

```
resources
└─ routes
    ├── api.php
    ├── channels.php
    ├── console.php
    └── web.php
storage
tests
vendor
```


```
21
22 Route::get(uri: '/some-route', [SomeController::class, 'index']);
23 //Route::resource('/another', AnotherController::class);
24 Route::controller(controller: AnotherController::class)->group(function(){
25     Route::get(uri: '/another', action: 'index')->name(name: 'another.index');
26     Route::get(uri: '/another/{id}', action: 'show')->name(name: 'another.show');
27 });
28
```

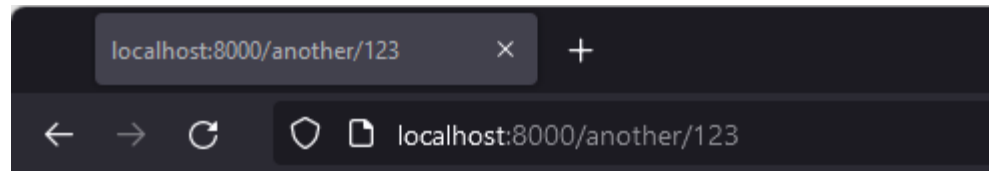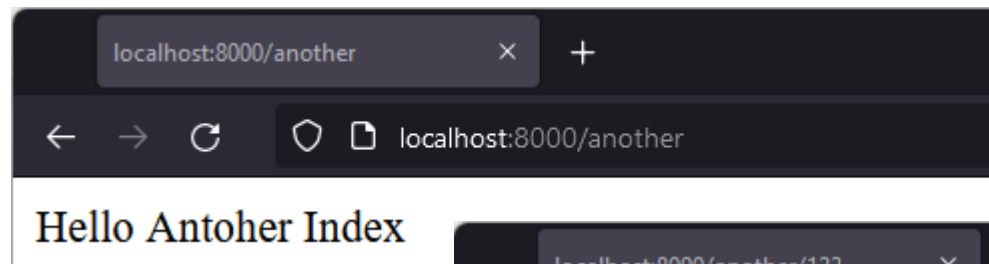


Hello Another Show ID: 123




# Views

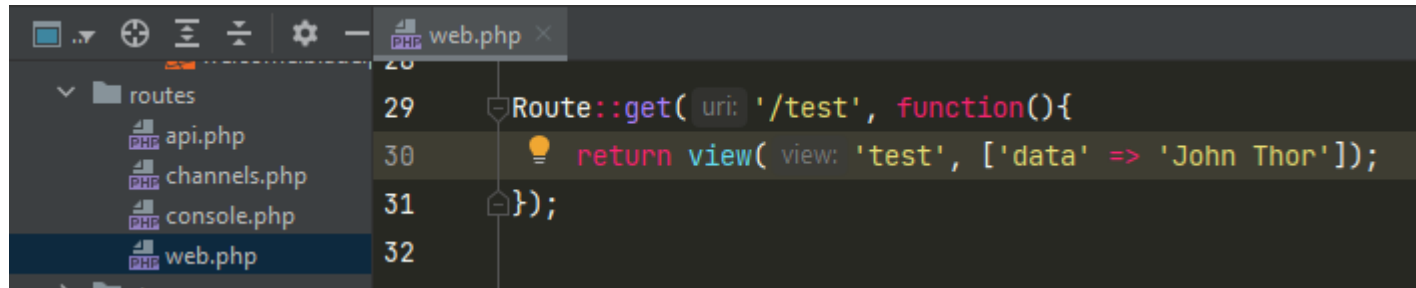

```
28  
29 Route::get( uri: '/test', function(){  
30     return view( view: 'test', ['data' => 'John Thor']);  
31 });  
32
```

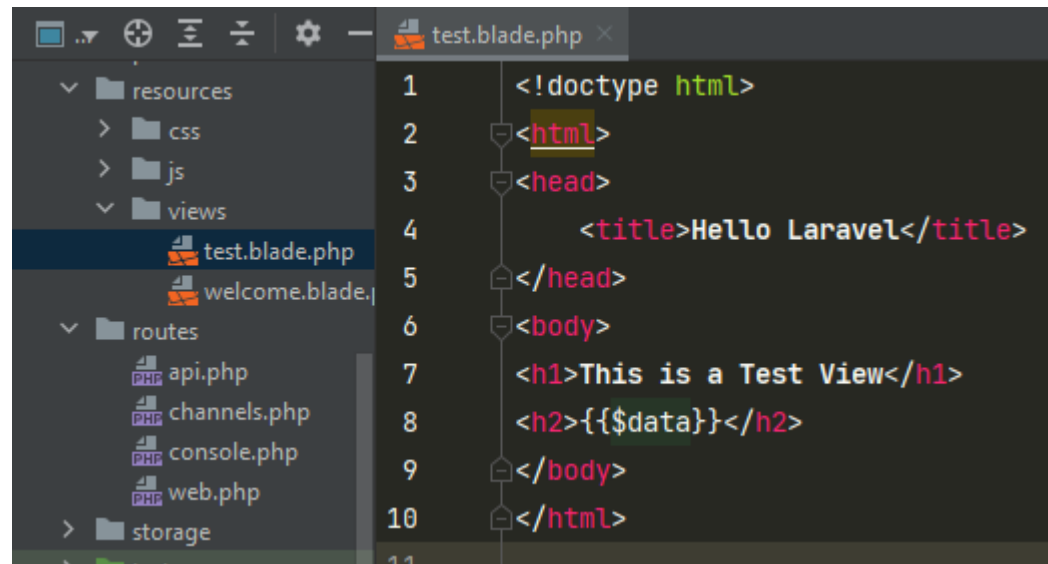

```
1 <!doctype html>  
2 <html>  
3 <head>  
4     <title>Hello Laravel</title>  
5 </head>  
6 <body>  
7     <h1>This is a Test View</h1>  
8     <h2>{{ $data }}</h2>  
9 </body>  
10 </html>  
11
```

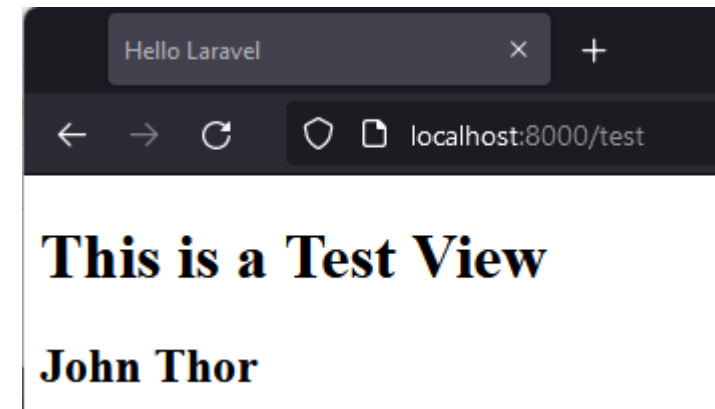

# Nested Views Directories

## # Nested View Directories

Views may also be nested within subdirectories of the `resources/views` directory. "Dot" notation may be used to reference nested views. For example, if your view is stored at `resources/views/admin/profile.blade.php`, you may return it from one of your application's routes / controllers like so:

```
return view('admin.profile', $data);
```



View directory names should not contain the `.` character.

# Views & Controllers

```


web.php
18 Route::get( uri: '/', function () {
19     return view( view: 'welcome');
20 });
21
22 Route::get( uri: '/some-route', [SomeController::class, 'index']);
  
```

```

SomeController.php
7 class SomeController extends Controller
8 {
9     //
10    public function index(){
11        return view( view: 'somefolder.index');
12    }
13 }
  
```

```

index.blade.php
1 <!doctype html>
2 <html>
3 <head>
4     <title>Hello Laravel</title>
5 </head>
6 <body>
7     <h1>This is a somefolder/Index View</h1>
8     <h2></h2>
9 </body>
10 </html>
  
```

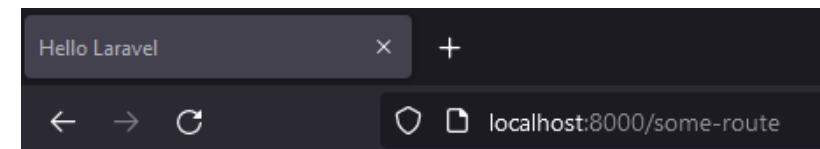


**This is a somefolder/Index View**

# Pass Multiple Data to Views

```
SomeController.php x
7 class SomeController extends Controller
8 {
9     //
10    public function index(){
11        return view('somefolder.index', [
12            'nim' => '001',
13            'nama' => 'John Thor',
14            'prodi' => 'Informatika'
15        ]);
16    }
17 }
18

index.blade.php x
1 <!doctype html>
2 <html>
3 <head>
4     <title>Hello Laravel</title>
5 </head>
6 <body>
7     <h1>This is a somefolder/Index View</h1>
8     <ul>
9         <li>NIM: {{ $nim }}</li>
10        <li>Nama: {{ $nama }}</li>
11        <li>Prodi: {{ $prodi }}</li>
12    </ul>
13 </body>
```

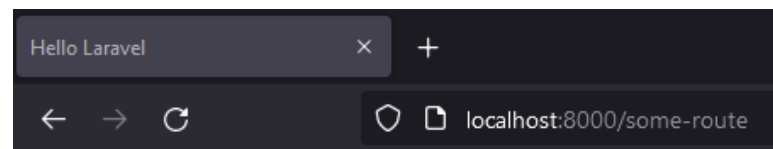


## This is a somefolder/Index View

- NIM: 001
- Nama: John Thor
- Prodi: Informatika

# Pass Multiple Data to Views

```
SomeController.php | index.blade.php
7 class SomeController extends Controller
8 {
9     //
10    public function index(){
11        return view('somefolder.index')
12            ->with('nim', '001')
13            ->with('nama', 'John Thor')
14            ->with('prodi', 'Informatika');
15    }
16 }
17

1 <!doctype html>
2 <html>
3 <head>
4     <title>Hello Laravel</title>
5 </head>
6 <body>
7     <h1>This is a somefolder/Index View</h1>
8     <ul>
9         <li>NIM: {{$nim}}</li>
10        <li>Nama: {{$nama}}</li>
11        <li>Prodi: {{$prodi}}</li>
12    </ul>
13 </body>
```

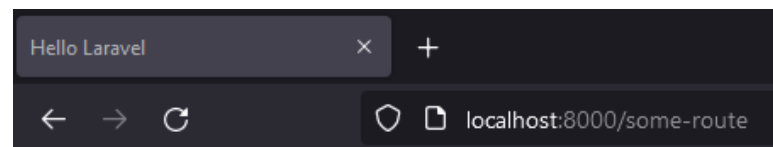

## This is a somefolder/Index View


- NIM: 001
- Nama: John Thor
- Prodi: Informatika

# Blade Templating Engine

```

app.blade.php
1 <!doctype html>
2 <html>
3 <head>
4     <title>@yield('title')</title>
5     @yield('css')
6 </head>
7 <body>
8 <div class="container">
9     @yield('header')
10    @yield('content')
11    @yield('footer')
12    @yield('js')
13 </div>
14
15
16 </body>
17 </html>

welcome.blade.php
1 @extends('app');
2
3 @section('title')
4     Hello Laravel
5 @stop
6
7 @section('header')
8     <h1>This is a Header</h1>
9 @stop
10
11 @section('content')
12     <h3>This is a Content</h3>
13 @stop
14
15 @section('footer')
16     <p>This is a Footer</p>
17 @stop
  
```

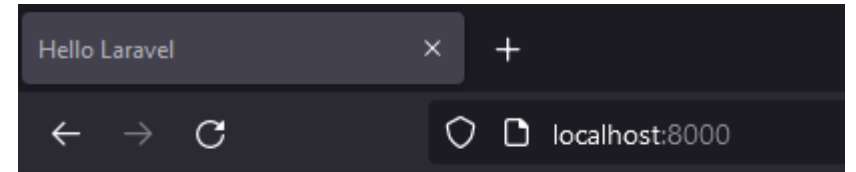

**This is a Header**


**This is a Content**

This is a Footer

# Display Multiple Data using Loop

```
SomeController.php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6
7 class SomeController extends Controller
8 {
9     public function index(){
10         $data = ['John Thor', 'John Wick', 'John Doel', 'John Jones'];
11         return view('somefolder.index')->with('data', $data);
12     }
13 }
14

index.blade.php
1 <!doctype html>
2 <html>
3 <head>
4     <title>Hello Laravel</title>
5 </head>
6 <body>
7     <h1>This is a somefolder/Index View</h1>
8     <ul>
9         @foreach($data as $d)
10             <li>{{ $d }}</li>
11         @endforeach
12     </ul>
13 </body>
14 </html>
```

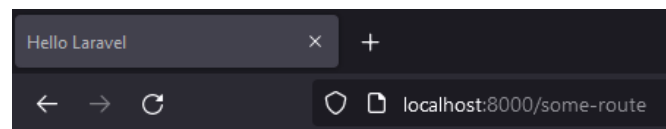

## This is a somefolder/Index View

- John Thor
- John Wick
- John Doel
- John Jones

# SUMMARY

After finishing this module, you should be able:

- to understand how to implement Controller
- to understand how to setup Routing Controller
- to understand how to implement Views
- to understand how to Pass Data to Views
- to understand how to implement Blade Templating Engine
- to understand how to display multiple data using looping



# NEXT WEEK'S OUTLINE



- Database
- Laravel Model
- Laravel Migration
- Accessor & Mutator

# REFERENCES

<https://laravel.com/docs/9.x>

# Visi

Menjadi Program Studi Strata Satu Informatika **unggulan** yang menghasilkan lulusan **berwawasan internasional** yang **kompeten** di bidang Ilmu Komputer (*Computer Science*), **berjiwa wirausaha** dan **berbudi pekerti luhur**.



# Misi

1. Menyelenggarakan pembelajaran dengan teknologi dan kurikulum terbaik serta didukung tenaga pengajar profesional.
2. Melaksanakan kegiatan penelitian di bidang Informatika untuk memajukan ilmu dan teknologi Informatika.
3. Melaksanakan kegiatan pengabdian kepada masyarakat berbasis ilmu dan teknologi Informatika dalam rangka mengamalkan ilmu dan teknologi Informatika.