

Wireless networks overview


- Wireless network = Wi-Fi
- Type of Wireless Local Area Network (WLAN)
- Standardized by [IEEE 802.11](#)
- Allows devices in range of an access point to access the network.


Wireless terms

- **Access Point**
 - Access Point (AP) or Wireless Access Point (WAP)
 - Hardware device that allows wireless connectivity to the end devices.
- **SSID (Service Set Identifier)**
 - Unique name for a wireless Access Point
 - Inserted into the header of every data packet.
- **BSSID (Basic Service Set Identifier)**
 - MAC address of an access point
- **GSM**
 - Global System for Mobile Communication
- **Bandwidth**
 - Amount of information that may be broadcasted over a connection
- **Hotspot**
 - Places where wireless network is available for public use
- **Orthogonal Frequency Division Multiplexing**
 - Encoding method of digital data on multiple carrier frequencies
- **Frequency-hopping spread spectrum (FHSS)**
 - Method of transmitting radio signals rapidly switching a carrier among many frequency channels
- **Phase Shift Keying (PSK)**
 - Modulation technique where phase of carrier signal changed by varying the sine and cosine inputs.
 - Widely used for WLANs, biometric and contactless operations, along with RFID and Bluetooth communications.

Antenna patterns

-

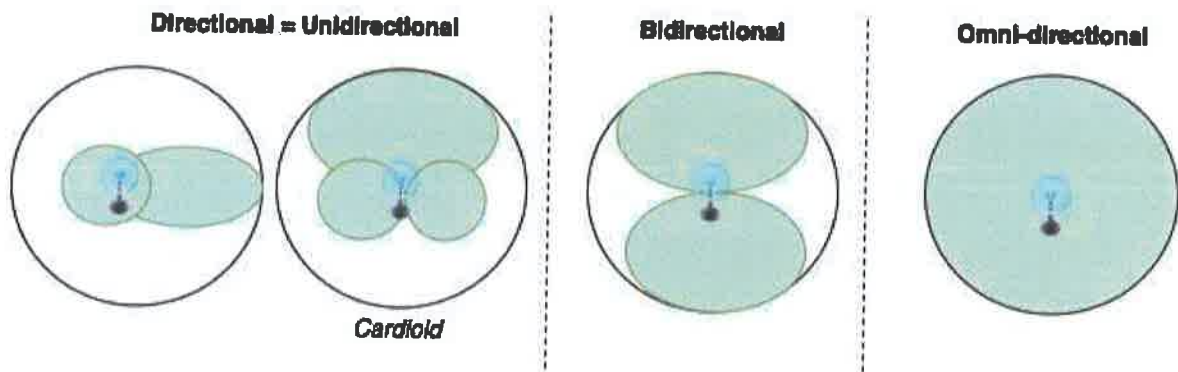

-  Directional antenna patterns
 - **Directional antenna**
 - Also known as **unidirectional antenna**
 - Broadcasts and obtains radio waves from a single direction (can be e.g. 30 - 60 degrees)
 - E.g. **Yagi** (also known as **Yagi-Uda antenna**)
 - Most concentrated, higher range
 - **Parabolic grid antenna**
 - Based on the idea of a satellite dish
 - Can be attacked from farther away as it picks up Wi-Fi signal from 16 km and more
 - **Bi-directional antenna**
 - **Omni-directional antenna**
 - Broadcasts in 360 degrees
 - Most common type of antenna used in wireless communications and networks, especially WiFi
 - Used also in wireless base stations
 - Least concentrated and lower range



- **Dipole:** Used for closer proximity e.g. mobile phones, client connections instead of site-to-site

Wireless encryption

Wireless encryption comparisons

WEP

- Wired Equivalent Privacy
- 1997, to provide data confidentiality
- Stream cipher RC4 for confidentiality
- CRC-32 checksum for integrity
- Authentication using WEP-Open and WEP-Shared (using a shared key) modes
- ❌ Weak as it reuses small IVs which allows decoding of its shared key.

WPA

- Wi-Fi Protected Access
- 2003, replace WEPs weak encryption
- Uses **Temporal Key Integrity Protocol (TKIP)**
 - Major improvement over WEP
 - Dynamically changes key as system is used
 - Combined with larger IV, this defeats well known attacks
 - Uses RC4 encryption
- Authentication using WPA-PSK and WPA-Enterprise modes
 - WPA-PSK uses pre-shared (symmetric) key to encrypt the wireless data
- Improved payload integrity vs. WEP
 - Uses more secure message integrity check (MIC) known as Michael
 - Includes a frame counter to prevent replay attacks
- Still subject to attack

WPA2

- Also known as **Wi-Fi Protected Access 2** or **802.11i**
- 2004, replace WPA's weak cipher
- Authentication WPA2-Personal and WPA2-Enterprise modes
- Uses **Advanced Encryption Standard algorithm (AES)**
 - Much harder to decrypt than WPA or WEP
- 📝 Replaces TKIP with **CCMP** (AES-CCMP)
 - Also known as **Counter Mode Cipher Block Chaining Message Authentication Code Protocol (Counter Mode CBC-MAC Protocol)** or **CCM mode Protocol (CCMP)**
 - Uses AES as encryption algorithm instead of RC4 in WPA.

WPA3

- Wi-Fi Protected Access 3
- 2018, introduce Dragonfly handshake, protects against dictionary attacks
- Authentication using WPA3-Personal and WPA3-Enterprise

Wireless cryptographic differences

	WEP	WPA	WPA2	WPA3
Encryption	RC4	RC4 + TKIP	AES-CCMP	AES-CCMP & AES-GCMP
IV Size (Bits)	24	48	48	48
Key Length (Bits)	40/140	128	128	128/256
Integrity Check	CRC-32	Michael/CRC-32	CBC-MAC, CCMP	BIP-GMAC-256

WPA2 and WPA3 Operation Modes

Personal

- Intended for home use, easier setup

Enterprise

- More complex setup, more granular control
- Uses RADIUS authentication with Extensible Authentication Protocol (EAP) extensions for more security


WPA2 vs WPA3 operation modes

	Personal	Enterprise
WPA2	Also called WPA-PSK (pre-shared key) as it uses PSK to protect network access	Same encryption
WPA3	Also called WPA3-SAE (Simultaneous Authentication of Equals). Uses 128-bit key and <u>Forward Secrecy</u> against dictionary attacks.	Uses 192-bit key

Wireless standards

- **802.15.1 - Bluetooth**
 - Read more on [bluetooth](#)
- **802.15.4 - Zigbee**
 - Low-power, low-data-rate, and close-proximity wireless ad hoc networks.
 - Popular IoT connection protocol
- **802.16 - WiMAX**
 - Wireless on "steroids"
 - Written for global development of broadband wireless metropolitan area networks.
 - Big range and fast.
- **Comparing wireless standards**
- **802.11 Specifications**

Standard	Distance	Speed
WiFi	Medium (20-250 m)	Started slow (2 Mbit/s) but fast now (1300 Mbit/s)
ZigBee	Smallest (1-100 m)	Slow (up to 0.25 Mbit/s)
WiMax	Biggest (1.6 - 9.6 km)	Fast (up to 1 Gbit/s)

-  Summary of the standards

Standard	Year	Summary
802.11 (WLAN/Wi-Fi)	1997	• 2.4 GHz • DSS, FHSS • Up to 2 Mbit/s • 20 - 100 meters
802.11a (Wi-Fi 2)	1999	• 5 - 3.7 GHz • OFDM • Up to 54 Mbit/s • 35 - 100 meters
802.11b	1999	• 5.4 GHz • DSSS • Up to 11 Mbit/s • 35 - 140 meters
802.11c	2001	Bridge operation procedures; included in the IEEE 802.1D standard
802.11d	2001	International (country-to-country) roaming extensions
802.11e	2005	Enhancements: QoS, including packet bursting
802.11f	2003	Inter-Access Point Protocol, Withdrawn February 2006
802.11g (Wi-Fi 3)	2003	• 2.4 GHz • OFDM • Up to 54 Mbit/s • 38 - 140 meters
802.11i	2004	Defines WPA/WPA2 encryption standards
802.11n (Wi-Fi 4)	2009	• 2.4 - 5 GHz • MIMO-OFDM • Up to 600 Mbit/s • 70 - 250 meters
802.11ac (Wi-Fi 5)	2012	• 5 GHz • MU-MIMO, • Up to 1300 Mbit/s • 70 - 250 meters
802.11ax (Wi-Fi 6)	2019	• 1 - 6 GHz • MU-MIMO, OFDMA • Up to 11 Gbit/s • 70 - 250 meters
802.15.1 (WPAN/Bluetooth)	2002	• 2.4 GHz • GFSK, $\pi/4$ -DPSK, 8DPSK • Up to 50 Mbit/s • 70 - 250 meters
802.15.4 (Low rate WPAN/ZigBee)	2003	• 0.868, 0.915, 2.4 GHz • O-QPSK, GFSK, BPSK • Up to 0.25 Mbit/s • 70 - 250 meters
802.16 (WIMAX)	2005	• 2-11 GHz • SOFDMA • Up to 1 Gbit/s • 1.6 - 9.6 kilometers


- See also [all 802.11 standards and amendments](#)

Wi-Fi authentication

Wireless authentication modes


Open system authentication process (OSA)

- Uses WPA protocol.
- Complete free for all, no auth at all

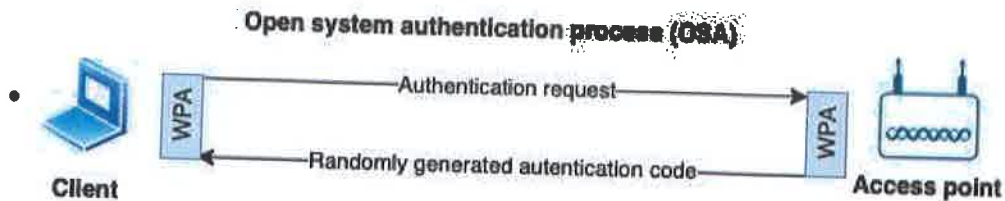


Shared key authentication process (SKA)

- Uses WEP protocol + a shared secret key

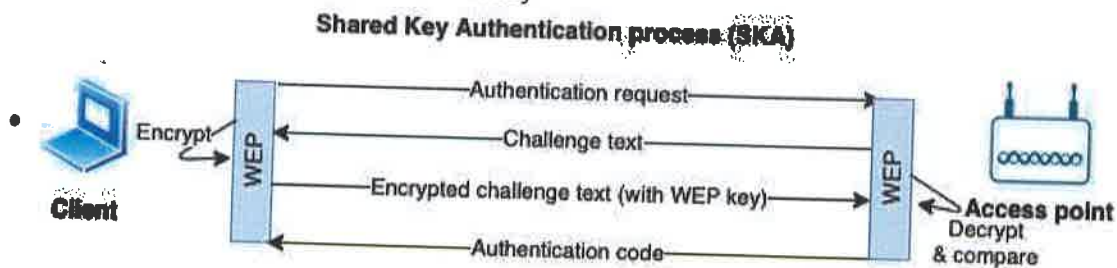


IEEE 802.1x

-  Authentication mechanism for both wireless and physical access to a network
- Authenticate devices to decide to give e.g. corporate or guest access
- Switches uses back-end authentication server, see [AAA](#)
- Can authenticate based on MAC address or other requirements (certificate, VLAN etc.)
- Per default all hosts on a wired connection (LAN) can see each other

AAA protocols

- AAA stands for (Authentication, Authorization, Accounting)
- Family of protocols that mediate network access.
- Sometimes these protocols are used in combination with
 - [Point-to-Point Protocol \(PPP\)](#)
 - [Extensible Authentication Protocol \(EAP\)](#)
 - Protected Extensible Authentication Protocol (PEAP)
 - [Lightweight Directory Access Protocol \(LDAP\)](#)
- Most commonly used protocol is [RADIUS](#) and then [Diameter](#), meanwhile older systems use [TACACS](#) and [TACACS+](#)

RADIUS

- Stands for **R**emote **A**uthentication **D**ial **I**n **U**ser **S**ervice
-  Commonly used by ISPs (Internet Service Providers) and corporations for access control
- Primarily used to manage access to the internet or other networks
 - Networks can employ a variety of networking technologies, including analog modems, DSL, wireless local area networks (WLANs), and VPNs.
- Based on UDP (User Datagram Protocol)
- Flexible and extensible offering a variety of ways to authenticate the user
- Requires setting-up a RADIUS back-end server.
 - Usually integrated with AD (active directory)

Extensible Authentication Protocol (EAP)

- Authentication framework used by [Enterprise WPA operation mode](#).
- Strong when used with TLS (EAP-TLS)
 - Higher security when client-side certificates are hosted in smart cards.
- Extends and replaces [Point-to-Point Protocol \(PPP\)](#).

EAP Transport Layer Security (EAP-TLS)

- Secure standard using TLS protocol
- Requires mutual authentication
 - Where the client-side certificate can be stored in e.g. smart cards.

Diameter

- Successor to RADIUS
- Not directly backwards compatible
- Security is provided by [IPsec](#) or [TLS](#) and privacy protocols.

TACACS

- Terminal Access Controller Access-Control System
- Remote authentication protocol
- Commonly used in networks of UNIX systems

TACACS+ (TACACS plus)

- Terminal Access Controller Access-Control System Plus
- Provides access control for routers, network access servers, and other networked computing devices via one or more centralized servers.
- Based on TACACS but an entirely new protocol (incompatible with TACACS)
- Runs on older systems but generally replaced by RADIUS

Wireless threats and attacks


Wireless threats

- **Access control attacks**
 - Evading access control measures such as Access Point MAC filters, port access control
- **Integrity attacks**
 - Sending forged frames
 - E.g. data frame injection, bit-flipping.
- **Confidentiality attacks**
 - Intercepting confidential information transmitted over the network
 - E.g. traffic analysis, session hijacking, MITM, etc...
- **Availability attacks**
 - Attempting to prevent users from accessing WLAN resources.
 - E.g. flooding, ARP poisoning, De-Authentication attacks
- **Authentication attacks**
 - Steal identity information or impersonating clients
 - E.g. password cracking, identity theft, password guessing
 - See also [Authentication attacks](#) | [Hacking Web Applications](#)
- **Misconfigured access point attack**
 - Accidents for configurations that you can exploit
- **AD Hoc connection attack**
 - Connecting directly to another device via ad-hoc network.
 - Not very successful as the other user has to accept connection
- **Honeyspot access point attack**
 - Using multiple WLANs in area and use same SID.
- **AP MAC spoofing**
 - MAC spoofing to mask an authorized client
- **Jamming signal attack**
 - Jamming or blocking the wireless communication, causing a denial of service

De-authentication attack

- Also known as **deauthentication attack**
- Used to capture the handshake traffic.
- Can also be used to DoS the client by continuously de-authenticating the device.

Evil twin attack

- Also known as **client mis-association**
-  A rogue access point outside the place with the legitimate one
- E.g. can lure the employees of the organization to connect with it
- Can be done using [Airsnarf](#)

Honeypot attack

- Faking a well-known hotspot on a rogue AP
- E.g. as McDonald's or Starbucks free Wi-Fi spot

Rogue Access Point Attack

- Fake AP with same SSID as legitimate one.
- Allows hijacking connections and acting as a middle man sniffing
- Differs from [evil twin attack](#) as it focuses on MITM instead of WiFi passwords.

Sinkhole attack

- Compromised node tries to attract network traffic by advertise its fake routing update.
- Allows traffic to be directed away from its target.
- Can be used to launch other attacks like dropping or altering routing information.

DNS sinkhole

- Also known as a **sinkhole server**, **Internet sinkhole**, or **Blackhole DNS**
- DNS server that gives out a false result for a domain name.
- Used to attack on sensor/IoT device networks
- Can be prevented by owning own DNS server or hardcoding IP addresses.
- E.g. [WannaCry malware was stopped](#) spreading as a worm by Marcus Hutchins who discovered kill switch in the malware and Registering a domain name for a DNS sinkhole.

Wireless hacking methodology

1. [Wi-Fi Discovery](#)

- find wireless networks

2. **GPS mapping**

- List of discovered Wi-Fi networks


3. **Wireless Traffic Analysis**

- Capture the packets to reveal any information (SSID, authentication method, ...)

4. **Launch Attacks**

- E.g. ARP poisoning, MAC spoofing, De-Authentication, Rogue access point, MITM.

Wireless discovery

- Also known as Wi-Fi discovery
- **Wardriving**: Using a mobile vehicle to detect WiFi networks
 -  E.g. [T.J. Maxx Data Theft](#) where 45 million credit/debit card data was stolen because of weak WEP encryption.
 - Also used: warbiking, warcycling, warwalking.
 - **Warchalking**: drawing of symbols in public places to advertise an open Wi-Fi network.
- Tools such as WiFiExplorer, WiFiFoFum, OpenSignalMaps, WiFinder
 - WIGLE: map for wireless networks
 - [NetStumbler](#): Windows tool to find networks

- Kismet
 - Wireless network detector, sniffer, and intrusion detection system.
 - Works without sending any packets (passively)
- NetSurveyor: Windows tool similar to NetStumbler and Kismet
- Silica: Discovers and shows vulnerabilities

Wireless encryption attacks

WEP cracking

- Weak IV (Initialization Vectors)
 - Small
 - Get reused frequently
 - Are sent in clear text during transmission
- Can take a few seconds to discover the shared secret key.
- The goal is to collect as many IVs as possible
 - 💡 Inject packets to speed it up
- 📝 Can be cracked using Aircrack-ng:
 1. Listen to the traffic
 - Start a compatible adapter with injection and sniffing capabilities
 - `airmon-ng start <interface-name>`
 2. Start a sniffer to capture packets
 - `airodump-ng --bssid <AP-MAC-address> -c 11 -w <output-file> <interface-name>`
 3. Create more packets to escalate the process to collect more IV
 - Inject ARP traffic: `aireplay-ng -3 -b 00::09:58:6F:64:1E -h 44:60:57:c8:58:A0 mon0`
 4. Run a cracking tool to extract encryption keys from the collected IVs
 - `aircrack-ng <output-file>.cap`
 - Default method is PTW (Pyshkin, Tews, Weinmann), other (older) supported methods include:
 - FMS (Fluhrer, Mantin, Shamir) attacks: statistical techniques
 - Korek attacks: statistical techniques
 - Brute force
- Using separate tools for sniffing and cracking:
 1. Gathering packets through e.g. Wireshark or Prismdump
 2. Crack using e.g. WEPCrack, AirSnort, Aircrack-ng, and WEPLab

WPA/WPA2 cracking

- Much more difficult than WEP
- Uses a constantly changing temporal key and user-defined password
- **Key Reinstallation Attack (KRACK)**
 - Replay attack that uses third handshake of another device's session
- Most other attacks are simply brute-forcing the password that take a lot of time.

Sniffing 4-way handshake


- 4-way handshake is the ceremony between AP and the device
- Vulnerability in WPA and WPA-Personal (WPA-PSK, pre-shared key)
- During WPA handshake, password is shared in encrypted form (called **PMK (pairwise master key)**)
- Flow:
 1. Client tries to connect to an AP (access point)
 - If the client is already connected then deauthentication attack can be used to disconnect the client and sniff when client is reconnecting.
 2. Grab packets while client goes through a 4-step process of authentication
 3. Crack WPA keys from recorded packets
 - Can be an offline attack e.g. utilizing a cloud virtual machine.
 - E.g. using `hashcat`
- Steps
 1. Recording and deauthenticating using `aircrack-ng`
 - 🕸 Used often in movies as it looks cool
 - `airmon-ng start <interface-name>` to create a new interface and enable monitor mode
 - `airmon-ng <interface-name>` to list access points with BSSID, encryption (WPA2 etc.) and more.
 - `airmon-ng -c2 -w capture -d <BSSID> <interface-name>` to listen
 - Shows each client MAC and logs their traffics notifying handshakes.
 - `airplay-ng -deauth 100 -a <BSSID> -c <client-MAC> <interface-name>` to inject packets to de-authenticate the client
 2. Crack the password using `hashcat`
 - Convert log files from `airmon-ng` from `.cap` to `.hccapx` using e.g. an online tool
 - Run `hashcat.bin -a 3 -m 2500 converted-file.hccapx ?d?d?d?d?d`
 - `-m 2500`: hash mode for `WPA-EAPOL-PBKDF2`
 - `-a 3 ?d?d?d?d?d`: attack mode: bruteforce with mask telling 5 any characters.

WPA3


- More secure against sniffing, brute force and WPS attacks.
- However has implementation bugs that can be exploited using:
 - potential side channel attacks
 - DoS attacks

Tools for wireless encryption attacks

Aircrack-ng


-  Sniffer, detector, traffic analysis tool and a password cracker
- [Official webpage](#) | [Source code](#)
- Uses dictionary attacks for WPA and WPA2.
 - Other attacks are for WEP only

Cain and Abel

- Also known as **Cain & Abel** or **Cain**
-  Windows tool to sniff packets and crack passwords
- Relies on statistical measures and the PTW technique to break WEP
- See also • [Cain and Abel](#) | [Web server threats and attacks](#) • [Cain and Abel](#) | [Sniffing tools](#)

Wireless security tools

Wireless Intrusion Prevention Systems (WIPS)

- Also known as **Wireless IPS**
- Network device
-  Intrusion detection by monitoring the radio spectrum for the presence of unauthorized access points (e.g. evil twins)
- Intrusion prevention by taking steps to mitigate the threat (e.g. deattaching it).
- E.g. • [Cisco Adaptive Wireless IPS](#) • [WatchGuard WIPS](#)

Wireless Intrusion Detection Systems (WIDS)

- Also known as **Wireless IDS**
- Monitors radio spectrum used by wireless LANs and alerts whenever a rogue access point is detected.
- Alerts a systems administrator whenever a rogue access point is detected

Wi-Fi security auditing tools

- [AirMagnet® WiFi Analyzer PRO](#)
 - Real-time analysis of 802.11a/b/g/n/ac wireless networks
- [RFProtect Wireless Intrusion Protection](#)
 - Prevents denial-of-service and man-in-the-middle attacks and mitigates over-the-air security threats.
- [FruityWiFi](#)
 - Open source tool to audit wireless networks
 - Allows the user to deploy advanced attacks by directly using the web interface or by sending messages to it.
- [Fern Wifi Cracker](#)
 - Security auditing and attack software program
 - Can run attacks such as cracking WEP/WPA/WPS keys
- [OSWA-Assistant](#)
 - Organizational System Wirelss Auditor

Wi-Fi predictive planning tools

- Allows to plan and design Wi-Fi 6 networks
- E.g.
 - [AirMagnet® Planner](#)
 - Plan networks, estimate budgets, optimize, plan mitigation strategies
 - [Cisco Prime Infrastructure](#)
 - Solution for provisioning, monitoring, optimizing, and troubleshooting both wired and wireless devices

- [Ekahau Pro](#)
 - Tool for designing, analyzing, optimizing, and troubleshooting Wi-Fi networks.
- [TamoGraph Site Survey](#)
 - Wireless site survey software tool for collecting, visualizing, and analyzing 802.11 a/b/g/n/ac/ax Wi-Fi data.
- [NetSpot](#)
 - Wi-Fi analysis, and troubleshooting on Mac OS X and Windows.
 - Visualize, manage, troubleshoot, audit, plan, and deploy your wireless networks.

Wi-Fi vulnerability scanning tools

- [Zenmap](#)
 - Official Nmap GUI.
- [Nessus](#)
 - Read more on [vulnerability analysis](#)
- [Network Security Toolkit](#)
 - Bootable Fedora with network security tools
- [SecPoint® Penetrator™ Vulnerability Scanner & Assessment](#)
 - Comes with WiFi pen-testing tools
- [SILICA](#)
 - Automated, WiFi specific, vulnerability assessment and penetration tool.
- [WebSploit](#)
 - MITM framework with WiFi attacks
- [Airbase-ng](#)
 - Multi-purpose tool aimed at attacking clients as opposed to the Access Point (AP) itself

Wi-Fi security tools for mobile

- [Wifi Protector](#)
 - Android WiFi firewall
- [WiFiGuard](#)
 - iOS/Android app to scan and detect devices on WiFi network
- [Wifi Inspector](#)
 - Android app to scan and detect devices on WiFi network
- [ARP Guard](#)
 - Android app for protection against network attacks including ARP poisoning.

Bluetooth

- Range is typically less than 10m
- Operates on the 2.4 GHz
- Discovery feature can control the visibility of the device
- **Bluetooth Low Energy (BLE):** Bluetooth ≥ 4.0
- **Bluetooth Classic (BC):** Bluetooth < 4.0
- Uses WPAN (wireless personal area network)
- Utilize the Gaussian Frequency Shift Keying (FSK) to exchange information in the basic rate (BR) of usually 1 mbps.

Bluetooth security

- Standard provides three basic security services:
 - **Authentication**
 - To verify the identity of communicating devices
 - **Confidentiality**
 - To prevent the compromise of information and ensure that only authorized devices can access and view data.
 - **Authorization**
 - To allow the control of resources by ensuring that a device is authorized to use a service before permitting it to do so.
- ⚠ Standard does not address other security services such as audit and non-repudiation.
- Four security modes (levels):
 1. **Mode 1:** No authentication/encryption.
 2. **Mode 2:** Authorization with access control policies.
 3. **Mode 3:** Mandate authentication and encryption using secret key with paired devices
 4. **Mode 4:** Secure Simple Pairing using Elliptic-Curve Diffie-Hellman (ECDH) for key exchange and link key generation

Bluetooth device discovery



- BlueScanner: Finds devices around and displays information
- BT Browser: Find and enumerate nearby devices

Bluetooth attacks

BlueSmacking

- 📝 DoS attack using echo.


BlueJacking

-  Sending unsolicited data to bluetooth devices
- Allows spamming for bluetooth also known as **BlueSpamming**
-  Not related to hijacking


BluePrinting

-  Extracting information about the device


BlueSnarfing

-  Stealing data from target device
- E.g. calendars, contact lists, emails and text messages

BlackJacking

-  Exploits a blackberry device to attack corporate LAN directly
- Compromises blackberry then proxies between corporate servers and attacker.


BBProxy

-  Bluejacking tool
- Included in [BlackBerry Attack Toolkit](#)
- Announced by [DefCon](#)

BlueBugging

- Also known as **bluebug-attack**
- Create a [backdoor attack](#) before returning control of the phone to its owner
- Extends [BlueJacking](#) and [BlueSnarfing](#) (allows attacker to access data)
- E.g. by pretending to be a headset to receive phone calls
- Not so common as vulnerabilities are generally patched

Bloover

- A proof-of-concept [tool](#)
-  Exploits bluebugging targeting J2ME (Java micro edition) enabled phones such as Nokia
- [Bloover II](#): Exploits bluebug and also helomoto, bluesnarf and OBEX object push attacks

Bluetooth attacks countermeasures

- Check paired devices
- Turn off visibility / turn off Bluetooth if not used
- Use strong PIN
- Use encryption
- Use the strongest security mode available
- Don't accept unknown requests
- Use [bluetooth security tools](#)

Bluetooth security tools

- [Bluetooth firewall](#)
 - Mobile app for logging and monitoring Bluetooth connections
 - Radar feature allows you to scan nearby bluetooth devices
 - Scan feature lists apps that can perform bluetooth actions
- [Bluediving](#)
 - Bluetooth penetration suite
 - Exploits BlueBug, BlueSnarf, BlueSnarf++ and BlueSmack
- [Bluelog](#)
 - Linux Bluetooth scanner
- [btscanner](#)
 - Debian tool to extract information from a Bluetooth device without the requirement to pair.
- [BlueRanger](#)
 - Simple Bash script which uses Link Quality to locate Bluetooth device radios