

Fundamentals of Artificial Intelligence and Knowledge Representation (Module 2)

Last update: 04 December 2023

Academic Year 2023 – 2024
Alma Mater Studiorum · University of Bologna

Contents

1	Propositional and first order logic	1
2	Prolog	2
2.1	Syntax	2
2.2	Semantics	3
2.3	Arithmetic operators	3
2.4	Lists	4
2.5	Cut	4
2.6	Negation	5
3	Ontologies	7
3.1	Categories	7
3.1.1	Reification properties and operations	7
3.1.2	Physical composition	8
3.1.3	Measures	8
3.1.4	Things vs stuff	8
3.2	Semantic networks	9
3.3	Frames	9
4	Description logic	11
4.1	Syntax	11
4.2	Semantics	12
4.2.1	Concept-forming operators	12
4.2.2	Sentences	12
4.2.3	Interpretation	12
4.3	Reasoning	13
4.3.1	T-box reasoning	13
4.3.2	A-box reasoning	13
4.3.3	Computing subsumptions	14
4.3.4	Open world assumption	14
4.4	Expanding description logic	14
4.5	Description logics family	15
5	Web reasoning	16
5.1	Semantic web	16
5.2	Knowledge graphs	17
6	Quantitative time reasoning	19
6.1	Propositional logic	19
6.2	Situation calculus (Green's formulation)	19
6.3	Event calculus (Kowalski's formulation)	20
6.3.1	Reactive event calculus	21
6.4	Allen's logic of intervals	21

1 Propositional and first order logic

See Languages and Algorithms for AI (module 2).

2 Prolog

It may be useful to first have a look at the "Logic programming" section of **Languages and Algorithms for AI (module 2)**.

2.1 Syntax

Term Following the first-order logic definition, a term can be a:

Term

- Constant (`lowerCase`).
- Variable (`UpperCase`).
- Function symbol (`f(t1, ..., tn)` with `t1, ..., tn` terms).

Atomic formula An atomic formula has form:

Atomic formula

$$p(t1, \dots, tn)$$

where `p` is a predicate symbol and `t1, ..., tn` are terms.

Note: there are no syntactic distinctions between constants, functions and predicates.

Clause A Prolog program is a set of horn clauses:

Horn clause

Fact `A`.

Rule `A :- B1, ..., Bn`. (`A` is the head and `B1, ..., Bn` the body)

Goal `:- B1, ..., Bn`.

where:

- `A, B1, ..., Bn` are atomic formulas.
- `,` represents the conjunction (\wedge).
- `:-` represents the logical implication (\Leftarrow).

Quantification

Quantification

Facts Variables appearing in a fact are quantified universally.

$$A(X) . \equiv \forall X : A(X)$$

Rules Variables appearing the the body only are quantified existentially. Variables appearing in both the head and the body are quantified universally.

$$A(X) :- B(X, Y) . \equiv \forall X, \exists Y : A(X) \Leftarrow B(X, Y)$$

Goals Variables are quantified existentially.

$$:- B(Y) . \equiv \exists Y : B(Y)$$

2.2 Semantics

Execution of a program A computation in Prolog attempts to prove the goal. Given a program P and a goal $:- p(t_1, \dots, t_n)$, the objective is to find a substitution σ such that:

$$P \models [p(t_1, \dots, t_n)]\sigma$$

In practice, it uses two stacks:

Execution stack Contains the predicates the interpreter is trying to prove.

Backtracking stack Contains the choice points (clauses) the interpreter can try.

SLD resolution Prolog uses SLD resolution with the following choices:

SLD

Left-most Always proves the left-most literal first.

Depth-first Applies the predicates following the order of definition.

Note that the depth-first approach can be efficiently implemented (tail recursion) but the termination of a Prolog program on a provable goal is not guaranteed as it may loop depending on the ordering of the clauses.

Disjunction operator The operator `;` can be seen as a disjunction and makes the Prolog interpreter explore the remaining SLD tree looking for alternative solutions.

2.3 Arithmetic operators

In Prolog:

Arithmetic operators

- Integers and floating points are built-in atoms.
- Math operators are built-in function symbols.

Therefore, mathematical expressions are terms.

is predicate The predicate `is` is used to evaluate and unify expressions:

$$T \text{ is Expr}$$

where T is a numerical atom or a variable and `Expr` is an expression without free variables. After evaluation, the result of `Expr` is unified with T .

Example.

```
:- X is 2+3.  
yes X=5
```

Note: a term representing an expression is evaluated only with the predicate `is` (otherwise it remains as is).

Relational operators Relational operators (`>`, `<`, `>=`, `<=`, `==`, `=/=`) are built-in.

2.4 Lists

A list is defined recursively as:

Lists

Empty list `[]`

List constructor `.(T, L)` where T is a term and L is a list.

Note that a list always ends with an empty list.

As the formal definition is impractical, some syntactic sugar has been defined:

List definition `[t1, ..., tn]` can be used to define a list.

Head and tail `[H | T]` where H is the head (term) and T the tail (list) can be useful for recursive calls.

2.5 Cut

The cut operator `(!)` allows to control the exploration of the SLD tree.

Cut

A cut in a clause:

`p :- q1, ..., qi, !, qj, ..., qn.`

makes the interpreter consider only the first choice points for `q1, ..., qi`, dropping all the other possibilities. Therefore, if `qj, ..., qn` fails, there won't be backtracking and `p` fails.

Example.

```
p(X) :- q(X), r(X).  
q(1).  
q(2).  
r(2).
```

```
:- p(X).  
yes X=2
```

```
p(X) :- q(X), !, r(X).  
q(1).  
q(2).  
r(2).
```

```
:- p(X).  
no
```

In the second case, the cut drops the choice point `q(2)` and only considers `q(1)`.

Mutual exclusion A cut can be useful to achieve mutual exclusion. In other words, to represent a conditional branching:

`if a(X) then b else c`

a cut can be used as follows:

```
p(X) :- a(X), !, b.  
p(X) :- c.
```

If `a(X)` succeeds, other choice points for `p` will be dropped and only `b` will be evaluated. If `a(X)` fails, the second clause will be considered, therefore evaluating `c`.

2.6 Negation

Closed-world assumption Only what is stated in a program P is true, everything else is false:

Closed-world assumption

$$\text{CWA}(P) = P \cup \{\neg A \mid A \text{ is a ground atomic formula and } P \not\models A\}$$

Non-monotonic inference rule Adding new axioms to the program may change the set of valid theorems.

As first-order logic is undecidable, closed-world assumption cannot be directly applied in practice.

Negation as failure A negated atom $\neg A$ is considered true iff A fails in finite time:

Negation as failure

$$\text{NF}(P) = P \cup \{\neg A \mid A \in \text{FF}(P)\}$$

where $\text{FF}(P) = \{B \mid P \not\models B \text{ in finite time}\}$ is the set of atoms for which the proof fails in finite time. Note that not all atoms B such that $P \not\models B$ are in $\text{FF}(P)$.

SLDNF SLD resolution with NF to solve negative atoms.

SLDNF

Given a goal of literals $:- L_1, \dots, L_m$, SLDNF does the following:

1. Select a positive or ground negative literal L_i :
 - If L_i is positive, apply the normal SLD resolution.
 - If $L_i = \neg A$, prove that A fails in finite time. If it succeeds, L_i fails.
2. Solve the goal $:- L_1, \dots, L_{i-1}, L_{i+1}, \dots, L_m$.

Theorem 2.6.1. If only positive or ground negative literal are selected during resolution, SLDNF is correct and complete.

Prolog SLDNF Prolog uses an incorrect implementation of SLDNF where the selection rule always chooses the left-most literal. This potentially causes incorrect deductions.

Proof. When proving $:- \text{capital}(X)$, the intended meaning is:

$$\exists X : \neg \text{capital}(X)$$

In SLDNF, to prove $:- \text{capital}(X)$, the algorithm proves $:- \text{capital}(X)$, which results in:

$$\exists X : \text{capital}(X)$$

and then negates the result, which corresponds to:

$$\neg(\exists X : \text{capital}(X)) \iff \forall X : (\neg \text{capital}(X))$$


□

Example (Correct SLDNF resolution). Given the program:


```
capital(rome).
region_capital(bologna).
city(X) :- capital(X).
city(X) :- region_capital(X).

:- city(X), \+capital(X).
```

its resolution succeeds with $X=\text{bologna}$ as $\neg \text{capital}(X)$ is ground by the unification of $\text{city}(X)$.

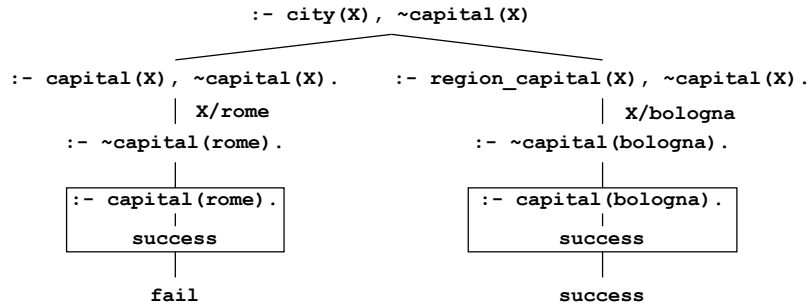

Example (Incorrect SLDNF resolution). Given the program:

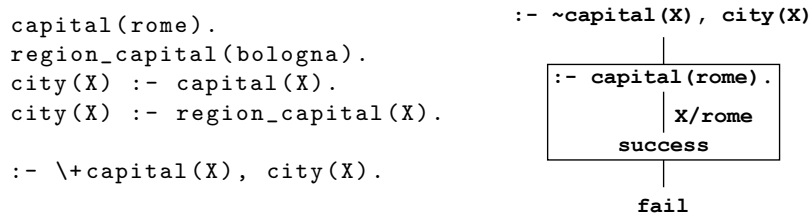

its resolution fails as $\neg \text{capital}(X)$ is a free variable and the proof of $\text{capital}(X)$ is ground with $X=\text{rome}$ and succeeds, therefore failing $\neg \text{capital}(X)$. Note that bologna is not tried as it does not appear in the axioms of capital .

3 Ontologies

Ontology	Formal (non-ambiguous) and explicit (obtainable through a finite sound procedure) description of a domain.	Ontology
Category	Can be organized hierarchically on different levels of generality.	Category
Object	Belongs to one or more categories.	Object
Upper/general ontology	Ontology focused on the most general domain.	Upper/general ontology
Properties:		
<ul style="list-style-type: none">• Should be applicable to almost any special domain.• Combining general concepts should not incur in inconsistencies.		
Approaches to create ontologies:		
<ul style="list-style-type: none">• Created by philosophers/logicians/researchers.• Automatic knowledge extraction from well-structured databases.• Created from text documents (e.g. web).• Crowd-sharing information.		

3.1 Categories

Category	Used in human reasoning when the goal is category-driven (in contrast to specific-instance-driven).	Category
In first order logic, categories can be represented through:		
Predicate	A predicate to tell if an object belongs to a category (e.g. <code>Car(c1)</code> indicates that <code>c1</code> is a car).	Predicate categories
Reification	Represent categories as objects as well (e.g. <code>c1 ∈ Car</code>).	Reification

3.1.1 Reification properties and operations

Membership	Indicates if an object belongs to a category. (e.g. <code>c1 ∈ Car</code>).	Membership
Subclass	Indicates if a category is a subcategory of another one. (e.g. <code>Car ⊂ Vehicle</code>).	Subclass
Necessity	Members of a category enjoy some properties (e.g. $(x \in \text{Car}) \Rightarrow \text{hasWheels}(x)$).	Necessity
Sufficiency	Sufficient conditions to be part of a category (e.g. $\text{hasPlate}(x) \wedge \text{hasWheels}(x) \Rightarrow x \in \text{Car}$).	Sufficiency
Category-level properties	Category themselves can enjoy properties (e.g. <code>Car ∈ VehicleType</code>)	Category-level properties

Disjointness	Given a set of categories S , the categories in S are disjoint iff they all have different objects:	Disjointness
	$\text{disjoint}(S) \iff (\forall c_1, c_2 \in S, c_1 \neq c_2 \Rightarrow c_1 \cap c_2 = \emptyset)$	
Exhaustive decomposition	Given a category c and a set of categories S , S is an exhaustive decomposition of c iff any element in c belongs to at least a category in S :	Exhaustive decomposition
	$\text{exhaustiveDecomposition}(S, c) \iff (\forall o \in c \iff \exists c_2 \in S : o \in c_2)$	
Partition	Given a category c and a set of categories S , S is a partition of c when:	Partition
	$\text{partition}(S, c) \iff \text{disjoint}(S) \wedge \text{exhaustiveDecomposition}(S, c)$	
3.1.2 Physical composition		
	Objects (meronyms) are part of a whole (holonym).	
Part-of	If the objects have a structural relation (e.g. <code>partOf(cylinder1, engine1)</code>). Properties:	Part-of
	Transitivity $\text{partOf}(x, y) \wedge \text{partOf}(y, z) \Rightarrow \text{partOf}(x, z)$	
	Reflexivity $\text{partOf}(x, x)$	
Bunch-of	If the objects do not have a structural relation. Useful to define a composition of countable objects (e.g. <code>bunchOf(nail1, nail3, nail4)</code>).	Bunch-of
3.1.3 Measures		
	A property of objects.	
Quantitative measure	Something that can be measured using a unit (e.g. <code>length(table1) = cm(80)</code>). Qualitative measures propagate when using <code>partOf</code> or <code>bunchOf</code> (e.g. the weight of a car is the sum of its parts).	Quantitative measure
Qualitative measure	Something that can be measured using terms with a partial or total order relation (e.g. <code>{good, neutral, bad}</code>). Qualitative measures do not propagate when using <code>partOf</code> or <code>bunchOf</code> .	Qualitative measure
Fuzzy logic	Provides a semantics to qualitative measures (i.e. convert qualitative to quantitative).	Fuzzy logic
3.1.4 Things vs stuff		
Intrinsic property	Related to the substance of the object. It is retained when the object is divided (e.g. water boils at 100°C).	Intrinsic property
Extrinsic property	Related to the structure of the object. It is not retained when the object is divided (e.g. the weight of an object changes when split).	Extrinsic property
Substance	Category of objects with only intrinsic properties.	Substance
Stuff	The most general substance category.	Stuff
Count noun	Category of objects with only extrinsic properties.	Count noun
Things	The most general object category.	Things

3.2 Semantic networks

Graphical representation of objects and categories connected through labelled links.

Semantic networks

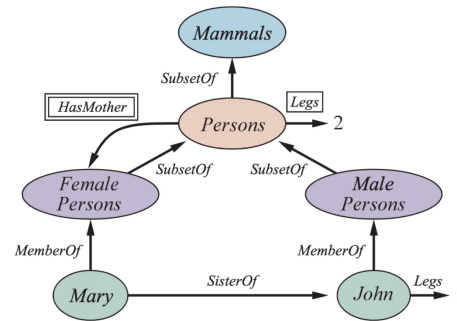


Figure 3.1: Example of semantic network

Objects and categories Represented using the same symbol.

Links Four different types of links:

- Relation between objects (e.g. **SisterOf**).
- Property of a category (e.g. **2 Legs**).
- Is-a relation (e.g. **SubsetOf**).
- Property of the members of a category (e.g. **HasMother**).

Single inheritance reasoning Starting from an object, check if it has the queried property. If not, iteratively move up to the category it belongs to and check for the property.

Single inheritance reasoning

Multiple inheritance reasoning Reasoning is not possible as it is not clear which parent to choose.

Multiple inheritance reasoning

Limitations Compared to first order logic, semantic networks do not have:

- Negations.
- Universally and existentially quantified properties.
- Disjunctions.
- Nested function symbols.

Many semantic network systems allow to attach special procedures to handle special cases that the standard inference algorithm cannot handle. This approach is powerful but does not have a corresponding logical meaning.

Advantages With semantic networks it is easy to attach default properties to categories and override them on the objects (i.e. **Legs** of **John**).

3.3 Frames

Knowledge that describes an object in terms of its properties. Each frame has:

Frames

- An unique name
- Properties represented as pairs `<slot - filler>`

Example.

```
(
  toronto
    <:Instance-Of City>
    <:Province ontario>
    <:Population 4.5M>
)
```

Prototype Members of a category used as comparison metric to determine if another object belongs to the same class (i.e. an object belongs to a category if it is similar enough to the prototypes of that category). Prototype

Defeasible value Value that is allowed to be different when comparing an object to a prototype. Defeasible value

Facets Additional information contained in a slot for its filler (e.g. default value, type, domain). Facets

Procedural information Fillers can be a procedure that can be activated by specific facets:

if-needed Looks for the value of the slot.

if-added Adds a value.

if-removed Removes a value.

Example.

```
(
  toronto
    <:Instance-Of City>
    <:Province ontario>
    <:Population [if-needed QueryDB]>
)
```

4 Description logic

4.1 Syntax

Logical symbols Symbols with fixed meaning.

Logical symbols

Punctuation () []

Positive integers

Concept-forming operators ALL, EXISTS, FILLS, AND

Connectives \sqsubseteq , \doteq , \rightarrow

Non-logical symbols Domain-dependant symbols.

Non-logical symbols

Atomic concepts Categories (CamelCase, e.g. Person).

Roles Used to describe objects (:CamelCase, e.g. :Height).

Constants (camelCase, e.g. johnDoe).

Complex concept Concept-forming operators can be used to combine atomic concepts and form complex concepts. A well-formed concept follows the conditions:

Complex concept

- An atomic concept is a concept.
- If r is a role and d is a concept, then $[ALL \ r \ d]$ is a concept.
- If r is a role and n is a positive integer, then $[EXISTS \ n \ r]$ is a concept.
- If r is a role and c is a constant, then $[FILLS \ r \ c]$ is a concept.
- If $d_1 \dots d_n$ are concepts, then $[AND \ d_1 \dots d_n]$ is a concept.

Sentence Connectives can be used to combine concepts and form sentences. A well-formed sentence follows the conditions:

Sentence

- If d_1 and d_2 are concepts, then $(d_1 \sqsubseteq d_2)$ is a sentence.
- If d_1 and d_2 are concepts, then $(d_1 \doteq d_2)$ is a sentence.
- If c is a constant and d is a concept, then $(c \rightarrow d)$ is a sentence.

Knowledge base Collection of sentences.

Knowledge base

Constants are individuals of the domain.

Concepts are categories of individuals.

Roles are binary relations between individuals.

Assertion box (A-box) List of facts about individuals.

Assertion box
(A-box)

Terminological box (T-box) List of sentences (axioms) about concepts.

Terminological box
(T-box)

4.2 Semantics

4.2.1 Concept-forming operators

Let r be a role, d be a concept, c be a constant and n a positive integer. The semantics of concept-forming operators are:

Concept-forming operators

[ALL r d] Individuals r -related to the individuals of the category d .

Example. [ALL :HasChild Male] individuals that have zero children or only male children.

[EXISTS n r] Individuals r -related to at least n other individuals.

Example. [EXISTS 1 :Child] individuals with at least one child.

[FILLS r c] Individuals r -related to the individual c .

Example. [FILLS :Child john] individuals with child john.

[AND $d_1 \dots d_n$] Individuals belonging to all the categories $d_1 \dots d_n$.

4.2.2 Sentences

Sentences are expressions with truth values in the domain. Let d be a concept and c be a constant. The semantics of sentences are:

Sentences

$d_1 \sqsubseteq d_2$ Concept d_1 is subsumed by d_2 .

Example. PhDStudent \sqsubseteq Student as every PhD is also a student.

$d_1 \doteq d_2$ Concept d_1 is equivalent to d_2 .

Example. PhDStudent \doteq [AND Student :Graduated :HasFunding]

$c \rightarrow d$ The individual c satisfies the description of the concept d .

Example. federico \rightarrow Professor

4.2.3 Interpretation

Interpretation An interpretation \mathcal{I} in description logic is a pair $(\mathcal{D}, \mathcal{I})$ where:

Interpretation

- \mathcal{D} is the domain.
- \mathcal{I} is the interpretation mapping.

Constant Let c be a constant, $\mathcal{I}[c] \in \mathcal{D}$.

Atomic concept Let a be an atomic concept, $\mathcal{I}[a] \subseteq \mathcal{D}$.

Role Let r be a role, $\mathcal{I}[r] \subseteq \mathcal{D} \times \mathcal{D}$.

Thing The concept **Thing** corresponds to the domain: $\mathcal{I}[\text{Thing}] = \mathcal{D}$.

[ALL r d]

$$\mathcal{I}[\text{[ALL } r \text{ } d]] = \{x \in \mathcal{D} \mid \forall y : \langle x, y \rangle \in \mathcal{I}[r] \text{ then } y \in \mathcal{I}[d]\}$$

[EXISTS n r]

$$\mathcal{I}[\text{[EXISTS } n \text{ } r]] = \{x \in \mathcal{D} \mid \text{exists at least } n \text{ distinct } y : \langle x, y \rangle \in \mathcal{I}[r]\}$$

[FILLS $r \ c$]

$$\mathcal{I}[\text{[FILLS } r \ c]] = \{x \in \mathcal{D} \mid \langle x, \mathcal{I}[c] \rangle \in \mathcal{I}[r]\}$$

[AND $d_1 \dots d_n$]

$$\mathcal{I}[\text{[AND } d_1 \dots d_n]] = \mathcal{I}[d_1] \cap \dots \cap \mathcal{I}[d_n]$$

Model Given an interpretation $\mathcal{J} = (\mathcal{D}, \mathcal{I})$, a sentence is true under \mathcal{J} ($\mathcal{J} \models \text{sentence}$) if:

Model

- $\mathcal{J} \models (c \rightarrow d)$ iff $\mathcal{I}[c] \in \mathcal{I}[d]$.
- $\mathcal{J} \models (d_1 \sqsubseteq d_2)$ iff $\mathcal{I}[d_1] \subseteq \mathcal{I}[d_2]$.
- $\mathcal{J} \models (d_1 \doteq d_2)$ iff $\mathcal{I}[d_1] = \mathcal{I}[d_2]$.

Given a set of sentences S , \mathcal{J} models S if $\mathcal{J} \models S$.

Entailment A set of sentences S logically entails a sentence α if:

Entailment

$$\forall \mathcal{J} : (\mathcal{J} \models S) \rightarrow (\mathcal{J} \models \alpha)$$

4.3 Reasoning

4.3.1 T-box reasoning

Given a knowledge base of a set of sentences S , we would like to be able to determine the following:

Satisfiability A concept d is satisfiable w.r.t. S if:

Satisfiability

$$\exists \mathcal{J}, (\mathcal{J} \models S) : \mathcal{J}[d] \neq \emptyset$$

Subsumption A concept d_1 is subsumed by d_2 w.r.t. S if:

Subsumption

$$\forall \mathcal{J}, (\mathcal{J} \models S) : \mathcal{J}[d_1] \subseteq \mathcal{J}[d_2]$$

Equivalence A concept d_1 is equivalent to d_2 w.r.t. S if:

Equivalence

$$\forall \mathcal{J}, (\mathcal{J} \models S) : \mathcal{J}[d_1] = \mathcal{J}[d_2]$$

Disjointness A concept d_1 is disjoint to d_2 w.r.t. S if:

Disjointness

$$\forall \mathcal{J}, (\mathcal{J} \models S) : \mathcal{J}[d_1] \cap \mathcal{J}[d_2] = \emptyset$$

Theorem 4.3.1 (Reduction to subsumption). Given the concepts d_1 and d_2 , it holds that:

Reduction to subsumption

- d_1 is unsatisfiable $\iff d_1 \sqsubseteq \perp$.
- $d_1 \doteq d_2 \iff d_1 \sqsubseteq d_2 \wedge d_2 \sqsubseteq d_1$.
- d_1 and d_2 are disjoint $\iff (d_1 \sqcap d_2) \sqsubseteq \perp$.

4.3.2 A-box reasoning

Given a constant c , a concept d and a set of sentences S , we can determine the following:

Satisfiability A constant c satisfies the concept d if:

Satisfiability

$$S \models (c \rightarrow d)$$

Note that it can be reduced to subsumption.

4.3.3 Computing subsumptions

Given a knowledge base KB and two concepts d and e , we want to prove:

$$KB \models (d \sqsubseteq e)$$

The following algorithms can be employed:

Structural matching

Structural matching

1. Normalize d and e into a conjunctive form:

$$d = [\text{AND } d_1 \dots d_n] \quad e = [\text{AND } e_1 \dots e_m]$$

2. Check if each part of e is accounted by at least a component of d .

Tableaux-based algorithms

Exploit the following theorem:

Tableaux-based algorithms

$$(KB \models (C \sqsubseteq D)) \iff (KB \cup (x : C \sqcap \neg D)) \text{ is inconsistent}$$

Note: similar to refutation.

4.3.4 Open world assumption

Open world assumption If a sentence cannot be inferred, its truth values is unknown.

Open world assumption

Description logics are based on the open world assumption. To reason in open world assumption, all the possible models are split upon encountering an unknown facts depending on the possible cases (Oedipus example).

4.4 Expanding description logic

It is possible to expand a description logic by:

Adding concept-forming operators Let r be a role, d be a concept, c be a constant and n a positive integer. We can extend our description logic with:

Adding concept-forming operators

[AT-MOST n r] Individuals r -related to at most n other individuals.

Example. [AT-MOST 1 :Child] individuals with only a child.

[ONE-OF $c_1 \dots c_n$] Concept only satisfied by $c_1 \dots c_n$.

Example. Beatles \doteq [ALL :BandMember [ONE-OF john paul george ringo]]

[EXISTS n r d] Individuals r -related to at least n individuals in the category d .

Example. [EXISTS 2 :Child Male] individuals with at least two male children.

Note: this increases the computational complexity of entailment.

Relating roles

Relating roles

[SAME-AS r_1 r_2] Equates fillers of the roles r_1 and r_2

Example. [SAME-AS :CEO :Owner]

Note: this increases the computational complexity of entailment. Role chaining also leads to undecidability.

Adding rules Rules are useful to add conditions (e.g. if d_1 then [FILLS r c]).

Adding rules

4.5 Description logics family

Depending on the number of operators, a description logic can be:

- More expressive.
- Computationally more expensive.
- Undecidable.

Attributive language (\mathcal{AL}) Minimal description logic with:

- Atomic concepts.
- Universal concept (**Thing** or \top).
- Bottom concept (**Nothing** or \perp).
- Atomic negation (only for atomic concepts).
- AND operator (\sqcap).
- ALL operator (\forall).
- [EXISTS 1 r] operator (\exists).

Attributive language complement (\mathcal{ALC}) \mathcal{AL} with negation for concepts.

\mathcal{F}	Functional properties
\mathcal{E}	Full existential quantification
\mathcal{U}	Concept union
\mathcal{C}	Complex concept negation
\mathcal{S}	\mathcal{ALC} with transitive roles
\mathcal{H}	Role hierarchy
\mathcal{R}	Limited complex roles axioms Reflexivity and irreflexivity Roles disjointness
\mathcal{O}	Nominals
\mathcal{I}	Inverse properties
\mathcal{N}	Cardinality restrictions
\mathcal{Q}	Qualified cardinality restrictions
(\mathcal{D})	Datatype properties, data values and data types

Table 4.1: Name and expressivity of logics

5 Web reasoning

5.1 Semantic web

Semantic web Method to represent and reason on the data available on the web. Semantic web aims to preserve the characteristics of the web, this includes:

- Globality.
- Information distribution.
- Information inconsistency of contents and links (as everyone can publish).
- Information incompleteness of contents and links.

Information is structured using ontologies and logic is used as inference mechanism. New knowledge can be derived through proofs.

Uniform resource identifier Naming system to uniquely identify concepts. Each URI correspond to one and only one concept, but multiple URIs can refer to the same concept.

XML Markup language to represent hierarchically structured data. An XML can contain in its preamble the description of the grammar used within the document.

Resource description framework (RDF) XML-based language to represent knowledge. Based on triplets:

<subject, predicate, object>
<resource, attribute, value>

RDF supports:

Types Using the attribute `type` which can assume an URI as value.

Collections Subjects and objects can be bags, sequences or alternatives.


Meta-sentences Reification of the sentences (e.g. "X says that Y...").

RDF schema RDF can be used to describe classes and relations with other classes (e.g. `type`, `subClassOf`, `subPropertyOf`, ...)

Representation

Graph A graph where nodes are subjects or objects and edges are predicates.

Example.

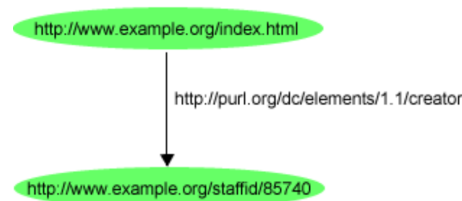

The graph stands for: `http://www.example.org/index.html` has a creator with staff id 85740.

XML

Example.

```
<rdf:RDF
  xmlns:rdf=http://www.w3.org/1999/02/22-rdf-syntax-ns#
  xmlns:contact=http://www.w3.org/2000/10/swap/pim/contact#>
  <contact:Person rdf:about="http://www.w3.org/People/EM/
    contact#me">
    <contact:fullName>Eric Miller</contact:fullName>
    <contact:mailbox rdf:resource="mailto:em@w3.org"/>
    <contact:personalTitle>Dr.</contact:personalTitle>
  </contact:Person>
</rdf:RDF>
```

Database similarities RDF aims to integrate different databases:

- A DB record is a RDF node.
- The name of a column can be seen as a property type.
- The value of a field corresponds to the value of a property.

RDFa Specification to integrate XHTML and RDF.

RDFa

SPARQL Language to query different data sources that support RDF (natively or through a middleware).

SPARQL

Ontology web language (OWL) Ontology based on RDF and description logic fragments. Three level of expressivity are available:

Ontology web language (OWL)

- OWL lite.
- OWL DL.
- OWL full.

An OWL has:

Classes Categories.

Properties Roles and relations.

Instances Individuals.

5.2 Knowledge graphs

Knowledge graph Knowledge graphs overcome the computational complexity of T-box reasoning with semantic web and description logics.

Knowledge graph

- Use a simple vocabulary with a simple but robust corpus of types and properties adopted as a standard.
- Represent a graph with terms as nodes and edges connecting them. Knowledge is therefore represented as triplets (**h**, **r**, **t**) where **h** and **t** are entities and **r** is a relation.
- Logic formulas are removed. T-box and A-box can be seen as the same concept. There is no reasoning but only facts.

- Data does not have a conceptual schema and can come from different sources with different semantics.
- Graph algorithms to traverse the graph and solve queries.

KG quality

Quality

Coverage If the graph has all the required information.

Correctness If the information is correct (can be objective or subjective).

Freshness If the content is up-to-date.

Graph embedding Project entities and relations into a vectorial space for ML applications.

Graph embedding

Entity prediction Given two entities h and t , determine the relation r between them.

Link prediction Given an entity h and a relation t , determine an entity t related to h .

6 Quantitative time reasoning

6.1 Propositional logic

State The current state of the world can be represented as a set of propositions that are true according the observation of an agent. State

The union of a countable sequence of states represents the evolution of the world. Each proposition is distinguished by its time step.

Example. A child has a bow and an arrow, then shoots the arrow.

$$\begin{aligned} \text{KB}^0 &= \{\text{hasBow}^0, \text{hasArrow}^0\} \\ \text{KB}^1 &= \{\text{hasBow}^0, \text{hasArrow}^0, \text{hasBow}^1, \neg \text{hasArrow}^1\} \end{aligned}$$

Action An action indicates how a state evolves into the next one. It is described using effect axioms in the form: Action

$$\text{action}^t \Rightarrow (\text{preconditions}^t \iff \text{effects}^{t+1})$$

Frame problem The effect axioms of an action do not tell what remains unchanged in the next state. Frame problem

Frame axioms The frame axioms of an action describe the unaffected propositions of an action. Frame axioms

Example. The action of shooting an arrow can be described as:

$$\begin{aligned} \text{SHOOT}^t &\Rightarrow \{\text{hasArrow}^t \iff \neg \text{hasArrow}^{t+1}\} \\ \text{SHOOT}^t &\Rightarrow \{\text{hasBow}^t \iff \text{hasBow}^{t+1}\} \end{aligned}$$

Note that with m actions and n propositions, the number of frame axioms will be of order $O(mn)$. Inference for t time steps will have complexity $O(nt)$.

6.2 Situation calculus (Green's formulation)

Situation calculus uses first order logic instead of propositional logic.

Situation The initial state is a situation. Applying an action in a situation is a situation: Situation

$$s \text{ is a situation and } \mathbf{a} \text{ is an action} \iff \text{result}(\mathbf{a}, s) \text{ is situation}$$

(Note: in FAIRK module 1, **result** is denoted as **do**).

Fluent Function that varies depending on the situation (i.e. tells if a property holds in a given situation). Fluent

Example. $\text{hasBow}(s)$ where s is a situation.

Action Actions are described using:

Action

Possibility axioms Indicates the preconditions ϕ_a of an action a in a given situation s :

Possibility axioms

$$\phi_a(s) \Rightarrow \text{poss}(a, s)$$

Successor state axiom The evolution of a fluent F follows the axiom:

Successor state axiom

$$F^{t+1} \iff (\text{ActionCauses}(F) \vee (F^t \wedge \neg \text{ActionCauses}(\neg F)))$$

In other words, a fluent is true if an action makes it true or does not change if the action does not involve it.

Adding the notion of possibility, an action can be described as:

$$\begin{aligned} \text{poss}(a, s) \Rightarrow & \left(F(\text{result}(a, s)) \iff \right. \\ & (a = \text{ActionCauses}(F)) \vee \\ & \left. (F(s) \wedge a \neq \neg \text{ActionCauses}(\neg F)) \right) \end{aligned}$$

Unique action axiom Only a single action can be executed in a situation to avoid non-determinism.

Unique action axiom

6.3 Event calculus (Kowalski's formulation)

Event calculus reifies fluents and events (actions) as terms (instead of predicates).

Event calculus ontology A fixed set of predicates:

Event calculus ontology

$\text{holdsAt}(F, T)$ The fluent F holds at time T .

$\text{happens}(E, T)$ The event E (i.e. execution of an action) happened at time T .

$\text{initiates}(E, F, T)$ The event E causes the fluent F to start holding at time T .

$\text{terminates}(E, F, T)$ The event E causes the fluent F to cease holding at time T .

$\text{clipped}(T_i, F, T_j)$ The fluent F has been made false between the times T_i and T_j ($T_i < T_j$).

$\text{initially}(F)$ The fluent F holds at time 0.

Domain-independent axioms A fixed set of axioms:

Domain-independent axioms

Truthness of a fluent

1. A fluent holds if an event initiated it in the past and has not been clipped.

$$\begin{aligned} \text{holdsAt}(F, T_j) \Leftarrow & \text{happens}(E, T_i) \wedge (T_i < T_j) \wedge \\ & \text{initiates}(E, F, T_i) \wedge \neg \text{clipped}(T_i, F, T_j) \end{aligned}$$

2. A fluent holds if it was initially true and has not been clipped.

$$\text{holdsAt}(F, T) \Leftarrow \text{initially}(F) \wedge \neg \text{clipped}(0, F, T)$$

Note: the negations make the definition of these axioms in Prolog unsafe.

Clipping of a fluent

$$\text{clipped}(T_i, F, T_j) \Leftarrow \text{happens}(E, T) \wedge (T_i < T < T_j) \wedge \text{terminates}(E, F, T)$$

Domain-dependent axioms Domain-specific axioms defined using the predicates `initially`, `initiates` and `terminates`.

Domain-dependent axioms

Deductive reasoning Event calculus only allows deductive reasoning: it takes as input the domain-dependant axioms and a set of events, and computes a set of true fluents. If a new event is observed, the query need to be recomputed again.

Example. A room with a light and a button can be described as:

Fluents `lightOn · lightOff`

Events `PUSH_BUTTON`

Domain-dependent axioms are:

Initial state `initially(lightOff)`

Effects of PUSH_BUTTON on lightOn

- `initiates(PUSH_BUTTON, lightOn, T) \Leftarrow holdsAt(lightOff, T)`
- `terminates(PUSH_BUTTON, lightOn, T) \Leftarrow holdsAt(lightOn, T)`

Effects of PUSH_BUTTON on lightOff

- `initiates(PUSH_BUTTON, lightOff, T) \Leftarrow holdsAt(lightOn, T)`
- `terminates(PUSH_BUTTON, lightOff, T) \Leftarrow holdsAt(lightOff, T)`

A set of events could be:

$$\text{happens}(\text{PUSH_BUTTON}, 3) \cdot \text{happens}(\text{PUSH_BUTTON}, 5) \cdot \text{happens}(\text{PUSH_BUTTON}, 6)$$

6.3.1 Reactive event calculus

Allows to add events dynamically without the need to recompute the result.

Reactive event calculus

6.4 Allen's logic of intervals

Event calculus only captures instantaneous events that happen in given points in time.

Allen's logic of intervals Reasoning on time intervals.

Allen's logic of intervals
Interval

Interval An interval i starts at a time `begin(i)` and ends at a time `end(i)`.

Temporal operators

Temporal operators

- `meet(i, j) \iff end(i) = begin(j)`
- `before(i, j) \iff end(i) < begin(j)`
- `after(i, j) \iff before(j, i)`
- `during(i, j) \iff begin(j) < begin(i) < end(i) < end(j)`
- `overlap(i, j) \iff begin(i) < begin(j) < end(i) < end(j)`

- $\text{starts}(i, j) \iff \text{begin}(i) = \text{begin}(j)$
- $\text{finishes}(i, j) \iff \text{end}(i) = \text{end}(j)$
- $\text{equals}(i, j) \iff \text{starts}(i, j) \wedge \text{ends}(i, j)$

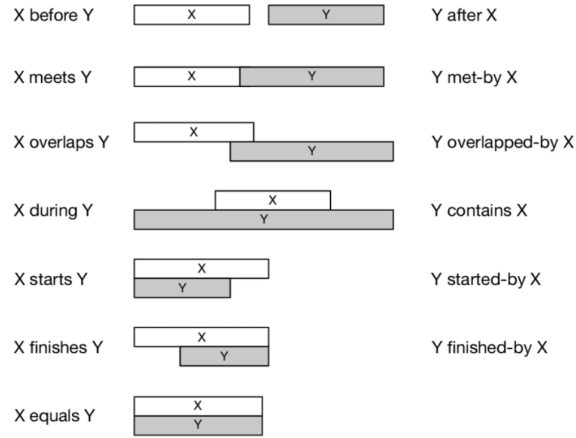


Figure 6.1: Visual representation of temporal operators