

InputMaster

v6.5.3

Generated by Doxygen 1.8.8

Tue Oct 21 2014 13:49:59

Contents

1	Namespace Index	1
1.1	Packages	1
2	Hierarchical Index	3
2.1	Class Hierarchy	3
3	Class Index	5
3.1	Class List	5
4	Namespace Documentation	7
4.1	Package BSGTools	7
4.2	Package BSGTools.IO	7
4.2.1	Enumeration Type Documentation	8
4.2.1.1	ControlState	8
4.3	Package BSGTools.IO.Tools	8
4.4	Package BSGTools.IO.Xbox	8
4.4.1	Enumeration Type Documentation	8
4.4.1.1	XButton	8
4.4.1.2	XStick	9
4.4.1.3	XTrigger	9
5	Class Documentation	11
5.1	BSGTools.IO.CombinedOutput Class Reference	11
5.1.1	Detailed Description	11
5.1.2	Constructor & Destructor Documentation	11
5.1.2.1	CombinedOutput	11
5.1.3	Property Documentation	11
5.1.3.1	Controls	11
5.1.3.2	FixedValue	12
5.1.3.3	FixedValueF	12
5.1.3.4	Value	12
5.2	BSGTools.IO.Control Class Reference	12
5.2.1	Detailed Description	13

5.2.2	Member Function Documentation	13
5.2.2.1	ClampRange	13
5.2.2.2	Reset	14
5.2.2.3	Reset	14
5.2.2.4	RoundFixed	14
5.2.2.5	RoundFixedF	14
5.2.2.6	SoftReset	14
5.2.2.7	ToString	14
5.2.2.8	ToStringBlock	15
5.2.2.9	Update	15
5.2.2.10	UpdateStates	15
5.2.2.11	UpdateValues	15
5.2.3	Property Documentation	15
5.2.3.1	Dead	15
5.2.3.2	Down	15
5.2.3.3	FixedValue	15
5.2.3.4	Gravity	15
5.2.3.5	Held	15
5.2.3.6	Invert	16
5.2.3.7	IsBlocked	16
5.2.3.8	IsDebugControl	16
5.2.3.9	Name	16
5.2.3.10	RealValue	16
5.2.3.11	Sensitivity	16
5.2.3.12	Snap	16
5.2.3.13	Up	16
5.2.3.14	Value	16
5.3	BSGTools.IO.Tools.InputManagerWizard Class Reference	16
5.4	BSGTools.IO.InputMaster Class Reference	17
5.4.1	Detailed Description	18
5.4.2	Member Function Documentation	18
5.4.2.1	CreateMaster	18
5.4.2.2	CreateMaster	18
5.4.2.3	DestroyMaster	18
5.4.2.4	ResetAll	18
5.4.2.5	SetBlockAll	18
5.4.2.6	UpdateControls	19
5.4.3	Property Documentation	19
5.4.3.1	AnyControlDown	19
5.4.3.2	AnyControlHeld	19

5.4.3.3	AnyControlUp	19
5.4.3.4	MouseWheel	19
5.4.3.5	MouseWheelAxisName	19
5.4.3.6	MouseWheelRaw	19
5.4.3.7	MouseX	19
5.4.3.8	MouseXAxisName	19
5.4.3.9	MouseXRaw	20
5.4.3.10	MouseY	20
5.4.3.11	MouseYAxisName	20
5.4.3.12	MouseYRaw	20
5.5	BSGTools.IO.Xbox.IXboxControl Interface Reference	20
5.5.1	Detailed Description	20
5.6	BSGTools.IO.KeyControl Class Reference	20
5.6.1	Detailed Description	21
5.6.2	Constructor & Destructor Documentation	21
5.6.2.1	KeyControl	21
5.6.2.2	KeyControl	21
5.6.3	Member Function Documentation	21
5.6.3.1	ToStringBlock	21
5.6.3.2	UpdateStates	22
5.6.4	Property Documentation	22
5.6.4.1	Modifier	22
5.6.4.2	Negative	22
5.6.4.3	Positive	22
5.7	BSGTools.IO.ModifierKey Class Reference	22
5.7.1	Detailed Description	23
5.7.2	Member Enumeration Documentation	23
5.7.2.1	ModEnums	23
5.7.3	Member Function Documentation	23
5.7.3.1	FromMEnum	23
5.7.3.2	operator KeyCode	23
5.7.3.3	operator ModifierKey	24
5.7.4	Member Data Documentation	24
5.7.4.1	LAlt	24
5.7.4.2	LCommand	24
5.7.4.3	LCtrl	24
5.7.4.4	LShift	24
5.7.4.5	LWindows	24
5.7.4.6	modifiers	24
5.7.4.7	None	24

5.7.4.8	RAlt	25
5.7.4.9	RCommand	25
5.7.4.10	RCtrl	25
5.7.4.11	RShift	25
5.7.4.12	RWindows	25
5.7.5	Property Documentation	25
5.7.5.1	DisplayName	25
5.7.5.2	UKeyCode	25
5.8	BSGTools.IO.Xbox.XboxControl< T > Class Template Reference	25
5.8.1	Detailed Description	26
5.8.2	Constructor & Destructor Documentation	26
5.8.2.1	XboxControl	26
5.8.3	Member Function Documentation	26
5.8.3.1	CreateClone	26
5.8.3.2	CreateMultiple	27
5.8.4	Property Documentation	28
5.8.4.1	ControllerIndex	28
5.9	BSGTools.IO.Xbox.XButtonControl Class Reference	28
5.9.1	Detailed Description	29
5.9.2	Constructor & Destructor Documentation	29
5.9.2.1	XButtonControl	29
5.9.2.2	XButtonControl	29
5.9.3	Member Function Documentation	29
5.9.3.1	CreateClone	29
5.9.3.2	UpdateStates	29
5.9.4	Property Documentation	30
5.9.4.1	Negative	30
5.9.4.2	Positive	30
5.10	BSGTools.IO.Xbox.XStickControl Class Reference	30
5.10.1	Detailed Description	31
5.10.2	Member Enumeration Documentation	31
5.10.2.1	InvertMode	31
5.10.3	Constructor & Destructor Documentation	31
5.10.3.1	XStickControl	31
5.10.4	Member Function Documentation	31
5.10.4.1	CreateClone	31
5.10.4.2	UpdateStates	31
5.10.4.3	UpdateValues	31
5.10.5	Property Documentation	31
5.10.5.1	Stick	31

5.11 BSGTools.IO.Xbox.XTriggerControl Class Reference	32
5.11.1 Detailed Description	32
5.11.2 Constructor & Destructor Documentation	32
5.11.2.1 XTriggerControl	32
5.11.3 Member Function Documentation	32
5.11.3.1 CreateClone	33
5.11.3.2 UpdateStates	34
5.11.3.3 UpdateValues	34
5.11.4 Property Documentation	34
5.11.4.1 Trigger	34

Chapter 1

Namespace Index

1.1 Packages

Here are the packages with brief descriptions (if available):

BSGTools	7
BSGTools.IO	7
BSGTools.IO.Tools	8
BSGTools.IO.Xbox	8

Chapter 2

Hierarchical Index

2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

BSGTools.IO.CombinedOutput	11
BSGTools.IO.Control	12
BSGTools.IO.KeyControl	20
BSGTools.IO.Xbox.XboxControl< T >	25
BSGTools.IO.Xbox.XButtonControl	28
BSGTools.IO.Xbox.XStickControl	30
BSGTools.IO.Xbox.XTriggerControl	32
EditorWindow	
BSGTools.IO.Tools.InputManagerWizard	16
BSGTools.IO.Xbox.IXboxControl	20
BSGTools.IO.Xbox.XButtonControl	28
BSGTools.IO.Xbox.XStickControl	30
BSGTools.IO.Xbox.XTriggerControl	32
BSGTools.IO.ModifierKey	22
MonoBehaviour	
BSGTools.IO.InputMaster	17

Chapter 3

Class Index

3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

BSGTools.IO.CombinedOutput	
Allows for easy combination of multiple controls' outputs.	11
BSGTools.IO.Control	
Provided to give a common base class and common functionality for KeyControl and XboxControl	12
BSGTools.IO.Tools.InputManagerWizard	16
BSGTools.IO.InputMaster	
A single instance of this exists in the application. Updates and maintains all Control states. . .	17
BSGTools.IO.Xbox.IXboxControl	
Used for type constraints. Contains nor enforces any functionality.	20
BSGTools.IO.KeyControl	
Used for all Keyboard and Mouse Button controls. Any binding present in Unity's KeyCode enumeration is valid here.	20
BSGTools.IO.ModifierKey	
Represents a Modifier for a control.	22
BSGTools.IO.Xbox.XboxControl< T >	25
BSGTools.IO.Xbox.XButtonControl	
Used for integrating Xbox 360 controller digital buttons/inputs into InputMaster's Control system.	28
BSGTools.IO.Xbox.XStickControl	
Used for integrating Xbox 360 controller analog sticks into InputMaster's Control system. . . .	30
BSGTools.IO.Xbox.XTriggerControl	
Used for integrating Xbox 360 controller triggers into InputMaster's Control system.	32

Chapter 4

Namespace Documentation

4.1 Package BSGTools

Namespaces

- package [IO](#)

4.2 Package BSGTools.IO

Namespaces

- package [Tools](#)
- package [Xbox](#)

Classes

- class [CombinedOutput](#)
Allows for easy combination of multiple controls' outputs.
- class [Control](#)
Provided to give a common base class and common functionality for [KeyControl](#) and [XboxControl](#).
- class **EnumExt**
Simple extensions class for commonly used enum functionality.
- class [InputMaster](#)
A single instance of this exists in the application. Updates and maintains all [Control](#) states.
- class [KeyControl](#)
Used for all Keyboard and Mouse Button controls. Any binding present in Unity's KeyCode enumeration is valid here.
- class [ModifierKey](#)
Represents a Modifier for a control.

Enumerations

- enum [ControlState](#) {
Positive = 1 << 0, **Negative** = 1 << 1, **Neither** = Positive & Negative, **Both** = Positive | Negative,
Either = Positive ^ Negative }
*Describes the current state of a control's specific state. Use (control.Down/Held/Up & flag) != 0 for Positive & Negative.
Use == for Neither, Both, and Either.*

4.2.1 Enumeration Type Documentation

4.2.1.1 enum BSGTools.IO.ControlState

Describes the current state of a control's specific state. Use (control.Down/Held/Up & flag) != 0 for Positive & Negative. Use == for Neither, Both, and Either.

4.3 Package BSGTools.IO.Tools

Classes

- class [InputManagerWizard](#)

4.4 Package BSGTools.IO.Xbox

Classes

- interface [IXboxControl](#)
Used for type constraints. Contains nor enforces any functionality.
- class [XboxControl](#)< T >
- class **XboxUtils**
A static utility class for minimal required updates for XboxControls.
- class [XButtonControl](#)
Used for integrating [Xbox](#) 360 controller digital buttons/inputs into [InputMaster](#)'s [Control](#) system.
- class [XStickControl](#)
Used for integrating [Xbox](#) 360 controller analog sticks into [InputMaster](#)'s [Control](#) system.
- class [XTriggerControl](#)
Used for integrating [Xbox](#) 360 controller triggers into [InputMaster](#)'s [Control](#) system.

Enumerations

- enum [XButton](#) {
None, A, B, X,
Y, Back, Guide, Start,
StickLeft, StickRight, ShoulderLeft, ShoulderRight,
DPadUp, DPadDown, DPadLeft, DPadRight }
Represents all of the digital buttons of an Xbox 360 Controller.
- enum [XStick](#) { **StickLeftX, StickLeftY, StickRightX, StickRightY** }
Represents the two analog sticks of an Xbox 360 Controller.
- enum [XTrigger](#) { **TriggerLeft, TriggerRight** }
Represents the two triggers of an Xbox 360 Controller.

4.4.1 Enumeration Type Documentation

4.4.1.1 enum BSGTools.IO.Xbox.XButton

Represents all of the digital buttons of an [Xbox](#) 360 Controller.

4.4.1.2 enum BSGTools.IO.Xbox.XStick

Represents the two analog sticks of an Xbox 360 Controller.

4.4.1.3 enum BSGTools.IO.Xbox.XTrigger

Represents the two triggers of an Xbox 360 Controller.

Chapter 5

Class Documentation

5.1 BSGTools.IO.CombinedOutput Class Reference

Allows for easy combination of multiple controls' outputs.

Public Member Functions

- [CombinedOutput](#) (params [Control\[\]](#) controls)
Creates a new [CombinedOutput](#).

Properties

- float [FixedValueF](#) [get]
- sbyte [FixedValue](#) [get]
- float [Value](#) [get]
- [Control\[\]](#) [Controls](#) [get]

5.1.1 Detailed Description

Allows for easy combination of multiple controls' outputs.

5.1.2 Constructor & Destructor Documentation

5.1.2.1 BSGTools.IO.CombinedOutput.CombinedOutput (params [Control\[\]](#) *controls*)

Creates a new [CombinedOutput](#).

Parameters

<i>controls</i>	The controls to combine into a single output.
-----------------	---

5.1.3 Property Documentation

5.1.3.1 [Control \[\]](#) [BSGTools.IO.CombinedOutput.Controls](#) [get]

The combined Controls.

5.1.3.2 sbyte BSGTools.IO.CombinedOutput.FixedValue [get]

The clamped, combined FixedValue.

5.1.3.3 float BSGTools.IO.CombinedOutput.FixedValueF [get]

The clamped, combined FixedValue as a float.


5.1.3.4 float BSGTools.IO.CombinedOutput.Value [get]

The clamped, combined Value.

5.2 BSGTools.IO.Control Class Reference

Provided to give a common base class and common functionality for [KeyControl](#) and [XboxControl](#).

Inheritance diagram for BSGTools.IO.Control:

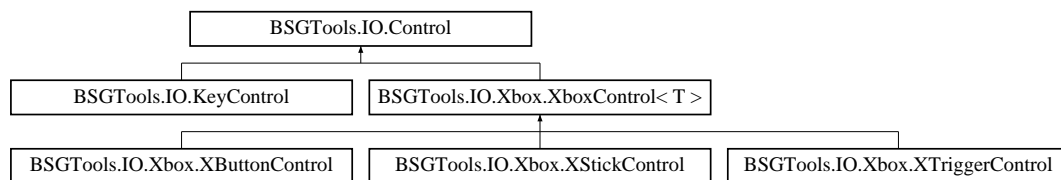

Public Member Functions

- void [Reset](#) ()
Reset all non-configuration values and states for this control.
- void [Reset](#) (bool block)
Reset all non-configuration values for this control. This is the best method to use for cutscenes.
- override string [ToString](#) ()
Returns debug information in a single line.
- virtual string [ToStringBlock](#) ()
Returns debug information as a formatted string block.
- void [Update](#) ()
Updates the control. This should never be used by any user-made script. This is public specifically for the use of [InputMaster](#).

Static Public Member Functions

- static float [ClampRange](#) (float f)
Returns a fixed control range float.
- static sbyte [RoundFixed](#) (float f)
Rounds and clamps to a FixedValue sbyte.
- static float [RoundFixedF](#) (float f)
Rounds and clamps to a FixedValue float.

Protected Member Functions

- void [SoftReset](#) ()
Internally used for maintaining the [RealValue](#) inbetween updates while resetting everything else.
- abstract void [UpdateStates](#) ()
Internally used for updating the Up/Held/Down states of a control.
- virtual void [UpdateValues](#) ()
Internally used for updating a control's values using it's current states.

Properties

- [ControlState Down](#) [get, set]
- [ControlState Held](#) [get, set]
- [ControlState Up](#) [get, set]
- float [Dead](#) [get, set]
- float [Gravity](#) [get, set]
- float [Sensitivity](#) [get, set]
- float [Value](#) [get, protected set]
- sbyte [FixedValue](#) [get, protected set]
- bool [Invert](#) [get, set]
- bool [IsBlocked](#) [get, set]
- bool [IsDebugControl](#) [get, set]
- string [Name](#) [get, set]
- bool [Snap](#) [get, set]
- float [RealValue](#) [get, set]

5.2.1 Detailed Description

Provided to give a common base class and common functionality for [KeyControl](#) and [XboxControl](#).

Controls should be instantiated as parameters in a custom [MonoBehaviour](#) using block initialization. See example below.

Declaration Example

```
KeyControl use = new KeyControl(KeyCode.E) {
    Name = "Jump",
    Gravity = 2f,
    Sensitivity = 2f
};
```

5.2.2 Member Function Documentation

5.2.2.1 static float BSGTools.IO.Control.ClampRange (float f) [static]

Returns a fixed control range float.

Parameters

<i>f</i>	A float to clamp.
----------	-------------------

Returns

A float fixed to -1...1

5.2.2.2 void BSGTools.IO.Control.Reset ()

Reset all non-configuration values and states for this control.

See also

[Reset\(bool\)](#)

5.2.2.3 void BSGTools.IO.Control.Reset (bool *block*)

Reset all non-configuration values for this control. This is the best method to use for cutscenes.

Parameters

<i>block</i>	Whether or not to block this input after resetting.
--------------	---

See also

[Reset](#), [IsBlocked](#)

5.2.2.4 static sbyte BSGTools.IO.Control.RoundFixed (float *f*) [static]

Rounds and clamps to a FixedValue sbyte.

Parameters

<i>f</i>	The value to round and clamp.
----------	-------------------------------

Returns

-1, 1 or 0

5.2.2.5 static float BSGTools.IO.Control.RoundFixedF (float *f*) [static]

Rounds and clamps to a FixedValue float.

Parameters

<i>f</i>	The value to round and clamp.
----------	-------------------------------

Returns

-1, 1 or 0

5.2.2.6 void BSGTools.IO.Control.SoftReset () [protected]

Internally used for maintaining the [RealValue](#) inbetween updates while resetting everything else.

5.2.2.7 override string BSGTools.IO.Control.ToString ()

Returns debug information in a single line.

Returns

The debug information.

5.2.2.8 `virtual string BSGTools.IO.Control.ToStringBlock () [virtual]`

Returns debug information as a formatted string block.

Returns

The debug information.

Reimplemented in [BSGTools.IO.KeyControl](#).

5.2.2.9 `void BSGTools.IO.Control.Update ()`

Updates the control. This should never be used by any user-made script. This is public specifically for the use of [InputMaster](#).

5.2.2.10 `abstract void BSGTools.IO.Control.UpdateStates () [protected],[pure virtual]`

Internally used for updating the Up/Held/Down states of a control.

Implemented in [BSGTools.IO.Xbox.XTriggerControl](#), [BSGTools.IO.KeyControl](#), [BSGTools.IO.Xbox.XStickControl](#), and [BSGTools.IO.Xbox.XButtonControl](#).

5.2.2.11 `virtual void BSGTools.IO.Control.UpdateValues () [protected],[virtual]`

Internally used for updating a control's values using it's current states.

Reimplemented in [BSGTools.IO.Xbox.XTriggerControl](#), and [BSGTools.IO.Xbox.XStickControl](#).

5.2.3 Property Documentation

5.2.3.1 `float BSGTools.IO.Control.Dead [get],[set]`

Functionally identical to the Dead property of Unity's native Input system. The absolute value of a control's real value reports as 0 if it's less than this value.

5.2.3.2 `ControlState BSGTools.IO.Control.Down [get],[set]`

The current "down" state of the control.

5.2.3.3 `sbyte BSGTools.IO.Control.FixedValue [get],[protected set]`

Returns a digital, ceiling-rounded representation of [Value](#). This is functionally identical to calling `Input.GetAxisRaw()` from Unity's native Input system.

5.2.3.4 `float BSGTools.IO.Control.Gravity [get],[set]`

Functionally identical to the Gravity property of Unity's native Input system. Speed per second that a control at rest returns to 0.

5.2.3.5 `ControlState BSGTools.IO.Control.Held [get],[set]`

The current "held" state of the control.

5.2.3.6 `bool BSGTools.IO.Control.Invert` `[get]`, `[set]`

Functionally identical to the `Invert` property of Unity's native Input system. If true, the control's value will report as `-(value)`. However, the state of the control will remain the same (positive down will still report as positive down, etc). Keep in mind that this functions whether or not a negative binding is supplied.

5.2.3.7 `bool BSGTools.IO.Control.IsBlocked` `[get]`, `[set]`

This is used to block any control from receiving updates. Keep in mind that if you block a control, it maintains its values from it's most recent update. If you want to block and reset a control, you can use the [Reset\(bool\)](#) function.

5.2.3.8 `bool BSGTools.IO.Control.IsDebugControl` `[get]`, `[set]`

Used to specify controls that automatically only work in the Editor or in Debug builds.

5.2.3.9 `string BSGTools.IO.Control.Name` `[get]`, `[set]`

Can be used as a display name or for string metadata.

5.2.3.10 `float BSGTools.IO.Control.RealValue` `[get]`, `[set]`, `[protected]`

An internally used property that keeps track of the "real value" across updates. This is necessary so that properties like [Dead](#) can be applied to the final value. Think of this as the "real value" and the [Value](#) property as this value after post processing. This value is not necessary to use for input.

5.2.3.11 `float BSGTools.IO.Control.Sensitivity` `[get]`, `[set]`

Functionally identical to the `Sensitivity` property of Unity's native Input system. Speed per second that a control in motion approaches 1.

5.2.3.12 `bool BSGTools.IO.Control.Snap` `[get]`, `[set]`

Functionally identical to the `Snap` property of Unity's native Input system. If true, and if the control has a positive and negative binding, the control's value will snap to 0 if provided an opposite input.

5.2.3.13 `ControlState BSGTools.IO.Control.Up` `[get]`, `[set]`


The current "up" state of the control.

5.2.3.14 `float BSGTools.IO.Control.Value` `[get]`, `[protected set]`

Returns an analog representation of the current real value. This is functionally identical to calling `Input.GetAxis()` from Unity's native Input system.

5.3 BSGTools.IO.Tools.InputManagerWizard Class Reference

Inheritance diagram for `BSGTools.IO.Tools.InputManagerWizard`:




Static Public Member Functions

- static void **ShowWizard** ()

5.4 BSGTools.IO.InputMaster Class Reference

A single instance of this exists in the application. Updates and maintains all [Control](#) states.

Inheritance diagram for BSGTools.IO.InputMaster:



Public Member Functions

- void [DestroyMaster](#) ()
Destroys the [InputMaster](#) object.
- void [ResetAll](#) ()
Resets all states/values on all controls.
- void [SetBlockAll](#) (bool blocked)
Blocks or unblocks all controls. This has the side effect of resetting all control states.
- void [UpdateControls](#) (params [Control](#)[] controls)
Searches the control list for the provided [Control](#) objects and replaces them with said provided object

Static Public Member Functions

- static [InputMaster CreateMaster](#) (object controlClass)
Uses reflection to get all controls in a class. Depending on the control count from your controlClass, this could have a noticable performance spike unless used during loading.
- static [InputMaster CreateMaster](#) (params [Control](#)[] controls)
Creates a new, empty, hidden GameObject, adds a new instance of [InputMaster](#) to it, and adds the provided controls to the master's control list.

Properties

- bool [AnyControlDown](#) [get]
- bool [AnyControlHeld](#) [get]
- bool [AnyControlUp](#) [get]
- float [MouseWheel](#) [get]
- string [MouseWheelAxisName](#) [get, set]
- float [MouseWheelRaw](#) [get]

- float [MouseX](#) [get]
- string [MouseXAxisName](#) [get, set]
- float [MouseXRaw](#) [get]
- float [MouseY](#) [get]
- string [MouseYAxisName](#) [get, set]
- float [MouseYRaw](#) [get]

5.4.1 Detailed Description

A single instance of this exists in the application. Updates and maintains all [Control](#) states.

5.4.2 Member Function Documentation

5.4.2.1 static [InputMaster](#) [BSGTools.IO.InputMaster.CreateMaster](#) (object *controlClass*) [static]

Uses reflection to get all controls in a class. Depending on the control count from your *controlClass*, this could have a noticable performance spike unless used during loading.

Parameters

<i>controlClass</i>	The instance of a class to get the controls from.
---------------------	---

Returns

The new [InputMaster](#) instance.

5.4.2.2 static [InputMaster](#) [BSGTools.IO.InputMaster.CreateMaster](#) (params [Control](#)[] *controls*) [static]

Creates a new, empty, hidden [GameObject](#), adds a new instance of [InputMaster](#) to it, and adds the provided controls to the master's control list.

Parameters

<i>controls</i>	A full listing of all of the games controls with the default bindings.
-----------------	--

Returns

The new [InputMaster](#) instance.

5.4.2.3 void [BSGTools.IO.InputMaster.DestroyMaster](#) ()

Destroys the [InputMaster](#) object.

5.4.2.4 void [BSGTools.IO.InputMaster.ResetAll](#) ()

Resets all states/values on all controls.

See also

[ResetAll\(bool\)](#)

5.4.2.5 void [BSGTools.IO.InputMaster.SetBlockAll](#) (bool *blocked*)

Blocks or unblocks all controls. This has the side effect of resetting all control states.

Parameters

<i>blocked</i>	To block/unblock.
----------------	-------------------

See also

[Control.IsBlocked](#)

5.4.2.6 void BSGTools.IO.InputMaster.UpdateControls (params **Control**[] *controls*)

Searches the control list for the provided [Control](#) objects and replaces them with said provided object

Parameters

<i>controls</i>	The Control objects to search and replace
-----------------	---

5.4.3 Property Documentation

5.4.3.1 bool BSGTools.IO.InputMaster.AnyControlDown [get]

Are any controls in an active Down state?

5.4.3.2 bool BSGTools.IO.InputMaster.AnyControlHeld [get]

Are any controls in an active Held state?

5.4.3.3 bool BSGTools.IO.InputMaster.AnyControlUp [get]

Are any controls in an active Up state?

5.4.3.4 float BSGTools.IO.InputMaster.MouseWheel [get]

The MouseWheel Axis axis value from Unity's native Input system.

5.4.3.5 string BSGTools.IO.InputMaster.MouseWheelAxisName [get], [set]

The MouseWheel Axis axis name in Unity's Input Manager

5.4.3.6 float BSGTools.IO.InputMaster.MouseWheelRaw [get]

The MouseWheel Axis raw axis value from Unity's native Input system.

5.4.3.7 float BSGTools.IO.InputMaster.MouseX [get]

The Mouse X Axis axis value from Unity's native Input system.

5.4.3.8 string BSGTools.IO.InputMaster.MouseXAxisName [get], [set]

The Mouse X Axis axis name in Unity's Input Manager

5.4.3.9 float BSGTools.IO.InputMaster.MouseXRaw [get]

The Mouse X Axis raw axis value from Unity's native Input system.

5.4.3.10 float BSGTools.IO.InputMaster.MouseY [get]

The Mouse Y Axis axis value from Unity's native Input system.

5.4.3.11 string BSGTools.IO.InputMaster.MouseYAxisName [get], [set]

The Mouse Y Axis axis name in Unity's Input Manager


5.4.3.12 float BSGTools.IO.InputMaster.MouseYRaw [get]

The Mouse Y Axis raw axis value from Unity's native Input system.

5.5 BSGTools.IO.Xbox.IXboxControl Interface Reference

Used for type constraints. Contains nor enforces any functionality.

Inheritance diagram for BSGTools.IO.Xbox.IXboxControl:




5.5.1 Detailed Description

Used for type constraints. Contains nor enforces any functionality.

5.6 BSGTools.IO.KeyControl Class Reference

Used for all Keyboard and Mouse Button controls. Any binding present in Unity's KeyCode enumeration is valid here.

Inheritance diagram for BSGTools.IO.KeyControl:



Public Member Functions

- [KeyControl](#) (KeyCode positive)
Creates a new [KeyControl](#). This is the "new version" of [OneWayControl](#) from previous versions of [InputMaster](#).
- [KeyControl](#) (KeyCode positive, KeyCode negative)

Creates a new [KeyControl](#) with a negative binding. This is the "new version" of [AxisControl](#) from previous versions of [InputMaster](#).

- override string [ToStringBlock](#) ()

Returns debug information as a formatted string block.

Protected Member Functions

- override void [UpdateStates](#) ()

Updates the current states of this control.

Properties

- [ModifierKey](#) [Modifier](#) [get, set]
- [KeyCode](#) [Negative](#) [get, set]
- [KeyCode](#) [Positive](#) [get, set]

Additional Inherited Members

5.6.1 Detailed Description

Used for all Keyboard and Mouse Button controls. Any binding present in Unity's [KeyCode](#) enumeration is valid here.

5.6.2 Constructor & Destructor Documentation

5.6.2.1 BSGTools.IO.KeyControl.KeyControl ([KeyCode](#) *positive*)

Creates a new [KeyControl](#). This is the "new version" of [OneWayControl](#) from previous versions of [InputMaster](#).

Parameters

<i>positive</i>	Positive
-----------------	--------------------------

5.6.2.2 BSGTools.IO.KeyControl.KeyControl ([KeyCode](#) *positive*, [KeyCode](#) *negative*)

Creates a new [KeyControl](#) with a negative binding. This is the "new version" of [AxisControl](#) from previous versions of [InputMaster](#).

Parameters

<i>positive</i>	Positive
<i>negative</i>	Negative

5.6.3 Member Function Documentation

5.6.3.1 override string BSGTools.IO.KeyControl.ToStringBlock () [virtual]

Returns debug information as a formatted string block.

Returns

The debug information.

Reimplemented from [BSGTools.IO.Control](#).

5.6.3.2 `override void BSGTools.IO.KeyControl.UpdateStates () [protected], [virtual]`

Updates the current states of this control.

Implements [BSGTools.IO.Control](#).

5.6.4 Property Documentation

5.6.4.1 `ModifierKey BSGTools.IO.KeyControl.Modifier [get], [set]`

The OPTIONAL modifier key for this control.

5.6.4.2 `KeyCode BSGTools.IO.KeyControl.Negative [get], [set]`

The OPTIONAL negative binding for this control.

5.6.4.3 `KeyCode BSGTools.IO.KeyControl.Positive [get], [set]`

The REQUIRED positive binding for this control. CANNOT BE KeyCode.None!

5.7 BSGTools.IO.ModifierKey Class Reference

Represents a Modifier for a control.

Public Types

- enum [ModEnums](#) {
None, **LShift**, **LCtrl**, **LAlt**,
LWindows, **LCommand**, **RShift**, **RCtrl**,
RAlt, **RWindows**, **RCommand** }
Used with [FromMEnum](#) for listing options.

Static Public Member Functions

- static [ModifierKey](#) [FromMEnum](#) ([ModEnums](#) me)
Utility method for listing purposes.
- static implicit [operator](#) [KeyCode](#) ([ModifierKey](#) modifier)
Assists in checking key status.
- static implicit [operator](#) [ModifierKey](#) ([ModEnums](#) modifier)
Utility operator overload for listing purposes.

Static Public Attributes

- static readonly [ModifierKey](#) [LAlt](#) = new [ModifierKey](#)([KeyCode](#).LeftAlt, "Left Alt")
The Left Alt modifier key.
- static readonly [ModifierKey](#) [LCommand](#) = new [ModifierKey](#)([KeyCode](#).LeftCommand, "Left Command")
The Left Command modifier key on Apple based keyboards.
- static readonly [ModifierKey](#) [LCtrl](#) = new [ModifierKey](#)([KeyCode](#).LeftControl, "Left [Control](#)")
The Left [Control](#) modifier key.
- static readonly [ModifierKey](#) [LShift](#) = new [ModifierKey](#)([KeyCode](#).LeftShift, "Left Shift")

- The Left Shift modifier key.*
- static readonly [ModifierKey LWindows](#) = new [ModifierKey](#)(KeyCode.LeftWindows, "Left Windows")
- The Left Windows modifier key.*
- static readonly [ModifierKey\[\] modifiers](#)
- Can be used for listing.*
- static readonly [ModifierKey None](#) = new [ModifierKey](#)(KeyCode.None, "None")
- Default Modifier for KeyControls with no modifier.*
- static readonly [ModifierKey RAlt](#) = new [ModifierKey](#)(KeyCode.RightAlt, "Right Alt")
- The Right Alt modifier key.*
- static readonly [ModifierKey RCommand](#) = new [ModifierKey](#)(KeyCode.RightCommand, "Right Command")
- The Right Command modifier key on Apple based keyboards.*
- static readonly [ModifierKey RCtrl](#) = new [ModifierKey](#)(KeyCode.RightControl, "Right [Control](#)")
- The Right [Control](#) modifier key.*
- static readonly [ModifierKey RShift](#) = new [ModifierKey](#)(KeyCode.RightShift, "Right Shift")
- The Right Shift modifier key.*
- static readonly [ModifierKey RWindows](#) = new [ModifierKey](#)(KeyCode.RightWindows, "Right Windows")
- The Right Windows modifier key.*

Properties

- string [DisplayName](#) [get]
- Full name of this modifier key.*
- KeyCode [UKeyCode](#) [get]
- Unity's keycode for this Modifier.*

5.7.1 Detailed Description

Represents a Modifier for a control.

5.7.2 Member Enumeration Documentation

5.7.2.1 enum BSGTools.IO.ModifierKey.ModEnums

Used with [FromMEnum](#) for listing options.

5.7.3 Member Function Documentation

5.7.3.1 static [ModifierKey](#) BSGTools.IO.ModifierKey.FromMEnum ([ModEnums me](#)) [static]

Utility method for listing purposes.

Parameters

<i>me</i>	The ModEnums to convert.
-----------	--

Returns

The proper static modifier.

5.7.3.2 static implicit BSGTools.IO.ModifierKey.operator KeyCode ([ModifierKey modifier](#)) [static]

Assists in checking key status.

5.7.3.3 static implicit **BSGTools.IO.ModifierKey.operator ModifierKey (ModEnums *modifier*)** [static]

Utility operator overload for listing purposes.

5.7.4 Member Data Documentation

5.7.4.1 readonly **ModifierKey** **BSGTools.IO.ModifierKey.LAlt** = new **ModifierKey**(KeyCode.LeftAlt, "Left Alt") [static]

The Left Alt modifier key.

5.7.4.2 readonly **ModifierKey** **BSGTools.IO.ModifierKey.LCommand** = new **ModifierKey**(KeyCode.LeftCommand, "Left Command") [static]

The Left Command modifier key on Apple based keyboards.

5.7.4.3 readonly **ModifierKey** **BSGTools.IO.ModifierKey.LCtrl** = new **ModifierKey**(KeyCode.LeftControl, "Left Control") [static]

The Left **Control** modifier key.

5.7.4.4 readonly **ModifierKey** **BSGTools.IO.ModifierKey.LShift** = new **ModifierKey**(KeyCode.LeftShift, "Left Shift") [static]

The Left Shift modifier key.

5.7.4.5 readonly **ModifierKey** **BSGTools.IO.ModifierKey.LWindows** = new **ModifierKey**(KeyCode.LeftWindows, "Left Windows") [static]

The Left Windows modifier key.

5.7.4.6 readonly **ModifierKey []** **BSGTools.IO.ModifierKey.modifiers** [static]

Initial value:

```
= new ModifierKey[]{
    None,
    LShift,
    LCtrl,
    LAlt,
    LWindows,
    LCommand,
    RShift,
    RCtrl,
    RAlt,
    RWindows,
    RCommand,
}
```

Can be used for listing.

5.7.4.7 readonly **ModifierKey** **BSGTools.IO.ModifierKey.None** = new **ModifierKey**(KeyCode.None, "None") [static]

Default Modifier for KeyControls with no modifier.

5.7.4.8 **readonly ModifierKey** BSGTools.IO.ModifierKey.RAlt = new **ModifierKey**(KeyCode.RightAlt, "Right Alt")
[static]

The Right Alt modifier key.

5.7.4.9 **readonly ModifierKey** BSGTools.IO.ModifierKey.RCommand = new **ModifierKey**(KeyCode.RightCommand, "Right Command") [static]

The Right Command modifier key on Apple based keyboards.

5.7.4.10 **readonly ModifierKey** BSGTools.IO.ModifierKey.RCtrl = new **ModifierKey**(KeyCode.RightControl, "Right Control")
[static]

The Right [Control](#) modifier key.

5.7.4.11 **readonly ModifierKey** BSGTools.IO.ModifierKey.RShift = new **ModifierKey**(KeyCode.RightShift, "Right Shift")
[static]

The Right Shift modifier key.

5.7.4.12 **readonly ModifierKey** BSGTools.IO.ModifierKey.RWindows = new **ModifierKey**(KeyCode.RightWindows, "Right Windows") [static]

The Right Windows modifier key.

5.7.5 Property Documentation

5.7.5.1 **string** BSGTools.IO.ModifierKey.DisplayName [get]


Full name of this modifier key.

5.7.5.2 **KeyCode** BSGTools.IO.ModifierKey.UKeyCode [get]

Unity's keycode for this Modifier.

5.8 BSGTools.IO.Xbox.XboxControl< T > Class Template Reference

Inheritance diagram for BSGTools.IO.Xbox.XboxControl< T >:

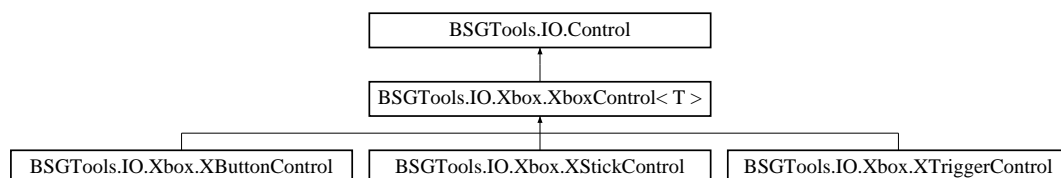

Static Public Member Functions

- static T[] [CreateMultiple](#) (byte count, T toClone)

Allows for the creation of up to 4 XboxControls at the same time (one for each controller index). An XboxControl must be provided for cloning. The [ControllerIndex](#) of the provided clone is ignored.

Protected Member Functions

- [XboxControl](#) (byte controllerIndex)
Creates a new XboxControl .
- abstract T [CreateClone](#) (byte controller)
Creates a clone of an this XboxControl.

Properties

- byte [ControllerIndex](#) [get]

Additional Inherited Members

5.8.1 Detailed Description

The base class for all [Xbox](#) 360 control classes.

Template Parameters

T	Used for generic self-creation.
-------------------	---------------------------------

Type Constraints

T : [IXboxControl](#)

5.8.2 Constructor & Destructor Documentation

5.8.2.1 [BSGTools.IO.Xbox.XboxControl< T >.XboxControl \(byte controllerIndex \)](#) [protected]

Creates a new XboxControl .

Parameters

<i>controllerIndex</i>	ControllerIndex
------------------------	---------------------------------

5.8.3 Member Function Documentation

5.8.3.1 [abstract T BSGTools.IO.Xbox.XboxControl< T >.CreateClone \(byte controller \)](#) [protected], [pure virtual]

Creates a clone of an this XboxControl.

Parameters

<i>controller</i>	The index of the controller that will manipulate this control's states and values.
-------------------	--

Returns

Implemented in [BSGTools.IO.Xbox.XTriggerControl](#), [BSGTools.IO.Xbox.XStickControl](#), and [BSGTools.IO.Xbox.X↔ButtonControl](#).

5.8.3.2 static T [] BSGTools.IO.Xbox.XboxControl< T >.CreateMultiple (byte *count*, T *toClone*) [static]

Allows for the creation of up to 4 XboxControls at the same time (one for each controller index). An *XboxControl* must be provided for cloning. The [ControllerIndex](#) of the provided clone is ignored.

Parameters

<i>count</i>	The number of controllers to create this control for.
<i>toClone</i>	The instance to take values from for clone creation.

Returns

An array of type T, each assigned to a specific controller index.

Example

```
// Defines a jump control for all 4 players.
XButtonControl[] jump = XButtonControl.CreateMultiple(4, new XButtonControl(0, XButton.A) {
    Name = "Jump",
    Gravity = 2f,
    Sensitivity = 2f
});

// Usage
jump[0].Value; //Player One's jump value
jump[3].Value; //Player Four's jump value
```

5.8.4 Property Documentation


5.8.4.1 byte BSGTools.IO.Xbox.XboxControl< T >.ControllerIndex [get]

The index of the controller that will manipulate this control's states and values. This is used in conjunction to the PlayerIndex enumeration in XInput.

5.9 BSGTools.IO.Xbox.XButtonControl Class Reference

Used for integrating [Xbox](#) 360 controller digital buttons/inputs into [InputMaster's Control](#) system.

Inheritance diagram for BSGTools.IO.Xbox.XButtonControl:

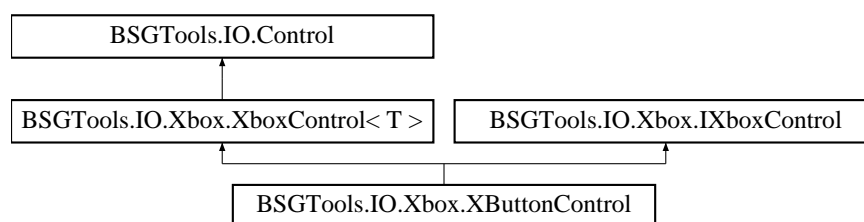

Public Member Functions

- [XButtonControl](#) ([XButton](#) positive)
Creates an [XButtonControl](#) for a single player game.
- [XButtonControl](#) ([XButton](#) positive, [XButton](#) negative)
Creates an [XButtonControl](#) for a single player game.

Protected Member Functions

- override [XButtonControl CreateClone](#) (byte controller)

Creates a clone of this [XButtonControl](#).

- override void [UpdateStates](#) ()

Updates this control's states.

Properties

- [XButton Negative](#) [get, set]
- [XButton Positive](#) [get, set]

Additional Inherited Members

5.9.1 Detailed Description

Used for integrating [Xbox](#) 360 controller digital buttons/inputs into [InputMaster](#)'s [Control](#) system.

5.9.2 Constructor & Destructor Documentation

5.9.2.1 BSGTools.IO.Xbox.XButtonControl.XButtonControl ([XButton positive](#))

Creates an [XButtonControl](#) for a single player game.

Parameters

<i>positive</i>	The positive binding. CANNOT BE XButton.None!
-----------------	---

5.9.2.2 BSGTools.IO.Xbox.XButtonControl.XButtonControl ([XButton positive](#), [XButton negative](#))

Creates an [XButtonControl](#) for a single player game.

Parameters

<i>positive</i>	The positive binding. CANNOT BE XButton.None!
<i>negative</i>	The negative binding.

5.9.3 Member Function Documentation

5.9.3.1 override [XButtonControl](#) BSGTools.IO.Xbox.XButtonControl.CreateClone ([byte controller](#)) [protected], [virtual]

Creates a clone of this [XButtonControl](#).

Parameters

<i>controller</i>	The index of the controller that will manipulate this control's states and values.
-------------------	--

Returns

The cloned control.

Implements [BSGTools.IO.Xbox.XboxControl< T >](#).

5.9.3.2 override void BSGTools.IO.Xbox.XButtonControl.UpdateStates () [protected], [virtual]

Updates this control's states.

Implements [BSGTools.IO.Control](#).

5.9.4 Property Documentation

5.9.4.1 XButton BSGTools.IO.Xbox.XButtonControl.Negative [get], [set]

The negative binding for this control.


5.9.4.2 XButton BSGTools.IO.Xbox.XButtonControl.Positive [get], [set]

The positive binding for this control. CANNOT BE XBinding.None!

5.10 BSGTools.IO.Xbox.XStickControl Class Reference

Used for integrating [Xbox](#) 360 controller analog sticks into [InputMaster's Control](#) system.

Inheritance diagram for BSGTools.IO.Xbox.XStickControl:

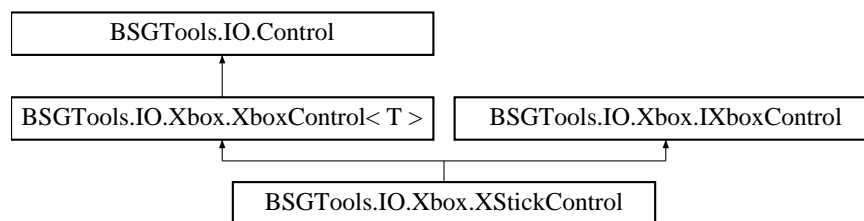

Public Types

- enum [InvertMode](#) { **X** = 1 >> 0, **Y** = 1 >> 1 }

Because there are 2 axes to worry about, a specialized enumeration is used to allow for different inversion modes.

Public Member Functions

- [XStickControl](#) ([XStick](#) stick)

Creates an [XStickControl](#) for a single player game.

Protected Member Functions

- override [XStickControl CreateClone](#) (byte controller)

Creates a clone of this [XStickControl](#).

- override void [UpdateStates](#) ()

States are not used for stick controls.

- override void [UpdateValues](#) ()

Updates this control's values. The [StickValue](#) property is updated in [UpdateStates](#).

Properties

- [XStick Stick](#) [get, set]

Additional Inherited Members

5.10.1 Detailed Description

Used for integrating [Xbox](#) 360 controller analog sticks into [InputMaster's Control](#) system.

5.10.2 Member Enumeration Documentation

5.10.2.1 enum BSGTools.IO.Xbox.XStickControl.InvertMode

Because there are 2 axes to worry about, a specialized enumeration is used to allow for different inversion modes.

5.10.3 Constructor & Destructor Documentation

5.10.3.1 BSGTools.IO.Xbox.XStickControl.XStickControl (XStick *stick*)

Creates an [XStickControl](#) for a single player game.

Parameters

<i>stick</i>	The bound stick.
--------------	------------------

5.10.4 Member Function Documentation

5.10.4.1 override XStickControl BSGTools.IO.Xbox.XStickControl.CreateClone (byte *controller*) [protected], [virtual]

Creates a clone of this [XStickControl](#).

Parameters

<i>controller</i>	The ControllerIndex to assign to the new clone.
-------------------	---

Returns

The cloned [XStickControl](#).

Implements [BSGTools.IO.Xbox.XboxControl< T >](#).

5.10.4.2 override void BSGTools.IO.Xbox.XStickControl.UpdateStates () [protected], [virtual]

States are not used for stick controls.

Implements [BSGTools.IO.Control](#).

5.10.4.3 override void BSGTools.IO.Xbox.XStickControl.UpdateValues () [protected], [virtual]

Updates this control's values. The StickValue property is updated in [UpdateStates](#).

Reimplemented from [BSGTools.IO.Control](#).

5.10.5 Property Documentation


5.10.5.1 XStick BSGTools.IO.Xbox.XStickControl.Stick [get], [set]

The assigned analog stick.

5.11 BSGTools.IO.Xbox.XTriggerControl Class Reference

Used for integrating [Xbox](#) 360 controller triggers into [InputMaster's Control](#) system.

Inheritance diagram for BSGTools.IO.Xbox.XTriggerControl:

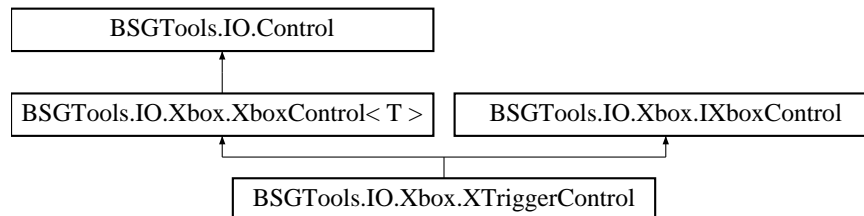

Public Member Functions

- [XTriggerControl](#) ([XTrigger](#) trigger)
Creates an [XTriggerControl](#) for a single player game.

Protected Member Functions

- override [XTriggerControl CreateClone](#) (byte controller)
Creates a clone of this [XTriggerControl](#).
- override void [UpdateStates](#) ()
In this specialized case, the values are updated here, not the states.
- override void [UpdateValues](#) ()

Properties

- [XTrigger Trigger](#) [get, set]

Additional Inherited Members

5.11.1 Detailed Description

Used for integrating [Xbox](#) 360 controller triggers into [InputMaster's Control](#) system.

5.11.2 Constructor & Destructor Documentation

5.11.2.1 BSGTools.IO.Xbox.XTriggerControl.XTriggerControl ([XTrigger](#) trigger)

Creates an [XTriggerControl](#) for a single player game.

Parameters

<i>trigger</i>	The bound trigger.
----------------	--------------------

5.11.3 Member Function Documentation

5.11.3.1 **override XTriggerControl** BSGTools.IO.Xbox.XTriggerControl.CreateClone (byte *controller*) [protected],
[virtual]

Creates a clone of this [XTriggerControl](#).

Parameters

<i>controller</i>	The ControllerIndex to assign to the new clone.
-------------------	---

Returns

The cloned [XTriggerControl](#).

Implements [BSGTools.IO.Xbox.XboxControl< T >](#).

5.11.3.2 `override void BSGTools.IO.Xbox.XTriggerControl.UpdateStates ()` `[protected], [virtual]`

In this specialized case, the values are updated here, not the states.

Implements [BSGTools.IO.Control](#).

5.11.3.3 `override void BSGTools.IO.Xbox.XTriggerControl.UpdateValues ()` `[protected], [virtual]`

[UpdateStates](#)

Reimplemented from [BSGTools.IO.Control](#).

5.11.4 Property Documentation

5.11.4.1 `XTrigger BSGTools.IO.Xbox.XTriggerControl.Trigger` `[get], [set]`

The assigned trigger that will manipulate this control's states and values.