



Service Cancellation Predictor

Team info

ID	Name
20201700185	بسمة احمد سيد حنفي
20201700861	منة الله محمد عبد البديع احمد
20201700928	نورالهدى أشرف عبدالحليم عبدالوهاب
20201700950	هاجر خالد عبد المنعم على مصطفى
20201700927	نور الهدى أحمد مصطفى كامل
20201700942	نورهان عادل عبد الراضي زكى
20201700943	نورهان محمد ابراهيم انور

Preprocessing

we use:

from matplotlib. Figure import Figure

import matplotlib. pyplot as plt

To show the plot and the Figure






import seaborn as sns



Seaborn based on matplotlib. It provides a high-level interface for drawing attractive and informative statistical graphics.




Sns.countplot (for each independent variables , dependent variables “**churn**”, data=our data set, ax= “Axes object to draw the plot onto”)

Put all the plots in function so we can call it where we want



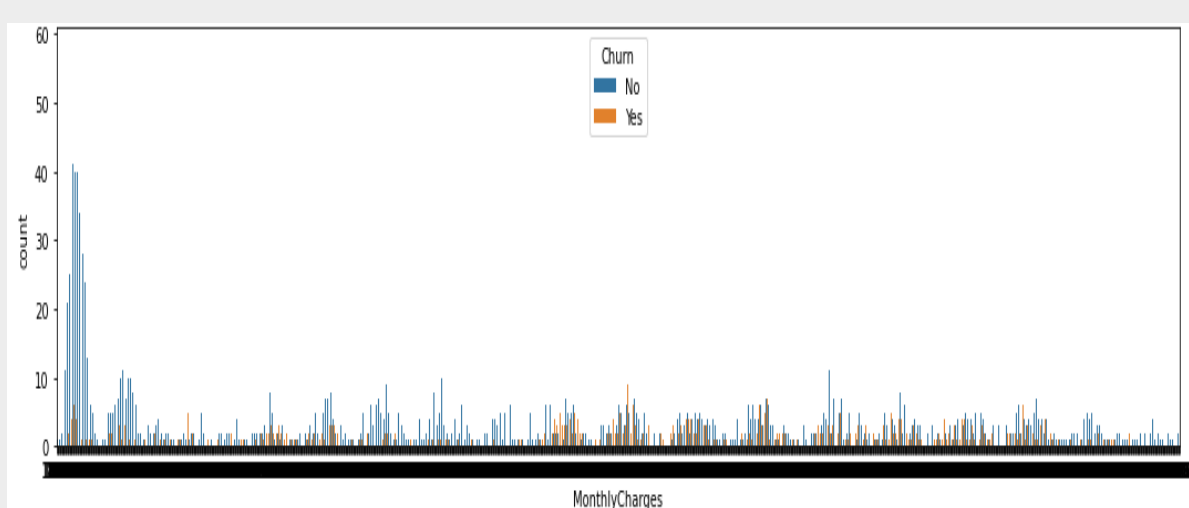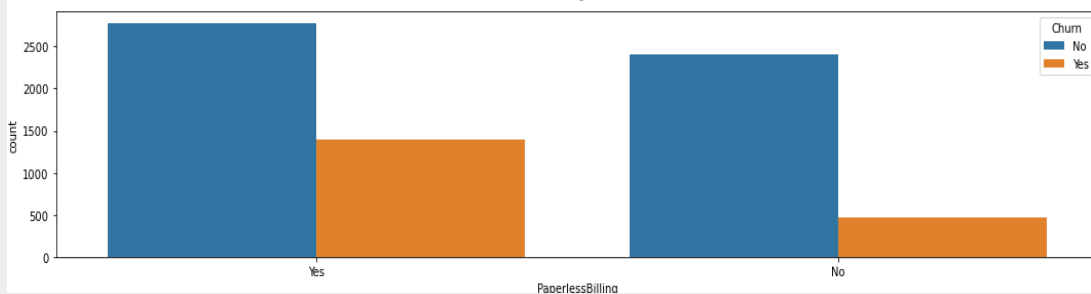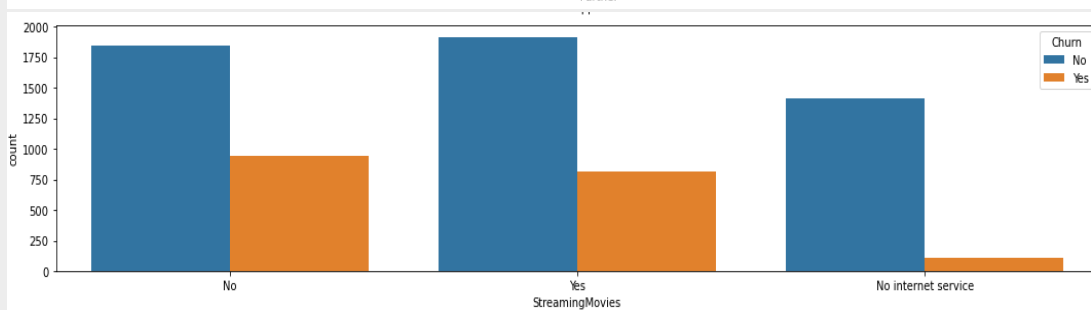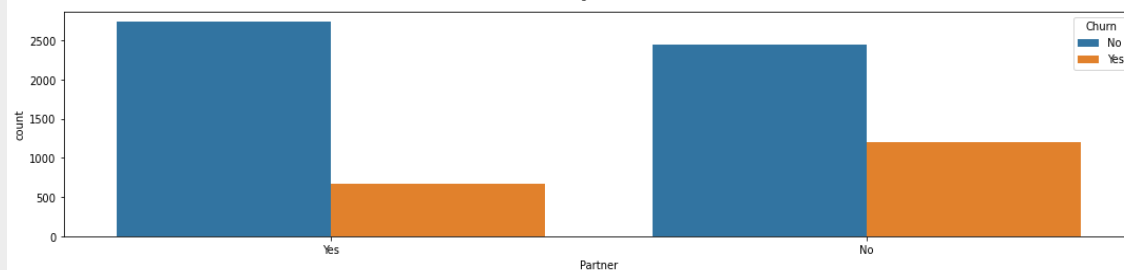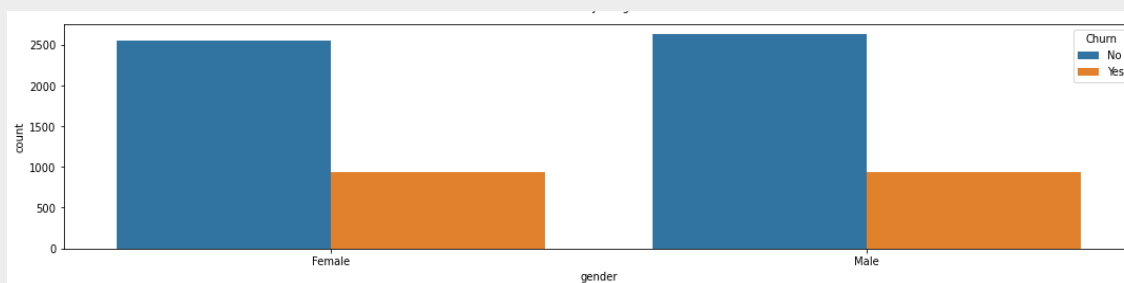

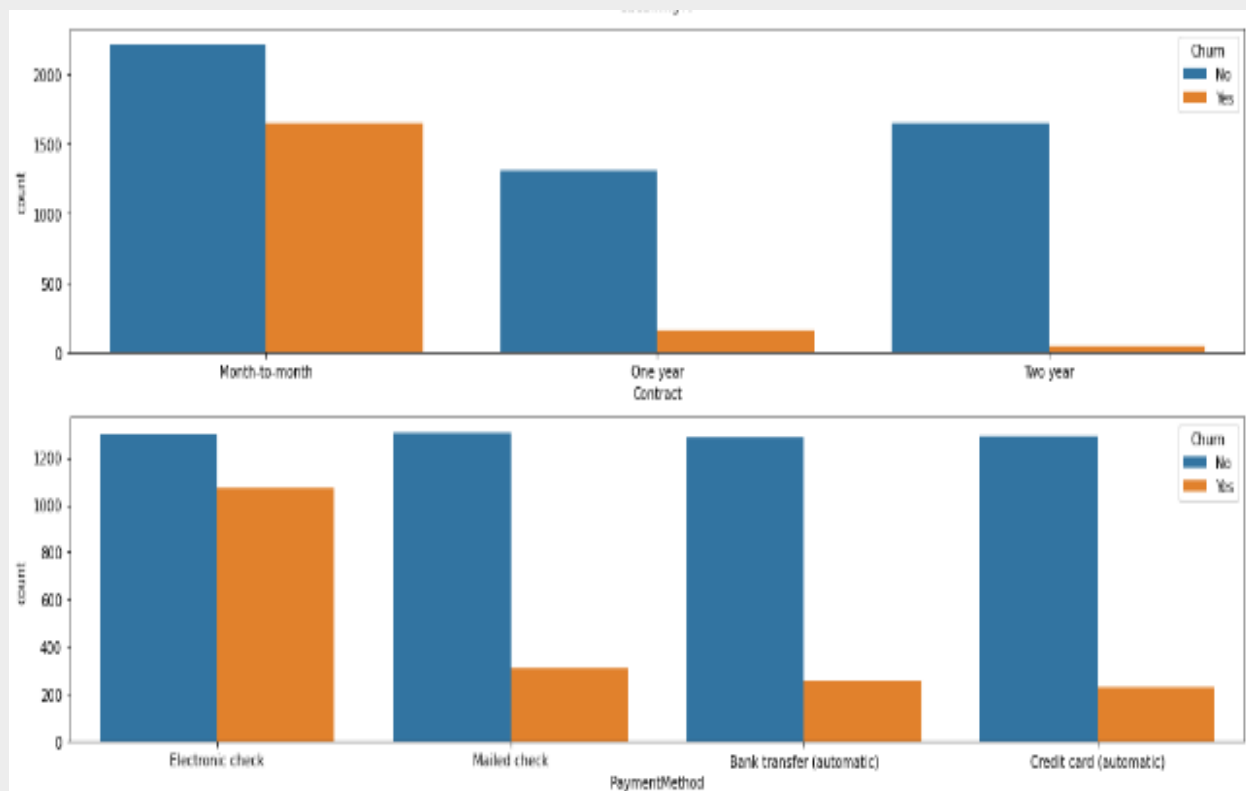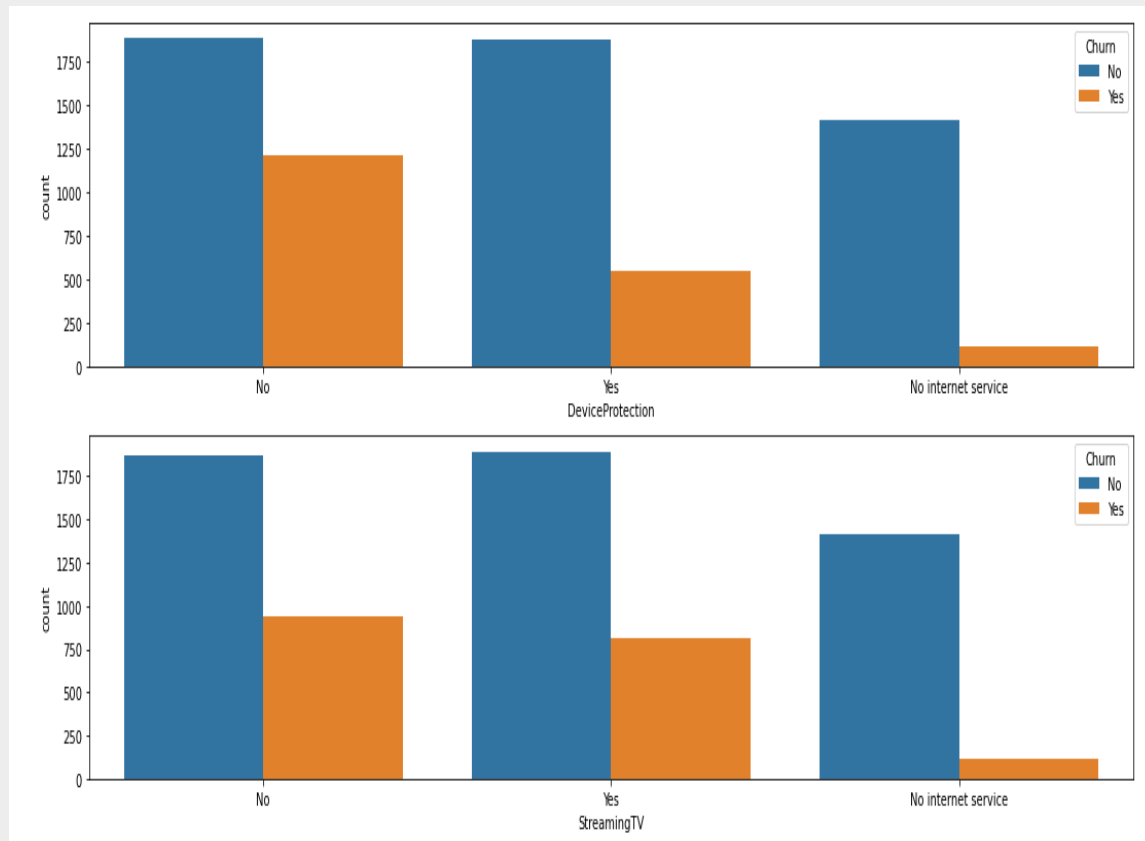

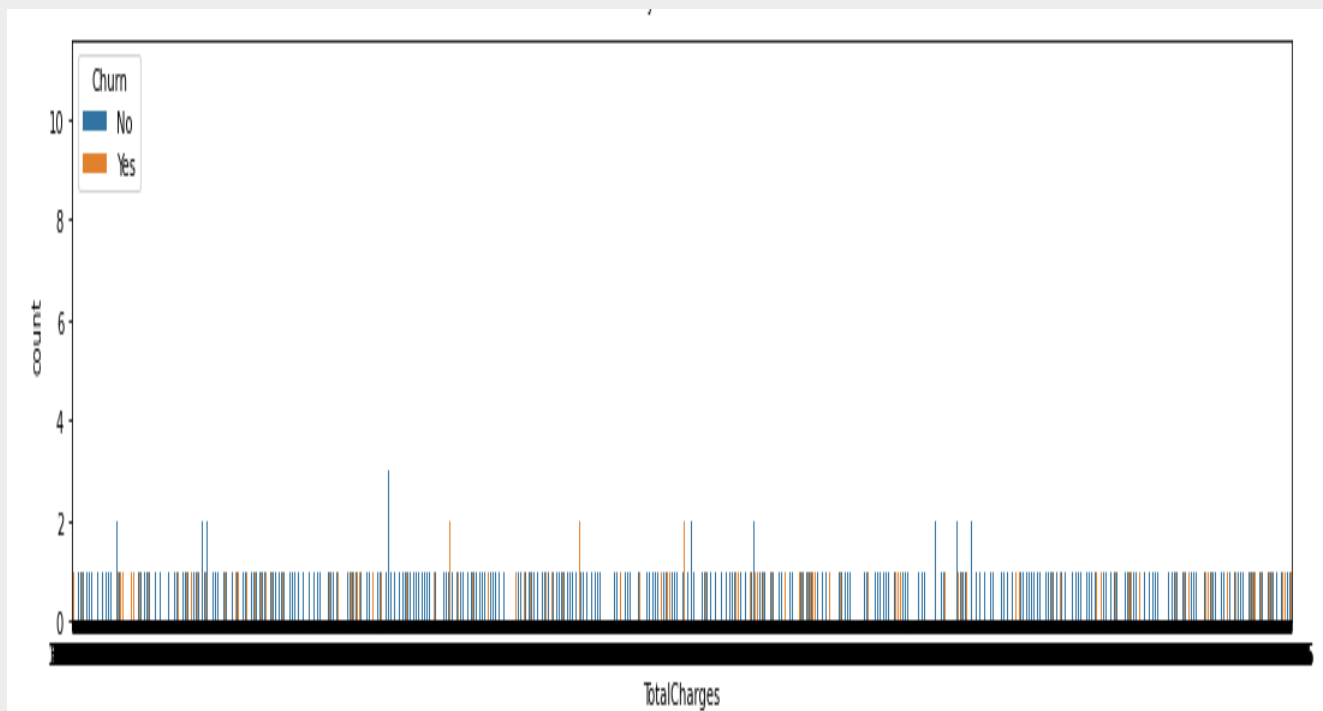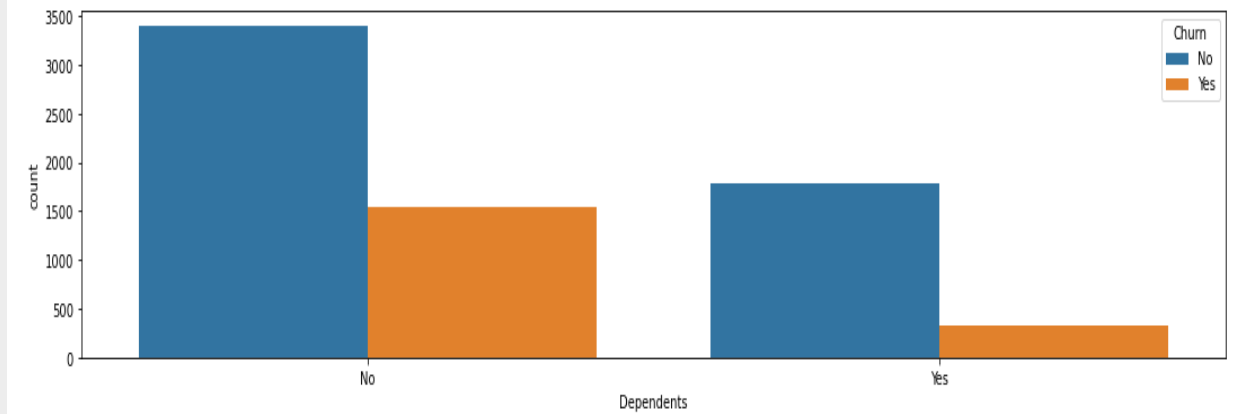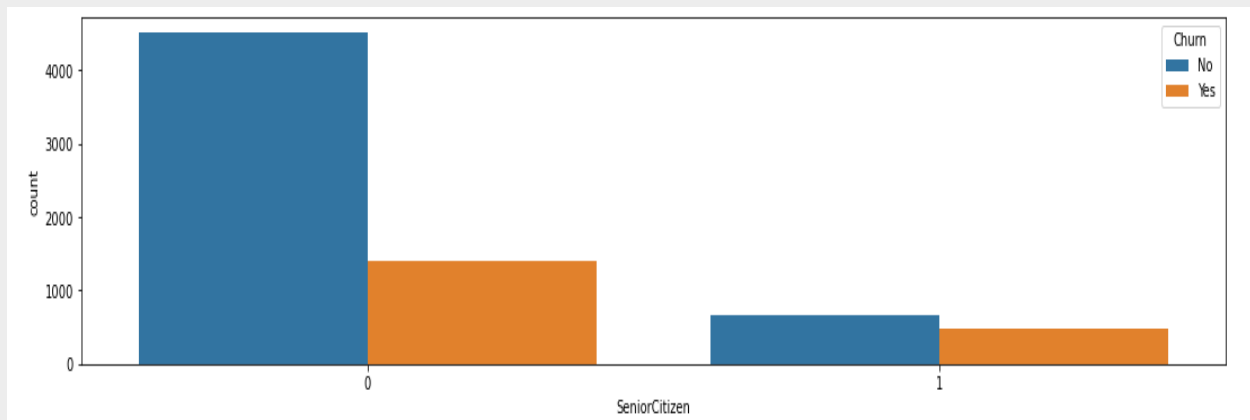

Data Cleaning

To do that we have 4 steps

*** create a function to take our data to do cleaning and return it after cleaning

**First step:

```
import numpy as np
from sklearn import preprocessing as pp

#change datatype of columns and convert the categorical to numeric
def cleaning (data):

    label_encoder=pp.LabelEncoder()
    data['Partner']= label_encoder.fit_transform(data['Partner'])

    data["gender"]= label_encoder.fit_transform(data['gender'])

    data["Dependents"]= label_encoder.fit_transform(data['Dependents'])
    data["InternetService"]= label_encoder.fit_transform(data['InternetService'])
    data["OnlineSecurity"]= label_encoder.fit_transform(data['OnlineSecurity'])
    data["Churn"]= label_encoder.fit_transform(data['Churn'])
    data["MultipleLines"]= label_encoder.fit_transform(data['MultipleLines'])
    data["OnlineSecurity"]= label_encoder.fit_transform(data['OnlineSecurity'])
    data["OnlineBackup"]= label_encoder.fit_transform(data['OnlineBackup'])
    data["DeviceProtection"]= label_encoder.fit_transform(data['DeviceProtection'])
    data["TechSupport"]= label_encoder.fit_transform(data['TechSupport'])
    data["StreamingTV"]= label_encoder.fit_transform(data['StreamingTV'])
    data["StreamingMovies"]= label_encoder.fit_transform(data['StreamingMovies'])
    data["InternetService"]= label_encoder.fit_transform(data['InternetService'])
    data["Contract"]= label_encoder.fit_transform(data['Contract'])
    data["PaymentMethod"]= label_encoder.fit_transform(data['PaymentMethod'])
    data["PaperlessBilling"]= label_encoder.fit_transform(data['PaperlessBilling'])
```

- We change our data to numeric by use (**label_Encoder** : to change yes &no &... To 0 & 1&...)&(fit_transform : to change strings to numeric by alphabetical order)

****Second step:**

#convert the empty cells to nan , changing data type and fill all nan values by using the mean of the column

```
data["TotalCharges"] = data["TotalCharges"].replace(" ", np.nan)
data["TotalCharges"] = data["TotalCharges"].astype('float64')
data["TotalCharges"] = data["TotalCharges"].fillna(value= data["TotalCharges"].mean())
```

- We have an empty cells in **Totalcharges** column so we handling that by turn empty cells to **Null** and replace Null to the **mean of data[TotalCharges]**
- We change data type of column form **object to float64** to be numeric

****Third step: “Data Scaling”**

#normalization of data

```
data_scaler= pp.MinMaxScaler(feature_range=(0 , 1))
TotalCharges_array=data[["TotalCharges"]]
TotalCharges = data_scaler.fit_transform(TotalCharges_array)
data["TotalCharges"] = TotalCharges

MonthlyCharges_array=data[["MonthlyCharges"]]
MonthlyCharges = data_scaler.fit_transform(MonthlyCharges_array)
data["MonthlyCharges"] = MonthlyCharges

tenure_array=data[["tenure"]]
tenure = data_scaler.fit_transform(tenure_array)
data["tenure"] = tenure
```

- We have 3 columns (**TotalCharges , MonthlyCharges,Tenure**) numeric but its very height and different so that we need to normalize this column to predict correct

- We make min &max range to numbers between **(0,1)** by using **MinMaxScaler** and put it in data_scaler
- Putting data of column in array in order to have the appility to make scaling
- Makeing scaling in array and fit it by fit_tranform and put it in object
- Put that object after make scaling in its column in data

****Forth step:**

```
#drop the unwanted features

data = data.drop('gender', axis=1)
data = data.drop('PhoneService', axis=1)
data = data.drop('MultipleLines', axis=1)

print ('inforamtion: ')
print (data.info())
print ('description: ')
print (data.describe())

return data
```

- After cleaning and pre-processing we will drop **unwanted features** that doesn't affect when we predict (**gender ,Phone Service ,Multiple lines**)
- print information to see our data types and number of Nulls
- print data description to see our first 5 rows information to see data after cleaning and number of rows and columns.

Data after Cleaning

```
Data columns (total 17 columns):
#      Column              Non-Null Count  Dtype
---  -
0      SeniorCitizen        7043 non-null   int64
1      Partner                7043 non-null   int32
2      Dependents              7043 non-null   int32
3      tenure                  7043 non-null   float64
4      InternetService         7043 non-null   int64
5      OnlineSecurity          7043 non-null   int64
6      OnlineBackup             7043 non-null   int32
7      DeviceProtection        7043 non-null   int32
8      TechSupport              7043 non-null   int32
9      StreamingTV              7043 non-null   int32
10     StreamingMovies          7043 non-null   int32
11     Contract                 7043 non-null   int32
12     PaperlessBilling         7043 non-null   int32
13     PaymentMethod            7043 non-null   int32
14     MonthlyCharges           7043 non-null   float64
15     TotalCharges              7043 non-null   float64
16     Churn                     7043 non-null   int32
dtypes: float64(3), int32(11), int64(3)
```


Algorithms

Logistic Regression

For train data:

- We import from sklearn. linear_model import LogisticRegression.
- We made function to train data take two parameters x_train and y_train and return LR (object of LogisticRegression class).

```
def trainRegression ( x_train , y_train ):
```

•

For module implementation:

- We import statsmodels.api as sm to print the result summary.

```
# module implementation :
logit_model = sm.Logit( y_train , x_train )
result = logit_model.fit()
print(result.summary2())
```

```
Results: Logit
=====
Model:                               Logit                               Pseudo R-squared: 0.275
Dependent Variable: Churn              AIC:                               4743.8587
Date: 2022-05-21 11:46                 BIC:                               4850.0439
No. Observations: 5634                 Log-Likelihood: -2355.9
Df Model: 15                           LL-Null: -3249.5
Df Residuals: 5618                     LLR p-value: 0.0000
Converged: 1.0000                      Scale: 1.0000
No. Iterations: 8.0000

-----
              Coef.   Std.Err.      z    P>|z|    [0.025   0.975]
-----
SeniorCitizen    0.3217    0.0935     3.4390 0.0006    0.1383    0.5050
Partner         -0.0456    0.0859    -0.5302 0.5960   -0.2140    0.1229
Dependents      -0.1843    0.0982    -1.8763 0.0606   -0.3769    0.0082
tenure          -4.5932    0.4183   -10.9803 0.0000   -5.4131   -3.7733
InternetService -0.0486    0.0586    -0.8287 0.4073   -0.1634    0.0663
OnlineSecurity  -0.2913    0.0454    -6.4104 0.0000   -0.3803   -0.2022
OnlineBackup    -0.1842    0.0420    -4.3804 0.0000   -0.2666   -0.1018
DeviceProtection -0.0965    0.0434    -2.2241 0.0261   -0.1815   -0.0115
TechSupport     -0.3361    0.0464    -7.2443 0.0000   -0.4271   -0.2452
StreamingTV      0.0178    0.0456     0.3906 0.6961   -0.0715    0.1072
StreamingMovies  0.0234    0.0454     0.5146 0.6068   -0.0656    0.1123
Contract        -0.7802    0.0859    -9.0780 0.0000   -0.9486   -0.6117
PaperlessBilling 0.3443    0.0800     4.3049 0.0000    0.1875    0.5010
PaymentMethod   -0.0569    0.0323    -1.7619 0.0781   -0.1201    0.0064
MonthlyCharges  1.2856    0.1726     7.4467 0.0000    0.9473    1.6240
TotalCharges     3.6520    0.5657     6.4555 0.0000    2.5432    4.7608
=====
```

- doing an object form Logistic Regression class so it can be used for train data.

```
LR = LogisticRegression()
```

- we use `from sklearn.metrics import accuracy_score` to calculate accuracy.
- We use `fit()` function to train data.

```
#train data
LR.fit(x_train , y_train)
prediction= LR.predict(x_train)
ac_logisticregression=accuracy_score(y_train,prediction)
print("LogisticRegression train accuracy: ",ac_logisticregression)
```

****Logistic Regression train accuracy: 0.8004969826056088**

For data scatter:

- Scatter train between Total Charges and churn:



- And in the end, we `return LR` (object of LogisticRegression class).

For test data:

- We made function to test data take three parameters `x_test`, `y_test` and `LR` (object of `LogisticRegression` class made fit () for the data) .

```
def testRegression( LR, x_test , y_test ):
```

- We use `predict ()` function to predict the target then calculate the accuracy.


```
#predict the data :
pre = LR.predict(x_test)
#calculate the accuracy :
ac_logisticregression=accuracy_score(y_test,pre)
print("LogisticRegression test accuracy: ",ac_logisticregression)
```

For module implementation:

- We use `from sklearn. metrics import roc_curve` to calculate the logistic curve.

```
#model evaluation :
yy = y_test.squeeze()
roc = roc_auc_score(y_test, pre)
pre = pre.reshape(1, -1)
fpr , tpr , holds = roc_curve(yy, LR.predict_proba(x_test)[: ,1])
plt.figure()
plt.plot(fpr , tpr , label = 'Logistic Regression' % roc)
plt.plot([0,1] , [0,1] , 'r--')
plt.xlim([0.0 , 1.0])
plt.ylim([0.0,1.05])
plt.xlabel('false positive rate')
plt.ylabel('true positive rate')
plt.title("Receiver operating characteristic")
plt.legend(loc = 'lower right')
plt.savefig('Log_ROC')
plt.show()
```

- We use `import matplotlib. Pyplot as plt`

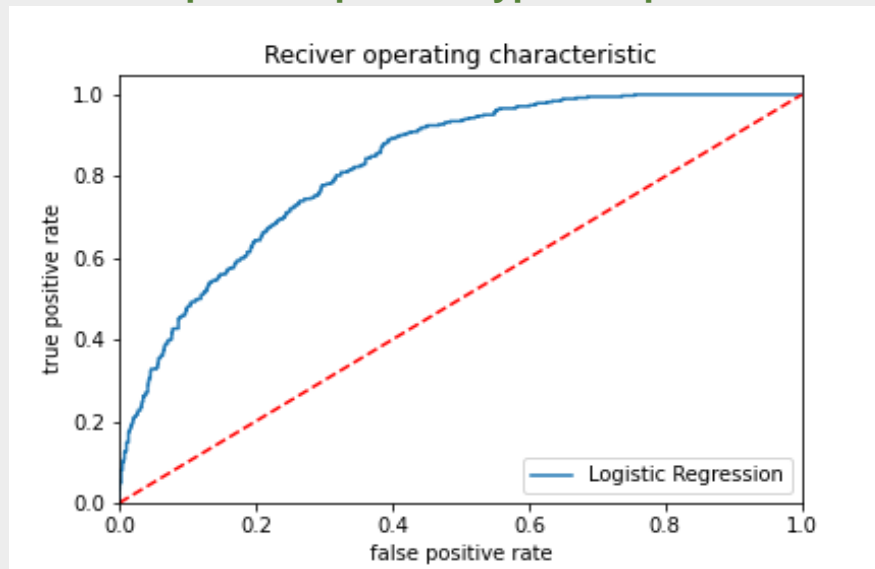

****Logistic Regression test accuracy: 0.801277501774308**

And in the end, we `return LR` (object of `LogisticRegression` class).

For predict data:

- We made function to predict data take two parameter `data` (1D array) and `LR`.

```
def predictRegression(LR , data):
```

```
xtest1=data
xtest1 = xtest1.reshape(1, -1)
ytest1=LR.predict(xtest1)
e = "yes"
if ytest1 == 0:
    e = "no"
print('Logistic Regression predicted Churn is ' + str(int(ytest1[0])) + " for " + e )
```

We convert the 1D array to 2D array using `reshape ()` function.

SVM

We use:

`from sklearn.svm import SVC`

`from sklearn.metrics import classification_report`

for example → `svm_test_report:`


Report:

	precision	recall	f1-score	support
0	0.92	0.98	0.95	1066
1	0.93	0.73	0.81	343
accuracy			0.92	1409
macro avg	0.92	0.85	0.88	1409
weighted avg	0.92	0.92	0.92	1409

`from matplotlib import pyplot as plt`

`from sklearn.metrics import plot_confusion_matrix`

for confusion_matrix:

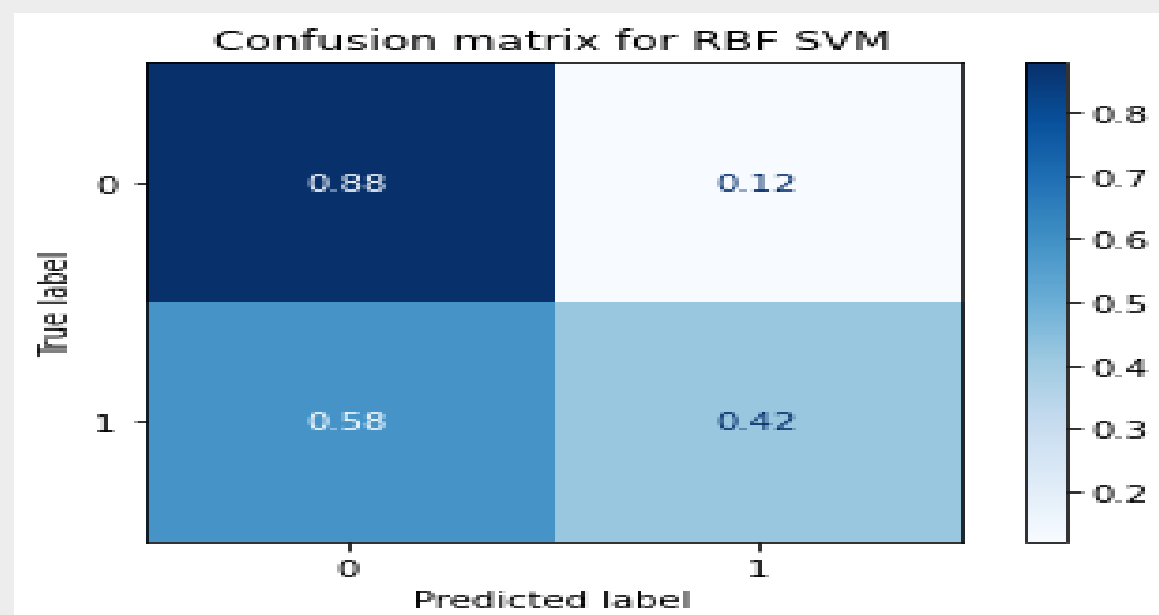

from sklearn. metrics import accuracy_score

To show accuracy.

For function train:

doing an object form svc so it can be used for train data.

```
SV = SVC(kernel='rbf', gamma=1.00)
```

- Doing fitting for **x_train, y_train** by using function **fit()**
- Doing predict by using function **predict(x_train)**
- calculate accuracy

SVM Accuracy for train: 0.8757543485977991.


```
SV.fit(x_train , y_train)
prediction= SV.predict(x_train)
ac_svm=accuracy_score(y_train,prediction)
print("SVM train accuracy: ",ac_svm)
```

- And in the end, we **return SV** (object of SVC class).

For data scatter :

Scatter train between Total Charges and churn:

```
x = np.random.normal( 0.261309, 0.261366, 1000) #(mean,standard deviation,dots)
y = np.random.normal(0.265370, 0.441561, 1000) #(mean,standard deviation,dots)
```

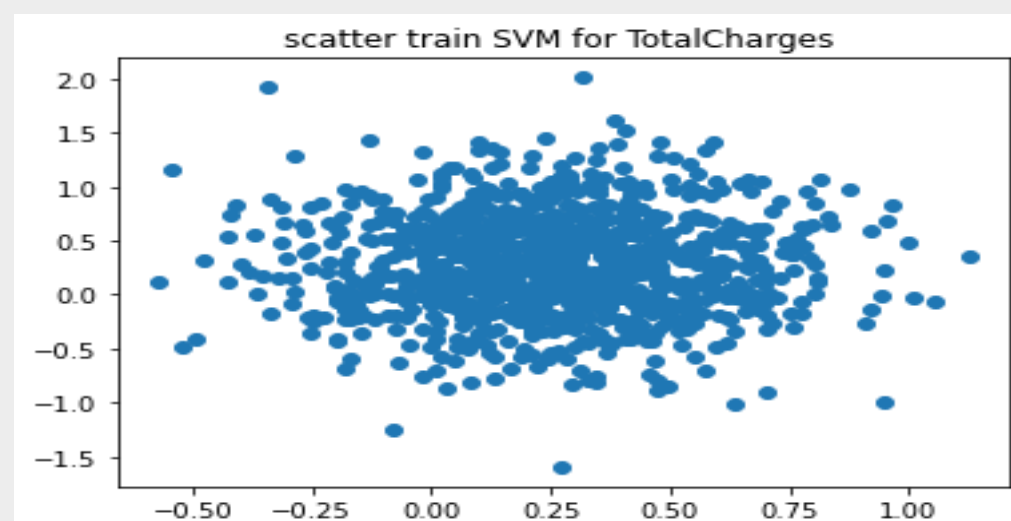

For function test:

- We made function to test data take three parameters **x_test**, **y_test** and **SV** (object of SVC class made fit () for the data) .
- We use **predict ()** function to predict the target then calculate the accuracy.

```
y_pre = SV.predict(x_test)
ac_svm=accuracy_score(y_test,y_pre)
print("SVM test accuracy: ",ac_svm)
```


SVM Accuracy for test: 0.7665010645848119.

- And in the end of the test function, we return **SV**(object of SVC class) .

For data scatter :

Scatter test between Total Charges and churn:

```
x = np.random.normal( 0.261309, 0.261366, 1000) #(mean,standard deviation,dots)
y = np.random.normal(0.265370, 0.441561, 1000) #(mean,standard deviation,dots)
```

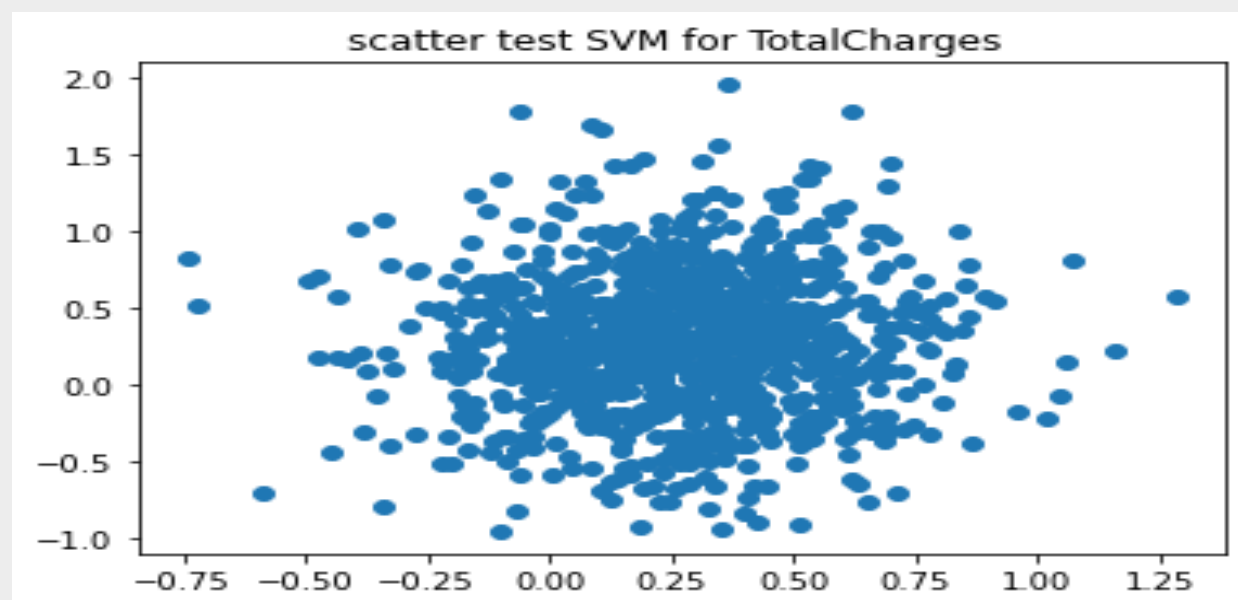

For function predict:

```
def predictSvm( SV , data):  
    #Predict of churn value  
    |  
    xtest1=data  
    xtest1 = xtest1.reshape(1, -1)  
    ytest1=SV.predict(xtest1)  
    e = "yes"  
    if ytest1 == 0:  
        e = "no"  
    print('SVM predicted Churn is ' + str(int(ytest1[0])) + " for " + e )
```

Data variable is the input from the user and reshape it then doing predict and SV (an object of **SVC**) that made **fit ()** for the data in train function

We convert the 1D array to 2D array using **reshape()** function.

And doing predict to **data** , If predict is equal **1** then churn is **YES**, else the churn is **NO**

Decision Tree

We use:

from sklearn. tree import DecisionTreeClassifier

To make an object from `DecisionTreeClassifier`, so it can be used for train data.

```
model_DecTree = DecisionTreeClassifier(criterion = "gini", random_state = 10,  
                                       max_depth=3, min_samples_leaf=5)
```

from sklearn. metrics import accuracy_score

to show accuracy of `Decision Tree`.

For function Train:

Doing fitting for (`x_train`, `y_train` for Training)

```
def trainDST(x_train , y_train):  
  
    model_DecTree.fit(x_train , y_train)  
    prediction= model_DecTree.predict(x_train)  
    ac_id3=accuracy_score(y_train,prediction)  
    print("Decision Tree train accuracy: ",ac_id3)
```

Decision Tree Accuracy for Training: 0.7825701100461484

For function Test:

Doing predict `predict(x_test)`, and finally calculate accuracy for `ytest` and `y_predict`

Taking a `model_DecTree` (an object of `DecisionTreeClassifier`) that made fit for the data in train function.

```
def testDST( model_DecTree , x_test , y_test):  
    y_predict = model_DecTree.predict(x_test)  
    ac=accuracy_score(y_test,y_predict)  
    print('DecisionTree Accuracy : ' , ac)  
    return model_DecTree
```

Decision Tree Accuracy for Testing: 0.7821149751596878

For function Predict:

```
def predictDST(model_DecTree , data):  
    |  
    xtest1=data  
    xtest1 = xtest1.reshape(1, -1)  
    ytest1=model_DecTree.predict(xtest1)  
    e = "yes"  
    if ytest1 == 0:  
        e = "no"  
    print('Decision Tree predicted Churn is ' + str(int(ytest1[0])) + " for " + e )
```

Data variable is the input from the user and reshape it then doing predict

And `model_DecTree` (an object of `DecisionTreeClassifier`) that made `fit ()` for the data in train function and `predict ()` for data in test function.


If predict is equal 1 then churn is YES, else the churn is NO

Comparing among 3 Algorithms

Algorithm Accuracy	Logistic Regression	SVM	Decision Tree
train	0.8004969826056088	0.8757543485977991	0.7825701100461484
test	0.801277501774308	0.7665010645848119	0.7821149751596878

GUI

GUI module:

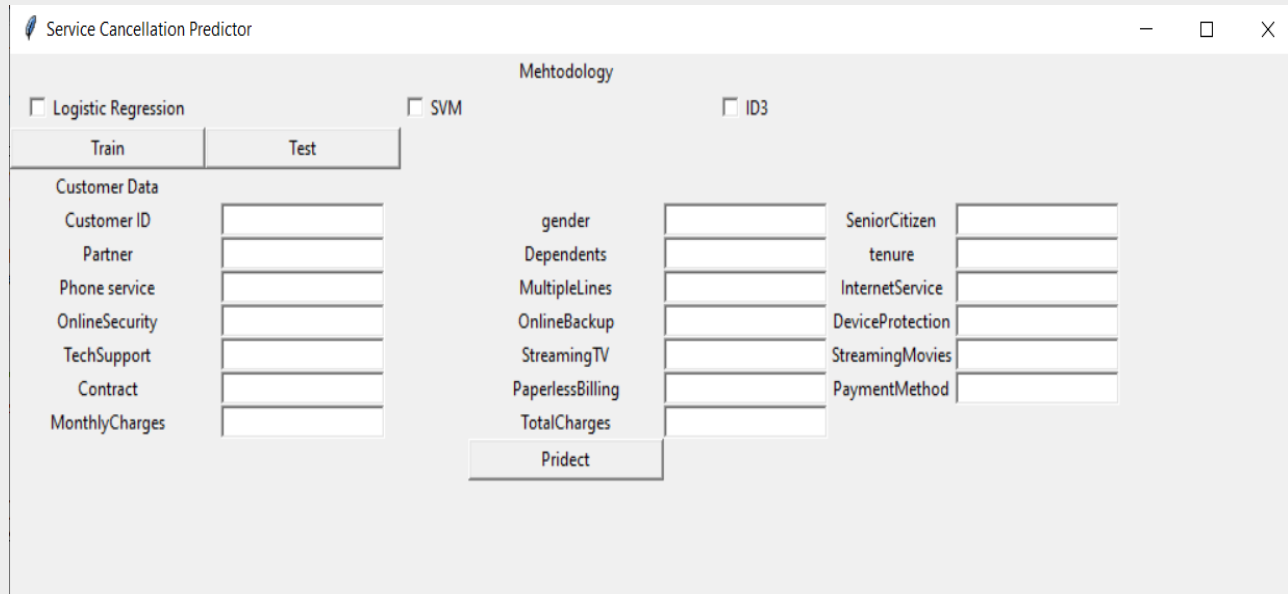

- We use **import tkinter as tk** for GUI.
- We use **from sklearn. model_selection import train_test_split** to split data.
- First , we must read file (CustomersDataset.csv) , and use function (isna().sum()) to count null values in data , drop the column "customerID" , and then clean the data , and then show plots

```
project=pd.read_csv("CustomersDataset.csv")
# check if there exist any nulls in data
print(project.isna().sum())
#drop customer id
data = project.drop('customerID', axis=1)
data = cleaning(data)
x = data.drop(columns = ['Churn'])
y = data[['Churn']]
plots(data = data)
```

```
customerID      0
gender          0
SeniorCitizen   0
Partner         0
Dependents      0
tenure          0
PhoneService    0
MultipleLines   0
InternetService 0
OnlineSecurity  0
OnlineBackup    0
DeviceProtection 0
TechSupport     0
StreamingTV     0
StreamingMovies 0
Contract        0
PaperlessBilling 0
PaymentMethod   0
MonthlyCharges  0
TotalCharges    0
Churn           0
dtype: int64
```

- **x_train, x_test, y_train, y_test =train_test_split (x, y, test_size=0.2, random_state=10)**
- **We made function to take data from Entries to make a 1D array and return it.**

```
def TakeData():
    data=np.array([senior.get() ,part.get() ,depend.get() , tenur.get() , internet.get() ,
                   |onlineS.get() , onlineB.get() , device.get() , tech.get() , streamT.get()
                   , streamM.get() , contract.get() , paper.get() , payment.get() ,
                   month.get() , total.get()])
    return data
```

- we made three `IntVar()` variables for every check button, set it = 0 by default, as when button selected the variable = 1 other variable = 0.

```
check_value1 = tk.IntVar()
check_value2 = tk.IntVar()
check_value3 = tk.IntVar()
check_value1.set(0)
check_value2.set(0)
check_value3.set(0)
```

- we made three functions for (train data, test data, predict state) for buttons (train, test, predict) in `command` attribute.

```
def TrainData():
    if check_value1.get() == 1 :
        global LR
        LR = trainRegression(x_train, y_train)
    if check_value2.get() == 1 :
        global SV
        SV = trainSvm(x_train, y_train)
    if check_value3.get() == 1 :
        global DST
        DST = trainDST(x_train, y_train)

def TestData():
    if check_value1.get() == 1 :
        global LR1
        LR1 = testRegression( LR , x_test, y_test)
    if check_value2.get() == 1 :
        global SV1
        SV1 = testSvm(SV , x_test, y_test)
    if check_value3.get() == 1 :
        global DST1
        DST1 = testDST(DST , x_test, y_test)

def predict_states():
    print("Predict Algorithms:")
    d=TakeData()
    if check_value1.get()==1:
        predictRegression(LR1 , d)
    if check_value2.get()==1:
        predictSvm(SV1 , d)
    if check_value3.get()==1:
        predictDST(DST1 ,d)
```

Thanks For Your Time 😊