

EVIDENCIAS - EJERCICIO FULL-STACK




Julián Foglia
Laura Hernandez
Santiago Cubides
Joel Ostos

Ingeniería de Software I
Universidad Nacional de Colombia

8 de mayo de 2026


1. PostgreSQL instalado

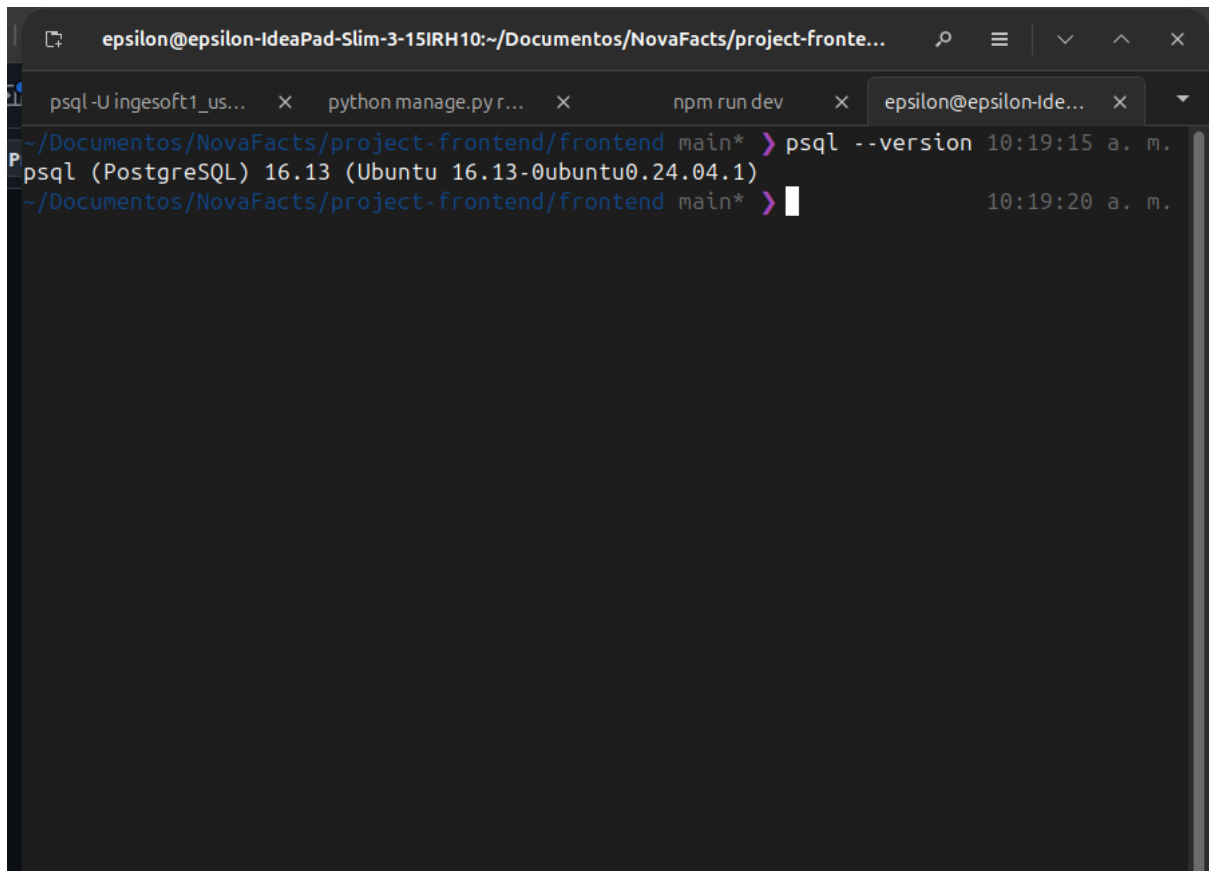A terminal window with a dark background and light-colored text. The window title is "epsilon@epsilon-IdeaPad-Slim-3-15IRH10:~/Documentos/NovaFacts/project-fronte...". The terminal shows a prompt "main*" followed by the command "psql --version". The output is "psql (PostgreSQL) 16.13 (Ubuntu 16.13-0ubuntu0.24.04.1)". The prompt "main*" is followed by a cursor. The time "10:19:20 a. m." is visible in the bottom right corner of the terminal area.

```
epsilon@epsilon-IdeaPad-Slim-3-15IRH10:~/Documentos/NovaFacts/project-fronte...  
psql -U ingesoft1_us... x python manage.py r... x npm run dev x epsilon@epsilon-Ide... x  
~/Documentos/NovaFacts/project-frontend/frontend main* > psql --version 10:19:15 a. m.  
psql (PostgreSQL) 16.13 (Ubuntu 16.13-0ubuntu0.24.04.1)  
~/Documentos/NovaFacts/project-frontend/frontend main* > 10:19:20 a. m.
```

Figura 1: Terminal mostrando `psql --version`

2. Base de datos creada

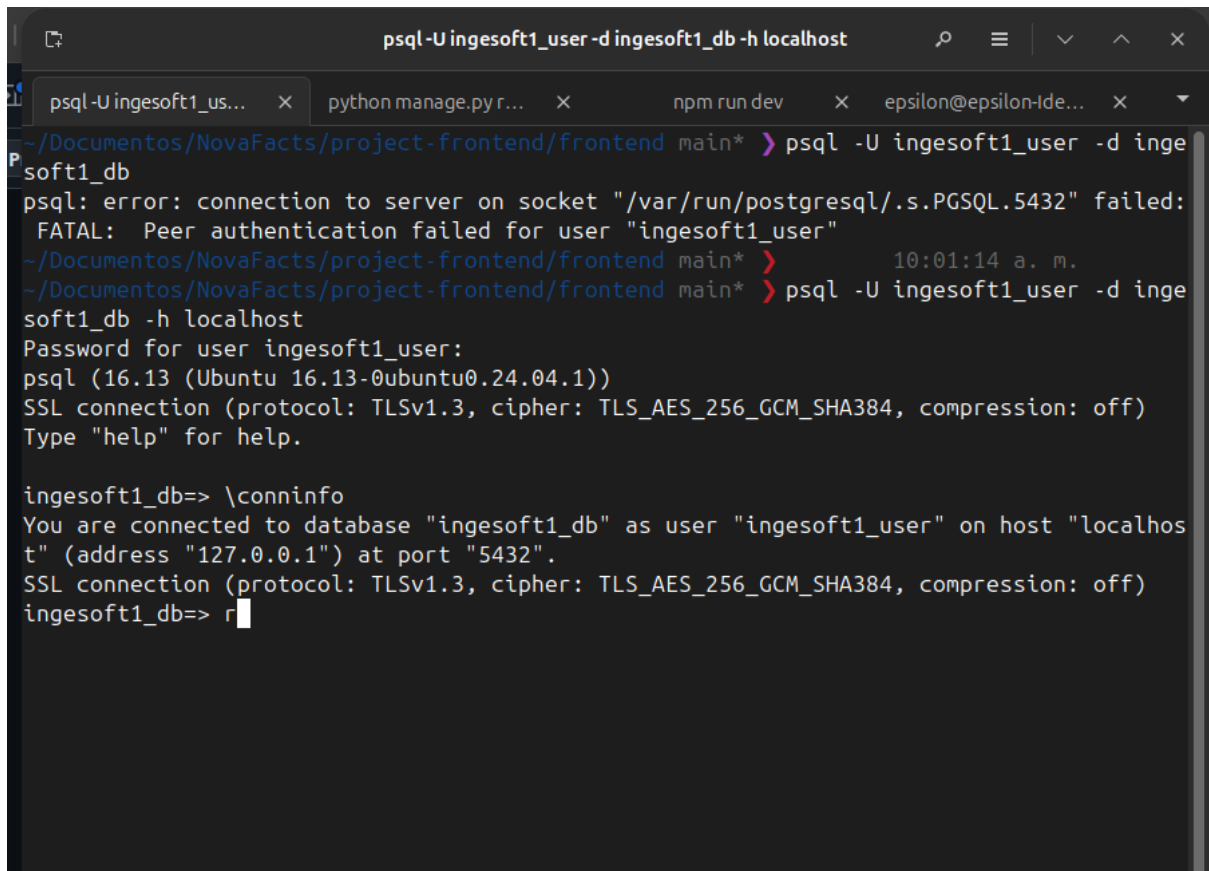

```
psql -U ingesoft1_user -d ingesoft1_db -h localhost
psql -U ingesoft1_us... x python manage.py r... x npm run dev x epsilon@epsilon-Ide... x
~/Documentos/NovaFacts/project-frontend/frontend main* > psql -U ingesoft1_user -d inge
soft1_db
psql: error: connection to server on socket "/var/run/postgresql/.s.PGSQL.5432" failed:
FATAL: Peer authentication failed for user "ingesoft1_user"
~/Documentos/NovaFacts/project-frontend/frontend main* > 10:01:14 a. m.
~/Documentos/NovaFacts/project-frontend/frontend main* > psql -U ingesoft1_user -d inge
soft1_db -h localhost
Password for user ingesoft1_user:
psql (16.13 (Ubuntu 16.13-0ubuntu0.24.04.1))
SSL connection (protocol: TLSv1.3, cipher: TLS_AES_256_GCM_SHA384, compression: off)
Type "help" for help.

ingesoft1_db=> \conninfo
You are connected to database "ingesoft1_db" as user "ingesoft1_user" on host "localhos
t" (address "127.0.0.1") at port "5432".
SSL connection (protocol: TLSv1.3, cipher: TLS_AES_256_GCM_SHA384, compression: off)
ingesoft1_db=> r
```

Figura 2: Conexión a ingesoft1_db

3. Tabla creada

```
psql-U ingesoft1_user -d ingesoft1_db -h localhost
```

```
psql-U ingesoft1_user -d i... x python manage.py runserver... x npm run dev x epsilon@epsilon-IdeaPad... x
```


```
Table "public.ingesoft1_users"
Column | Type | Collation | Nullable | Default
-----+-----+-----+-----+-----
id      | bigint |           | not null | generated by default as identity
correo  | character varying(254) |           | not null |
password_hash | character varying(128) |           | not null |
secret_phrase | character varying(255) |           | not null |
```

```
Indexes:
"ingesoft1_users_pkey" PRIMARY KEY, btree (id)
"ingesoft1_users_correo_6794ae2b_like" btree (correo varchar_pattern_ops)
"ingesoft1_users_correo_key" UNIQUE CONSTRAINT, btree (correo)
```

```
(END)
```

Figura 3: Resultado de `\d ingesoft1_users`

4. Usuario de prueba

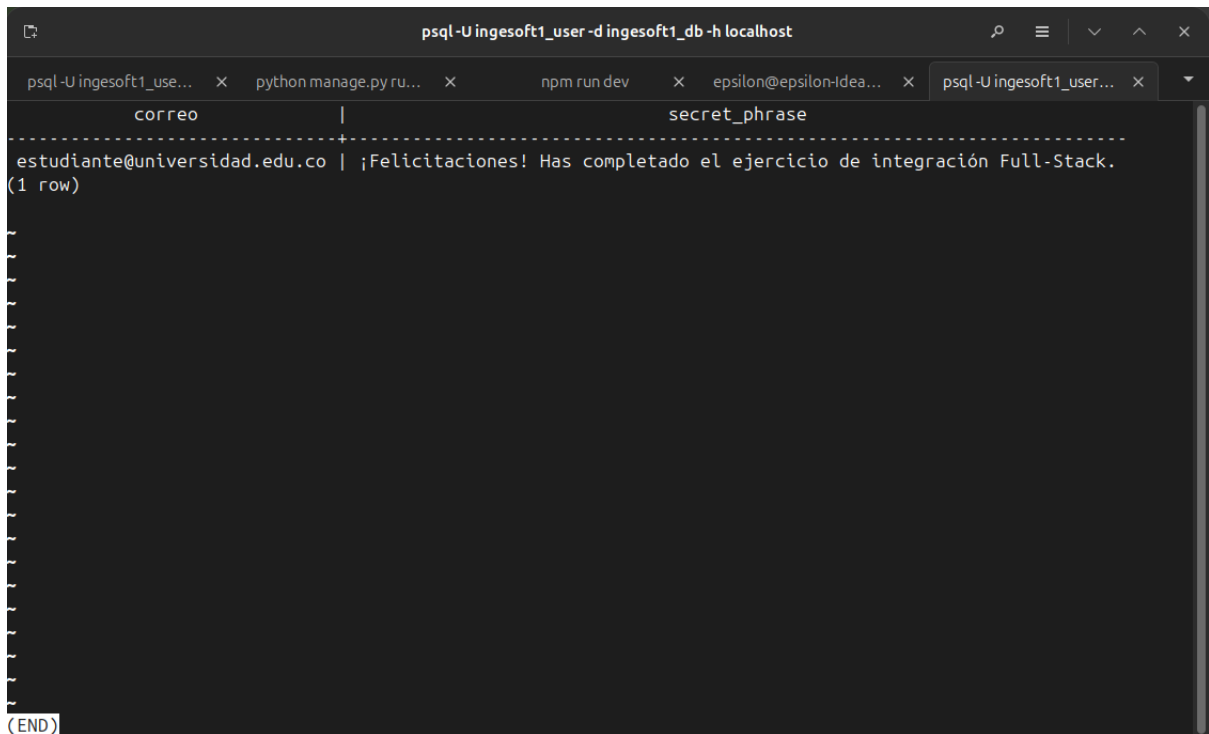

A terminal window titled "psql -U ingesoft1_user -d ingesoft1_db -h localhost" displays the result of a SQL query. The query has two columns: "correo" and "secret_phrase". The result shows a single row with the email "estudiante@universidad.edu.co" and a congratulatory message in Spanish. The terminal also shows the prompt "(1 row)" and "(END)".

```
psql -U ingesoft1_user -d ingesoft1_db -h localhost
correo | secret_phrase
-----+-----
estudiante@universidad.edu.co | ¡Felicitaciones! Has completado el ejercicio de integración Full-Stack.
(1 row)

(END)
```

Figura 4: Consulta de usuarios registrados

5. Estructura backend

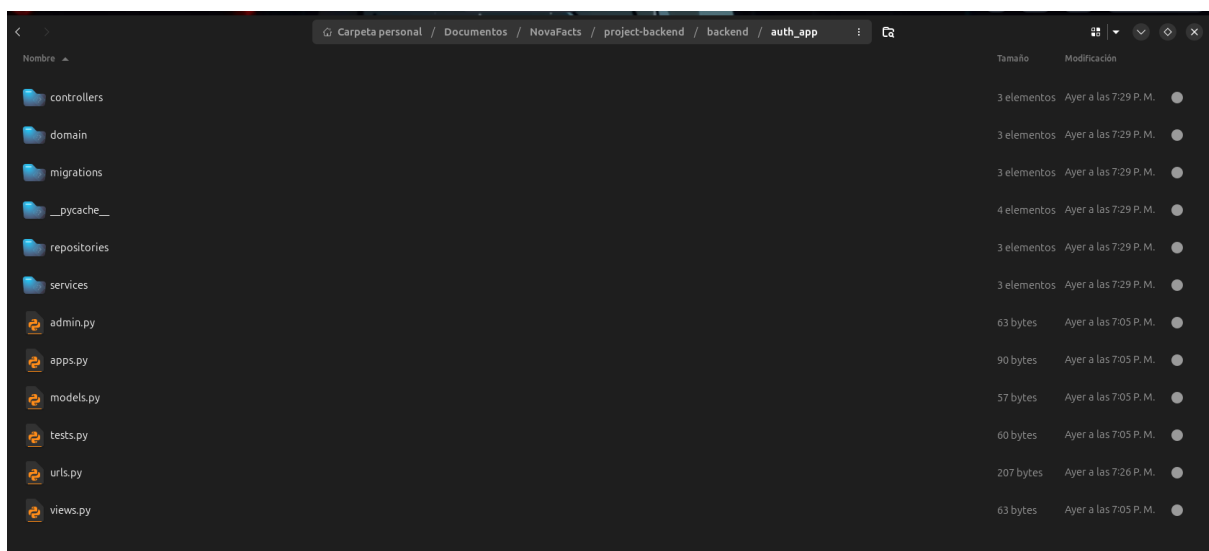


Figura 5: Estructura de carpetas del backend

6. Django corriendo

```
~/Documents/NovaFacts/project-backend/backend main* backend > python manage.py runserver
Watching for file changes with StatReloader
Performing system checks...

System check identified no issues (0 silenced).
May 08, 2026 - 15:04:46
Django version 6.0.5, using settings 'config.settings'
Starting development server at http://127.0.0.1:8000/
Quit the server with CONTROL-C.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.
For more information on production servers see: https://docs.djangoproject.com/en/6.0/howto/deployment/
```

Figura 6: Servidor Django ejecutándose en el puerto 8000

7. API - Login exitoso

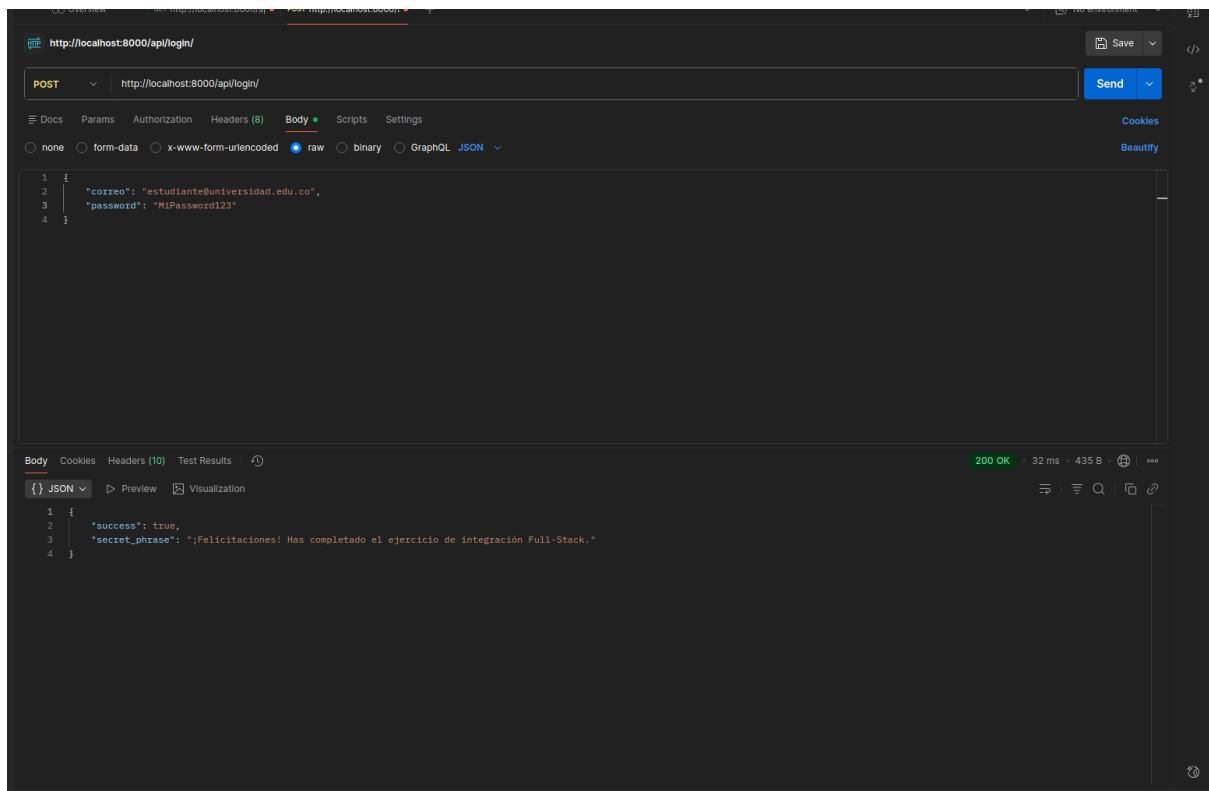


Figura 7: Respuesta exitosa del endpoint de login

8. API - Login fallido


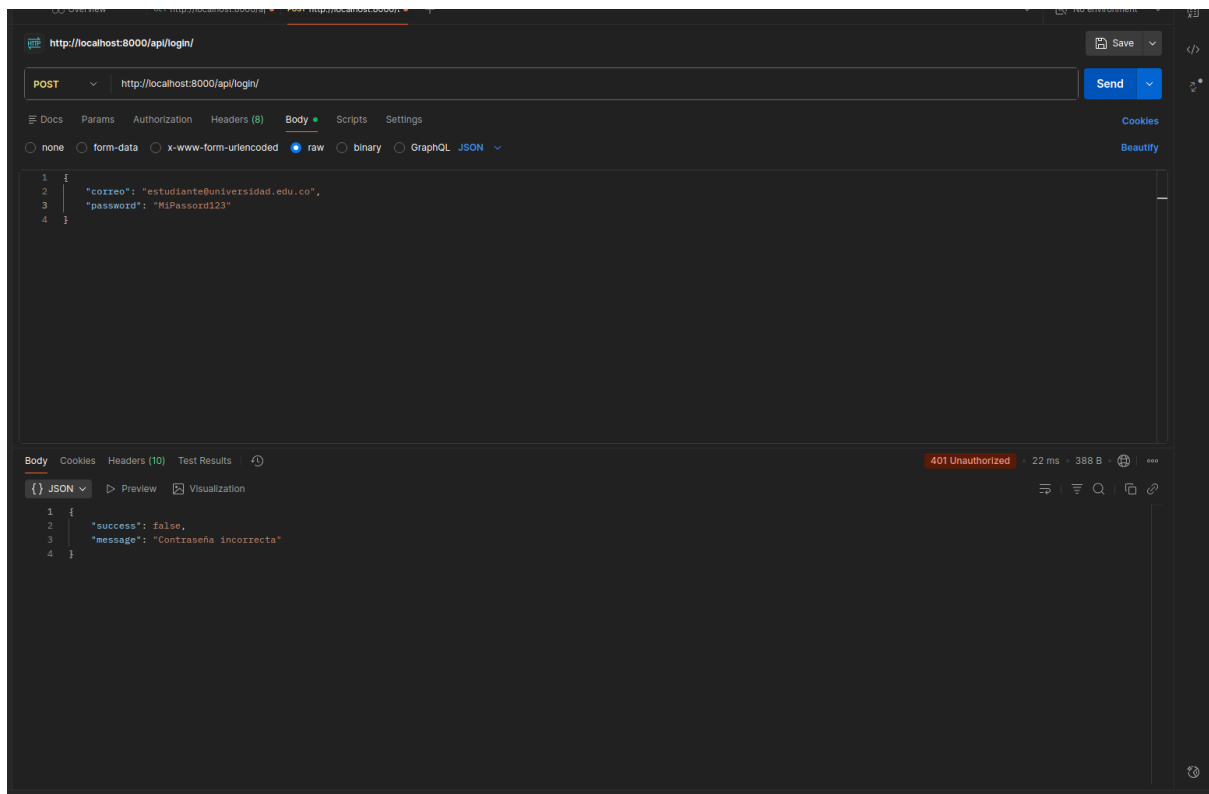


Figura 8: Respuesta fallida del endpoint de login


9. Estructura frontend

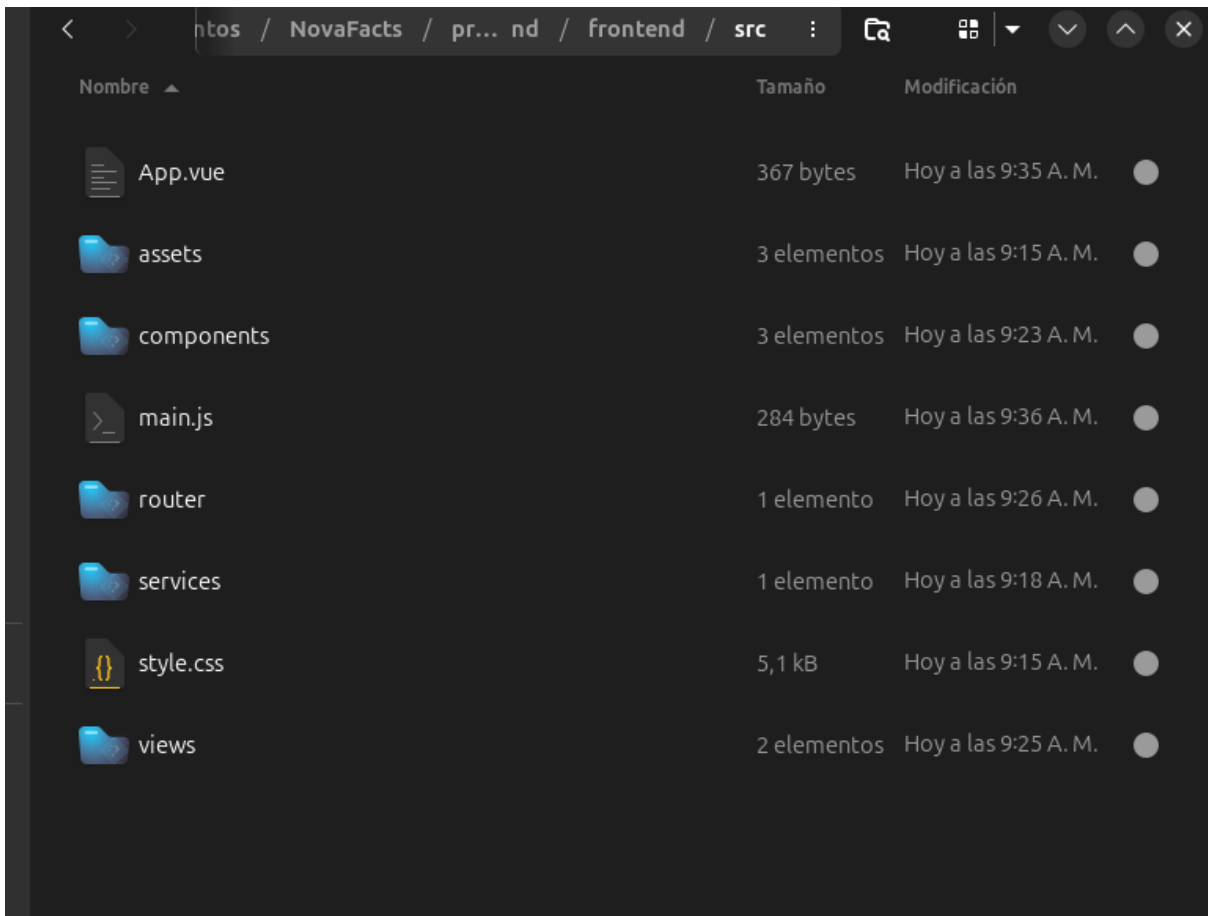

Nombre	Tamaño	Modificación	
App.vue	367 bytes	Hoy a las 9:35 A. M.	●
assets	3 elementos	Hoy a las 9:15 A. M.	●
components	3 elementos	Hoy a las 9:23 A. M.	●
main.js	284 bytes	Hoy a las 9:36 A. M.	●
router	1 elemento	Hoy a las 9:26 A. M.	●
services	1 elemento	Hoy a las 9:18 A. M.	●
style.css	5,1 kB	Hoy a las 9:15 A. M.	●
views	2 elementos	Hoy a las 9:25 A. M.	●

Figura 9: Estructura de carpetas del frontend

10. Vue corriendo

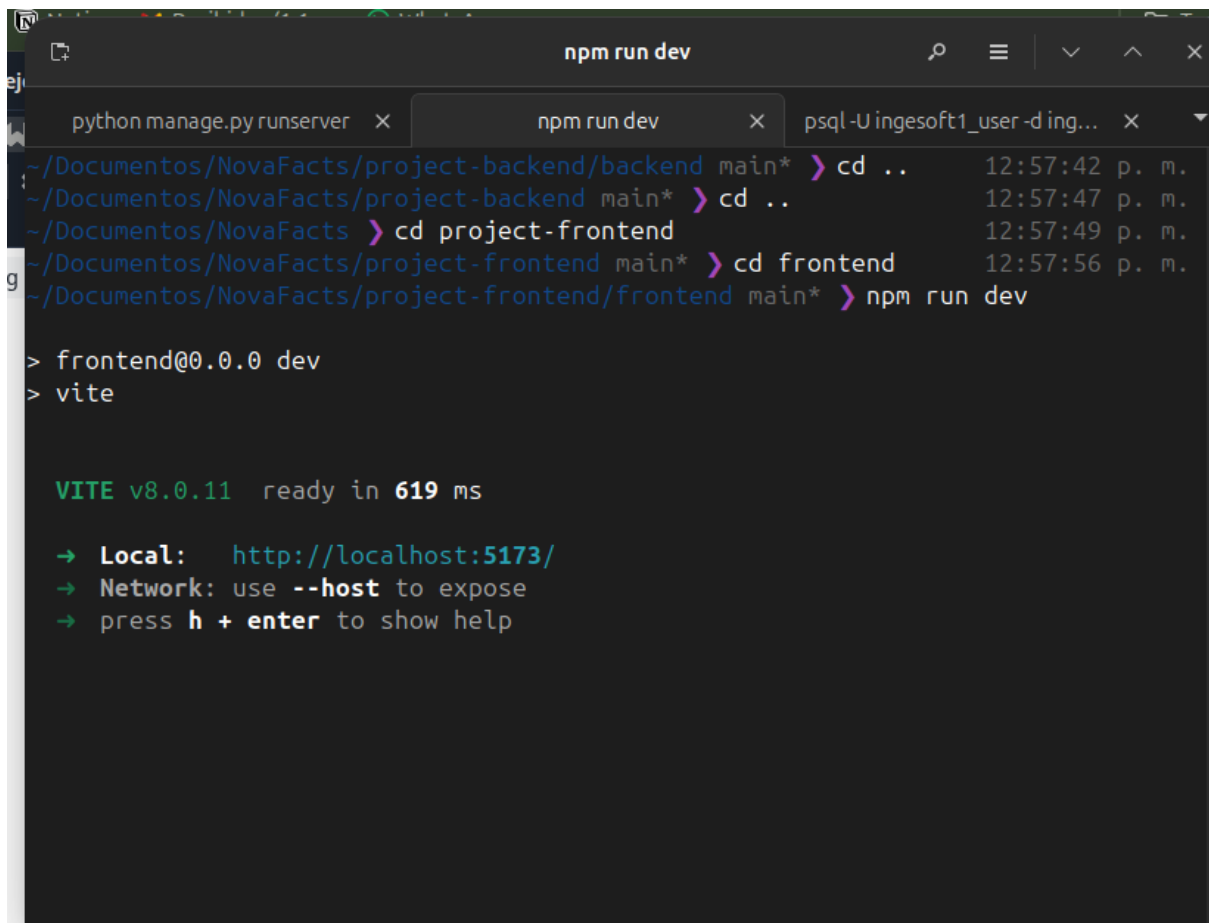

The image shows a terminal window with the title 'npm run dev'. It contains a series of commands and their outputs, showing the process of navigating to the frontend directory and starting the Vite development server. The terminal output includes the Vite version (v8.0.11) and the local development URL (http://localhost:5173/).

```
~/Documentos/NovaFacts/project-backend/backend main* > cd .. 12:57:42 p. m.
~/Documentos/NovaFacts/project-backend main* > cd .. 12:57:47 p. m.
~/Documentos/NovaFacts > cd project-frontend 12:57:49 p. m.
~/Documentos/NovaFacts/project-frontend main* > cd frontend 12:57:56 p. m.
~/Documentos/NovaFacts/project-frontend/frontend main* > npm run dev

> frontend@0.0.0 dev
> vite

VITE v8.0.11 ready in 619 ms

→ Local: http://localhost:5173/
→ Network: use --host to expose
→ press h + enter to show help
```

Figura 10: Servidor Vite ejecutándose en el puerto 5173

11. Pantalla login

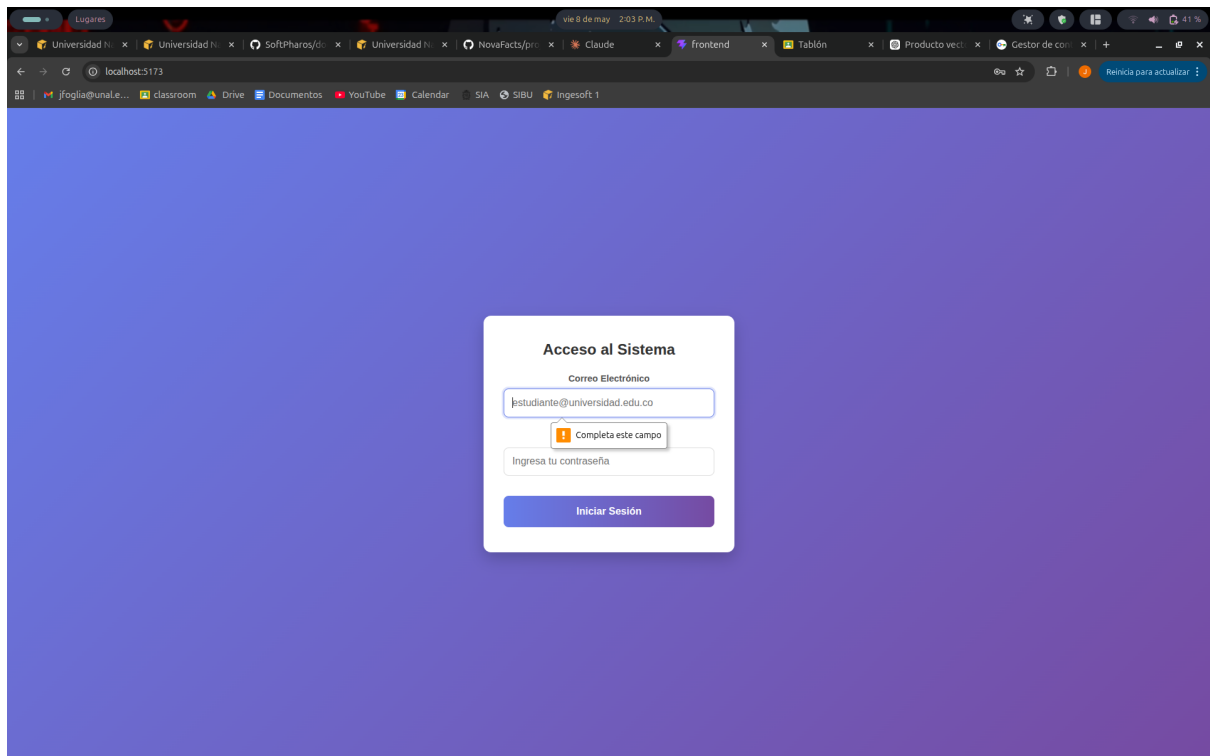


Figura 11: Formulario de inicio de sesión

12. Error de login

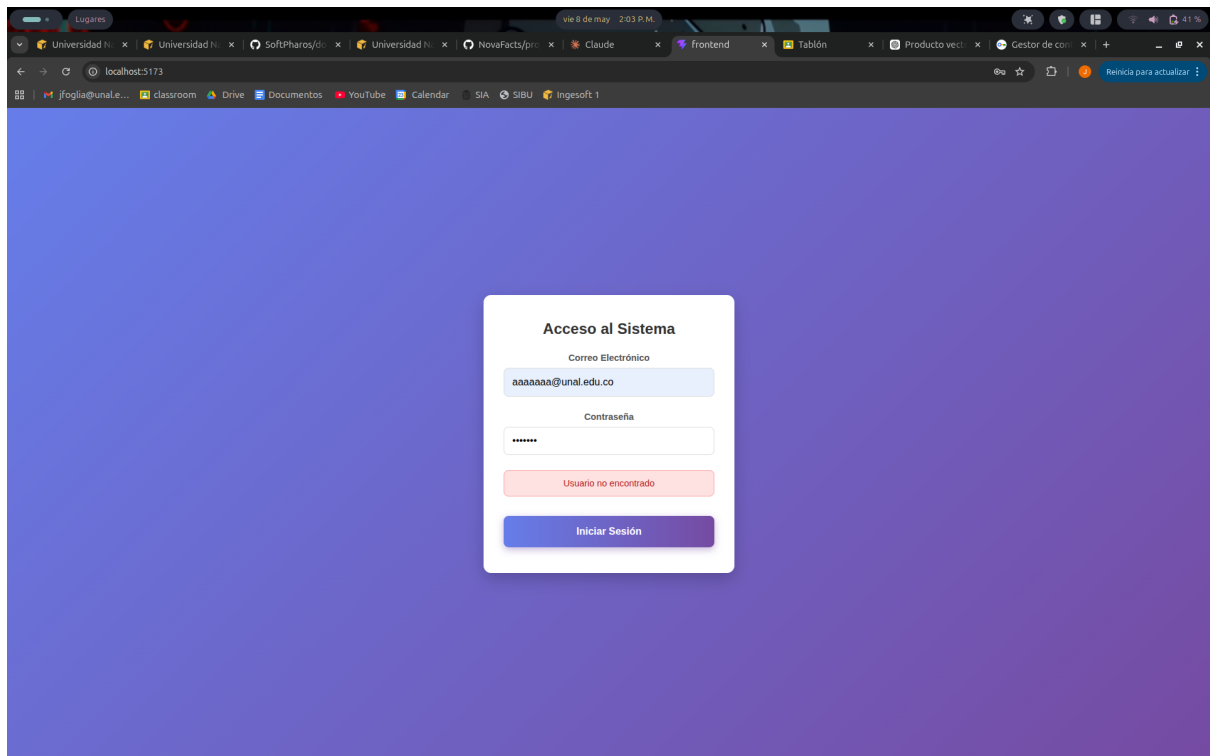


Figura 12: Mensaje de error al iniciar sesión

13. Login exitoso

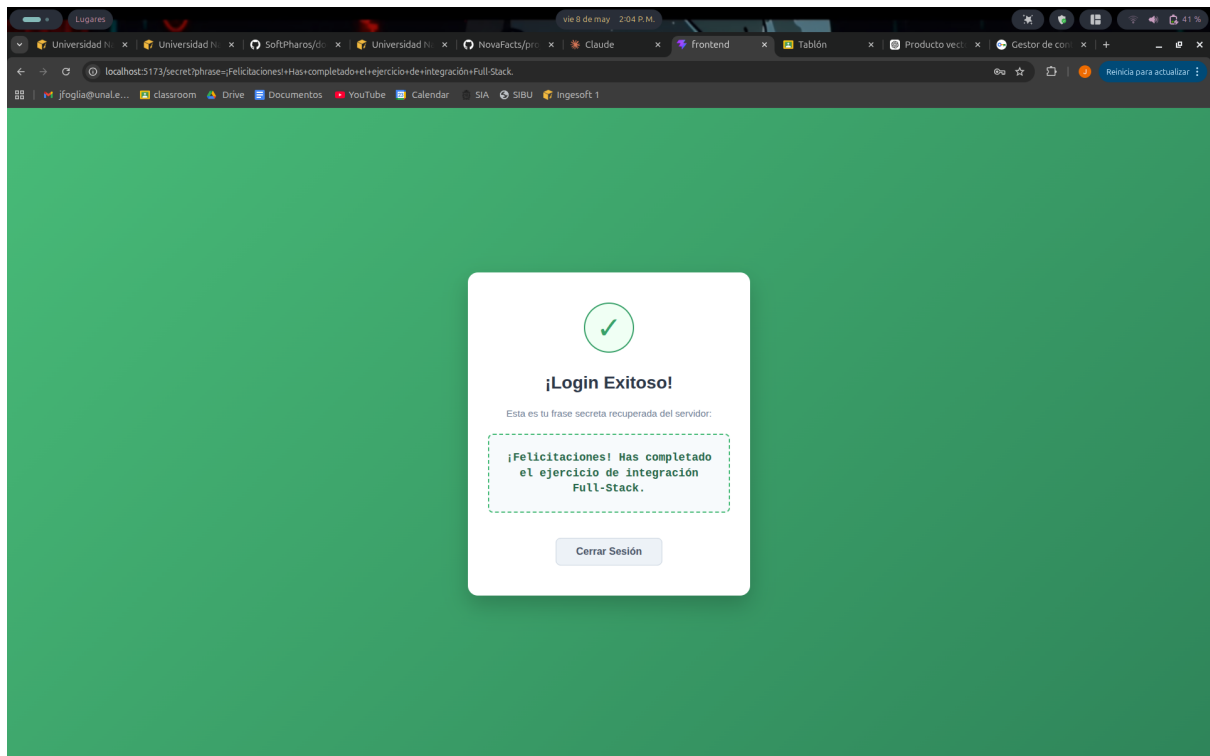


Figura 13: Pantalla mostrando frase secreta

14. DevTools - Request

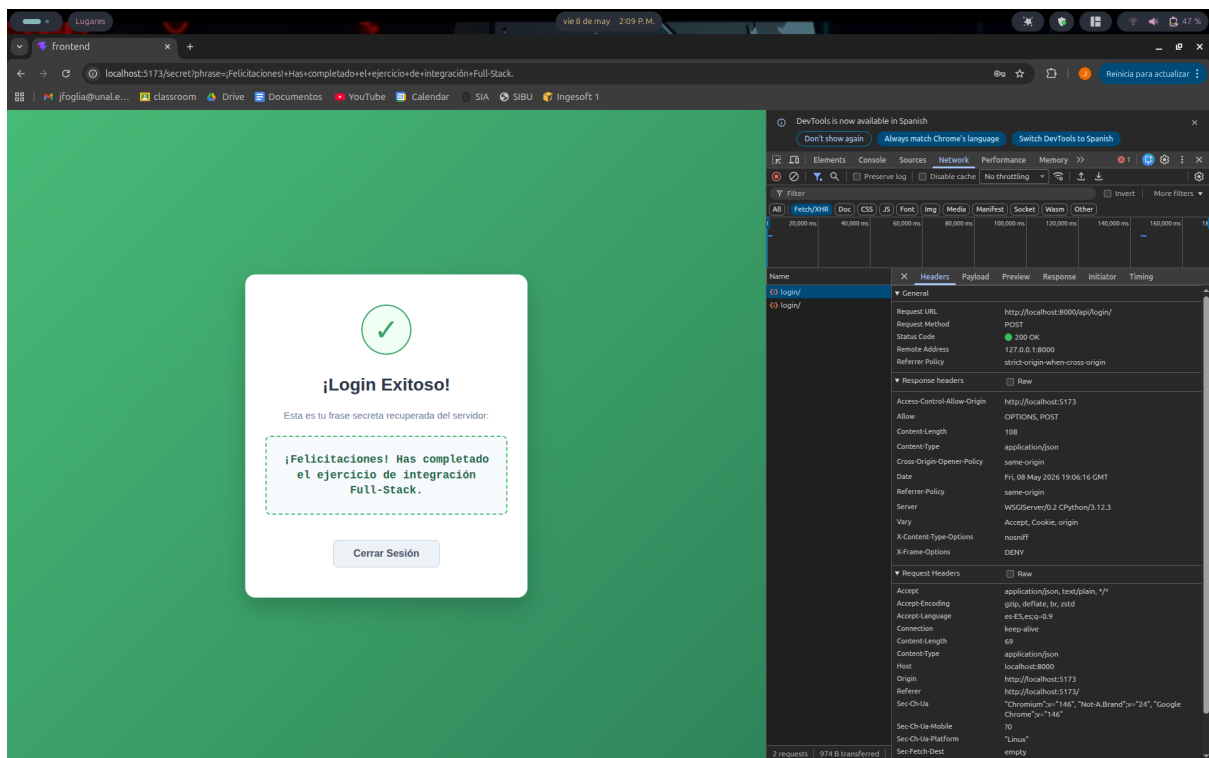


Figura 14: Petición POST al endpoint /api/login

15. DevTools - Response

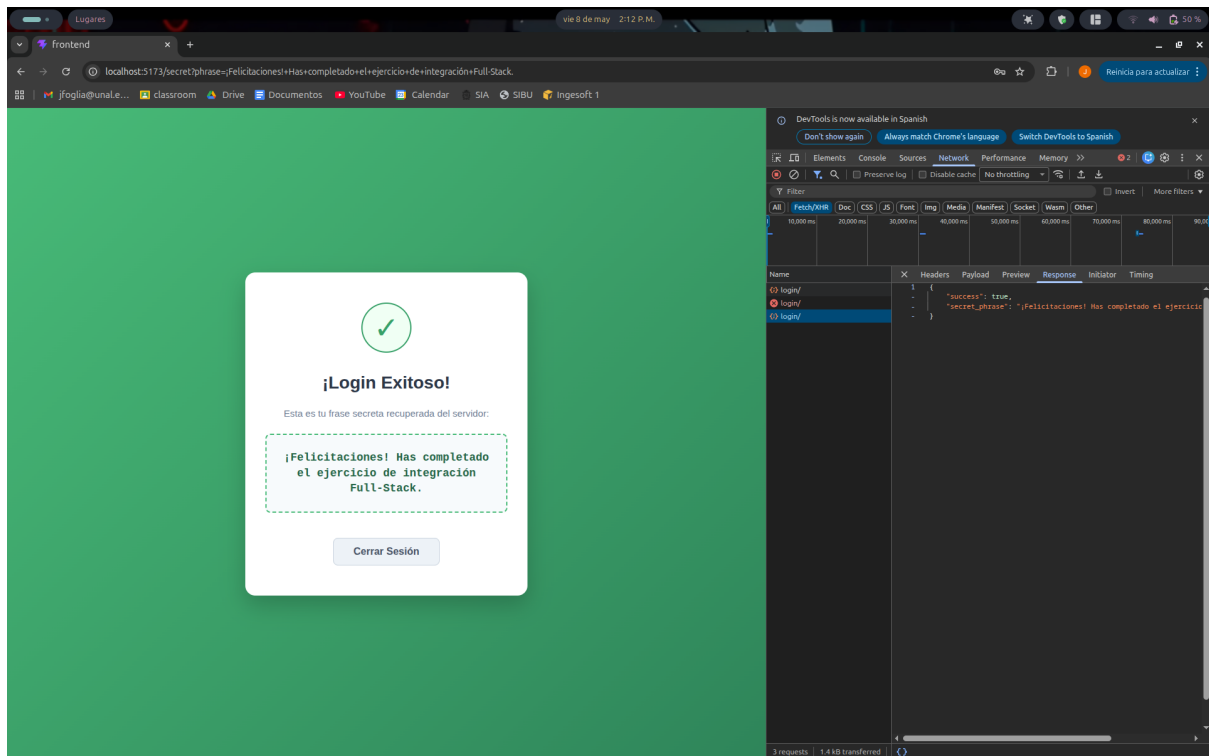


Figura 15: Respuesta JSON del servidor