

# Exceptional Control Flow: Exceptions and Processes

Introduction to Computer Systems  
17<sup>th</sup> Lecture, Nov. 22, 2021


**Instructors:**

**Class 1: Chen Xiangqun, Sun Guangyu , Liu Xianhua**

**Class 2: Guan Xuetao**

**Class 3: Lu Junlin**

# Printers Used to Catch on Fire

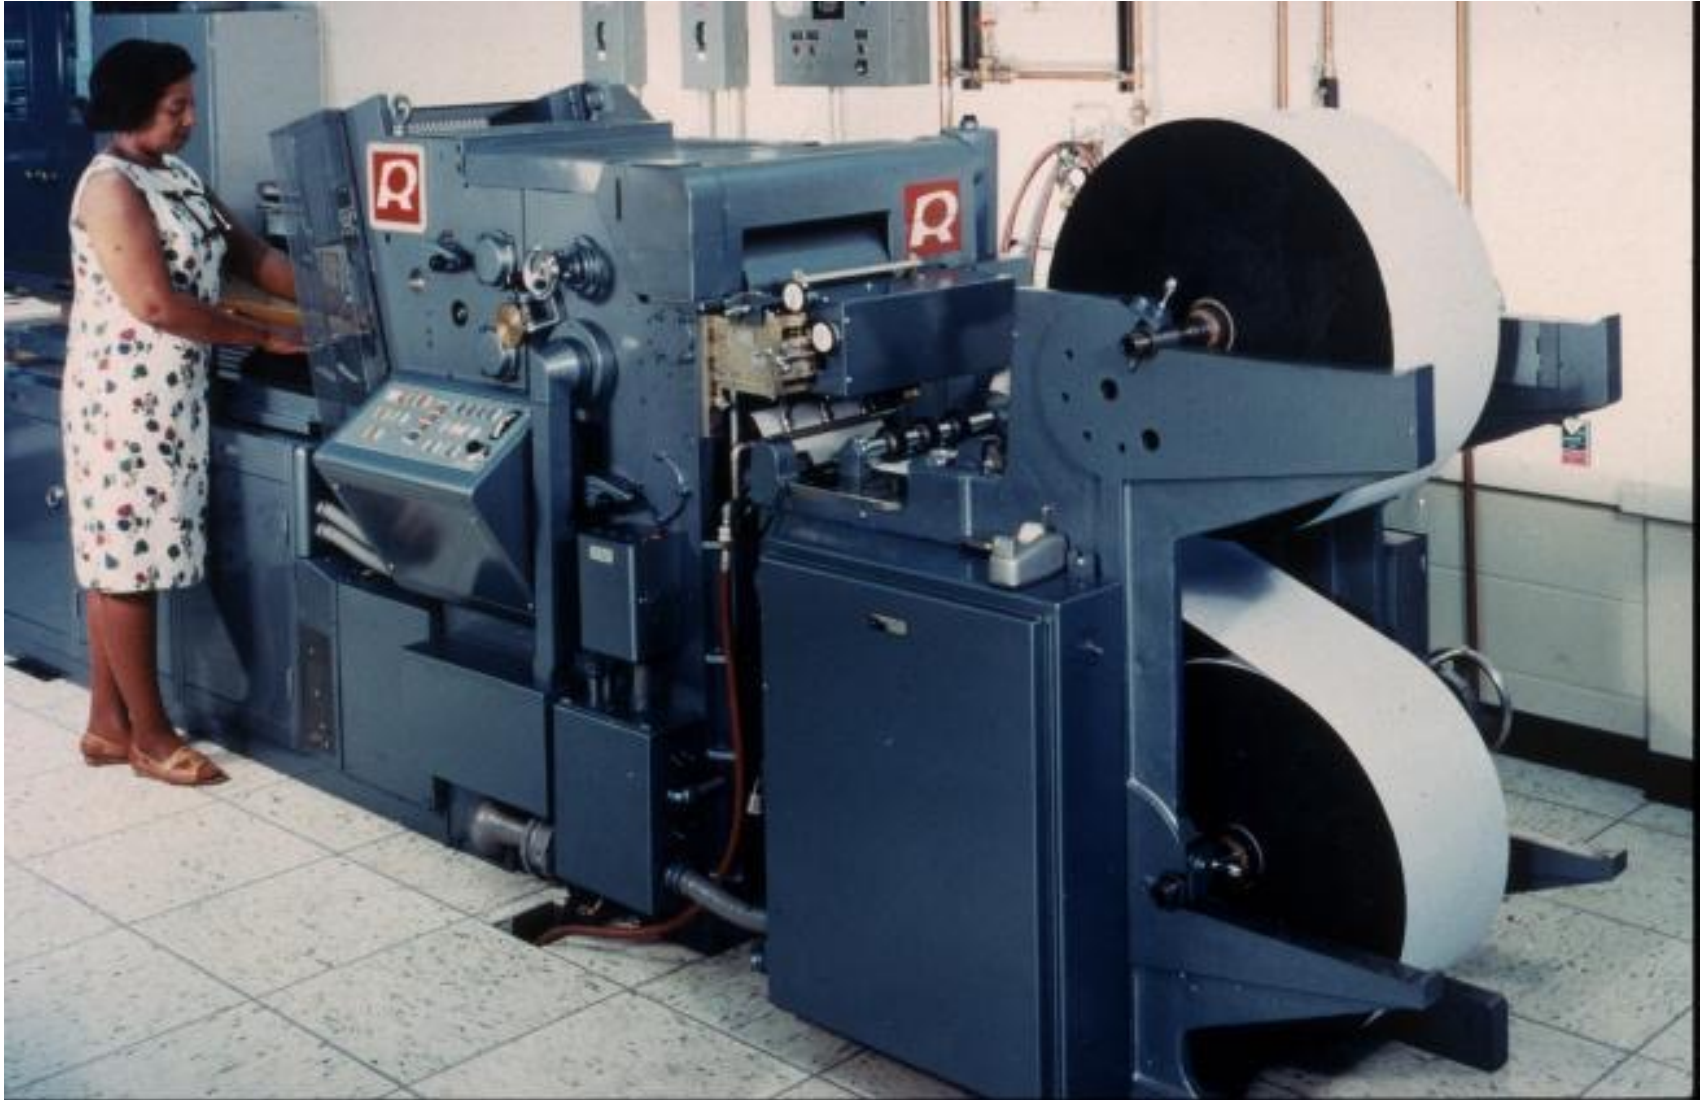

# Highly Exceptional Control Flow

```

234 static int lp_check_status(int minor)
235 {
236     int error = 0;
237     unsigned int last = lp_table[minor].last_error;
238     unsigned char status = r_str(minor);
239     if ((status & LP_PERRORP) && !(LP_F(minor) & LP_CAREFUL))
240         /* No error. */
241         last = 0;
242     else if ((status & LP_POUTPA)) {
243         if (last != LP_POUTPA) {
244             last = LP_POUTPA;
245             printk(KERN_INFO "lp%d out of paper\n", minor);
246         }
247         error = -ENOSPC;
248     } else if (!(status & LP_PSELECD)) {
249         if (last != LP_PSELECD) {
250             last = LP_PSELECD;
251             printk(KERN_INFO "lp%d off-line\n", minor);
252         }
253         error = -EIO;
254     } else if (!(status & LP_PERRORP)) {
255         if (last != LP_PERRORP) {
256             last = LP_PERRORP;
257             printk(KERN_INFO "lp%d on fire\n", minor);
258         }
259         error = -EIO;
260     } else {
261         last = 0; /* Come here if LP_CAREFUL is set and no
262                  errors are reported. */
263     }
264
265     lp_table[minor].last_error = last;
266
267     if (last != 0)
268         lp_error(minor);
269
270     return error;
271 }

```

<https://git.kernel.org/pub/scm/linux/kernel/git/torvalds/linux.git/tree/drivers/char/lp.c?h=v5.0-rc3>

# Today


- **Exceptional Control Flow**
- Exceptions
- Processes
- Process Control

# Control Flow

## ■ Processors do only one thing:

- From startup to shutdown, a CPU simply reads and executes (interprets) a sequence of instructions, one at a time
- This sequence is the CPU's *control flow* (or *flow of control*)

### *Physical control flow*

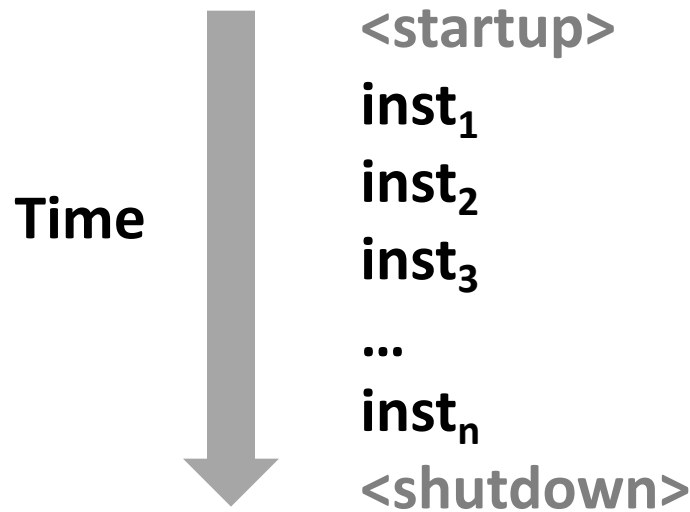

# Altering the Control Flow

## ■ Up to now: two mechanisms for changing control flow:

- Jumps and branches
- Call and return

React to changes in *program state*

## ■ Insufficient for a useful system:

Difficult to react to changes in *system state*

- Data arrives from a disk or a network adapter
- Instruction divides by zero
- User hits Ctrl-C at the keyboard
- System timer expires

## ■ System needs mechanisms for “exceptional control flow”

# Exceptional Control Flow

- **Exists at all levels of a computer system**
- **Low level mechanisms**
  - 1. **Exceptions**
    - Change in control flow in response to a system event (i.e., change in system state)
    - Implemented using combination of hardware and OS software
- **Higher level mechanisms**
  - 2. **Process context switch**
    - Implemented by OS software and hardware timer
  - 3. **Signals**
    - Implemented by OS software
  - 4. **Nonlocal jumps**: `setjmp()` and `longjmp()`
    - Implemented by C runtime library


# Today

- Exceptional Control Flow
- **Exceptions**
- Processes
- Process Control




# Exceptions

- An **exception** is a transfer of control to the OS *kernel* in response to some *event* (i.e., change in processor state)
  - Kernel is the memory-resident part of the OS
  - Examples of events: Divide by 0, arithmetic overflow, page fault, I/O request completes, typing Ctrl-C

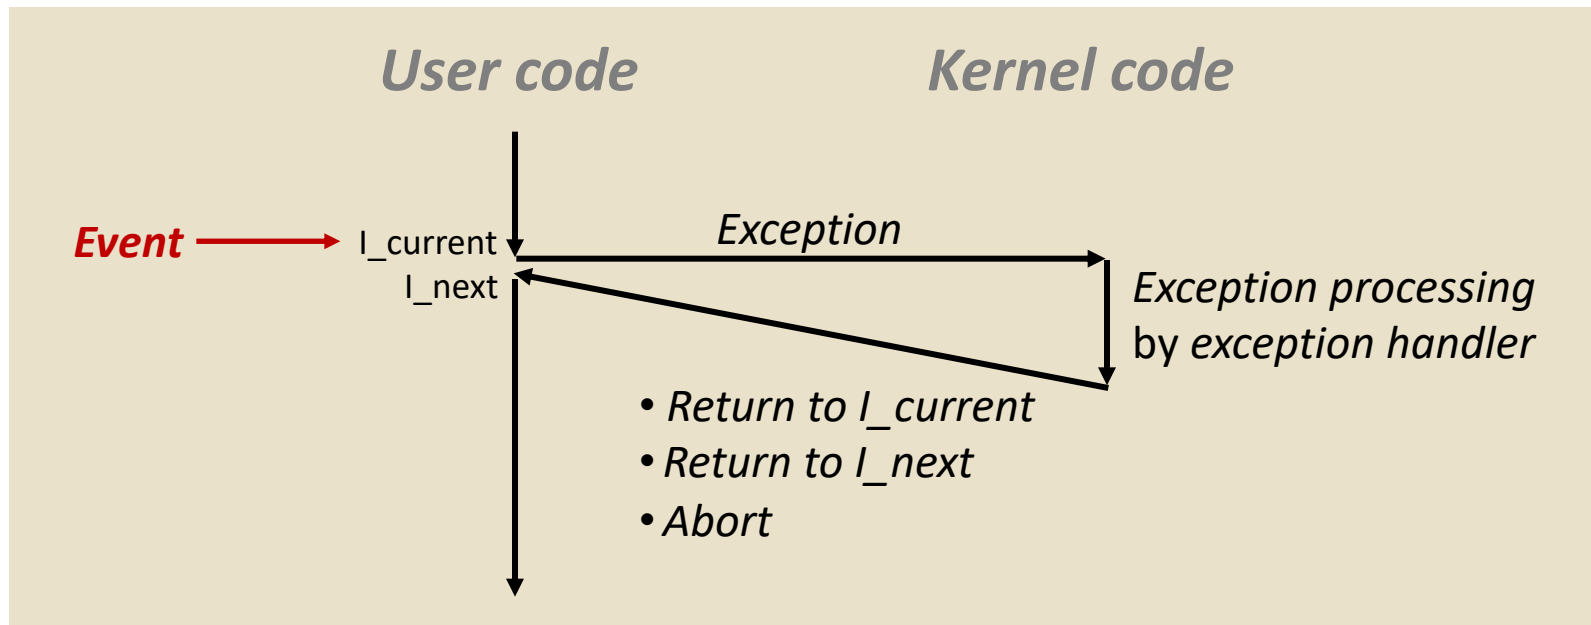


# Exception Tables

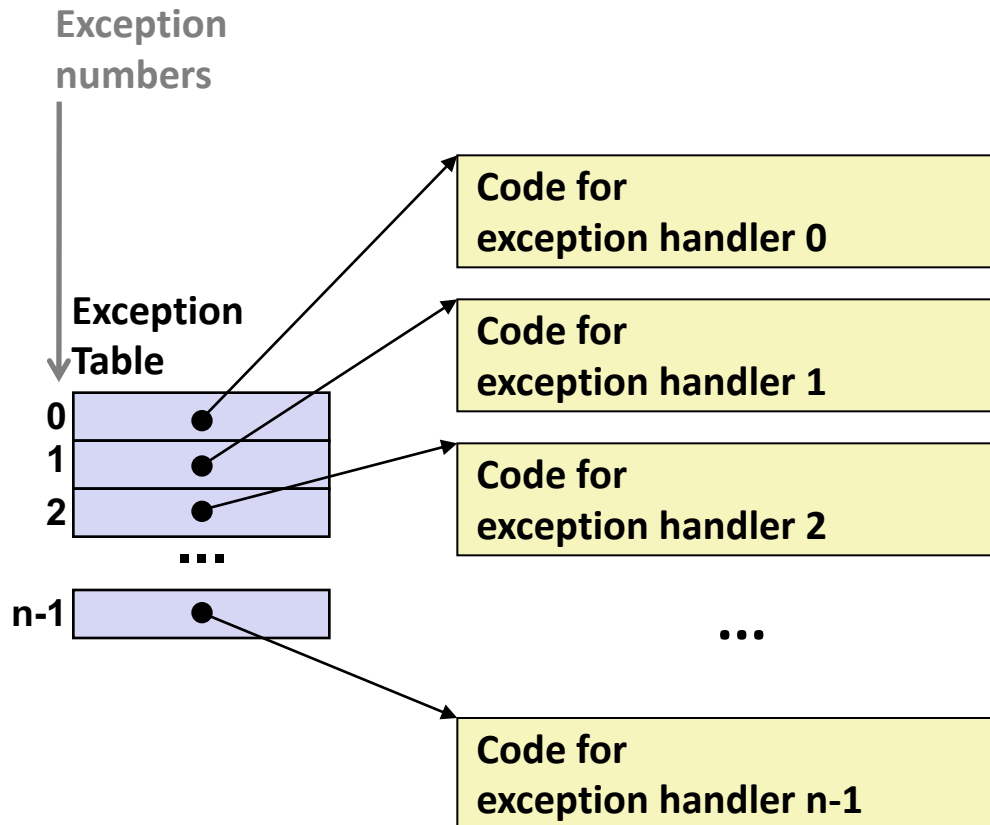

- Each type of event has a unique exception number  $k$
- $k$  = index into exception table (a.k.a. interrupt vector)
- Handler  $k$  is called each time exception  $k$  occurs

# (partial) Taxonomy

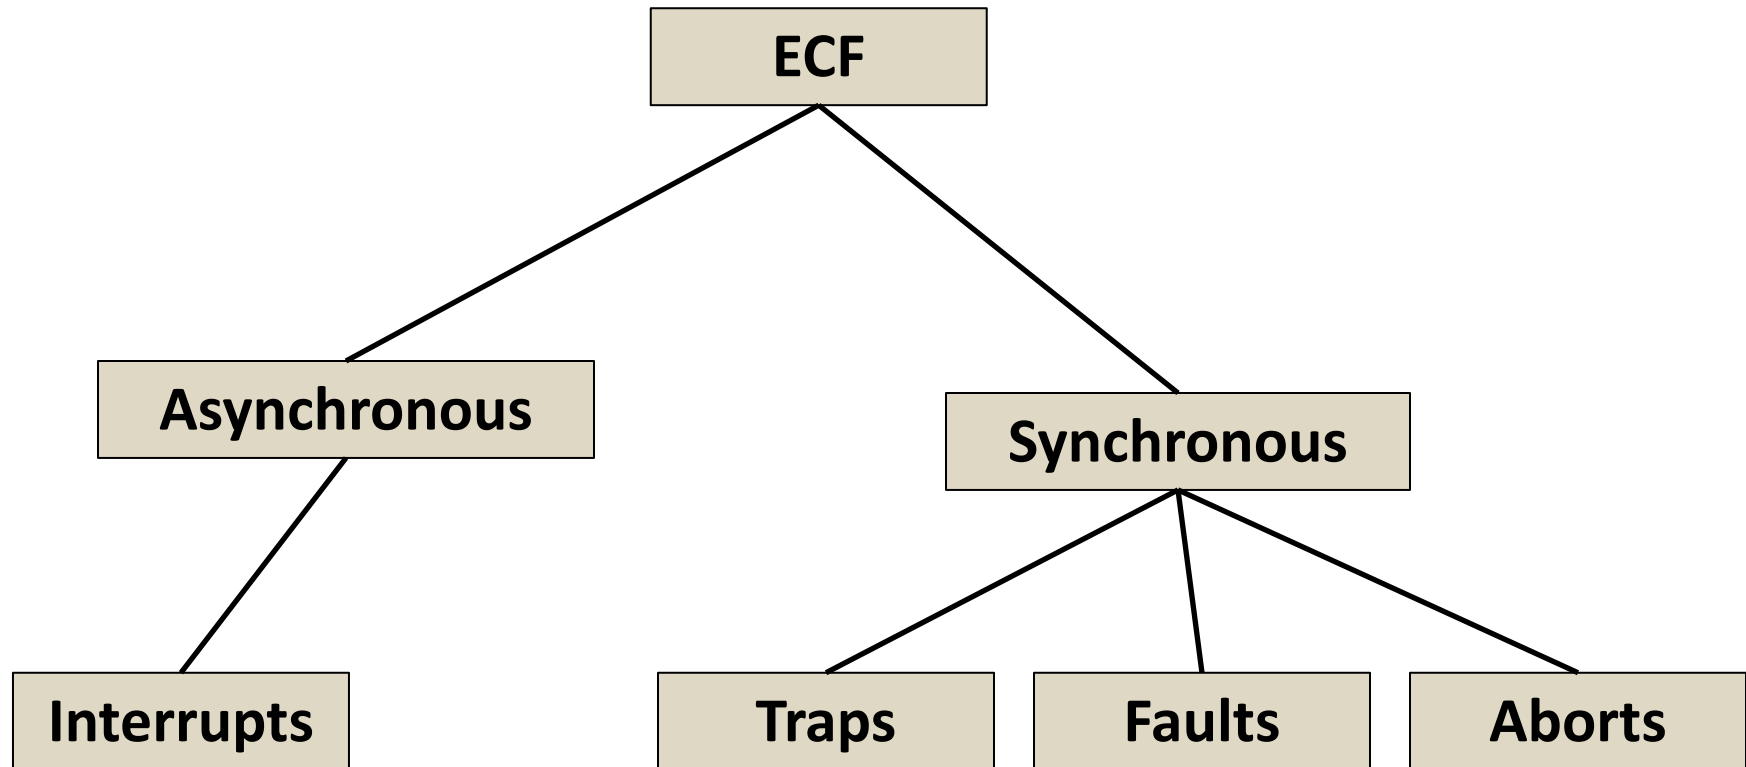

# Asynchronous Exceptions (Interrupts)

## ■ Caused by events external to the processor

- Indicated by setting the processor's *interrupt pin*
- Handler returns to “next” instruction

## ■ Examples:

- Timer interrupt
  - Every few ms, an external timer chip triggers an interrupt
  - Used by the kernel to take back control from user programs
- I/O interrupt from external device
  - Hitting Ctrl-C at the keyboard
  - Arrival of a packet from a network
  - Arrival of data from a disk

# Synchronous Exceptions

- Caused by events that occur as a result of executing an instruction:
  - *Traps*
    - Intentional
    - Examples: **system calls**, breakpoint traps, special instructions
    - Returns control to “next” instruction
  - *Faults*
    - Unintentional but possibly recoverable
    - Examples: page faults (recoverable), protection faults (unrecoverable), floating point exceptions
    - Either re-executes faulting (“current”) instruction or aborts
  - *Aborts*
    - Unintentional and unrecoverable
    - Examples: illegal instruction, parity error, machine check
    - Aborts current program

# System Calls

- Each x86-64 system call has a unique ID number
- Examples:

| <i>Number</i> | <i>Name</i> | <i>Description</i>     |
|---------------|-------------|------------------------|
| 0             | read        | Read file              |
| 1             | write       | Write file             |
| 2             | open        | Open file              |
| 3             | close       | Close file             |
| 4             | stat        | Get info about file    |
| 57            | fork        | Create process         |
| 59            | execve      | Execute a program      |
| 60            | _exit       | Terminate process      |
| 62            | kill        | Send signal to process |

# System Call Example: Opening File


- User calls: `open(filename, options)`
- Calls `__open` function, which invokes system call instruction `syscall`

```
0000000000e5d70 <__open>:
```

```

...
e5d79:  b8 02 00 00 00      mov  $0x2,%eax  # open is syscall #2
e5d7e:  0f 05               syscall          # Return value in %rax
e5d80:  48 3d 01 f0 ff ff    cmp  $0xffffffffffffffff001,%rax
...
e5dfa:  c3                  retq

```

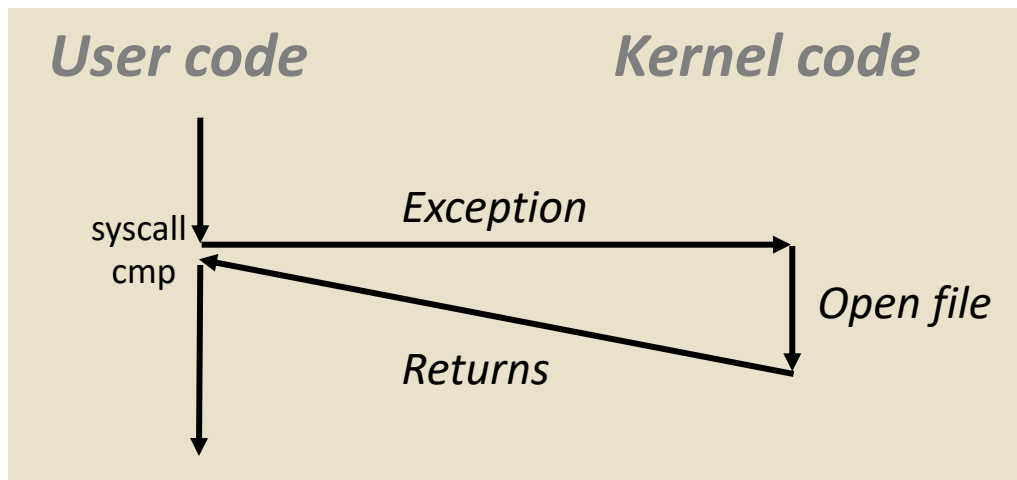

- `%rax` contains syscall number
- Other arguments in `%rdi`, `%rsi`, `%rdx`, `%r10`, `%r8`, `%r9`
- Return value in `%rax`
- Negative value is an error corresponding to negative `errno`

# System Call

- User calls: `open (`
- Calls `__open` func

```
000000000000e5d70
```

```

...
e5d79:  b8 02 00
e5d7e:  0f 05
e5d80:  48 3d 01
...
e5dfa:  c3

```


Almost like a function call

- Transfer of control
- On return, executes next instruction
- Passes arguments using calling convention
- Gets result in `%rax`

One Important exception!

- Executed by Kernel
- Different set of privileges
- And other differences:
  - E.g., “address” of “function” is in `%rax`
  - Uses `errno`
  - Etc.

*User code*

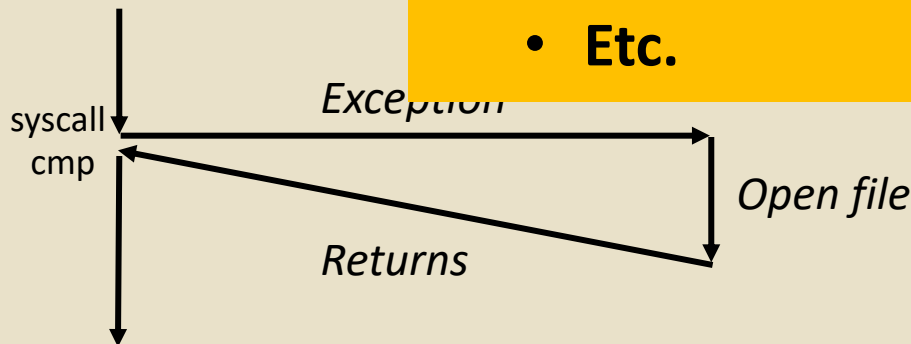

- Return value in `%rax`
- Negative value is an error corresponding to negative `errno`




# Fault Example: Page Fault

- User writes to memory location
- That portion (page) of user's memory is currently on disk

```
int a[1000];
main ()
{
    a[500] = 13;
}
```

|          |                      |      |                 |
|----------|----------------------|------|-----------------|
| 80483b7: | c7 05 10 9d 04 08 0d | movl | \$0xd,0x8049d10 |
|----------|----------------------|------|-----------------|

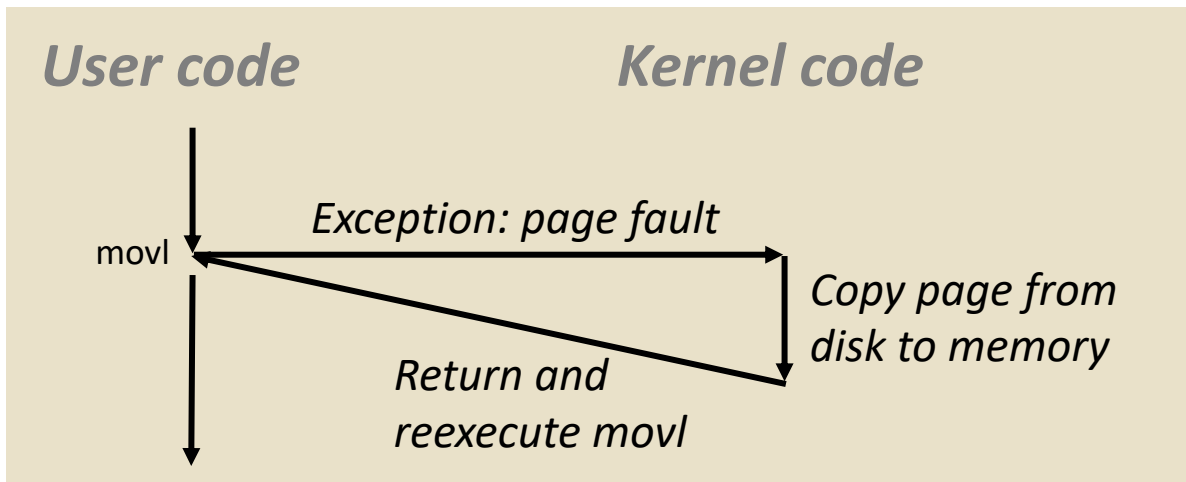


- Page handler must load page into physical memory
- Returns to faulting instruction
- Successful on second try

# Fault Example: Invalid Memory Reference

```
int a[1000];  
main ()  
{  
    a[5000] = 13;  
}
```

80483b7: c7 05 60 e3 04 08 0d movl \$0xd,0x804e360

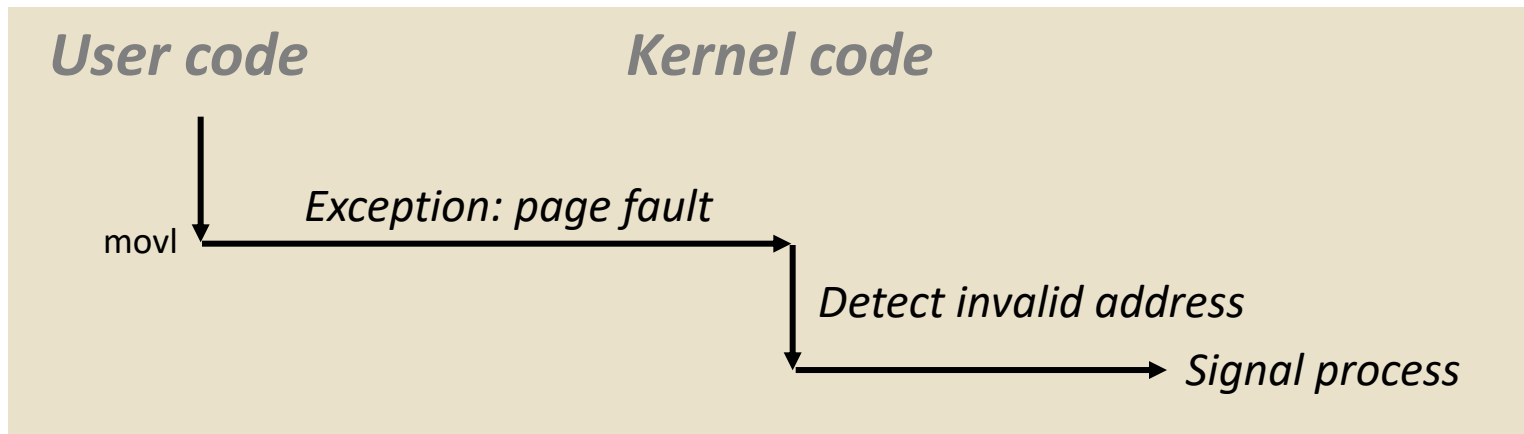


- Sends **SIGSEGV** signal to user process
- User process exits with “segmentation fault”

# Today


- Exceptional Control Flow
- Exceptions
- **Processes**
- Process Control

# Processes

- **Definition:** A *process* is an instance of a running program.
  - One of the most profound ideas in computer science
  - Not the same as “program” or “processor”
- **Process provides each program with two key abstractions:**
  - *Logical control flow*
    - Each program seems to have exclusive use of the CPU
    - Provided by kernel mechanism called *context switching*
  - *Private address space*
    - Each program seems to have exclusive use of main memory.
    - Provided by kernel mechanism called *virtual memory*

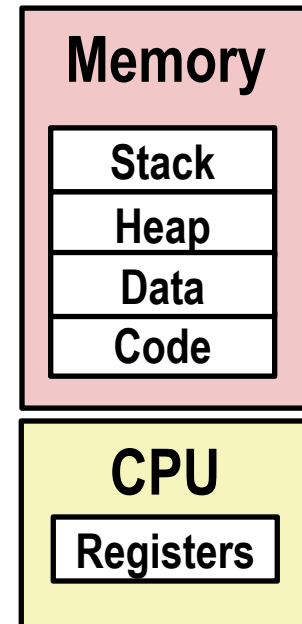


# Multiprocessing: The Illusion

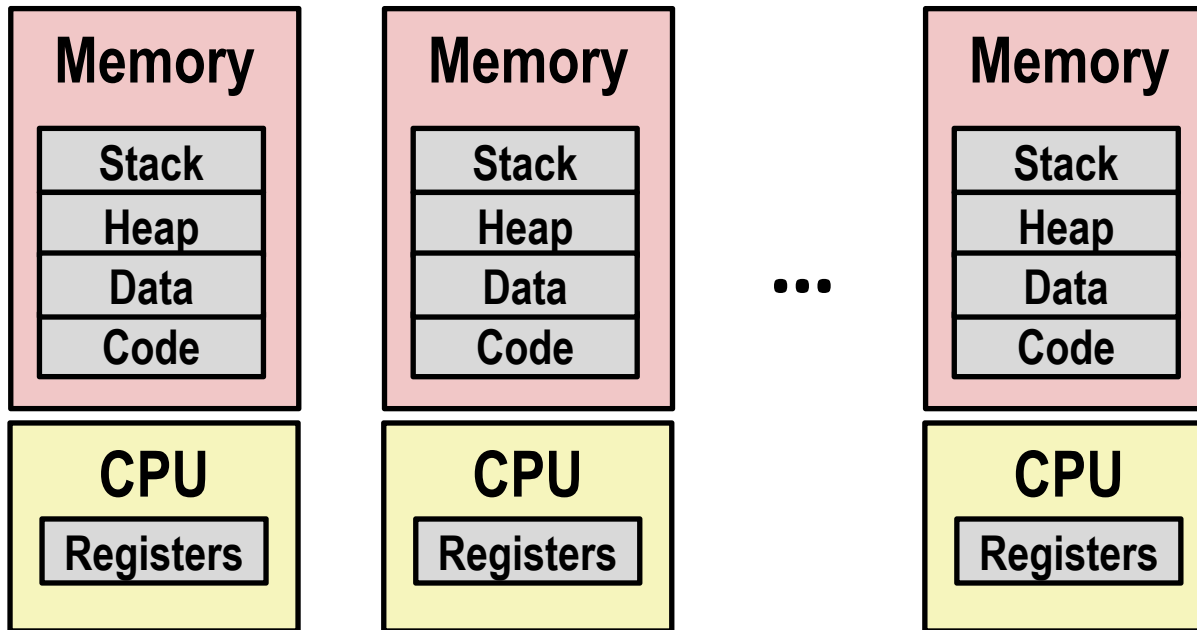

- **Computer runs many processes simultaneously**
  - Applications for one or more users
    - Web browsers, email clients, editors, ...
  - Background tasks
    - Monitoring network & I/O devices

# Multiprocessing Example

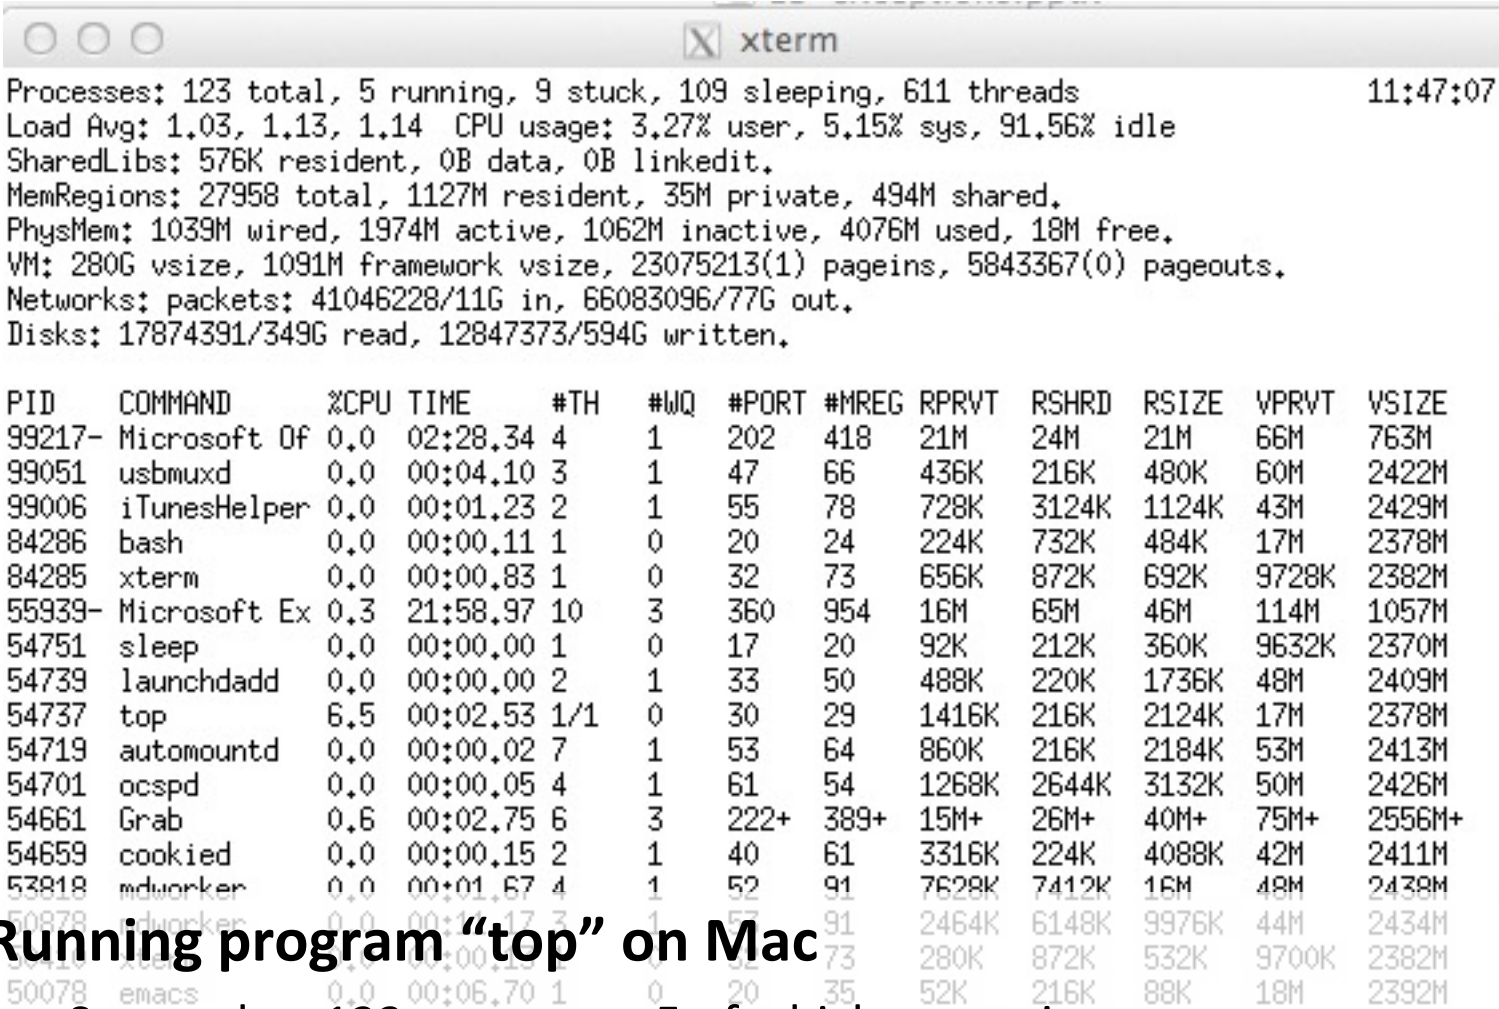

```

Processes: 123 total, 5 running, 9 stuck, 109 sleeping, 611 threads
Load Avg: 1.03, 1.13, 1.14  CPU usage: 3.27% user, 5.15% sys, 91.56% idle
SharedLibs: 576K resident, 0B data, 0B linkedit.
MemRegions: 27958 total, 1127M resident, 35M private, 494M shared.
PhysMem: 1039M wired, 1974M active, 1062M inactive, 4076M used, 18M free.
VM: 280G vsize, 1091M framework vsize, 23075213(1) pageins, 5843367(0) pageouts.
Networks: packets: 41046228/11G in, 66083096/77G out.
Disks: 17874391/349G read, 12847373/594G written.


PID    COMMAND      %CPU TIME    #TH   #WQ   #PORT #MREG RPRVT  RSHRD  RSIZE  VPRVT  VSIZE
99217-  Microsoft Of 0.0  02:28.34  4      1    202   418   21M   24M   21M   66M   763M
99051   usbmuxd      0.0  00:04.10  3      1     47    66   436K  216K  480K   60M   2422M
99006   iTunesHelper 0.0  00:01.23  2      1     55    78   728K  3124K 1124K   43M   2429M
84286   bash         0.0  00:00.11  1      0     20    24   224K  732K  484K   17M   2378M
84285   xterm        0.0  00:00.83  1      0     32    73   656K  872K  692K   9728K 2382M
55939-  Microsoft Ex 0.3  21:58.97 10      3    360   954   16M   65M   46M   114M  1057M
54751   sleep        0.0  00:00.00  1      0     17    20    92K   212K  360K   9632K 2370M
54739   launchdadd  0.0  00:00.00  2      1     33    50   488K  220K  1736K   48M   2409M
54737   top          6.5  00:02.53 1/1     0     30    29  1416K  216K  2124K   17M   2378M
54719   automountd  0.0  00:00.02  7      1     53    64   860K  216K  2184K   53M   2413M
54701   ocspd        0.0  00:00.05  4      1     61    54  1268K  2644K 3132K   50M   2426M
54661   Grab         0.6  00:02.75  6      3   222+  389+  15M+  26M+  40M+  75M+  2556M+
54659   cookied      0.0  00:00.15  2      1     40    61  3316K  224K  4088K   42M   2411M
53818   mdworker     0.0  00:01.67  4      1     52    91  7628K  7412K  16M   48M   2438M
50878   mdworker     0.0  00:01.17  3      1     57    91  2464K  6148K 9976K   44M   2434M
50778   emacs        0.0  00:06.70  1      0     20    35   52K   216K  88K    18M   2392M

```

## ■ Running program “top” on Mac


- System has 123 processes, 5 of which are active
- Identified by Process ID (PID)

# Multiprocessing: The (Traditional) Reality

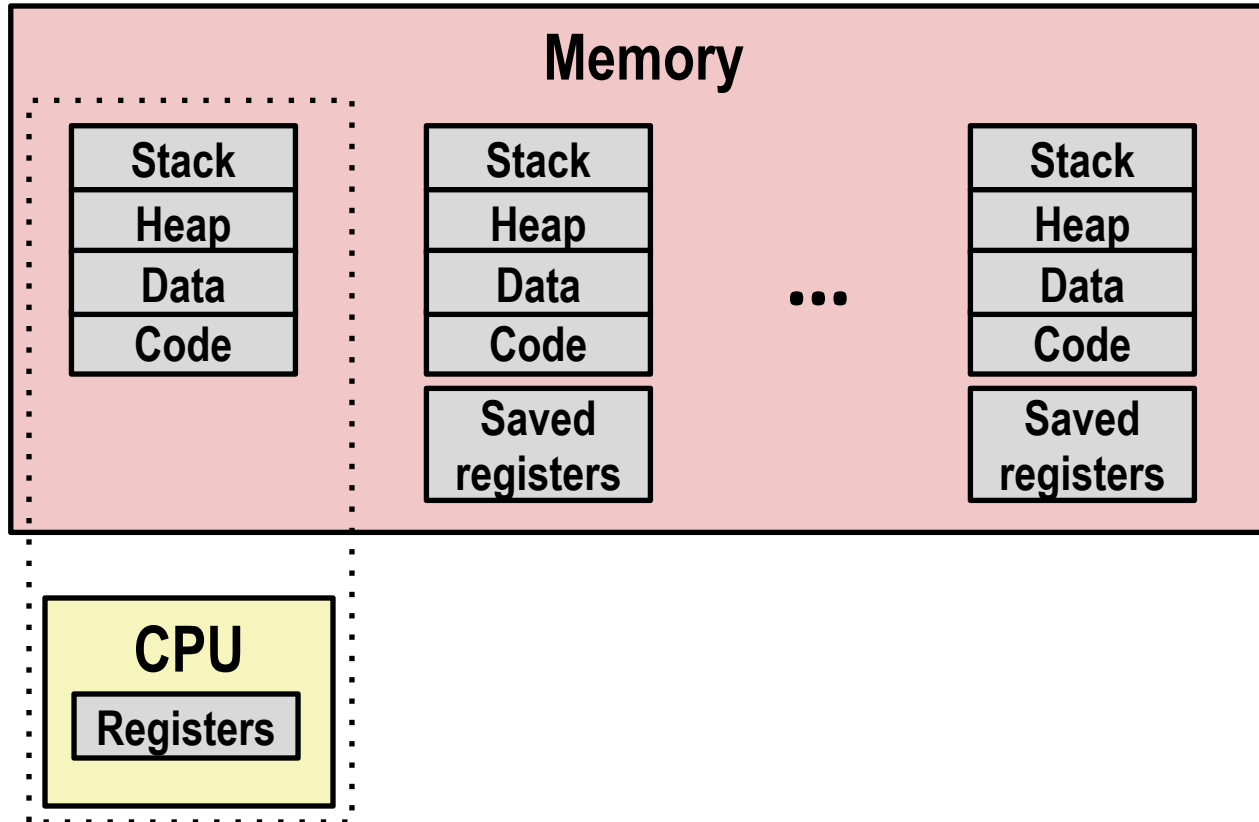

- **Single processor executes multiple processes concurrently**
  - Process executions interleaved (multitasking)
  - Address spaces managed by virtual memory system (later in course)
  - Register values for nonexecuting processes saved in memory


# Multiprocessing: The (Traditional) Reality

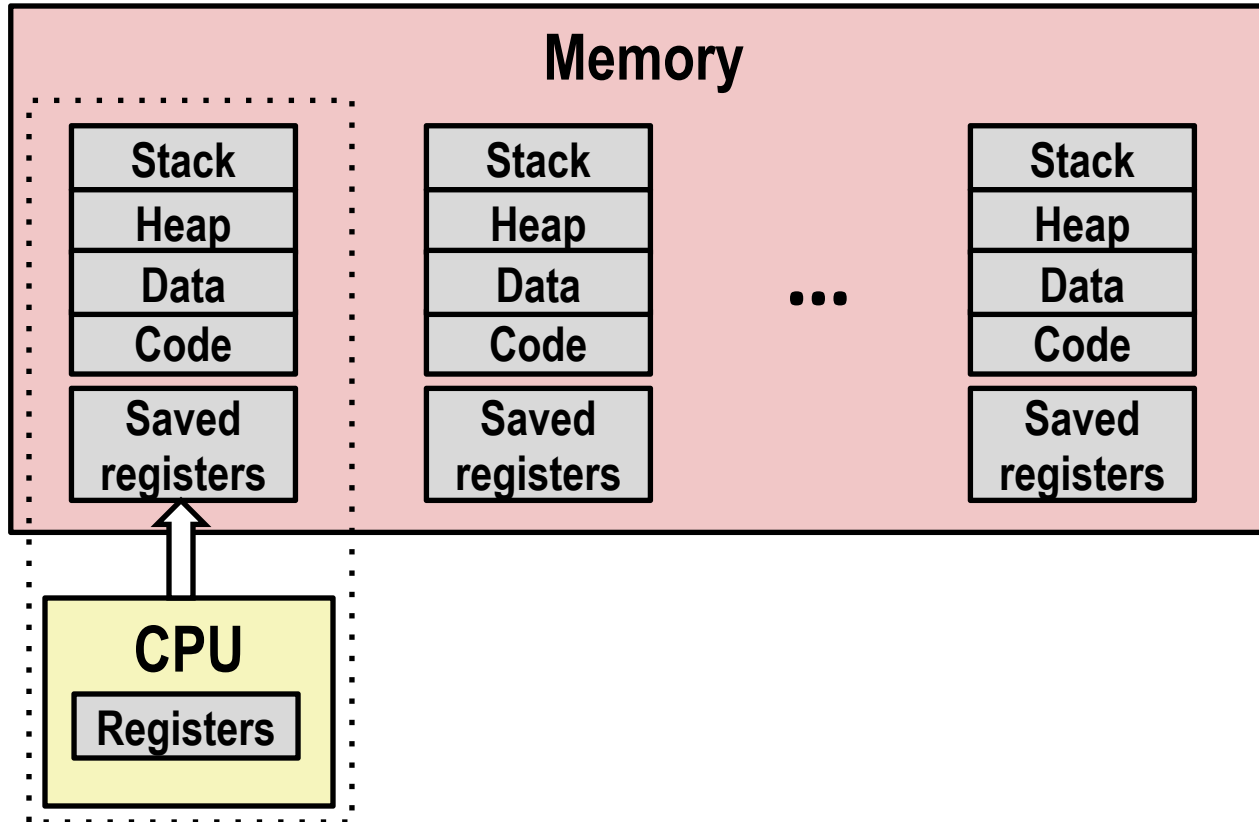

- Save current registers in memory




# Multiprocessing: The (Traditional) Reality

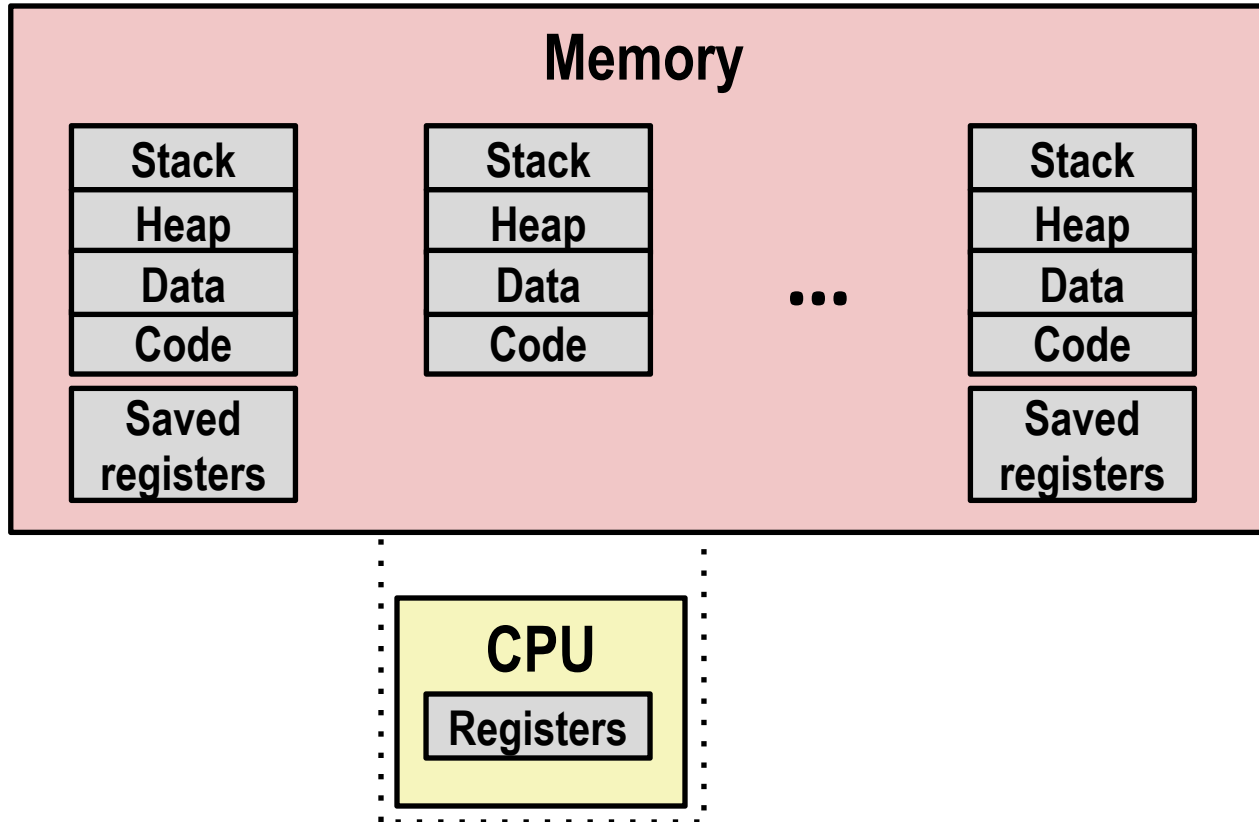


- Schedule next process for execution

# Multiprocessing: The (Traditional) Reality

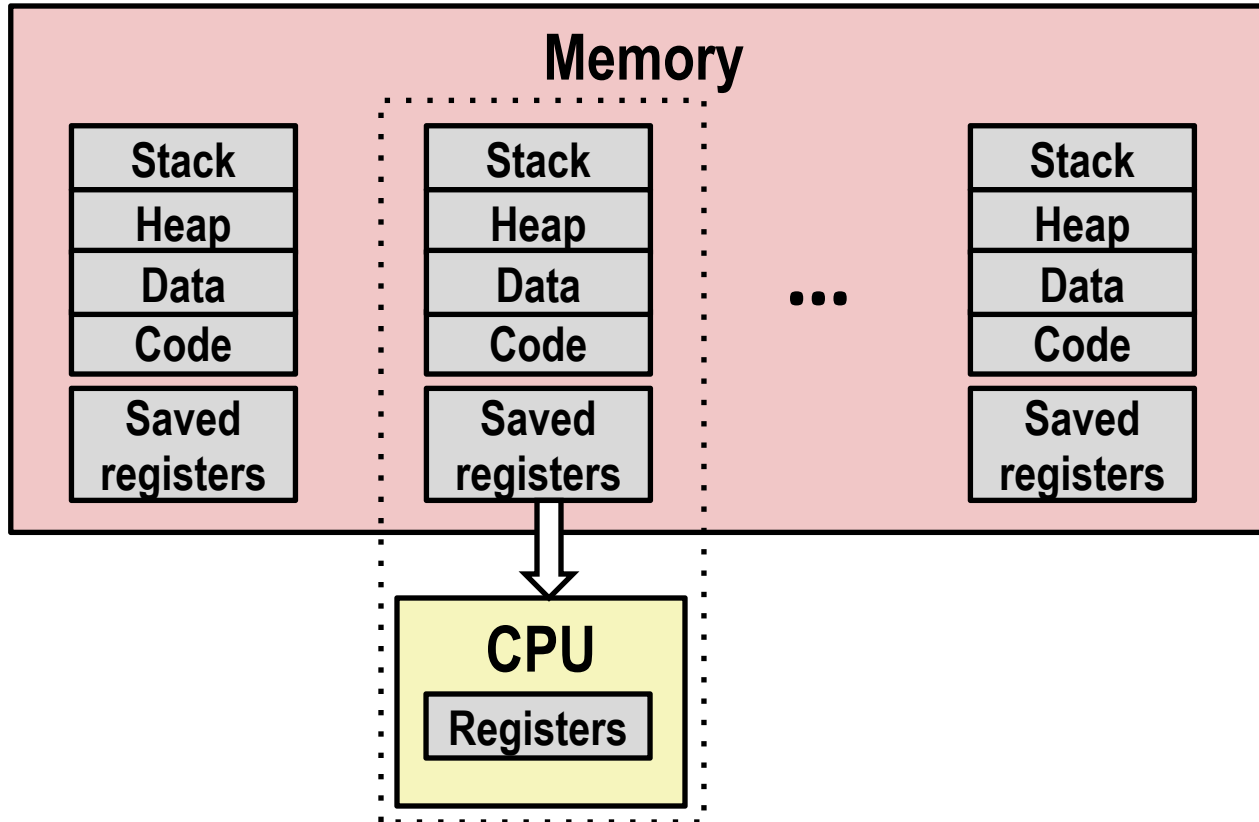

- Load saved registers and switch address space (context switch)

# Multiprocessing: The (Modern) Reality

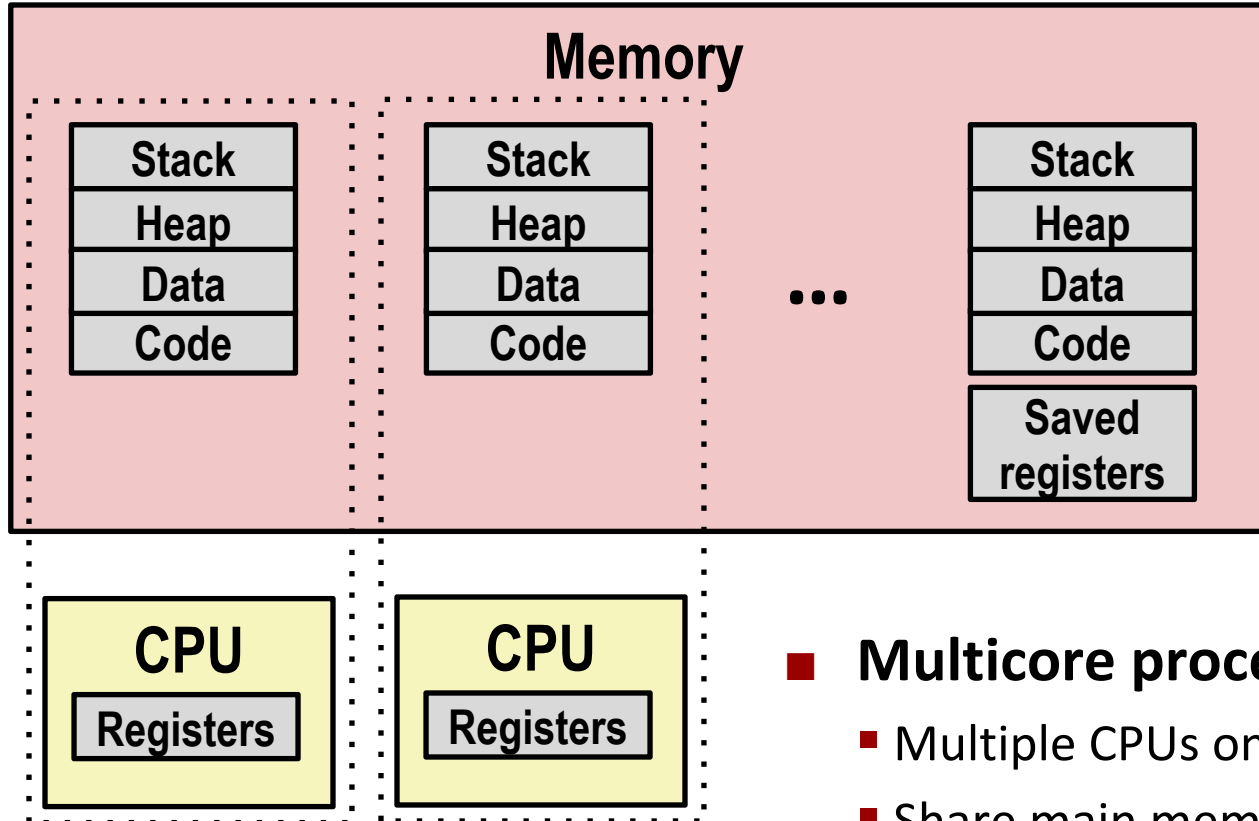


## ■ Multicore processors

- Multiple CPUs on single chip
- Share main memory (and some caches)
- Each can execute a separate process
  - Scheduling of processors onto cores done by kernel


# Concurrent Processes

- Each process is a logical control flow.
- Two processes *run concurrently* (are concurrent) if their flows overlap in time
- Otherwise, they are *sequential*
- Examples (running on single core):
  - Concurrent: A & B, A & C
  - Sequential: B & C

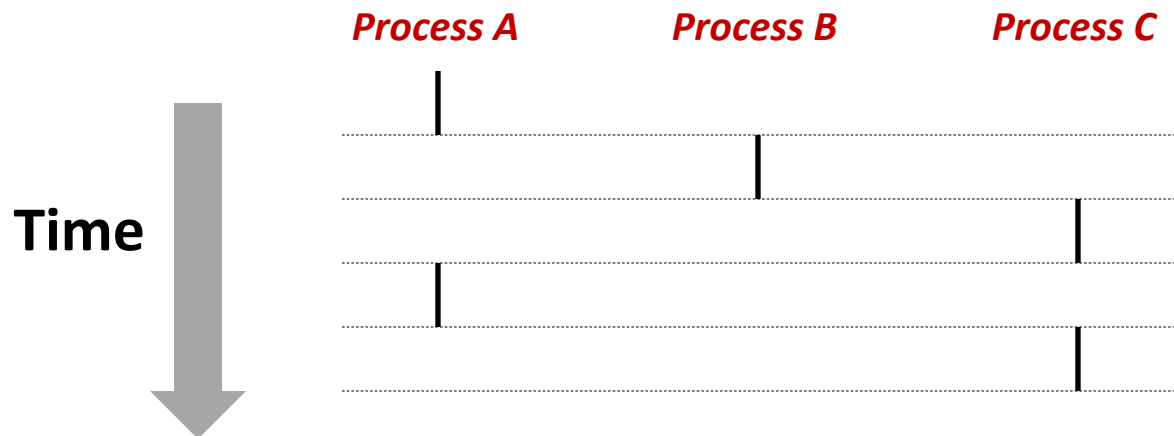


# User View of Concurrent Processes

- Control flows for concurrent processes are physically disjoint in time
- However, we can think of concurrent processes as running in parallel with each other

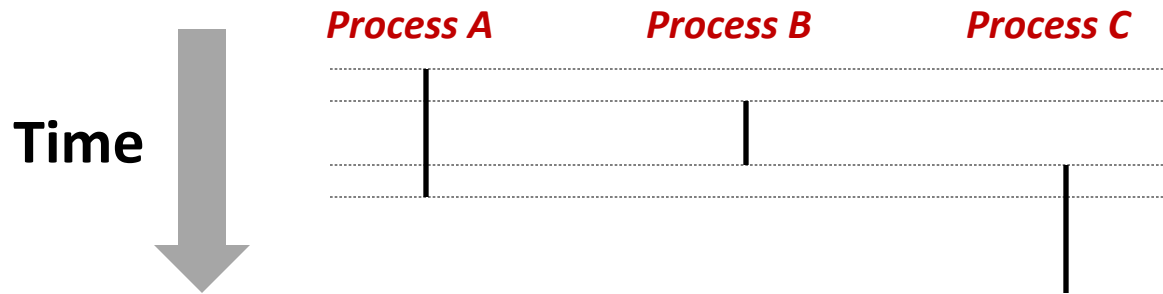

# Context Switching

- Processes are managed by a shared chunk of memory-resident OS code called the *kernel*
  - Important: the kernel is not a separate process, but rather runs as part of some existing process.
- Control flow passes from one process to another via a *context switch*

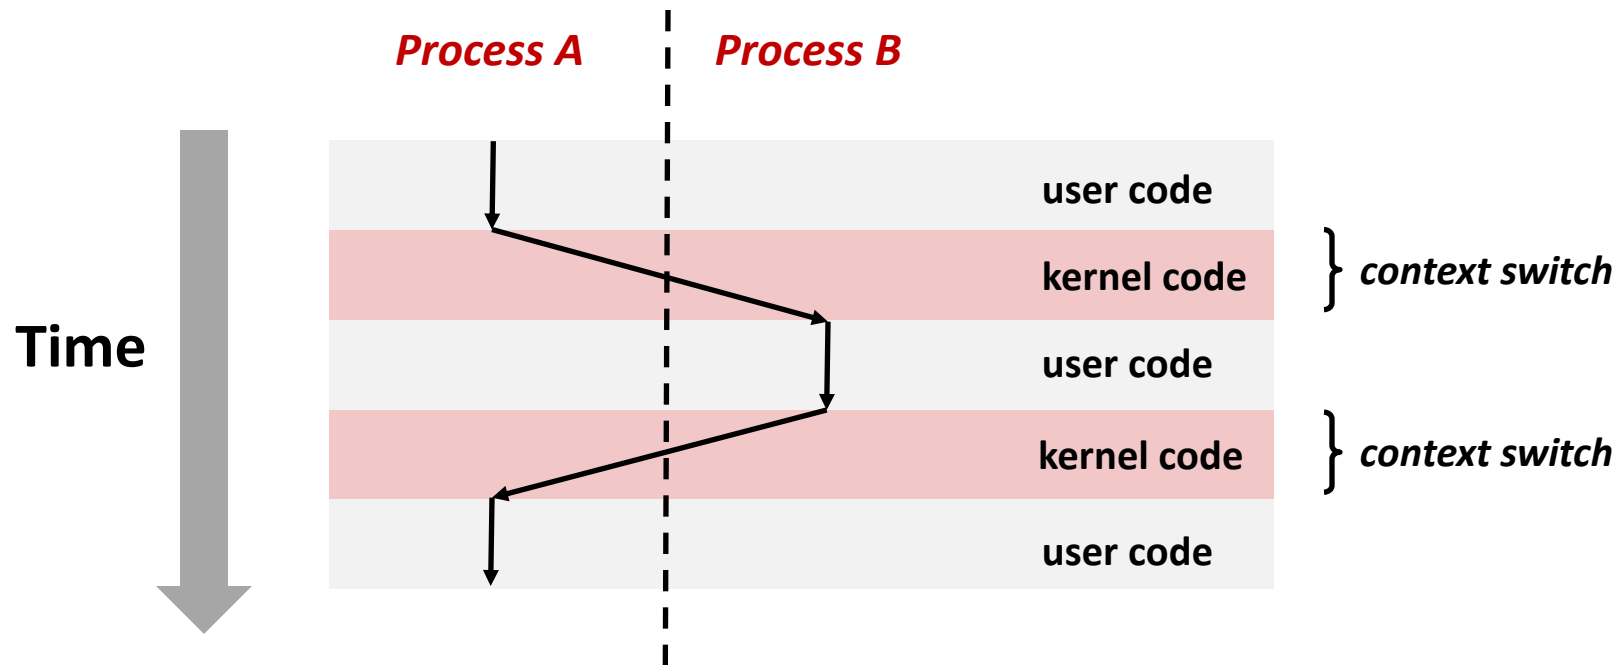

# Today

- Exceptional Control Flow
- Exceptions
- Processes
- **Process Control**

# System Call Error Handling

- On error, Linux system-level functions typically return -1 and set global variable `errno` to indicate cause.
- Hard and fast rule:
  - You must check the return status of every system-level function
  - Only exception is the handful of functions that return `void`
- Example:

```
if ((pid = fork()) < 0) {  
    fprintf(stderr, "fork error: %s\n", strerror(errno));  
    exit(-1);  
}
```



# Error-reporting functions

- Can simplify somewhat using an *error-reporting function*:

```
void unix_error(char *msg) /* Unix-style error */
{
    fprintf(stderr, "%s: %s\n", msg, strerror(errno));
    exit(-1);
}
```

```
if ((pid = fork()) < 0)
    unix_error("fork error");
```

Note: csapp.c exits with 0.

- But, must think about application. Not always appropriate to exit when something goes wrong.

# Error-handling Wrappers

- We simplify the code we present to you even further by using Stevens-style error-handling wrappers:

```
pid_t Fork(void)
{
    pid_t pid;

    if ((pid = fork()) < 0)
        unix_error("Fork error");
    return pid;
}
```

```
pid = Fork();
```

- NOT what you generally want to do in a real application

# Obtaining Process IDs

- `pid_t getpid(void)`
  - Returns PID of current process
- `pid_t getppid(void)`
  - Returns PID of parent process

# Creating and Terminating Processes

From a programmer's perspective, we can think of a process as being in one of three states

## ■ Running

- Process is either executing, or waiting to be executed and will eventually be *scheduled* (i.e., chosen to execute) by the kernel

## ■ Stopped

- Process execution is *suspended* and will not be scheduled until further notice (next lecture when we study signals)


## ■ Terminated

- Process is stopped permanently

# Creating Processes

- *Parent process* creates a new running *child process* by calling `fork`
- `int fork(void)`
  - Returns 0 to the child process, child's PID to parent process
  - Child is *almost* identical to parent:
    - Child get an identical (but separate) copy of the parent's virtual address space.
    - Child gets identical copies of the parent's open file descriptors
    - Child has a different PID than the parent
- `fork` is interesting (and often confusing) because it is called *once* but returns *twice*

# Conceptual View of fork

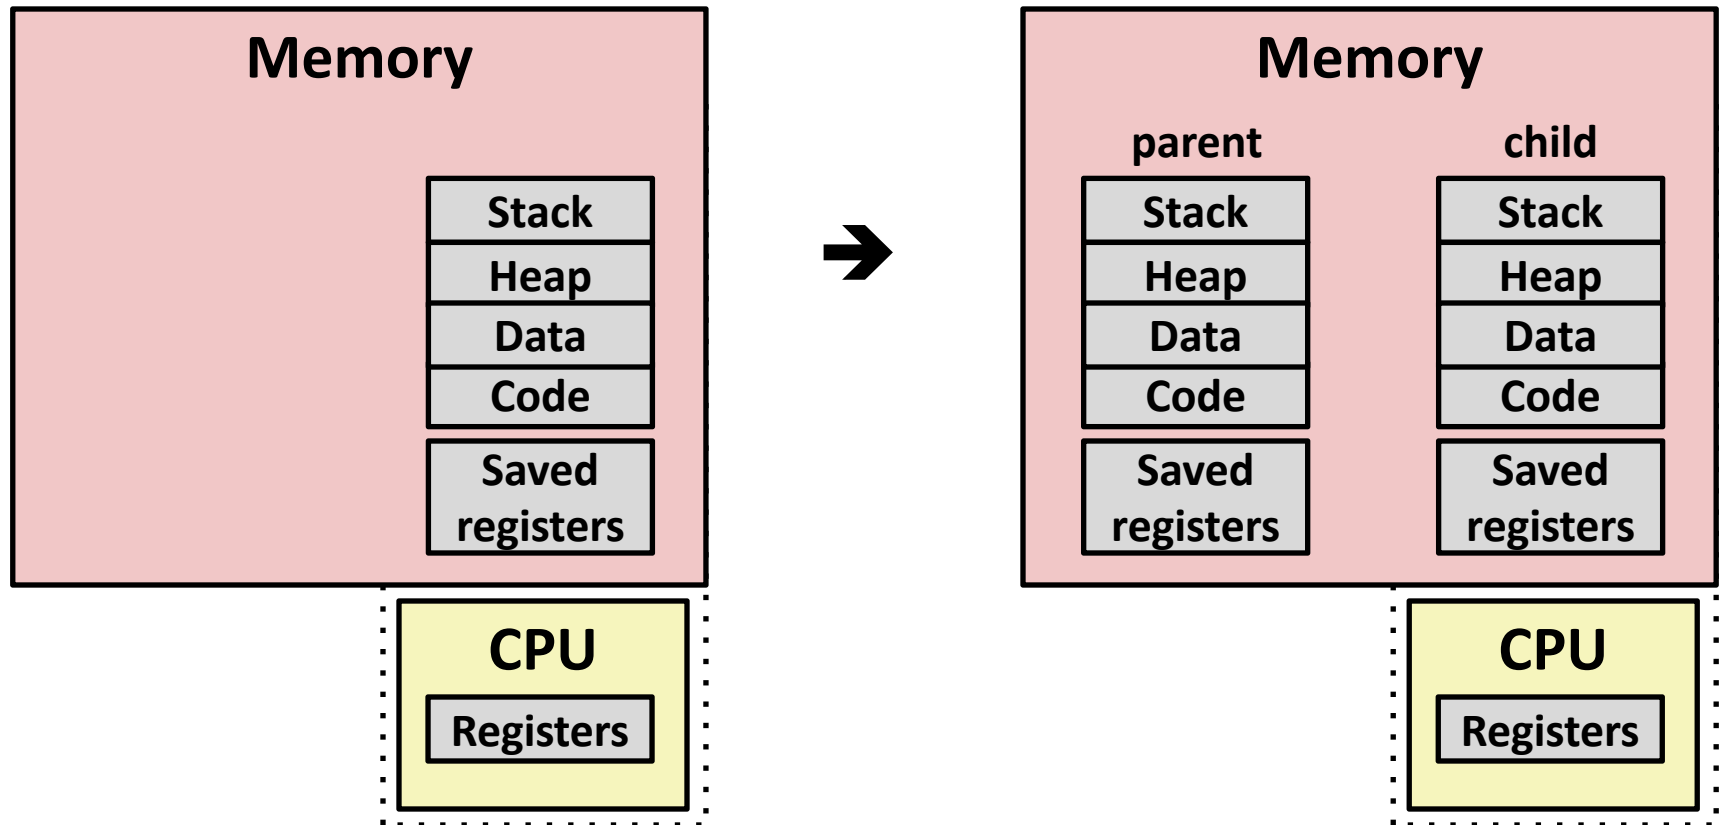

## ■ Make complete copy of execution state

- Designate one as parent and one as child
- Resume execution of parent or child

# fork Example

```
int main(int argc, char** argv)
{
    pid_t pid;
    int x = 1;

    pid = Fork();
    if (pid == 0) { /* Child */
        printf("child : x=%d\n", ++x);
        return 0;
    }

    /* Parent */
    printf("parent: x=%d\n", --x);
    return 0;
}
```

*fork.c*

- Call once, return twice
- Concurrent execution
  - Can't predict execution order of parent and child

```
linux> ./fork
parent: x=0
child : x=2
```

```
linux> ./fork
child : x=2
parent: x=0
```

```
linux> ./fork
parent: x=0
child : x=2
```

```
linux> ./fork
parent: x=0
child : x=2
```

# Making `fork` More Nondeterministic

## ■ Problem

- Linux scheduler does not create much run-to-run variance
- Hides potential race conditions in nondeterministic programs
  - E.g., does `fork` return to child first, or to parent?

## ■ Solution

- Create custom version of library routine that inserts random delays along different branches
  - E.g., for parent and child in `fork`
- Use runtime interpositioning to have program use special version of library code



# Variable delay fork

```
/* fork wrapper function */
pid_t fork(void) {
    initialize();
    int parent_delay = choose_delay();
    int child_delay = choose_delay();
    pid_t parent_pid = getpid();
    pid_t child_pid_or_zero = real_fork();
    if (child_pid_or_zero > 0) {
        /* Parent */
        if (verbose) {
            printf(
"Fork.  Child pid=%d, delay = %dms.  Parent pid=%d, delay = %dms\n",
                child_pid_or_zero, child_delay,
                parent_pid, parent_delay);
            fflush(stdout);
        }
        ms_sleep(parent_delay);
    } else {
        /* Child */
        ms_sleep(child_delay);
    }
    return child_pid_or_zero;
}
```

*myfork.c*

# forkx2 Example

```
int main(int argc, char** argv)
{
    pid_t pid;
    int x = 1;

    pid = Fork();
    if (pid == 0) { /* Child */
        printf("child : x=%d\n", ++x);
        printf("child : x=%d\n", ++x);
        return 0;
    }

    /* Parent */
    printf("parent: x=%d\n", --x);
    printf("parent: x=%d\n", --x);
    return 0;
}
```

```
linux> ./forkx2
parent: x=0
parent: x=-1
child : x=2
child : x=3
```

- Call once, return twice
- Concurrent execution
  - Can't predict execution order of parent and child
- Duplicate but separate address space
  - `x` has a value of 1 when fork returns in parent and child
  - Subsequent changes to `x` are independent
- Shared open files
  - `stdout` is the same in both parent and child

# Modeling fork with Process Graphs

- **A *process graph* is a useful tool for capturing the partial ordering of statements in a concurrent program:**
  - Each vertex is the execution of a statement
  - $a \rightarrow b$  means  $a$  happens before  $b$
  - Edges can be labeled with current value of variables
  - `printf` vertices can be labeled with output
  - Each graph begins with a vertex with no inedges
- **Any *topological sort* of the graph corresponds to a feasible total ordering.**
  - Total ordering of vertices where all edges point from left to right

# Process Graph Example

```


int main(int argc, char** argv)
{
    pid_t pid;
    int x = 1;

    pid = Fork();
    if (pid == 0) { /* Child */
        printf("child : x=%d\n", ++x);
        return 0;
    }

    /* Parent */
    printf("parent: x=%d\n", --x);
    return 0;
}


```

*fork.c*

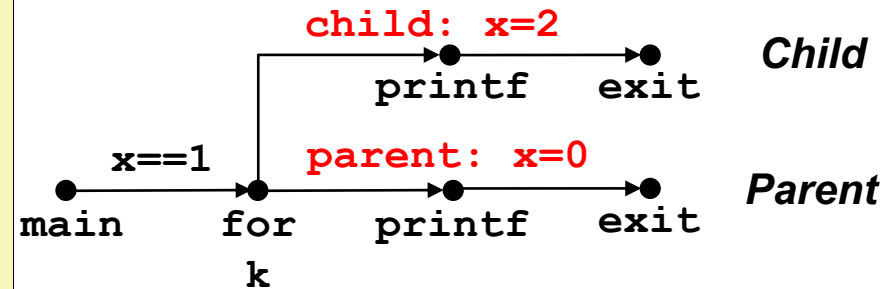


# Interpreting Process Graphs


## ■ Original graph:

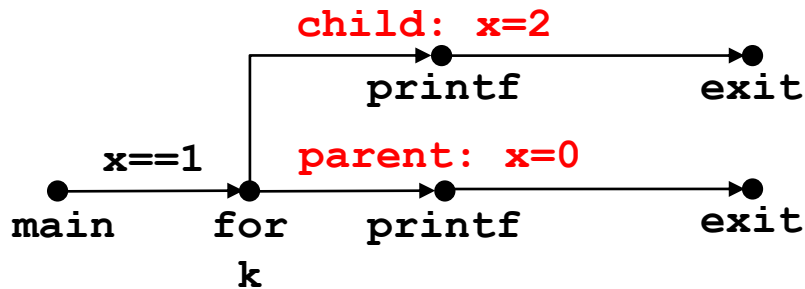


## ■ Relabled graph:

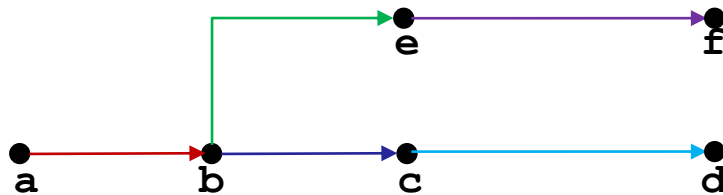

## Feasible total ordering:

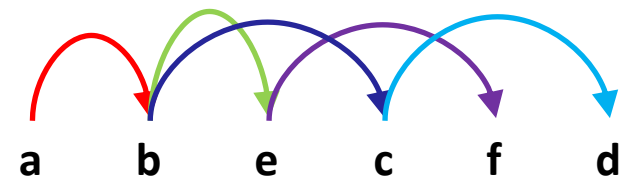

## Infeasible total ordering:

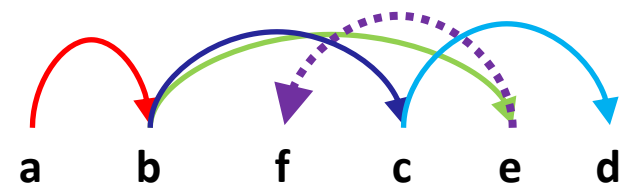


# fork Example: Two consecutive forks

```

void fork2 ()
{
    printf("L0\n");
    fork();
    printf("L1\n");
    fork();
    printf("Bye\n");
}
forks.c

```

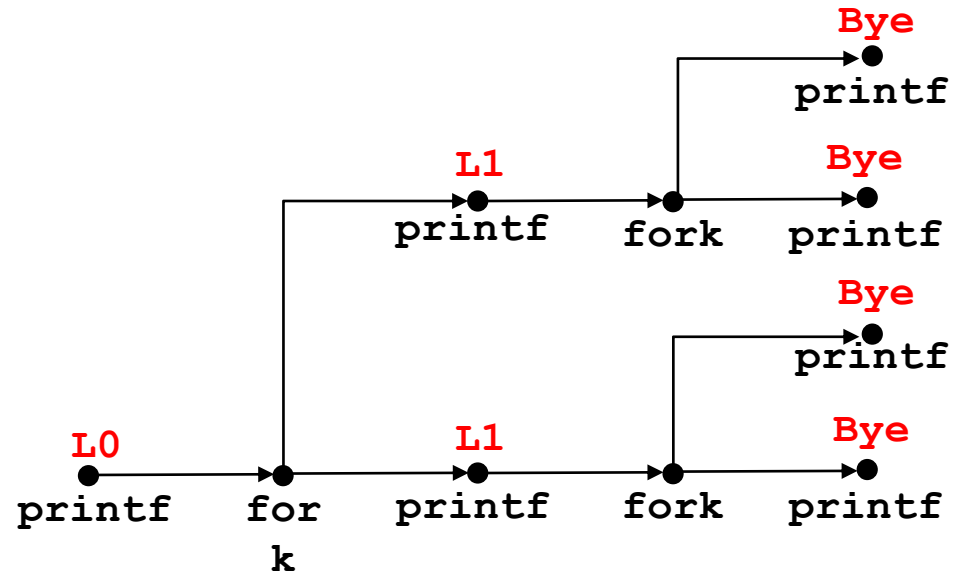

Feasible output:

L0  
 L1  
 Bye  
 Bye  
 L1  
 Bye  
 Bye

Infeasible output:


L0  
 Bye  
 L1  
 Bye  
 L1  
 Bye  
 Bye

# fork Example: Nested forks in parent

```

void fork4()
{
    printf("L0\n");
    if (fork() != 0) {
        printf("L1\n");
        if (fork() != 0) {
            printf("L2\n");
        }
    }
    printf("Bye\n");
}
forks.c

```

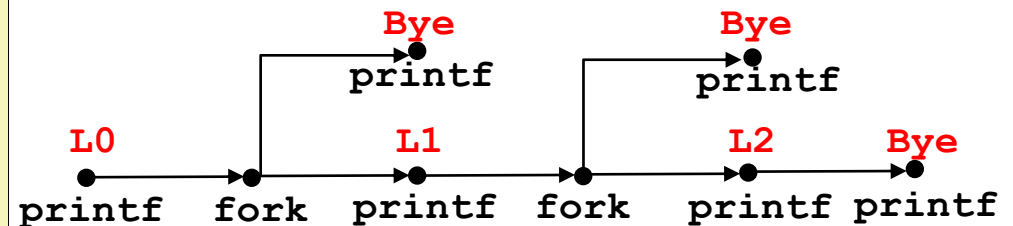

Feasible output:

L0  
 L1  
 Bye  
 Bye  
 L2  
 Bye

Infeasible output:


L0  
 Bye  
 L1  
 Bye  
 Bye  
 L2

# fork Example: Nested forks in children

```

void fork5()
{
    printf("L0\n");
    if (fork() == 0) {
        printf("L1\n");
        if (fork() == 0) {
            printf("L2\n");
        }
    }
    printf("Bye\n");
}
forks.c

```

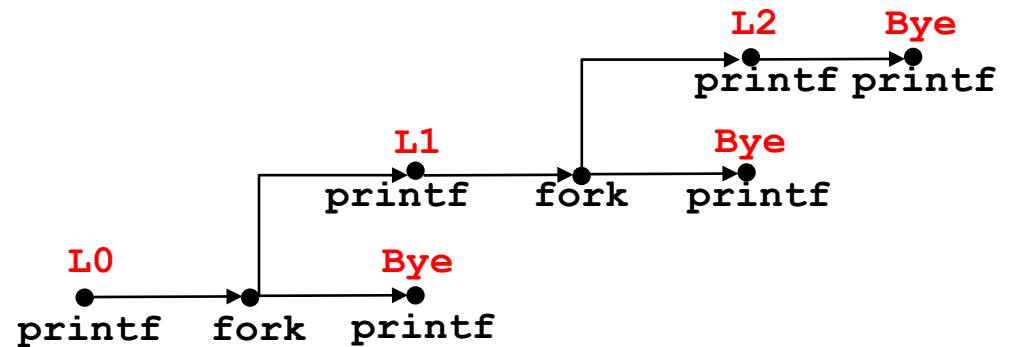

Feasible output:

L0  
 Bye  
 L1  
 L2  
 Bye  
 Bye

Infeasible output:

L0  
 Bye  
 L1  
 Bye  
 Bye  
 L2



# Terminating Processes

- **Process becomes terminated for one of three reasons:**
  - Receiving a signal whose default action is to terminate (next lecture)
  - Returning from the **main** routine
  - Calling the **exit** function
- **`void exit(int status)`**
  - Terminates with an *exit status* of **status**
  - Convention: normal return status is 0, nonzero on error
  - Another way to explicitly set the exit status is to return an integer value from the main routine
- **`exit` is called **once** but **never** returns.**

# Reaping Child Processes

## ■ Idea

- When process terminates, it still consumes system resources
  - Examples: Exit status, various OS tables
- Called a “zombie”
  - Living corpse, half alive and half dead

## ■ Reaping

- Performed by parent on terminated child (using `wait` or `waitpid`)
- Parent is given exit status information
- Kernel then deletes zombie child process

## ■ What if parent doesn't reap?

- If any parent terminates without reaping a child, then the orphaned child should be reaped by `init` process (`pid == 1`)
  - Unless `ppid == 1`! Then need to reboot...
- So, only need explicit reaping in long-running processes
  - e.g., shells and servers

# Zombie Example

```
void fork7() {
    if (fork() == 0) {
        /* Child */
        printf("Terminating Child, PID = %d\n", getpid());
        exit(0);
    } else {
        printf("Running Parent, PID = %d\n", getpid());
        while (1)
            ; /* Infinite loop */
    }
}
```

```
linux> ./forks 7 &
[1] 6639
```

```
Running Parent, PID = 6639
```

```
Terminating Child, PID = 6640
```

```
linux> ps
```

| PID  | TTY   | TIME     | CMD             |
|------|-------|----------|-----------------|
| 6585 | ttyp9 | 00:00:00 | tcsh            |
| 6639 | ttyp9 | 00:00:03 | forks           |
| 6640 | ttyp9 | 00:00:00 | forks <defunct> |
| 6641 | ttyp9 | 00:00:00 | ps              |

```
linux> kill 6639
```

```
[1] Terminated
```

```
linux> ps
```

| PID  | TTY   | TIME     | CMD  |
|------|-------|----------|------|
| 6585 | ttyp9 | 00:00:00 | tcsh |
| 6642 | ttyp9 | 00:00:00 | ps   |

■ **ps** shows child process as “defunct” (i.e., a zombie)

■ Killing parent allows child to be reaped by **init**

# Non-terminating Child Example

```
void fork8()
{
    if (fork() == 0) {
        /* Child */
        printf("Running Child, PID = %d\n",
               getpid());
        while (1)
            ; /* Infinite loop */
    } else {
        printf("Terminating Parent, PID = %d\n",
               getpid());
        exit(0);
    }
}
```


```
linux> ./forks 8
Terminating Parent, PID = 6675
Running Child, PID = 6676
linux> ps
  PID TTY          TIME CMD
 6585 tttyp9      00:00:00 tcsh
 6676 tttyp9      00:00:06 forks
 6677 tttyp9      00:00:00 ps
linux> kill 6676
linux> ps
  PID TTY          TIME CMD
 6585 tttyp9      00:00:00 tcsh
 6678 tttyp9      00:00:00 ps
```

■ Child process still active even though parent has terminated

■ Must kill child explicitly, or else will keep running indefinitely

# wait: Synchronizing with Children

- Parent reaps a child by calling the `wait` function
- `int wait(int *child_status)`
  - Suspends current process until one of its children terminates
  - Implemented as syscall

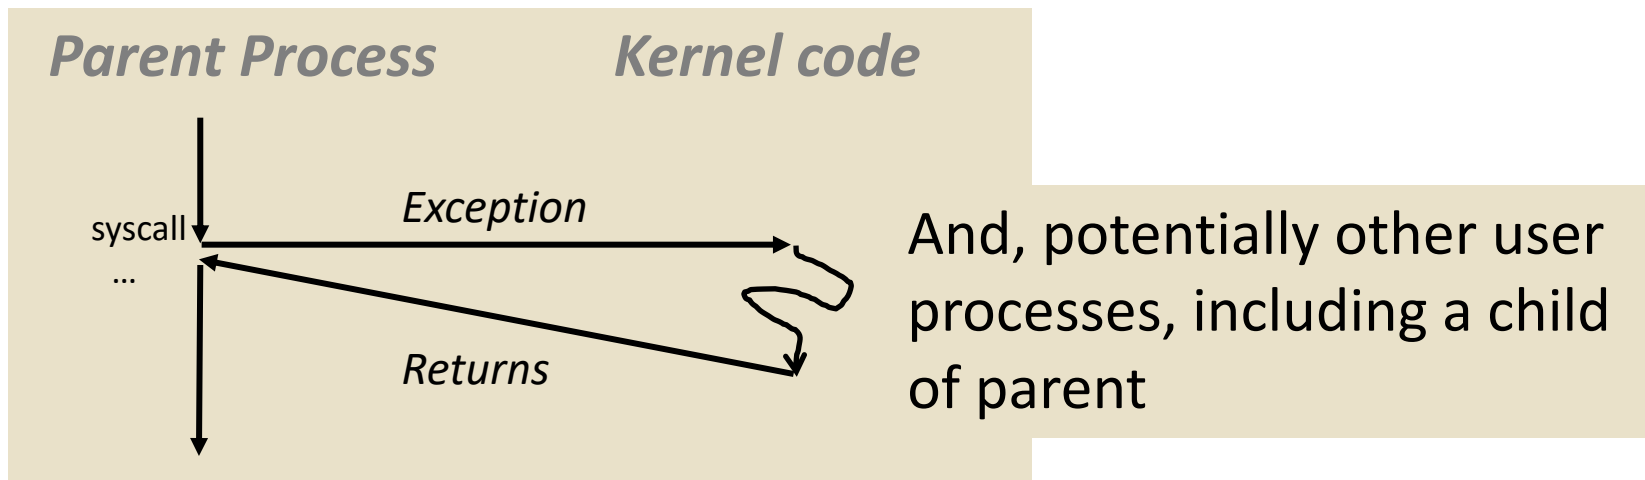

# `wait`: Synchronizing with Children

- Parent reaps a child by calling the `wait` function
  
- `int wait(int *child_status)`
  - Suspends current process until one of its children terminates
  - Return value is the `pid` of the child process that terminated
  - If `child_status != NULL`, then the integer it points to will be set to a value that indicates reason the child terminated and the exit status:
    - Checked using macros defined in `wait.h`
      - `WIFEXITED`, `WEXITSTATUS`, `WIFSIGNALED`,  
`WTERMSIG`, `WIFSTOPPED`, `WSTOPSIG`,  
`WIFCONTINUED`
      - See textbook for details

# wait: Synchronizing with Children


```

void fork9() {
    int child_status;

    if (fork() == 0) {
        printf("HC: hello from child\n");
        exit(0);
    } else {
        printf("HP: hello from parent\n");
        wait(&child_status);
        printf("CT: child has terminated\n");
    }
    printf("Bye\n");
}

```

*forks.c*

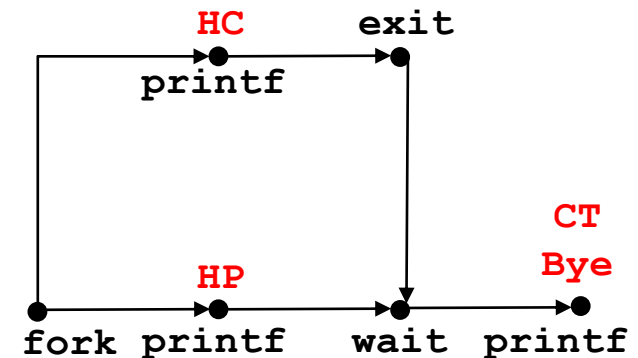

Feasible output(s):

|     |     |
|-----|-----|
| HC  | HP  |
| HP  | HC  |
| CT  | CT  |
| Bye | Bye |

Infeasible output:

|     |
|-----|
| HP  |
| CT  |
| Bye |
| HC  |

# Another wait Example

- If multiple children completed, will take in arbitrary order
- Can use macros WIFEXITED and WEXITSTATUS to get information about exit status

```
void fork10() {
    pid_t pid[N];
    int i, child_status;

    for (i = 0; i < N; i++)
        if ((pid[i] = fork()) == 0) {
            exit(100+i); /* Child */
        }
    for (i = 0; i < N; i++) { /* Parent */
        pid_t wpid = wait(&child_status);
        if (WIFEXITED(child_status))
            printf("Child %d terminated with exit status %d\n",
                wpid, WEXITSTATUS(child_status));
        else
            printf("Child %d terminate abnormally\n", wpid);
    }
}
```

*forks.c*



# waitpid: Waiting for a Specific Process

- `pid_t waitpid(pid_t pid, int *status, int options)`
  - Suspends current process until specific process terminates
  - Various options (see textbook)

```
void fork11() {
    pid_t pid[N];
    int i;
    int child_status;

    for (i = 0; i < N; i++)
        if ((pid[i] = fork()) == 0)
            exit(100+i); /* Child */
    for (i = N-1; i >= 0; i--) {
        pid_t wpid = waitpid(pid[i], &child_status, 0);
        if (WIFEXITED(child_status))
            printf("Child %d terminated with exit status %d\n",
                  wpid, WEXITSTATUS(child_status));
        else
            printf("Child %d terminate abnormally\n", wpid);
    }
}
```


*forks.c*

# execve: Loading and Running Programs

- `int execve(char *filename, char *argv[], char *envp[])`
- **Loads and runs in the current process:**
  - Executable file `filename`
    - Can be object file or script file beginning with `#!interpreter` (e.g., `#!/bin/bash`)
  - ...with argument list `argv`
    - By convention `argv[0]==filename`
  - ...and environment variable list `envp`
    - “name=value” strings (e.g., `USER=droh`)
    - `getenv`, `putenv`, `putenv`
- **Overwrites code, data, and stack**
  - Retains PID, open files and signal context
- Called **once** and **never** returns
  - ...except if there is an error


# execve Example

- **Execute `"/bin/ls -lt /usr/include"` in child process using current environment:**

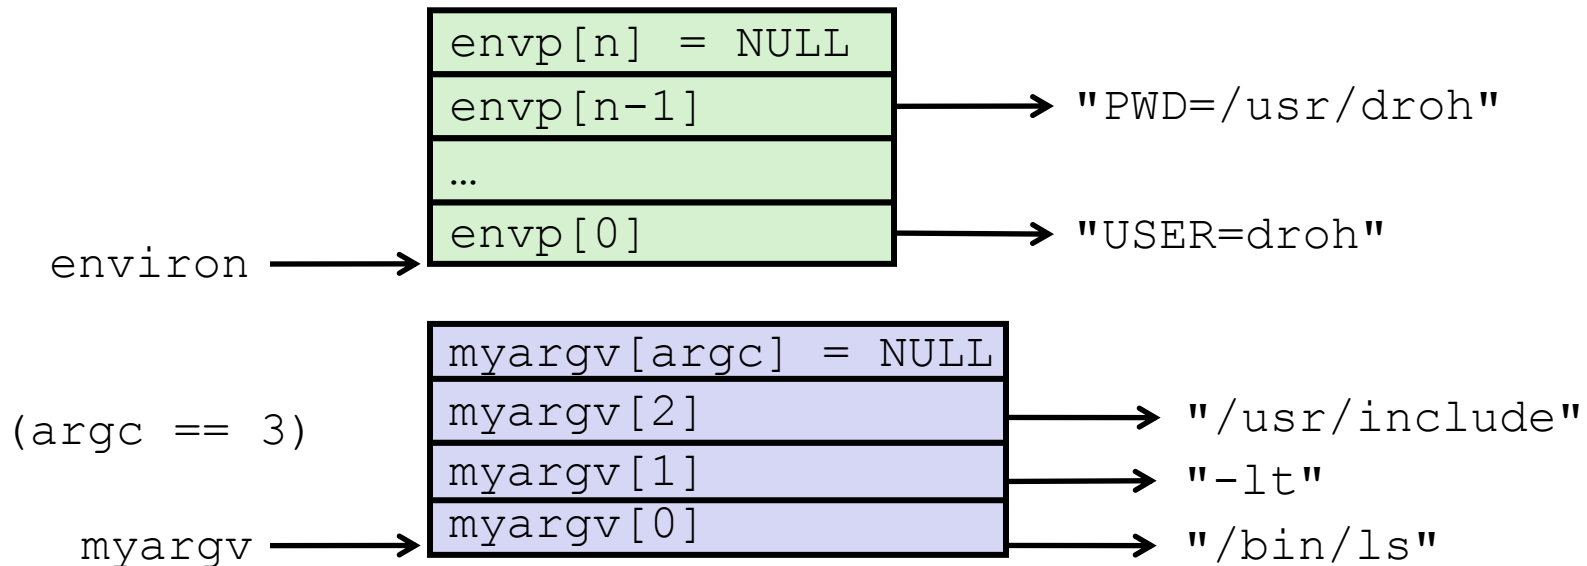

```
if ((pid = Fork()) == 0) {    /* Child runs program */
    if (execve(myargv[0], myargv, environ) < 0) {
        printf("%s: Command not found.\n", myargv[0]);
        exit(1);
    }
}
```

# Structure of the stack when a new program starts

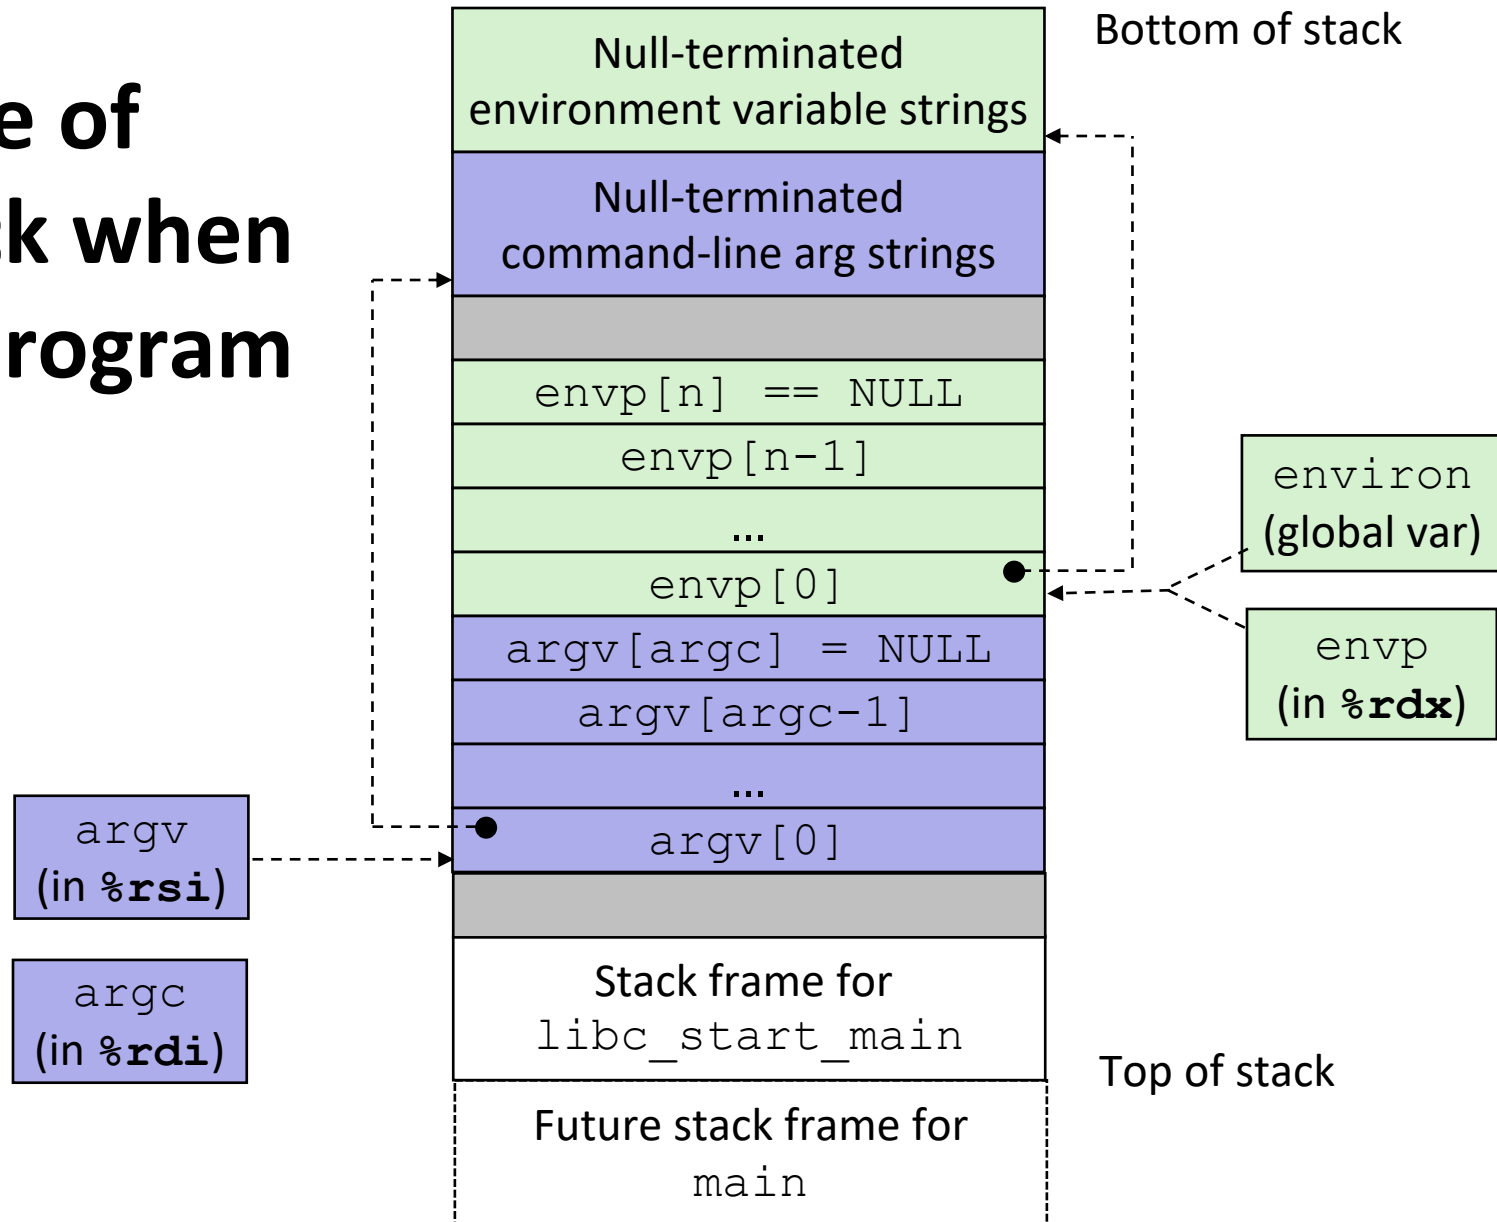

# Summary

## ■ Exceptions

- Events that require nonstandard control flow
- Generated externally (interrupts) or internally (traps and faults)

## ■ Processes

- At any given time, system has multiple active processes
- Only one can execute at a time on any single core
- Each process appears to have total control of processor + private memory space

# Summary (cont.)

## ■ Spawning processes

- Call `fork`
- One call, two returns

## ■ Process completion

- Call `exit`
- One call, no return

## ■ Reaping and waiting for processes

- Call `wait` or `waitpid`

## ■ Loading and running programs

- Call `execve` (or variant)
- One call, (normally) no return