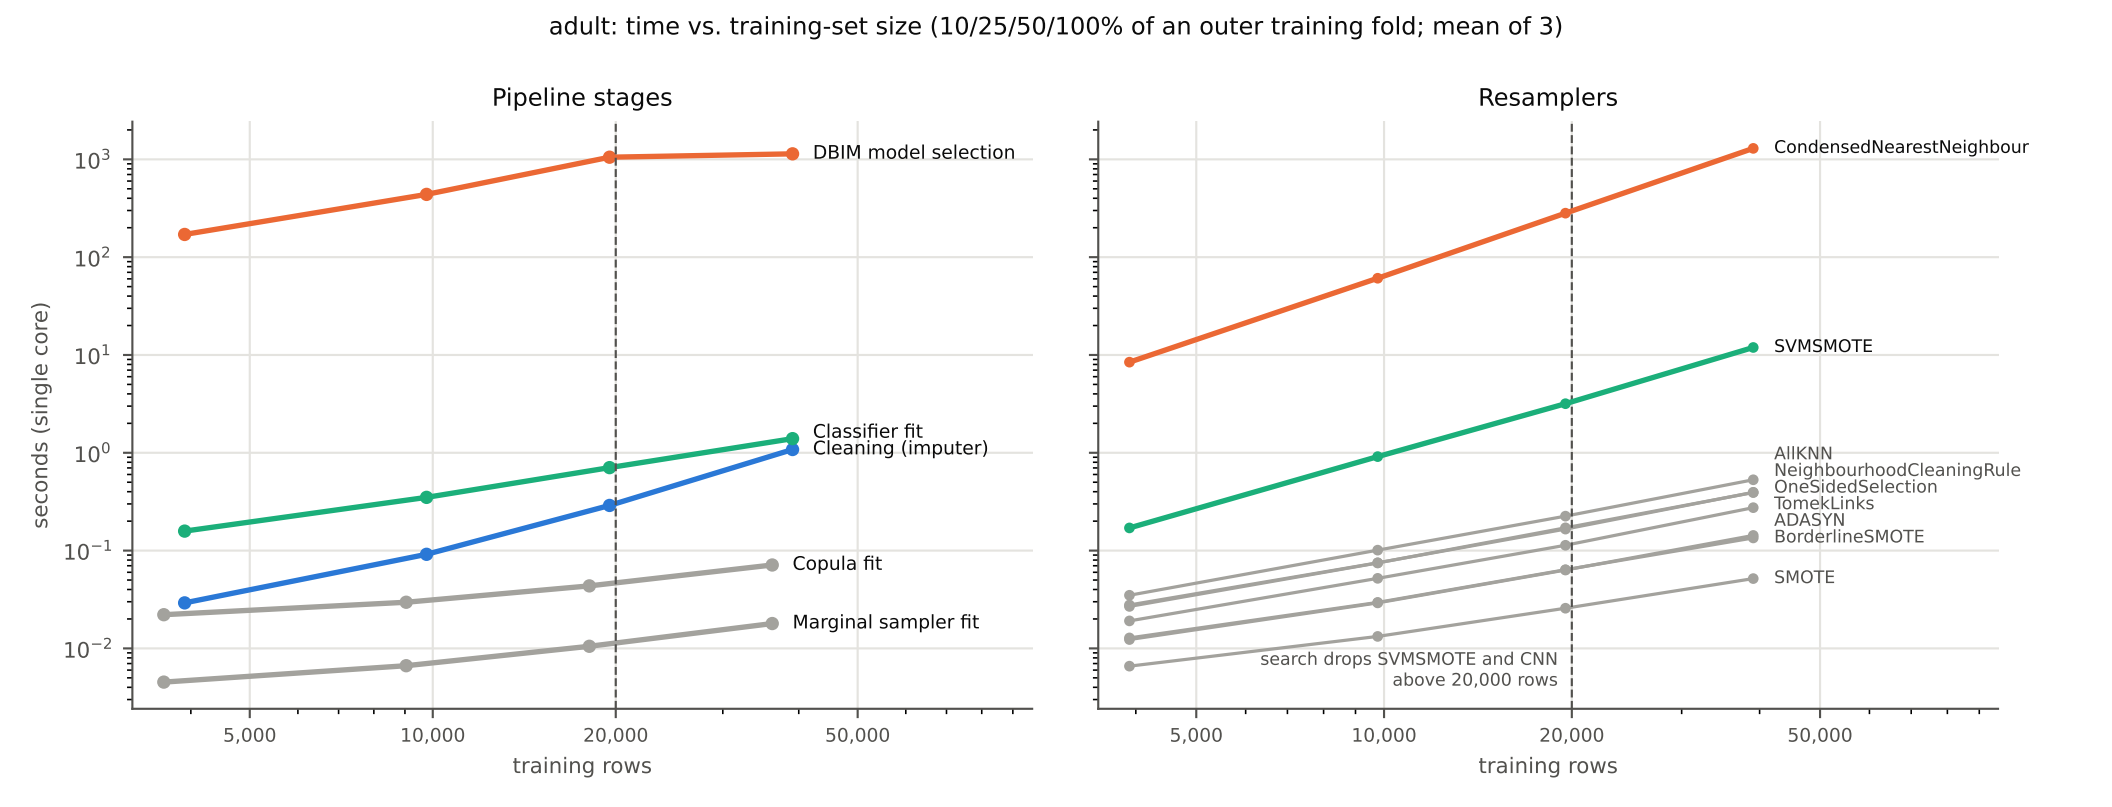
adult: time vs. training-set size (10/25/50/100% of an outer training fold; mean of 3)
Pipeline stages
Resamplers
seconds (single core)
training rows
DBIM model selection
Classifier fit
Cleaning (imputer)
Copula fit
Marginal sampler fit
CondensedNearestNeighbour
SVMSMOTE
AllKNN
NeighbourhoodCleaningRule
OneSidedSelection
TomekLinks
ADASYN
BorderlineSMOTE
SMOTE
search drops SVMSMOTE and CNN
above 20,000 rows
5,000
10,000
20,000
50,000