



고려대학교
KOREA UNIVERSITY

KU-The Future

Cloud computing – Chapter 11

Heonchang Yu

Distributed and Cloud Computing Lab.

Workload Distribution Architecture

- IT resources can be horizontally scaled via the addition of one or more identical IT resources, and a load balancer that provides runtime logic capable of evenly distributing the workload among the available IT resources.
- The resulting workload distribution architecture reduces both IT resource over-utilization and under-utilization to an extent dependent upon the sophistication of the load balancing algorithms and runtime logic.

Workload Distribution Architecture

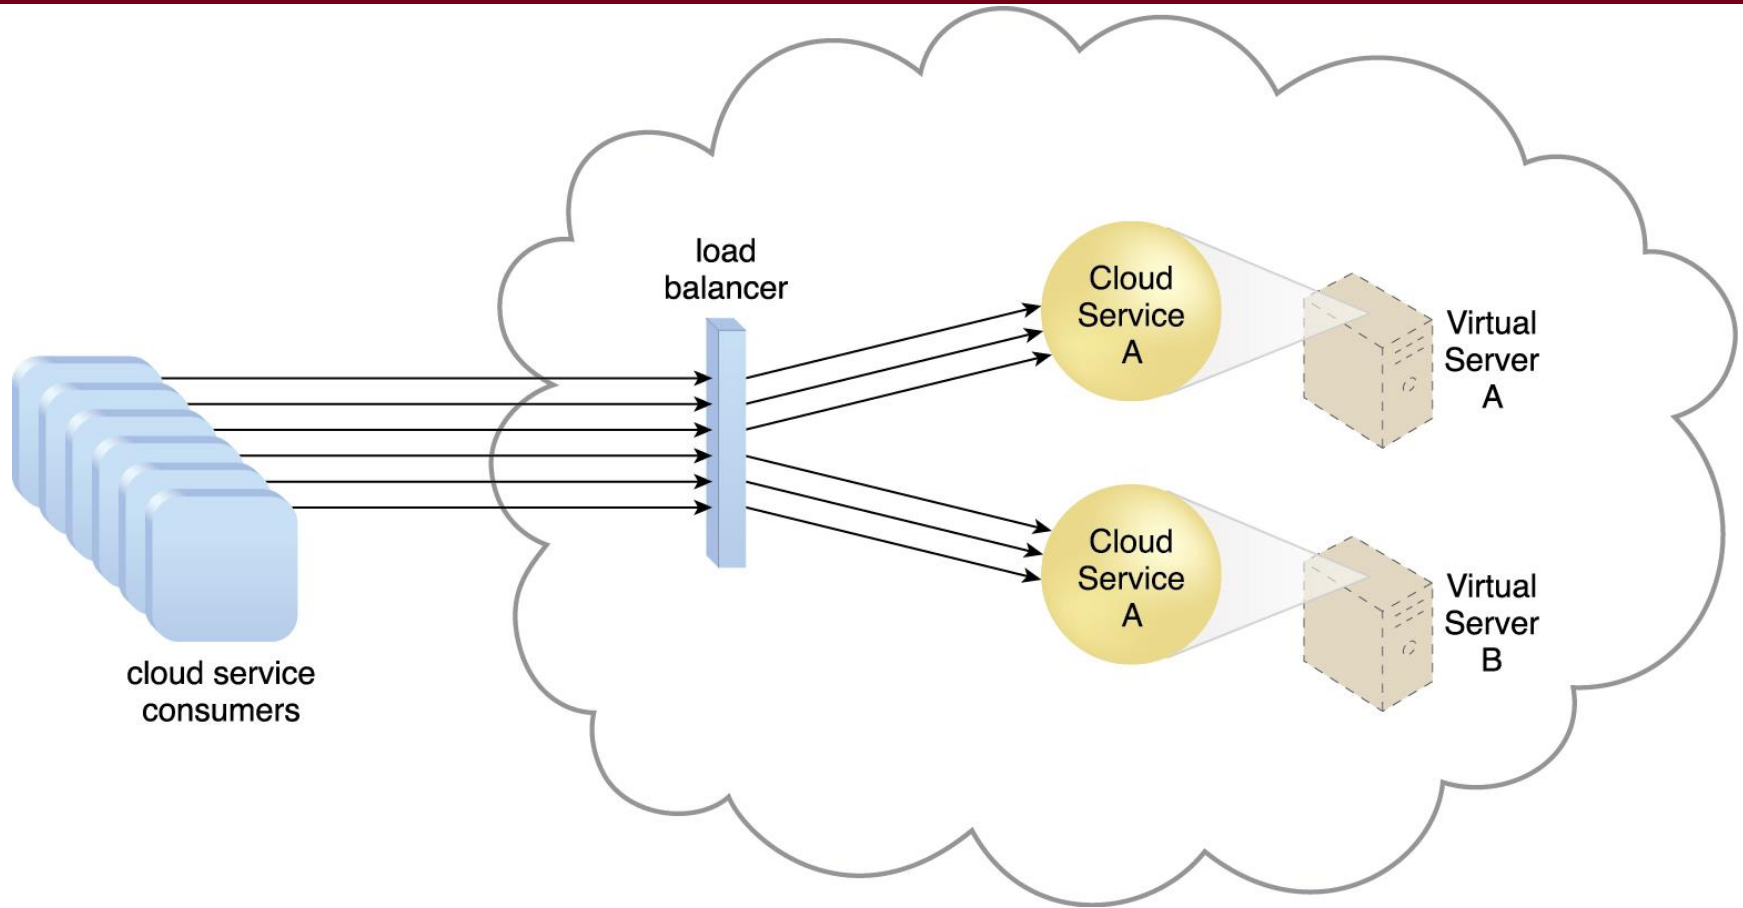


Figure 11.1 A redundant copy of Cloud Service A is implemented on Virtual Server B. The load balancer intercepts cloud service consumer requests and directs them to both Virtual Servers A and B to ensure even workload distribution.

Workload Distribution Architecture

- Load balancing systems applied to specific IT resources usually produce specialized variations of this architecture that incorporate aspects of load balancing, such as:
 - the service load balancing architecture explained later in this chapter
 - the load balanced virtual server architecture covered in Chapter 12
 - the load balanced virtual switches architecture described in Chapter 13

Workload Distribution Architecture


- Audit Monitor : When distributing runtime workloads, the type and geographical location of the IT resources that process the data can determine whether monitoring is necessary to fulfill legal and regulatory requirements.
- Cloud Usage Monitor : Various monitors can be involved to carry out runtime workload tracking and data processing.
- Hypervisor : Workloads between hypervisors and the virtual servers that they host may require distribution.
- Logical Network Perimeter : The logical network perimeter isolates cloud consumer network boundaries in relation to how and where workloads are distributed.
- Resource Cluster : Clustered IT resources in active/active mode are commonly used to support workload balancing between different cluster nodes.
- Resource Replication : This mechanism can generate new instances of virtualized IT resources in response to runtime workload distribution demands.

Resource Pooling Architecture


- A resource pooling architecture is based on the use of one or more resource pools, in which identical IT resources are grouped and maintained by a system that automatically ensures that they remain synchronized.

Resource Pooling Architecture

- Provided here are common examples of resource pools:

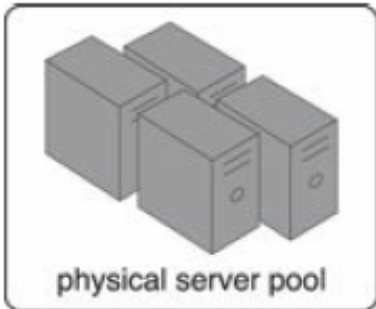

Physical server pools are composed of networked servers that have been installed with operating systems and other necessary programs and/or applications and are ready for immediate use.

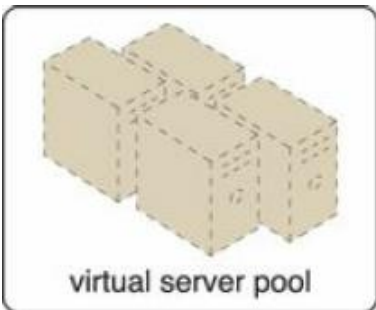


Virtual server pools are usually configured using one of several available templates chosen by the cloud consumer during provisioning.

Resource Pooling Architecture




Storage pools, or cloud storage device pools, consist of file-based or block-based storage structures that contain empty and/or filled cloud storage devices.

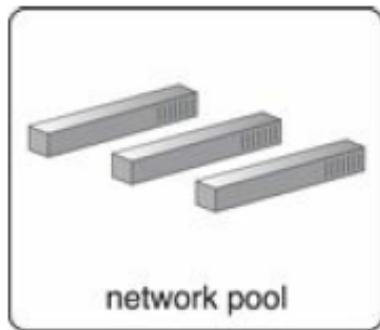


Network pools (or interconnect pools) are composed of different preconfigured network connectivity devices.

Resource Pooling Architecture

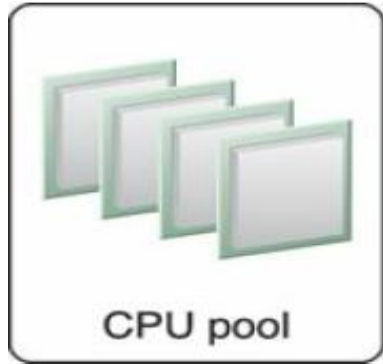

CPU pools are ready to be allocated to virtual servers, and are typically broken down into individual processing cores.

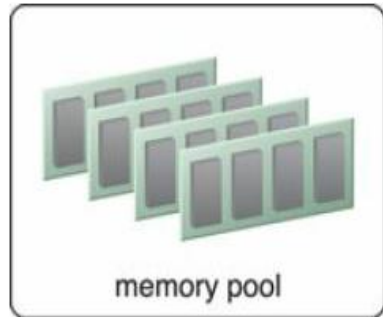

Pools of physical RAM can be used in newly provisioned physical servers or to vertically scale physical servers.

Resource Pooling Architecture

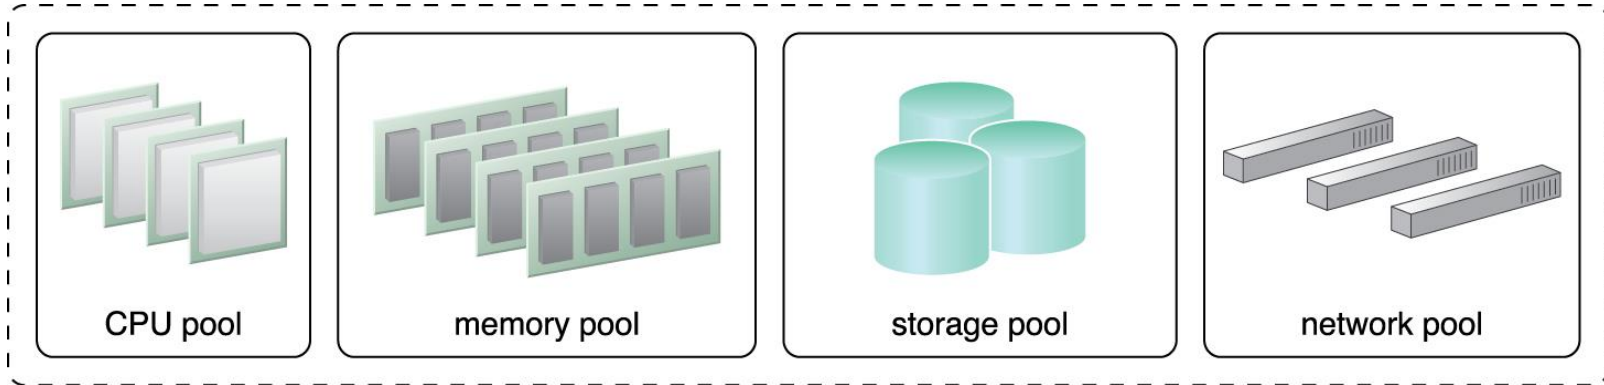


Figure 11.2 A sample resource pool that is comprised of four sub-pools of CPUs, memory, cloud storage devices, and virtual network devices.

- Resource pools can become highly complex, with multiple pools created for specific cloud consumers or applications.

Resource Pooling Architecture

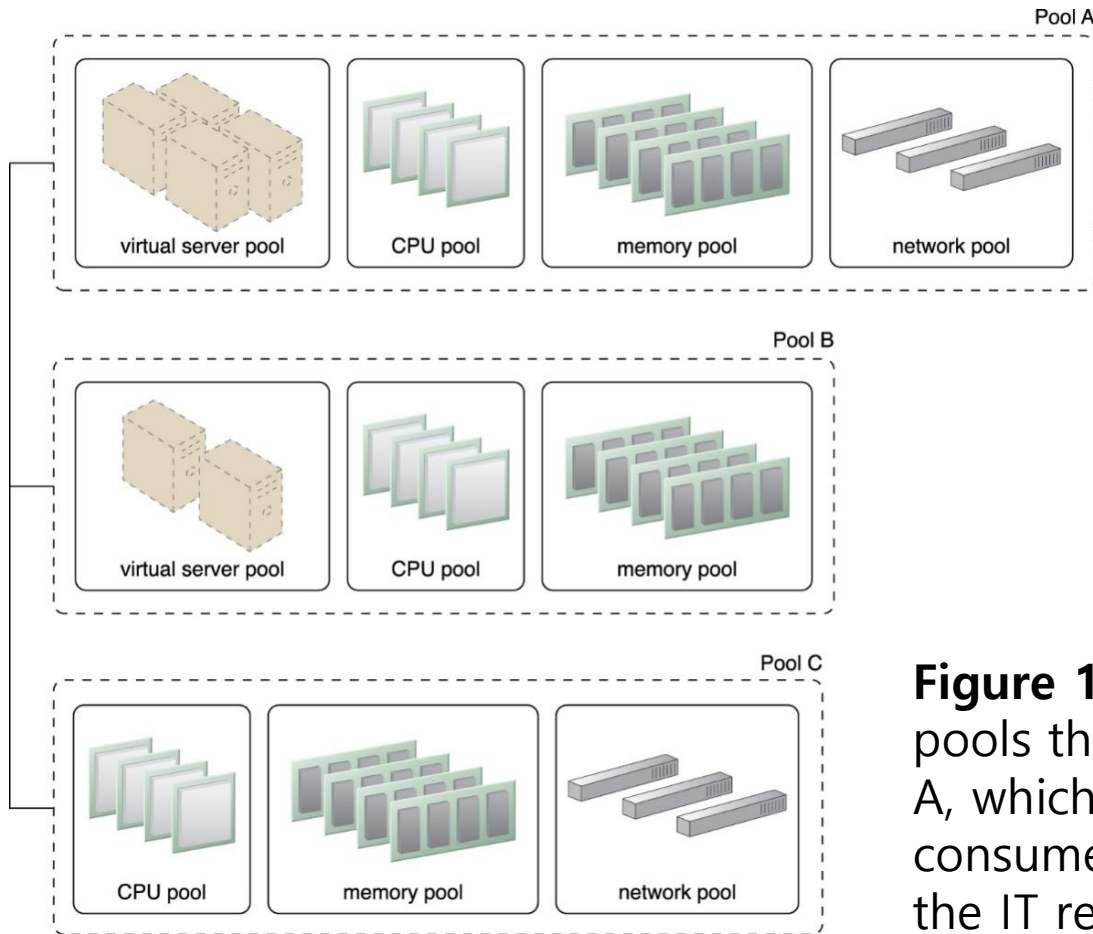


Figure 11.3 Pools B and C are sibling pools that are taken from the larger Pool A, which has been allocated to a cloud consumer. This is an alternative to taking the IT resources for Pool B and Pool C from a general reserve of IT resources that is shared throughout the cloud.

Resource Pooling Architecture

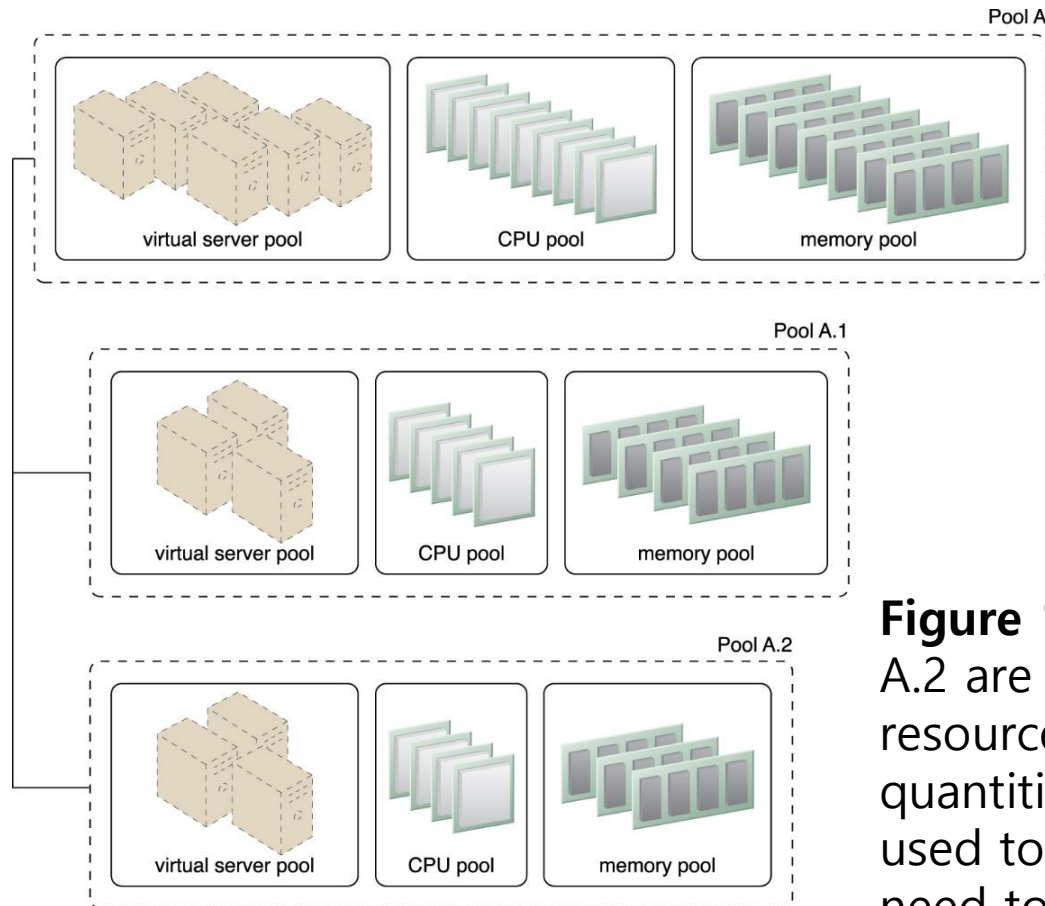


Figure 11.4 Nested Pools A.1 and Pool A.2 are comprised of the same IT resources as Pool A, but in different quantities. Nested pools are typically used to provision cloud services that need to be rapidly instantiated using the same type of IT resources with the same configuration settings.

Resource Pooling Architecture

- Audit Monitor : This mechanism monitors resource pool usage to ensure compliance with privacy and regulation requirements, especially when pools contain cloud storage devices or data loaded into memory.
- Cloud Usage Monitor : Various cloud usage monitors are involved in the runtime tracking and synchronization that are required by the pooled IT resources and any underlying management systems.
- Hypervisor : The hypervisor mechanism is responsible for providing virtual servers with access to resource pools, in addition to hosting the virtual servers and sometimes the resource pools themselves.
- Logical Network Perimeter : The logical network perimeter is used to logically organize and isolate resource pools.
- Pay-Per-Use Monitor : The pay-per-use monitor collects usage and billing information on how individual cloud consumers are allocated and use IT resources from various pools.

Resource Pooling Architecture

- Remote Administration System : This mechanism is commonly used to interface with backend systems and programs in order to provide resource pool administration features via a front-end portal.
- Resource Management System : The resource management system mechanism supplies cloud consumers with the tools and permission management options for administering resource pools.
- Resource Replication : This mechanism is used to generate new instances of IT resources for resource pools.

Dynamic Scalability Architecture

- The dynamic scalability architecture is an architectural model based on a system of predefined scaling conditions that trigger the dynamic allocation of IT resources from resource pools.
- Dynamic allocation enables variable utilization as dictated by usage demand fluctuations, since unnecessary IT resources are efficiently reclaimed without requiring manual interaction.
- The automated scaling listener is configured with workload thresholds that dictate when new IT resources need to be added to the workload processing.

Dynamic Scalability Architecture

- **Types of dynamic scaling**

- Dynamic Horizontal Scaling : IT resource instances are scaled out and in to handle fluctuating workloads. The automatic scaling listener monitors requests and signals resource replication to initiate IT resource duplication, as per requirements and permissions.
- Dynamic Vertical Scaling : IT resource instances are scaled up and down when there is a need to adjust the processing capacity of a single IT resource. For example, a virtual server that is being overloaded can have its memory dynamically increased or it may have a processing core added.
- Dynamic Relocation : The IT resource is relocated to a host with more capacity. For example, a database may need to be moved from a tape-based SAN storage device with 4 GB per second I/O capacity to another disk-based SAN storage device with 8 GB per second I/O capacity.

Dynamic Scalability Architecture

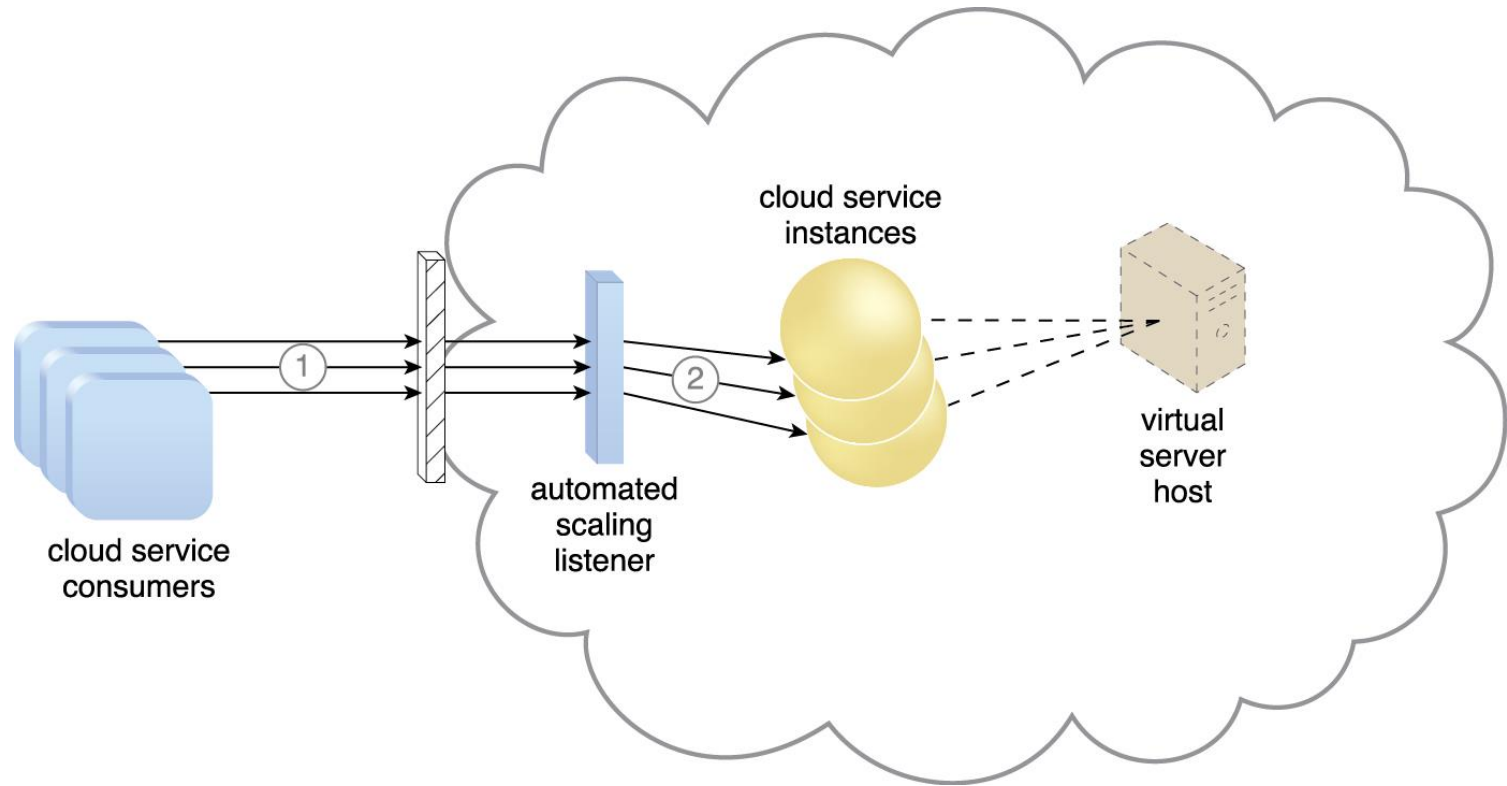


Figure 11.5. (1) Cloud service consumers are sending requests to a cloud service. (2) The automated scaling listener monitors the cloud service to determine if predefined capacity thresholds are being exceeded.

Dynamic Scalability Architecture

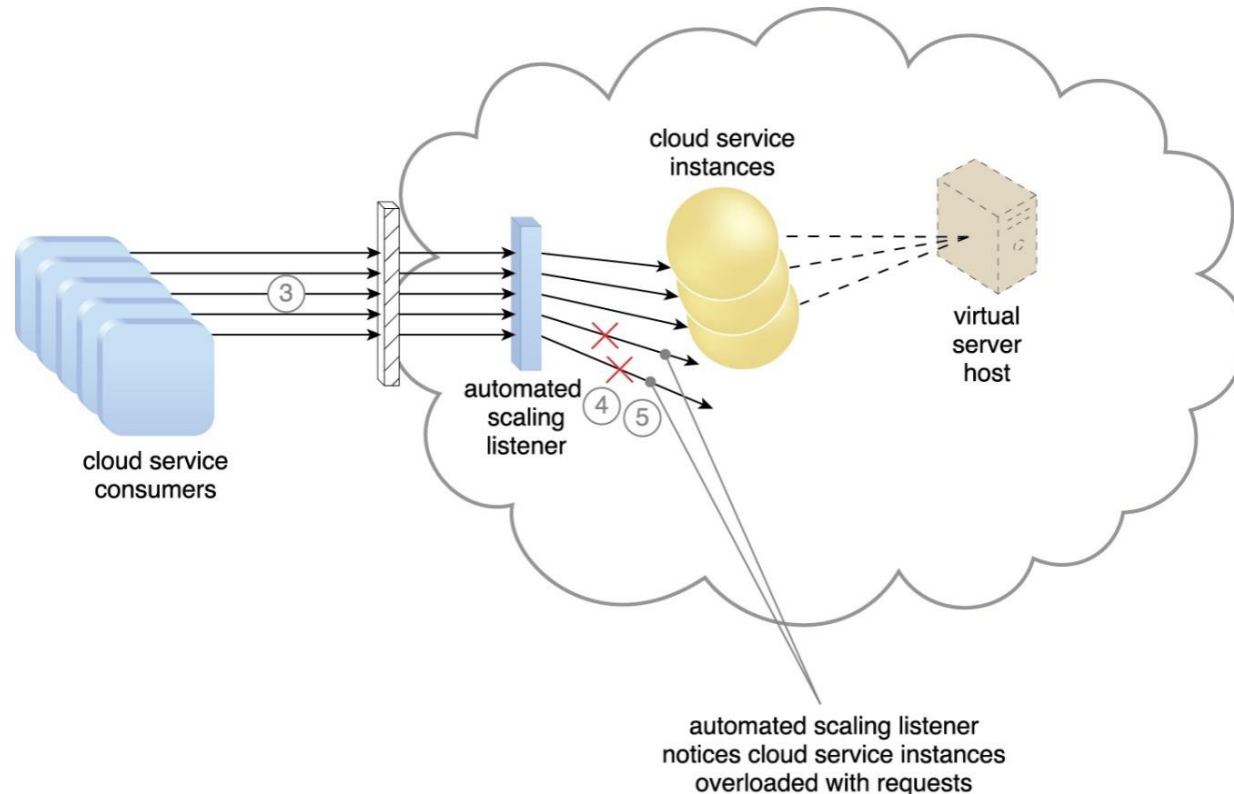


Figure 11.6 (3) The number of requests coming from cloud service consumers increases. (4) The workload exceeds the performance thresholds. The automated scaling listener determines the next course of action based on a predefined scaling policy. (5) If the cloud service implementation is deemed eligible for additional scaling, the automated scaling listener initiates the scaling process.

Dynamic Scalability Architecture

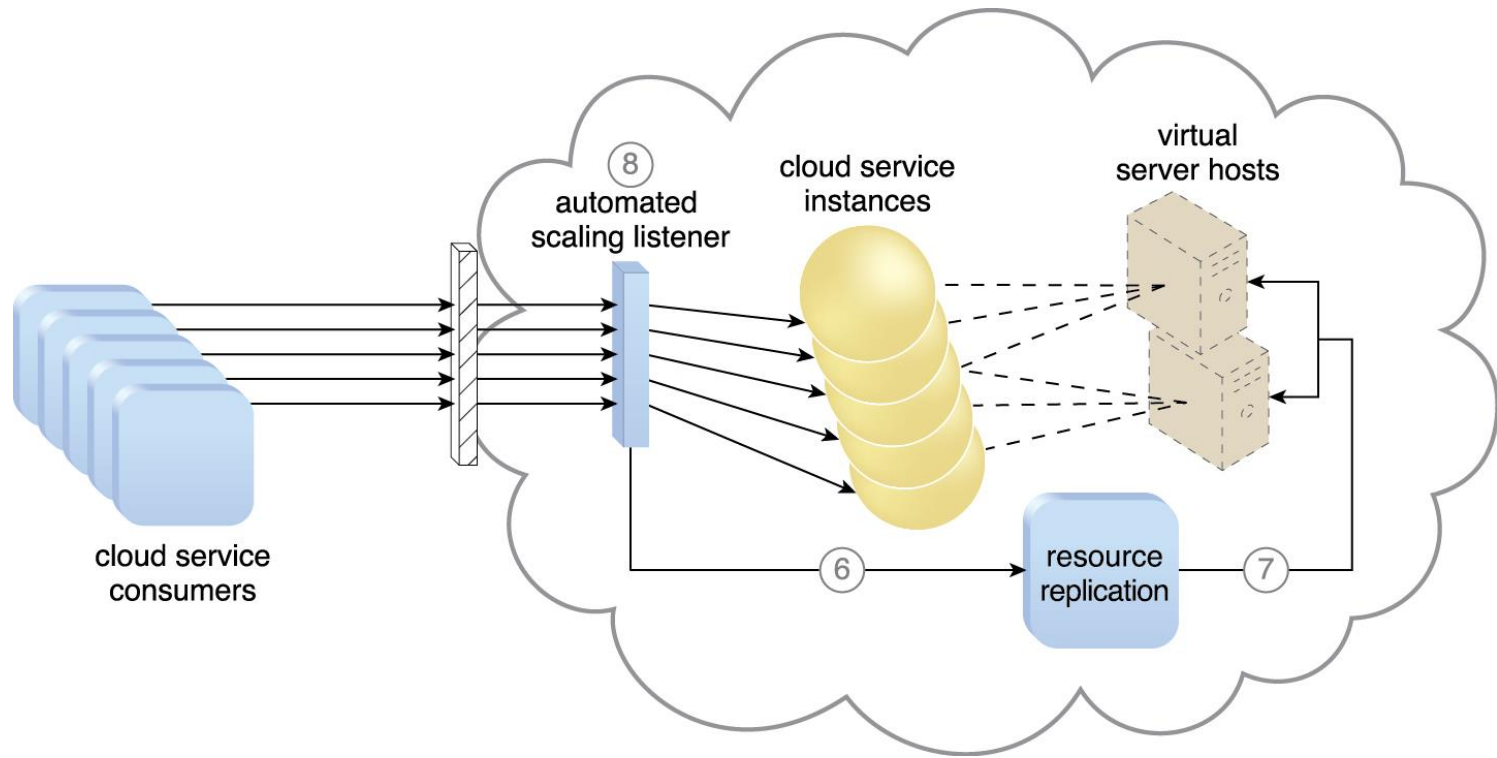


Figure 11.7 (6) The automated scaling listener sends a signal to the resource replication mechanism, (7) which creates more instances of the cloud service. (8) Now that the increased workload has been accommodated, the automated scaling listener resumes monitoring and detracting and adding IT resources, as required.

Dynamic Scalability Architecture

- Cloud Usage Monitor : Specialized cloud usage monitors can track runtime usage in response to dynamic fluctuations caused by this architecture.
- Hypervisor : The hypervisor is invoked by a dynamic scalability system to create or remove virtual server instances, or to be scaled itself.
- Pay-Per-Use Monitor : The pay-per-use monitor is engaged to collect usage cost information in response to the scaling of IT resources.

Elastic Resource Capacity Architecture

- The elastic resource capacity architecture is primarily related to the dynamic provisioning of virtual servers, using a system that allocates and reclaims CPUs and RAM in immediate response to the fluctuating processing requirements of hosted IT resources.

Elastic Resource Capacity Architecture

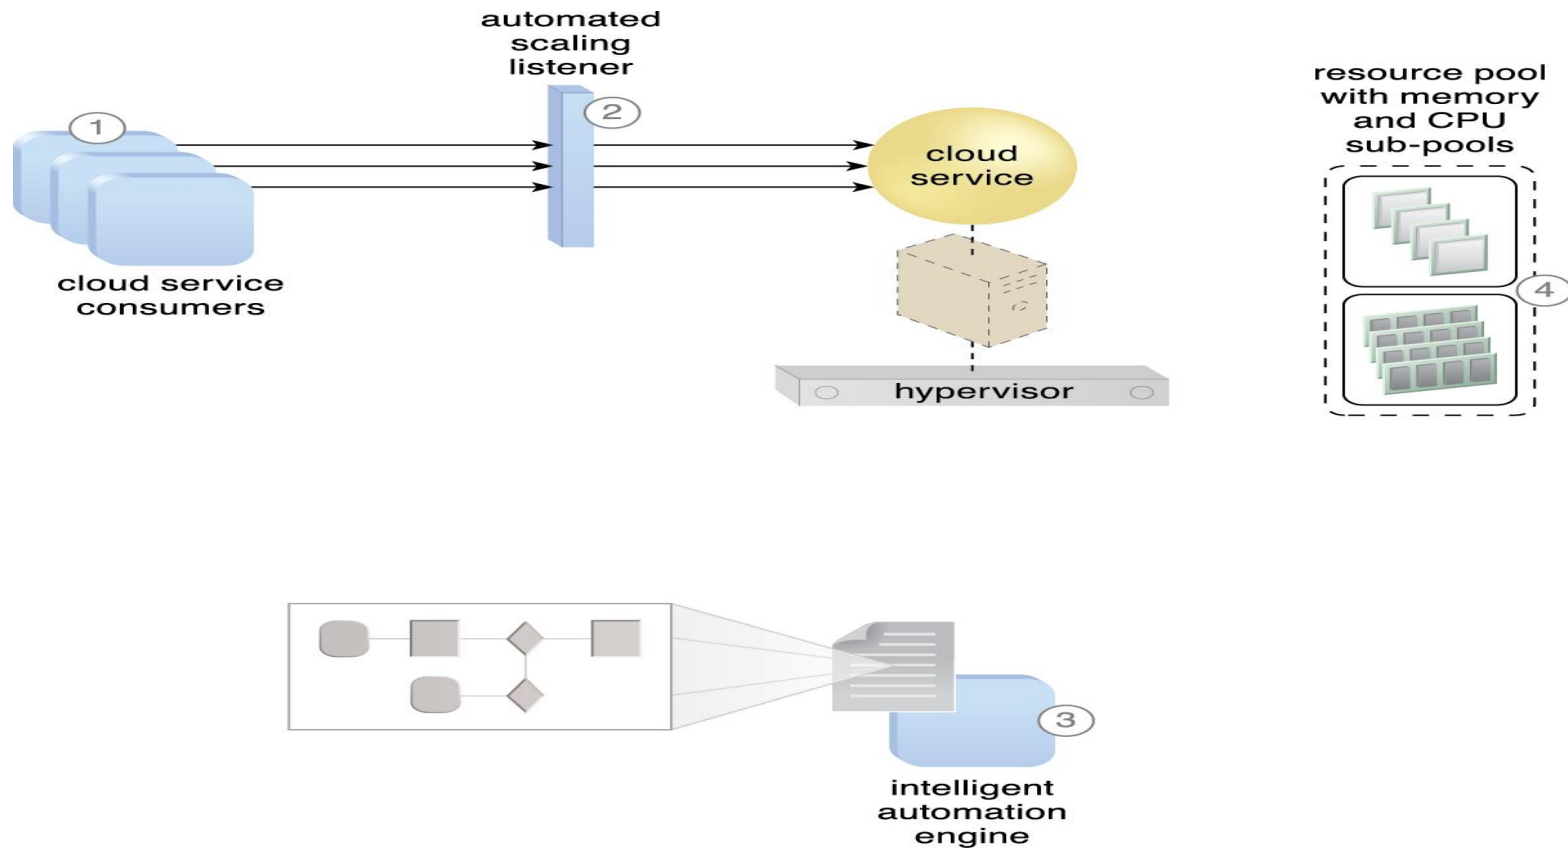


Figure 11.8 (1) Cloud service consumers are actively sending requests to a cloud service, (2) which are monitored by an automated scaling listener. (3) An intelligent automation engine script is deployed with workflow logic (4) that is capable of notifying the resource pool using allocation requests.

Elastic Resource Capacity Architecture


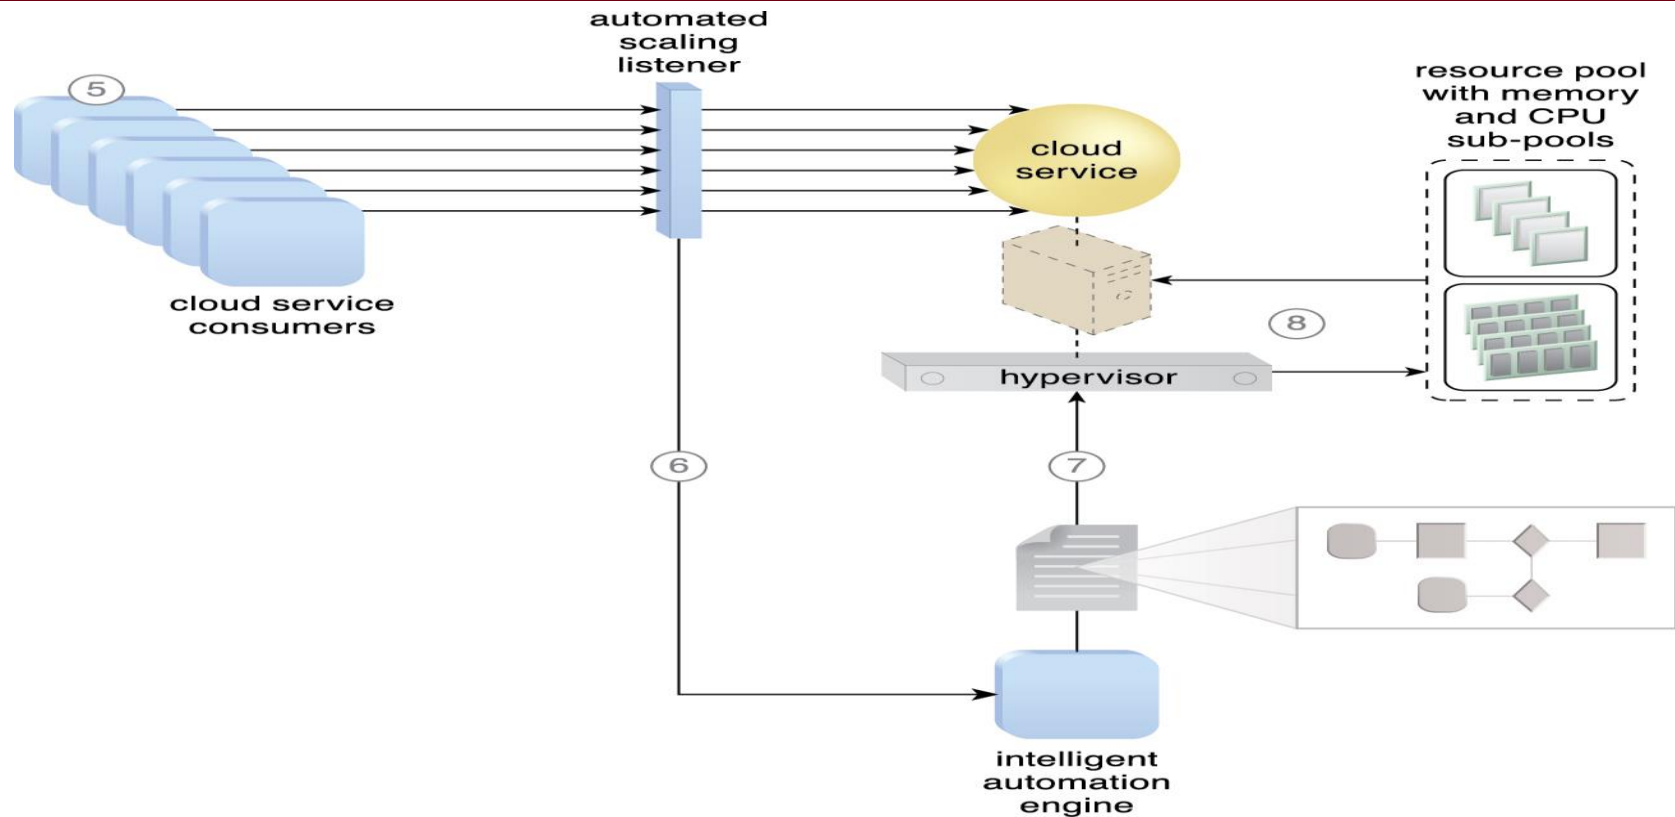


Figure 11.9. (5) Cloud service consumer requests increase, (6) causing the automated scaling listener to signal the intelligent automation engine to execute the script. (7) The script runs the workflow logic that signals the hypervisor to allocate more IT resources from the resource pools. (8) The hypervisor allocates additional CPU and RAM to the virtual server, enabling the increased workload to be handled.

Elastic Resource Capacity Architecture

Intelligent Automation Engine

- The intelligent automation engine automates administration tasks by executing scripts that contain workflow logic.
- Some additional mechanisms that can be included in this cloud architecture are the following:
 - ✓ Cloud Usage Monitor
 - ✓ Pay-Per-Use Monitor
 - ✓ Resource Replication

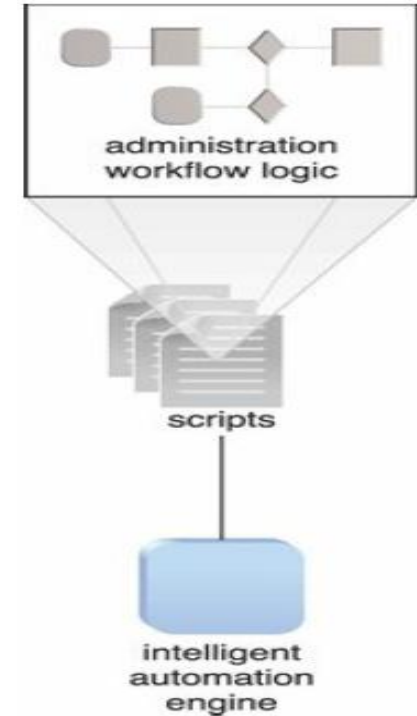

Service Load Balancing Architecture

- The service load balancing architecture can be considered a specialized variation of the workload distribution architecture that is geared specifically for scaling cloud service implementations.
- Redundant deployments of cloud services are created, with a load balancing system added to dynamically distribute workloads.
- Depending on the anticipated workload and processing capacity of host server environments, multiple instances of each cloud service implementation can be generated as part of a resource pool that responds to fluctuating request volumes more efficiently.

Service Load Balancing Architecture

The service load balancing architecture can involve the following mechanisms in addition to the load balancer:

- **Cloud Usage Monitor** : Cloud usage monitors may be involved with monitoring cloud service instances and their respective IT resource consumption levels, as well as various runtime monitoring and usage data collection tasks.
- **Resource Cluster** : Active-active cluster groups are incorporated in this architecture to help balance workloads across different members of the cluster.
- **Resource Replication** : The resource replication mechanism is utilized to generate cloud service implementations in support of load balancing requirements.

Service Load Balancing Architecture

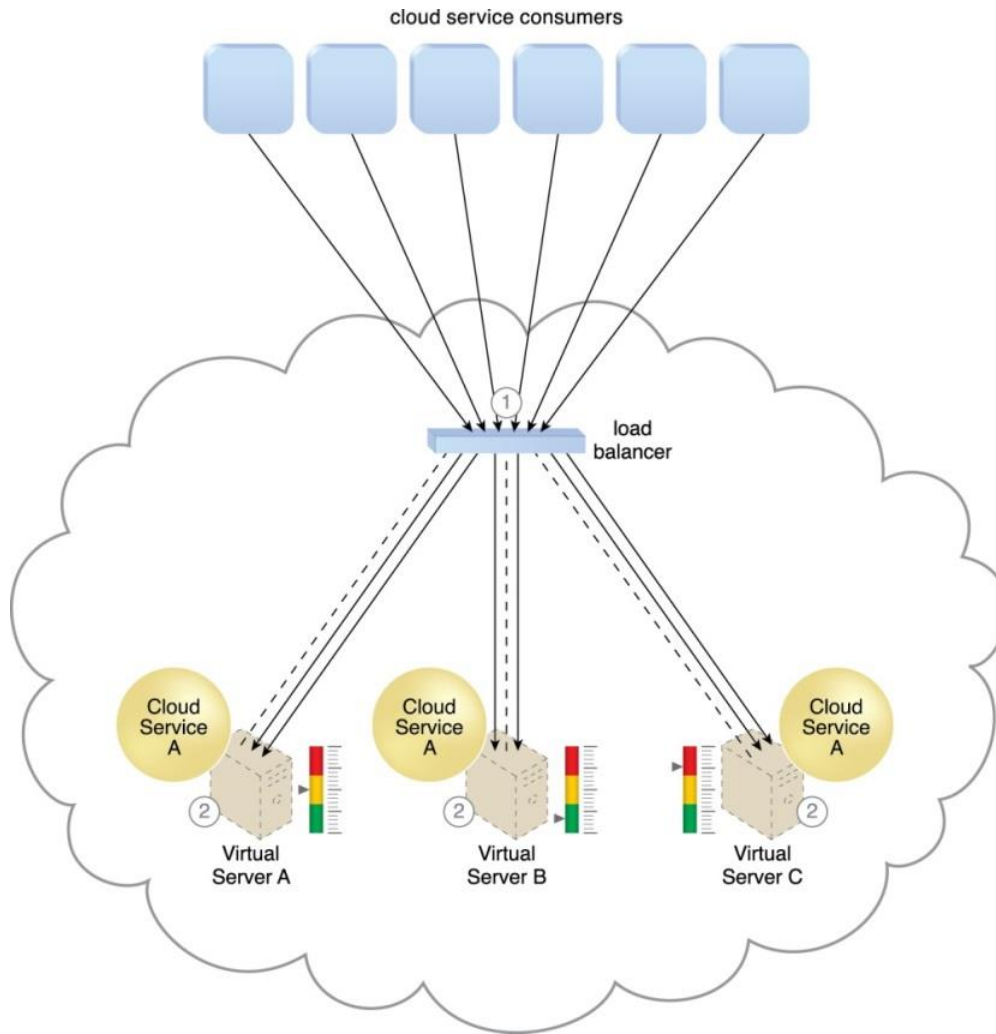


Figure 11.10 (1) The load balancer intercepts messages sent by cloud service consumers (2) and forwards them to the virtual servers so that the workload processing is horizontally scaled.

Service Load Balancing Architecture

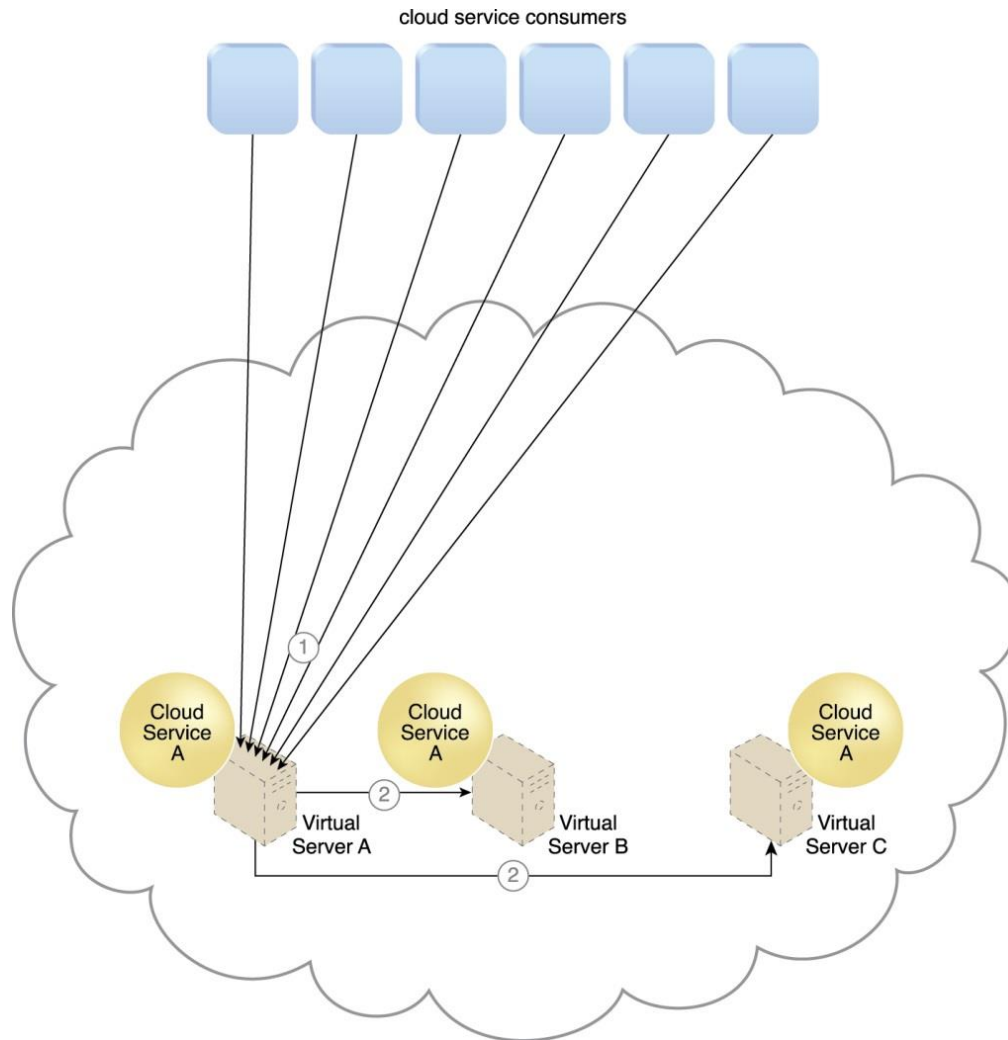


Figure 11.11 (1) Cloud service consumer requests are sent to Cloud Service A on Virtual Server A. (2) The cloud service implementation includes built-in load balancing logic that is capable of distributing requests to the neighboring Cloud Service A implementations on Virtual Servers B and C.

Cloud Bursting Architecture

- The cloud bursting architecture establishes a form of dynamic scaling that scales or “bursts out” on-premise IT resources into a cloud whenever predefined capacity thresholds have been reached. The corresponding cloud-based IT resources are redundantly pre-deployed but remain inactive until cloud bursting occurs. After they are no longer required, the cloud-based IT resources are released and the architecture “bursts in” back to the on-premise environment.
- Cloud bursting is a flexible scaling architecture that provides cloud consumers with the option of using cloud-based IT resources only to meet higher usage demands. The foundation of this architectural model is based on the automated scaling listener and resource replication mechanisms.

Cloud Bursting Architecture

- The automated scaling listener determines when to redirect requests to cloud-based IT resources, and resource replication is used to maintain synchronicity between on-premise and cloud-based IT resources in relation to state information
- In addition to the automated scaling listener and resource replication, numerous other mechanisms can be used to automate the burst in and out dynamics for this architecture, depending primarily on the type of IT resource being scaled.

Cloud Bursting Architecture

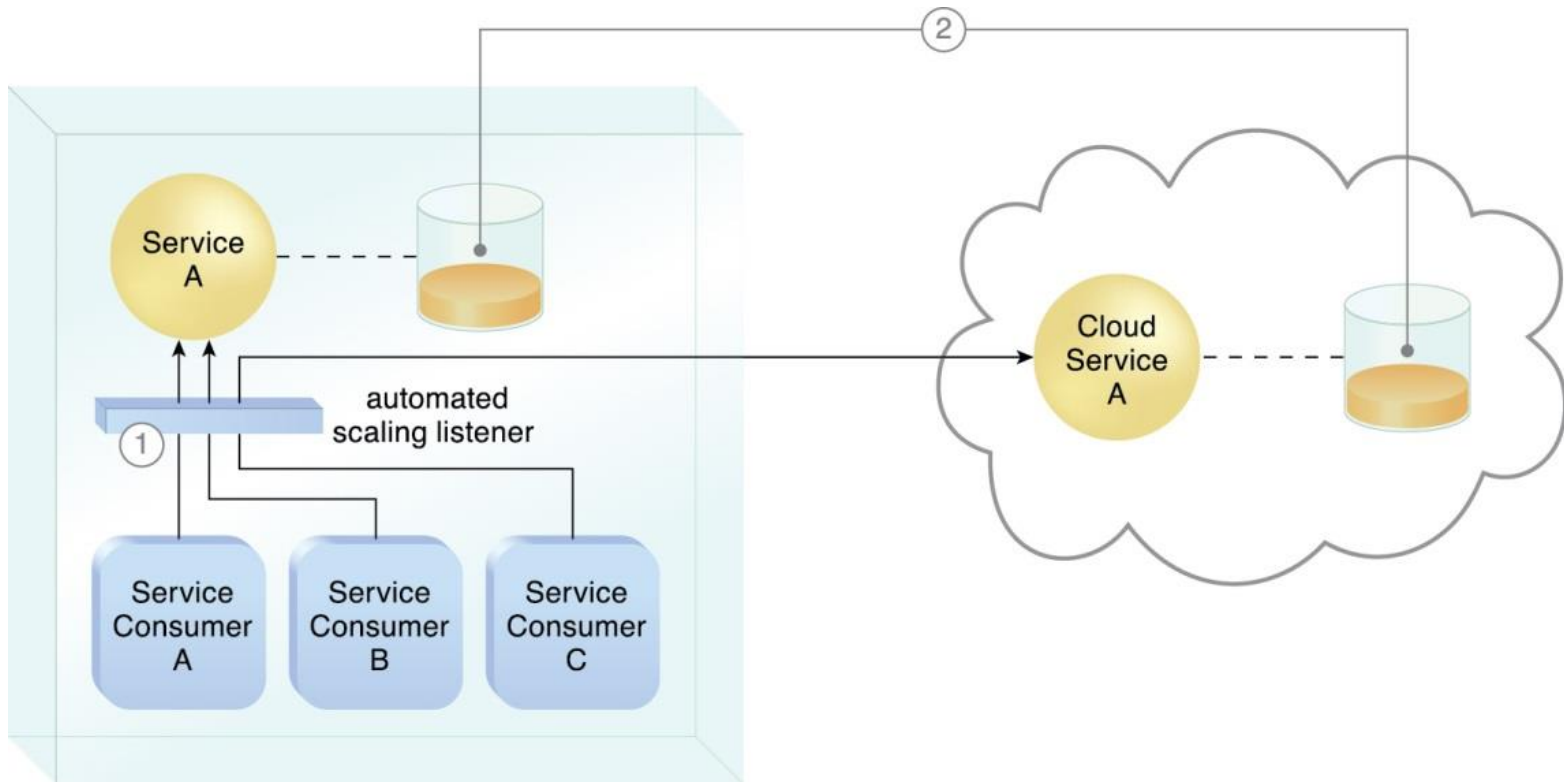


Figure 11.12 (1) An automated scaling listener monitors the usage of on-premise Service A, and redirects Service Consumer C's request to Service A's redundant implementation in the cloud (Cloud Service A) once Service A's usage threshold has been exceeded. (2) A resource replication system is used to keep state management databases synchronized.

Elastic Disk Provisioning Architecture

- The elastic disk provisioning architecture establishes a dynamic storage provisioning system that ensures that the cloud consumer is granularly billed for the exact amount of storage that it actually uses. This system uses thin-provisioning technology for the dynamic allocation of storage space, and is further supported by runtime usage monitoring to collect accurate usage data for billing purposes
- The following mechanisms can be included in this architecture in addition to the cloud storage device, virtual server, hypervisor, and pay-per-use monitor:
 - ✓ **Cloud Usage Monitor** : Specialized cloud usage monitors can be used to track and log storage usage fluctuations.
 - ✓ **Resource Replication** : Resource replication is part of an elastic disk provisioning system when conversion of dynamic thin-disk storage into static thick-disk storage is required.

Elastic Disk Provisioning Architecture

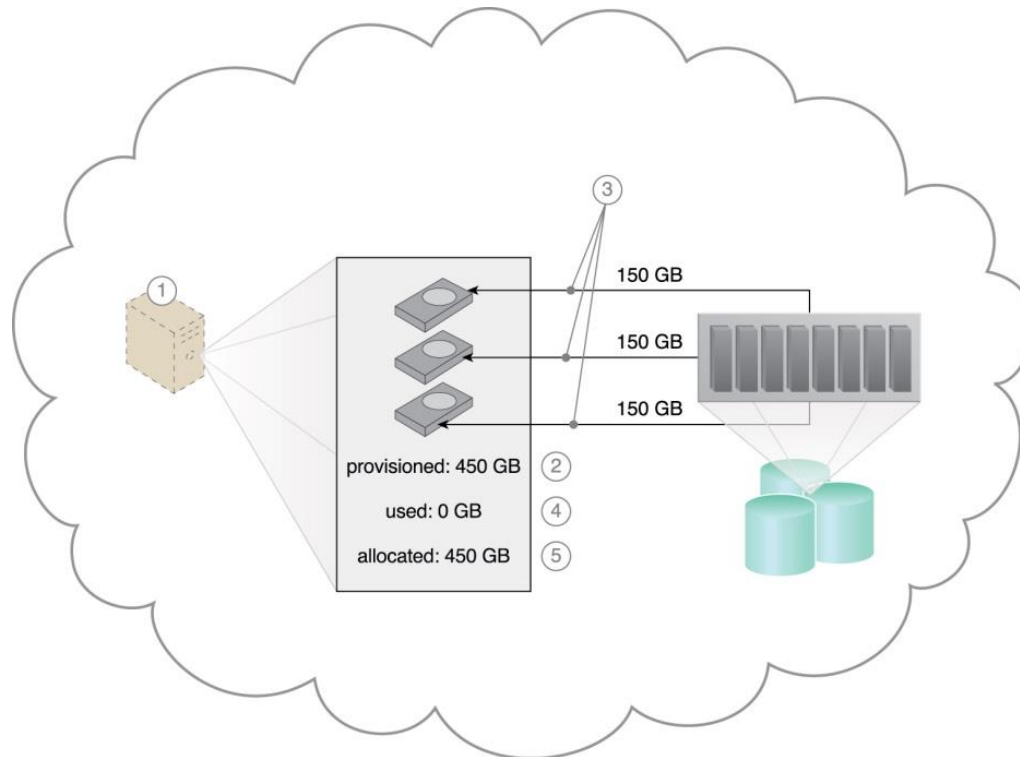


Figure 11.13 (1) The cloud consumer requests a virtual server with three hard disks, each with a capacity of 150 GB. (2) The virtual server is provisioned according to the elastic disk provisioning architecture, with a total of 450 GB of disk space. (3) The 450 GB is allocated to the virtual server by the cloud provider. (4) The cloud consumer has not installed any software yet, meaning the actual used space is currently 0 GB. (5) Because the 450 GB are already allocated and reserved for the cloud consumer, it will be charged for 450 GB of disk usage as of the point of allocation.

Elastic Disk Provisioning Architecture

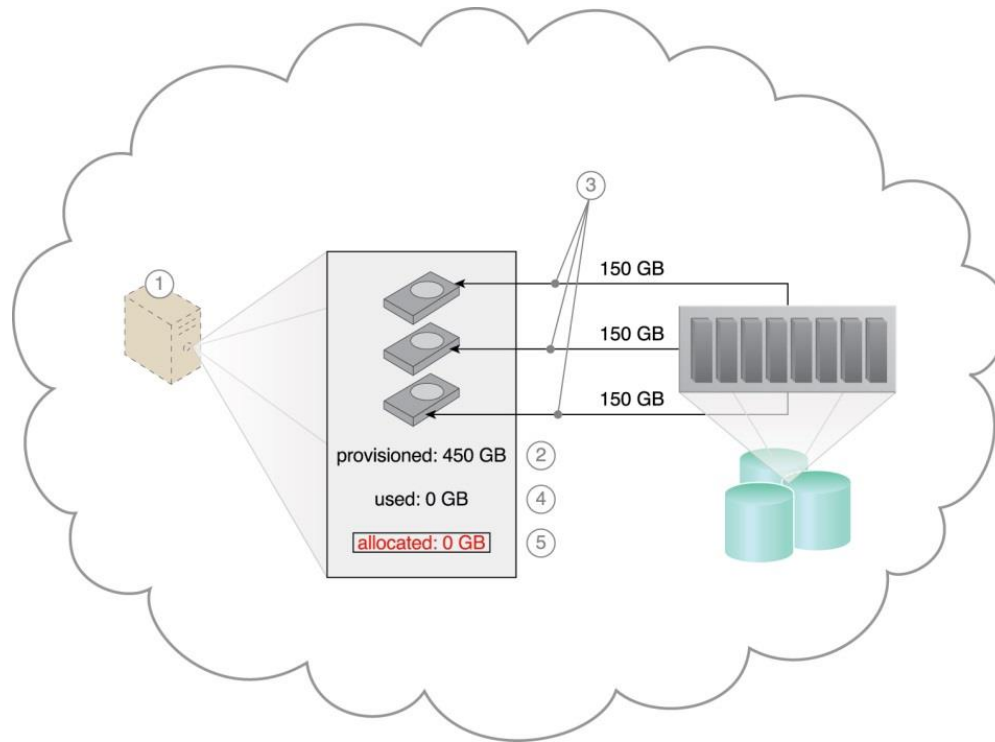


Figure 11.14 (1) The cloud consumer requests a virtual server with three hard disks, each with a capacity of 150 GB. (2) The virtual server is provisioned by this architecture with a total of 450 GB of disk space. (3) The 450 GB are set as the maximum disk usage that is allowed for this virtual server, although no physical disk space has been reserved or allocated yet. (4) The cloud consumer has not installed any software, meaning the actual used space is currently at 0 GB. (5) Because the allocated disk space is equal to the actual used space (which is currently at zero), the cloud consumer is not charged for any disk space usage.

Elastic Disk Provisioning Architecture

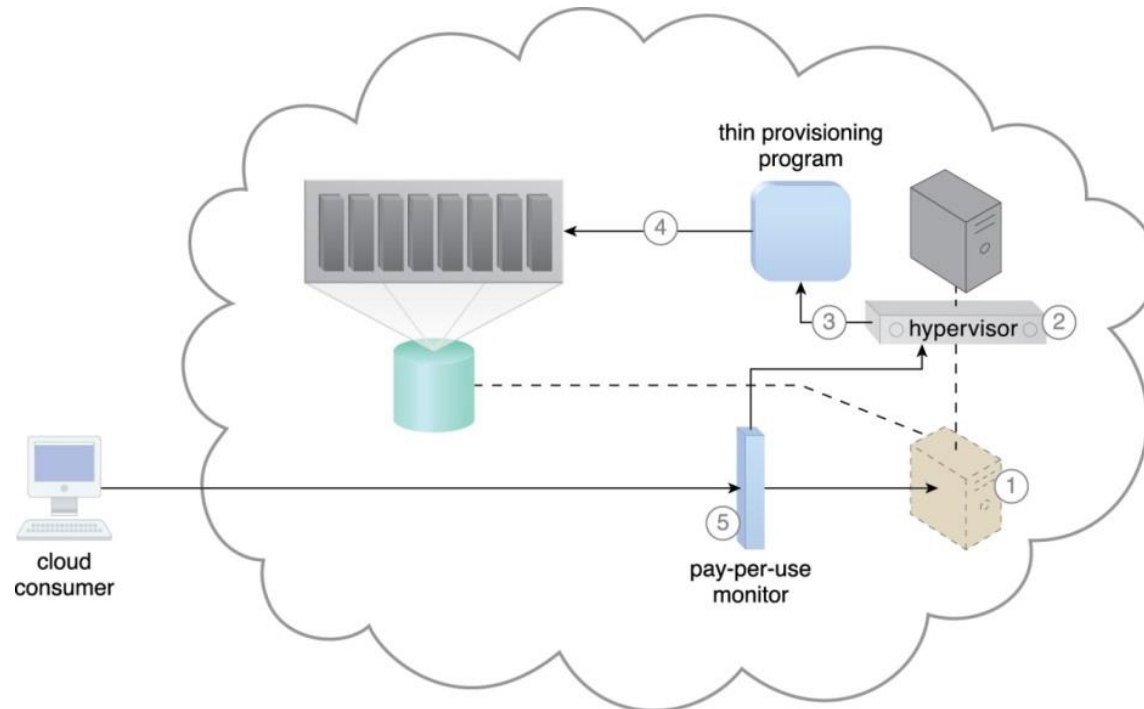


Figure 11.15 (1) A request is received from a cloud consumer, and the provisioning of a new virtual server instance begins. (2) As part of the provisioning process, the hard disks are chosen as dynamic or thin-provisioned disks. (3) The hypervisor calls a dynamic disk allocation component to create thin disks for the virtual server. (4) Virtual server disks are created via the thin-provisioning program and saved in a folder of near-zero size. The size of this folder and its files grow as operating applications are installed and additional files are copied onto the virtual server. (5) The pay-per-use monitor tracks the actual dynamically allocated storage for billing purposes.

Redundant Storage Architecture

- Cloud storage devices are occasionally subject to failure and disruptions that are caused by network connectivity issues, controller or general hardware failure, or security breaches. A compromised cloud storage device's reliability can have a ripple effect and cause impact failure across all of the services, applications, and infrastructure components in the cloud that are reliant on its availability.

Redundant Storage Architecture

- **LUN** : A logical unit number (LUN) is a logical drive that represents a partition of a physical drive.
- **Storage Service Gateway** : The storage service gateway is a component that acts as the external interface to cloud storage services, and is capable of automatically redirecting cloud consumer requests whenever the location of the requested data has changed.
- **Storage Replication**: Storage replication is a variation of the resource replication mechanisms used to synchronously or asynchronously replicate data from a primary storage device to a secondary storage device. It can be used to replicate partial and entire LUNs.

Redundant Storage Architecture

- The redundant storage architecture introduces a secondary duplicate cloud storage device as part of a failover system that synchronizes its data with the data in the primary cloud storage device. A storage service gateway diverts cloud consumer requests to the secondary device whenever the primary device fails.

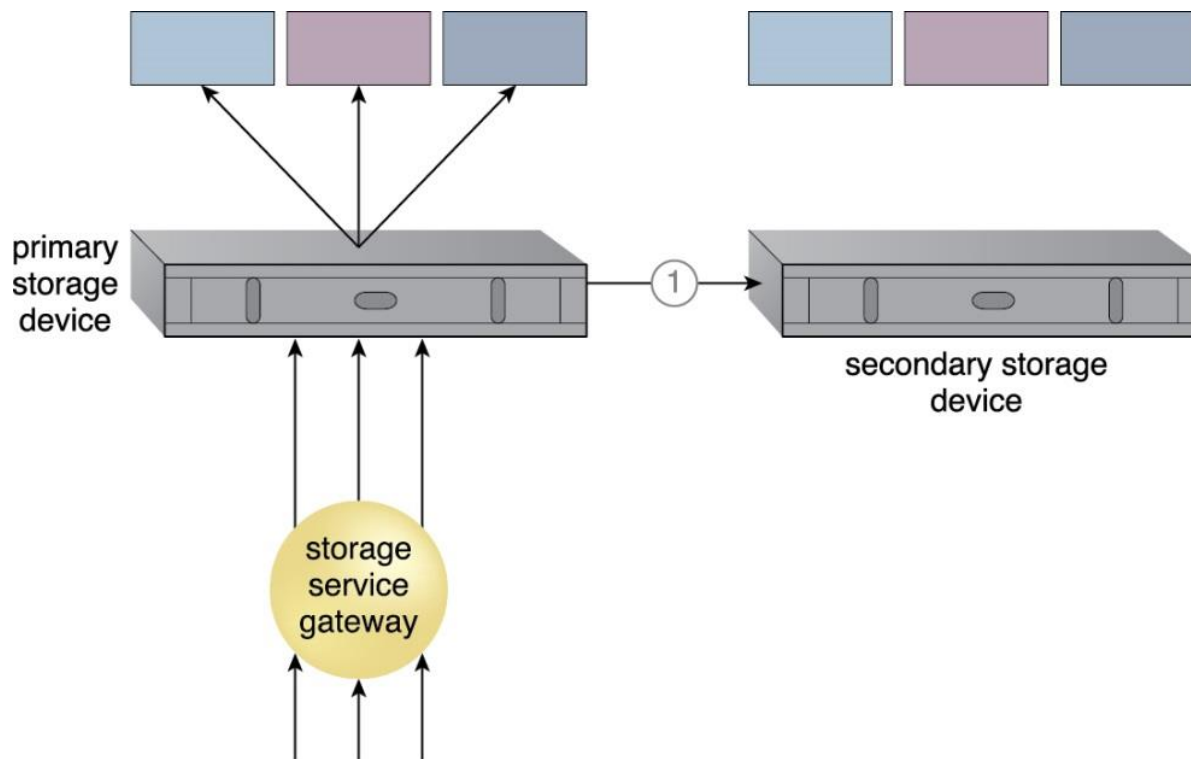


Figure 11.16

(1) The primary cloud storage device is routinely replicated to the secondary cloud storage device.

Redundant Storage Architecture

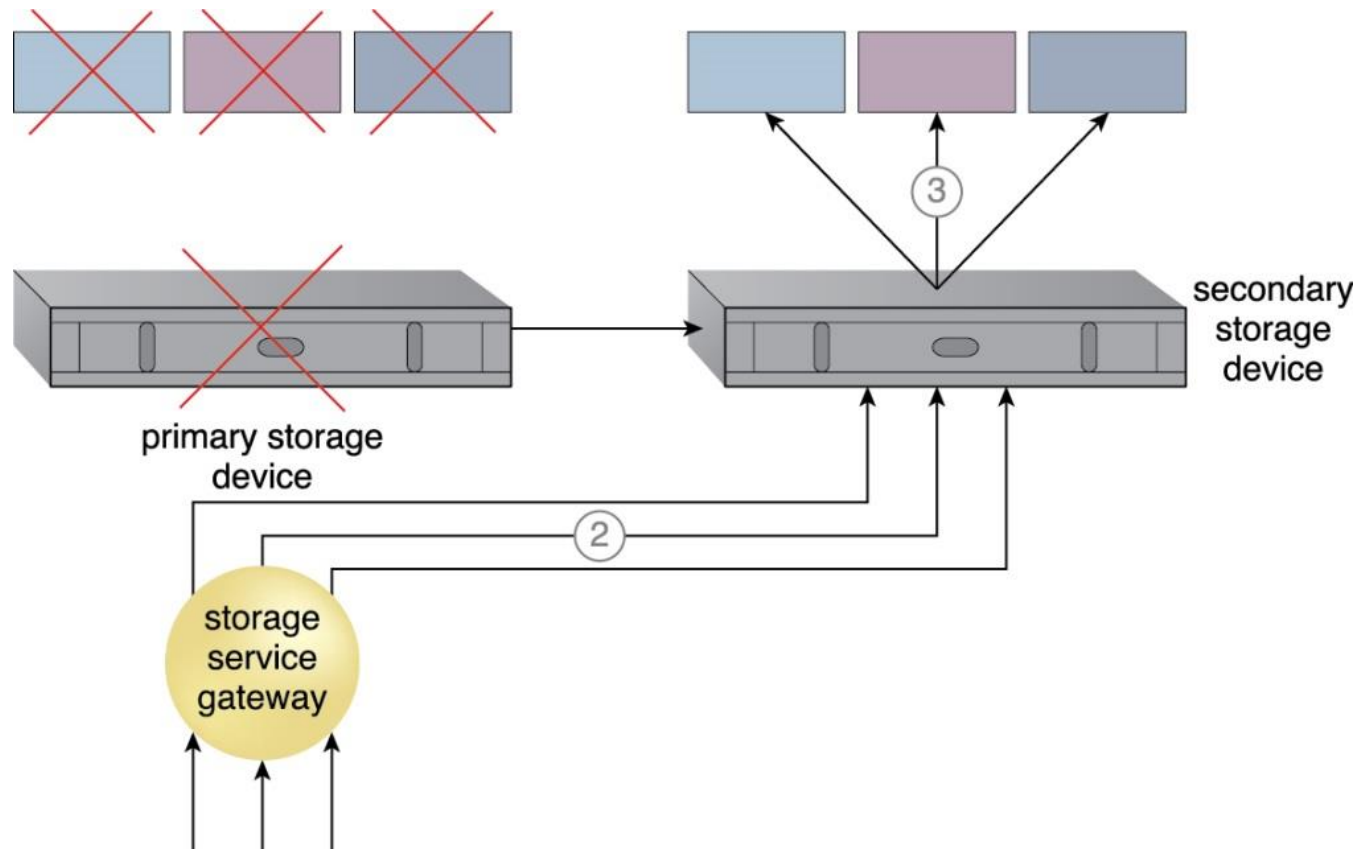


Figure 11.17 (2) The primary storage becomes unavailable and the storage service gateway forwards the cloud consumer requests to the secondary storage device. (3) The secondary storage device forwards the requests to the LUNs, allowing cloud consumers to continue to access their data.

Redundant Storage Architecture

- This cloud architecture primarily relies on a storage replication system that keeps the primary cloud storage device synchronized with its duplicate secondary cloud storage devices

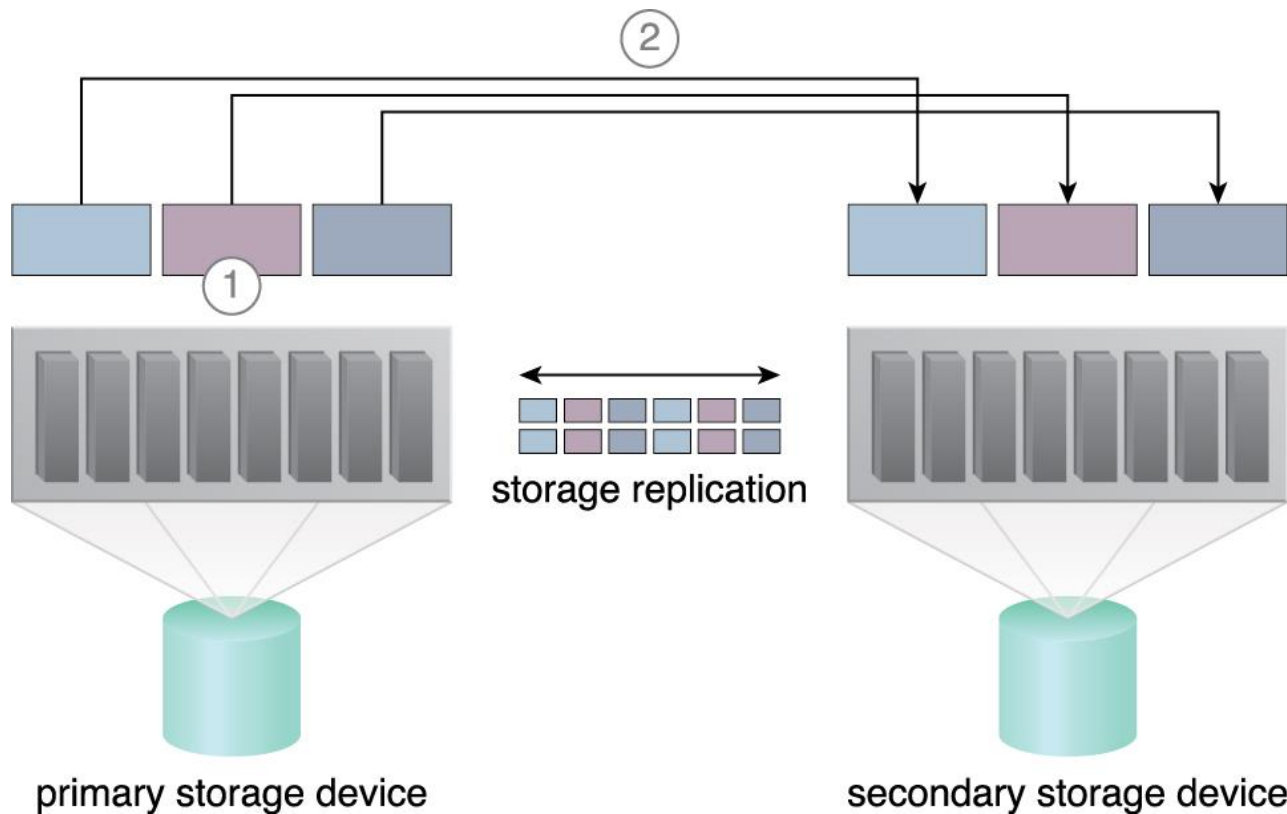


Figure 11.18
Storage replication is used to keep the redundant storage device synchronized with the primary storage device.

Redundant Storage Architecture

- Cloud providers may locate secondary cloud storage devices in a different geographical region than the primary cloud storage device, usually for economic reasons. However, this can introduce legal concerns for some types of data. The location of the secondary cloud storage devices can dictate the protocol and method used for synchronization, as some replication transport protocols have distance restrictions.
- Some cloud providers use storage devices with dual array and storage controllers to improve device redundancy, and place secondary storage devices in a different physical location for cloud balancing and disaster recovery purposes. In this case, cloud providers may need to lease a network connection via a third-party cloud provider in order to establish the replication between the two devices.

Case Study Example

- An in-house solution that ATN did not migrate to the cloud is the Remote Upload Module, a program that is used by their clients to upload accounting and legal documents to a central archive on a daily basis. Usage peaks occur without warning, since the quantity of documents received on a day-by-day basis is unpredictable.
- The Remote Upload Module currently rejects upload attempts when it is operating at capacity, which is problematic for users that need to archive certain documents before the end of a business day or prior to a deadline.
- ATN decides to take advantage of its cloud-based environment by creating a cloud-bursting architecture around the on-premise Remote Upload Module service implementation. This enables it to burst out into the cloud whenever on-premise processing thresholds are exceeded.

Case Study Example

- A “burst in” system is invoked after the service usage has decreased enough so that service consumer requests can be processed by the on-premise Remote Upload Module implementation again. Instances of the cloud services are released, and no additional cloud related usage fees are incurred.

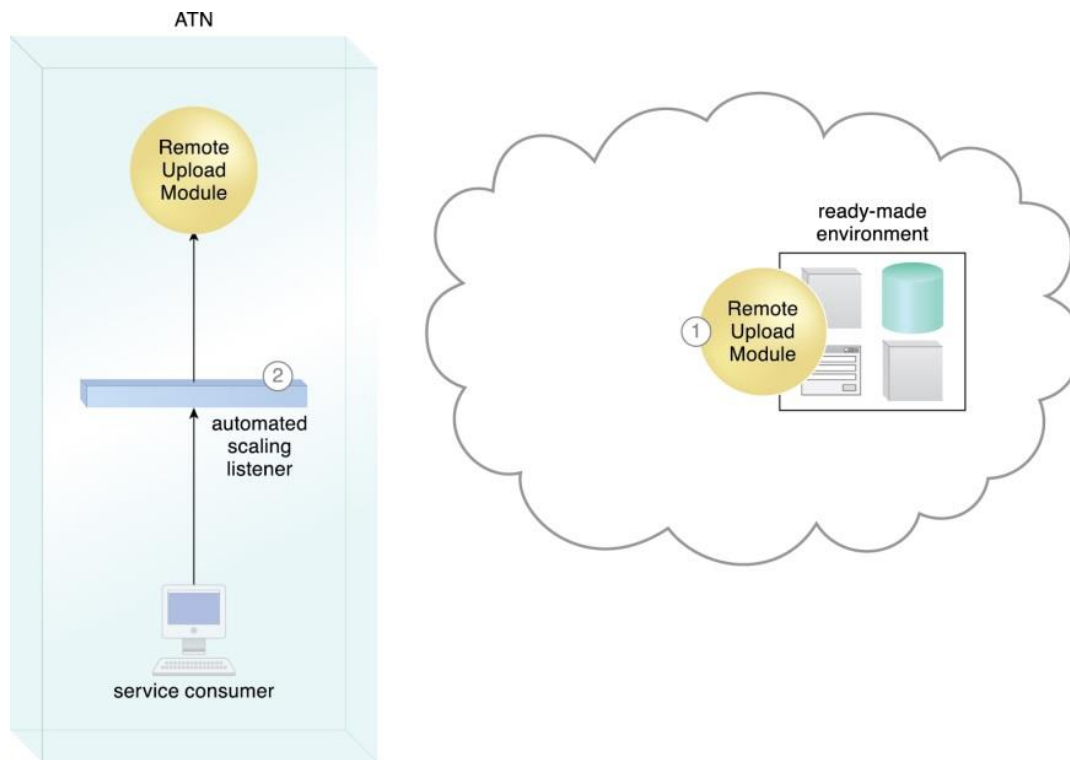


Figure 11.19

(1) A cloud-based version of the on-premise Remote Upload Module service is deployed on ATN's leased ready-made environment. (2) The automated scaling listener monitors service consumer requests.

Case Study Example

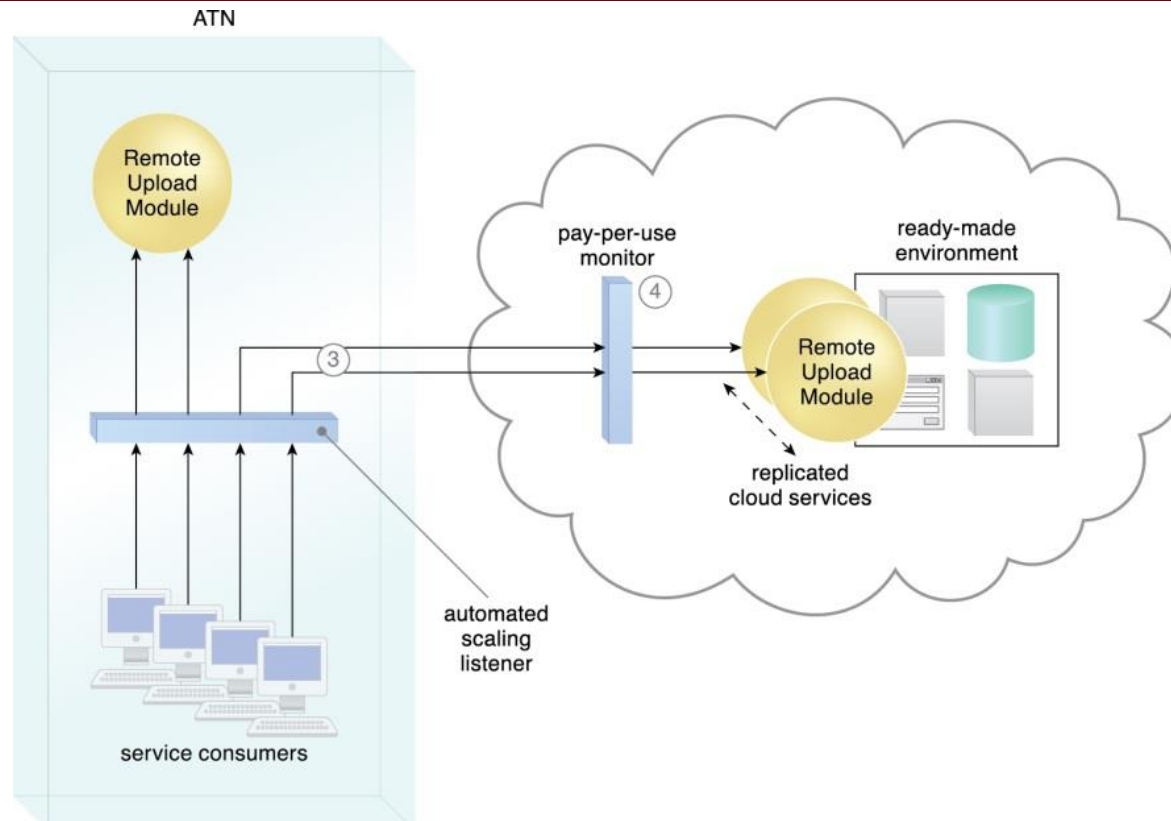


Figure 11.20 (3) The automated scaling listener detects that service consumer usage has exceeded the local Remote Upload Module service's usage threshold, and begins diverting excess requests to the cloud-based Remote Upload Module implementation. (4) The cloud provider's pay-per-use monitor tracks the requests received from the on-premise automated scaling listener to collect billing data, and Remote Upload Module cloud service instances are created on-demand via resource replication.