ISJ107V — Assignment 2: Formal System Proposal and Specification

Tshwane University of Technology Faculty of Information and Communication Technology Department of Computer Science

Module: ISJ107V — Integrated Software Project 2026 **Assignment:** Assignment 2 — Formal System Proposal and Specification **Student Name:** Ntwanano Mathebula **Student Number:** 216080254 **Tut4life Email:** 216080254@tut4life.ac.za **Lecturer:** Dr HD Masethe **Due Date:** 19 September 2026

Declaration of Originality

I, Ntwanano Mathebula (Student Number: 216080254), declare that this assignment is my own original work. All sources have been acknowledged using the Harvard referencing method as required by TUT policy RIPPOL067.

Signature: _____ **Date:** _____

Question 1 — Project Introduction [8 marks]

1.1 Project Title, Description, Intended Users and Emerging Technology (2 marks)

Project Title: AI-Enhanced Community-Based Missing Children Reporting and Tracking System

Description: The proposed system is a centralized web-based platform that enables South African community members to report missing children, search active cases, upload identifying photographs, and receive geographic alert notifications. The system addresses the current fragmentation of missing children information across disconnected channels such as WhatsApp groups, social media, and police stations by providing a single, structured digital platform for reporting and response coordination.

Intended Users: - Community members — submit and search missing children reports - Administrators — review AI-flagged duplicate reports, update case statuses, monitor analytics - System (automated) — AI duplicate detection engine, notification dispatcher

Emerging Technology: The system integrates Artificial Intelligence and Machine Learning (AI/ML) in the form of Natural Language Processing (NLP)-based text similarity analysis. A Python microservice uses TF-IDF vectorization and cosine similarity to automatically

detect when two submitted reports likely refer to the same missing child. This reduces duplicate data and improves the accuracy of information available to the community.

1.2 Problem Statement (3 marks)

South Africa records approximately 1 697 missing children cases annually — roughly one every five hours (Missing Children South Africa, 2024). Despite this, no centralized digital platform exists for communities to report and track these cases.

Current Problem: Information about missing children is shared through fragmented, unconnected channels — WhatsApp groups, Facebook posts, police station visits, and word of mouth. These channels do not communicate with each other, which means the same case is frequently reported multiple times with conflicting details, critical information reaches community members too slowly, and no mechanism exists to identify patterns or automatically alert people in the affected area.

Who is Affected: - Community members who rely on scattered, unreliable information to respond to missing children cases - Families of missing children who cannot consolidate information about their child's case - Community organisations and law enforcement who cannot analyse reporting trends or coordinate responses effectively

Consequences of Leaving it Unresolved: Every month without a better system means approximately 140 children are reported through fragmented channels (derived from Missing Children South Africa, 2024). Delayed and duplicated information directly reduces the chances of locating a missing child in the critical early hours. The longer this problem goes unaddressed, the more community response efforts are undermined by poor data quality and slow information flow.

1.3 Project Aim, Objectives, Scope and Success Criteria (3 marks)

Project Aim: To develop and deliver a functional AI-enhanced web-based platform for reporting, tracking, and analysing missing children cases in South Africa, ready for live demonstration by November 2026.

Three Measurable Objectives: 1. Develop and deploy a web-based reporting platform by June 2026 that allows registered users to submit missing children reports with all required fields and optional image upload, verified by at least one complete end-to-end report submission with no errors. 2. Implement an AI-based duplicate detection module by June 2026 that achieves a cosine similarity detection precision of at least 80%, measured against a test dataset of 20 known report pairs. 3. Deliver an analytics dashboard by June 2026 displaying at least three distinct reporting trend views — by location, by month, and by resolution status — sourced from live database data.

Main Scope Boundaries:

In Scope: - Web-based user registration, login and authentication - Missing children report submission with optional image upload - Geographic alert notifications to registered users - AI-based duplicate report detection using NLP text similarity - Analytics dashboard displaying reporting trends - Administrator panel for duplicate review and status management

Out of Scope: - Integration with SAPS or police databases - Facial recognition technology - GPS tracking of children - Mobile application development (Android/iOS)

Two Success Criteria: 1. The system successfully accepts, stores, and displays at least one complete missing children report end-to-end without errors, with all required fields validated and the AI duplicate check completing within 2 seconds. 2. The AI duplicate detection module correctly identifies at least 80% of duplicate reports in a prepared test dataset, and the analytics dashboard displays accurate reporting trends by location and time period sourced from live data.

Question 2 — System Requirements [15 marks]

2.1 Ten Prioritized Functional Requirements (10 marks)

ID	Priority	Requirement	Acceptance Criterion
FR-01	Must	The system shall allow an authenticated user to filter active missing children reports by gender, age range, and geographic area simultaneously on the dashboard.	Given filter values are selected, when the filter is applied, then only reports matching all selected criteria are displayed within 2 seconds.
FR-02	Must	The system shall allow an authenticated user to generate and copy a shareable alert message for any active missing children report, containing the child's name, age, gender, physical	Given the user clicks "Share Report", when the action completes, then a formatted alert text is copied to the clipboard and a confirmation message is displayed.

ID	Priority	Requirement	Acceptance Criterion
		description, and last known location.	
FR-03	Must	The system shall allow an authenticated user to submit a missing children report containing the child's full name, age, gender, physical description, last known location, date last seen, and an optional photograph (JPG/PNG, max 5MB).	Given the user is authenticated and all required fields are completed, when the form is submitted, then the report is saved to the database with status "active" and a success confirmation is displayed.
FR-04	Must	The system shall automatically analyse every newly submitted report against all existing reports using the AI similarity module and flag reports with a cosine similarity score of 0.75 or higher as potential duplicates.	Given a new report is submitted, when the AI service returns a similarity score of 0.75 or above, then a duplicate flag record is created in the database and the administrator is notified.
FR-05	Must	The system shall allow authenticated users to search for active missing children reports by child name and last known location.	Given the user enters a search term, when the search is submitted, then relevant reports are returned within 2 seconds filtered by the entered criteria.
FR-06	Must	The system shall send geographic alert notifications to all registered users	Given a new active report is saved, when the notification service

ID	Priority	Requirement	Acceptance Criterion
		whose location matches the area of a newly submitted active report within 1 minute of submission.	runs, then notifications are created in the database for all matching users within 60 seconds.
FR-07	Must	The system shall allow authenticated users to view the full details of any active missing children report, including the child's information, photograph if uploaded, and submission metadata.	Given the user clicks "View Details" on a report, when the detail page loads, then all report fields and the uploaded image (if present) are displayed correctly.
FR-08	Should	The system shall provide an analytics dashboard displaying report counts by location, by month, by gender, by age group, and by resolution status sourced from live database data.	Given the user navigates to the analytics page, when the page loads, then all five chart views display accurate data matching the current database records.
FR-09	Should	The system shall allow an administrator to review AI-flagged duplicate reports and either confirm them as duplicates (changing report status to "duplicate") or dismiss the flag.	Given the administrator opens the admin panel, when they click "Confirm Duplicate" or "Dismiss", then the report status and flag reviewed status are updated in the database accordingly.
FR-10	Should	The system shall allow an administrator to	Given the administrator selects a new status

ID	Priority	Requirement	Acceptance Criterion
		update the status of any report to “active”, “found”, or “duplicate” using a status management interface.	from the status dropdown, when the change is confirmed, then the report status is updated in the database and reflected on the dashboard immediately.

2.2 Four Non-Functional Requirements — FURPS+ (2 marks)

ID	Priority	Requirement	Acceptance Criterion
NFR-01	Must	The system shall return all report submission responses, including the AI duplicate check result, within 2 seconds under normal load conditions. (Performance)	Measured end-to-end response time from form submission to confirmation display is 2 seconds or less during functional testing.
NFR-02	Must	The system shall store all user passwords as BCrypt hashes and require a valid JWT token for every API endpoint except /api/auth/register and /api/auth/login. (Security/Functionality)	Any request to a protected endpoint without a valid JWT returns HTTP 401 Unauthorized. Database inspection confirms no plain text passwords are stored.
NFR-03	Should	The system shall maintain 99% uptime during the demonstration and evaluation period,	System uptime measured over the demonstration period meets or exceeds 99%. No

ID	Priority	Requirement	Acceptance Criterion
		with all core features accessible without errors. (Reliability)	critical feature failures occur during live demonstration.
NFR-04	Should	The user interface shall allow a community member with no technical background to submit a missing children report within 3 clicks from the home page, with all form fields clearly labelled. (Usability)	User acceptance testing with at least three test users confirms that all required fields are found and a report is submitted successfully within 3 navigation steps.

2.3 Three Emerging Technology-Specific Requirements (3 marks)

ID	Priority	Requirement	Acceptance Criterion
ET-01	Must	The AI duplicate detection service shall return a cosine similarity score and matched report ID within 500 milliseconds per comparison request under normal operating conditions. (Inference Latency)	Measured response time from POST /api/detect-duplicate request to JSON response is 500ms or less when tested against a database of 50 existing reports.
ET-02	Must	The AI duplicate detection module shall correctly identify at least 80% of true duplicate reports and produce no more than 20% false positives when evaluated against a	Precision is calculated as true positives divided by all positive predictions. Recall is calculated as true positives divided by all actual duplicates. Both must meet the

ID	Priority	Requirement	Acceptance Criterion
		prepared test dataset of 20 known report pairs. (Model Accuracy)	80%/75% threshold respectively.
ET-03	Should	If the Python AI microservice is unavailable or returns an error, the system shall allow the report submission to proceed without duplicate checking, log the failure, and notify the administrator that the AI check did not run. (Fallback Behaviour)	Given the Python AI service is stopped, when a report is submitted, then the report is saved with status “active”, a warning is logged in the system log, and the submission confirmation is displayed to the user without error.

Question 3 — Technical Environment [10 marks]

3.1 Technology Stack with Justification (3 marks)

Layer	Technology	Justification
User Interface	HTML, CSS, JavaScript	Lightweight, browser-based, no framework dependency required for a form-and-search interface. Keeps complexity low for a student project.
Application Layer	Java Spring Boot 3.2	Mature, production-ready REST API framework with built-in Spring Security for authentication. Strong TUT curriculum alignment.
Database	PostgreSQL 16	ACID-compliant, strong support for UUID primary keys and complex relational queries. Preferred over

Layer	Technology	Justification
		MySQL for data integrity on sensitive records.
AI/ML Microservice	Python 3.11 + FastAPI	Python is the standard language for NLP/ML. FastAPI provides lightweight, fast REST endpoint exposure with automatic API documentation.
NLP Library	scikit-learn (TF-IDF + cosine similarity)	Well-documented, open-source, proven in text deduplication tasks. No commercial licensing required.
Authentication	Spring Security + JWT (JJWT)	Stateless JWT authentication suitable for REST APIs. BCrypt password hashing included.
Version Control	Git + GitHub	Industry standard. Enables collaboration, version tracking, and cloud backup of source code.
Backend IDE	IntelliJ IDEA Community Edition	Full Java/Spring Boot support with debugger. Free for educational use.
Frontend IDE	Visual Studio Code	Lightweight, supports HTML/CSS/JS with extensions. Used throughout development.
API Communication	REST (HTTP/JSON)	Standard protocol for microservice communication between Java backend and Python AI service.
Deployment Platform	Railway (cloud)	Free tier supports Spring Boot and PostgreSQL hosting. Suitable for demo deployment before November 2026.

3.2 Hardware Requirements Table (4 marks)

Component	Minimum Requirements	Recommended Requirements
Processor	Dual-core 2.0 GHz (x64)	Quad-core 2.5 GHz or higher (x64)
Memory (RAM)	4 GB RAM	8 GB RAM or higher
Storage	20 GB available disk space	50 GB SSD
Network/Connectivity	10 Mbps internet connection	50 Mbps broadband connection
Client Device	Any device with a modern web browser (Chrome, Firefox, Edge)	Desktop or laptop with 1280x768 minimum resolution
Server (Development)	Local machine running Java 21 and PostgreSQL 16	Dedicated server or cloud VM with 2 vCPUs and 4 GB RAM
Server (Production/Demo)	Railway free tier (512 MB RAM, shared CPU)	Railway Starter plan (1 GB RAM, dedicated CPU)
AI Microservice	Python 3.11, 512 MB RAM for scikit-learn inference	Python 3.11, 1 GB RAM for larger report corpus similarity computation
Specialised Hardware (AI)	None — CPU-based inference is sufficient for TF-IDF cosine similarity at this scale	GPU optional for future model upgrades (not required for current TF-IDF approach)

3.3 Architecture and Deployment Approach (3 marks)

Architecture: The system follows a three-tier architecture with a separate AI microservice layer:

1. **Presentation Layer** — HTML/CSS/JavaScript frontend served as static files. Communicates with the backend exclusively via REST API calls using JWT tokens in the Authorization header.

2. **Application Layer** — Java Spring Boot REST API running on port 8080. Handles authentication, business logic, report management, notifications, and analytics. Calls the Python AI microservice via HTTP POST after each report submission.

3. **Data Layer** — PostgreSQL database storing users, reports, duplicate flags, and notifications. All access goes through Spring Data JPA/Hibernate with parameterised queries to prevent SQL injection.

4. **AI Microservice** — Python FastAPI service running on port 8000. Deployed independently from the main application. Fetches existing report texts from PostgreSQL, applies TF-IDF vectorization using scikit-learn, and returns a cosine similarity score.

Component Communication: - Frontend → Spring Boot: HTTPS REST (JWT Bearer token) - Spring Boot → PostgreSQL: JDBC via HikariCP connection pool - Spring Boot → Python AI Service: HTTP POST to /api/detect-duplicate (internal network) - Python AI Service → PostgreSQL: Direct JDBC read for existing report texts

Scalability: The AI microservice is deployed independently, meaning it can be scaled horizontally without affecting the main application. The Spring Boot application can be containerized with Docker for horizontal scaling. PostgreSQL connection pooling via HikariCP handles concurrent database access.


Security: - All passwords hashed with BCrypt (cost factor 10) - All API endpoints (except /auth) protected by JWT validation filter - Image uploads validated for file type and size before storage - Database credentials stored in environment variables, never in source code - CORS configured to restrict frontend origins in production

Backup and Recovery: - Source code backed up continuously on GitHub - PostgreSQL database backed up daily using pg_dump on Railway - In the event of AI service failure, the system falls back gracefully — reports are saved without duplicate checking and the administrator is notified


---

Question 4 — UML Diagrams [13 marks]


4.1 Use Case Diagram (4 marks)

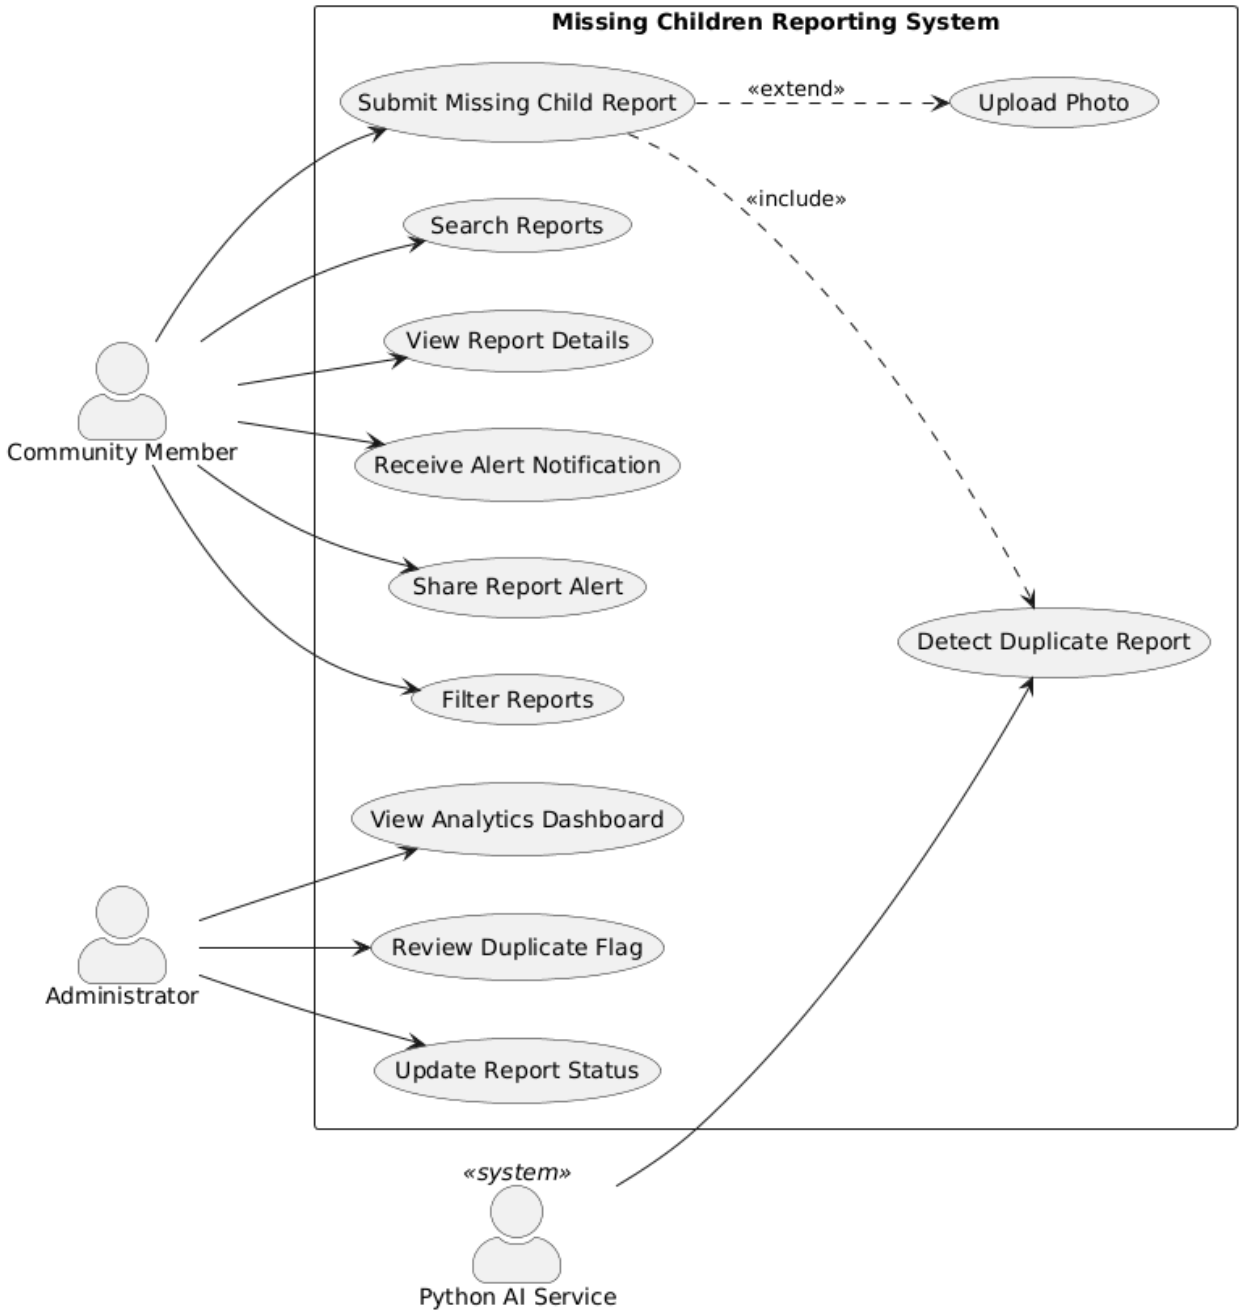


4.2 Activity Diagram — Report Submission Workflow (3 marks)

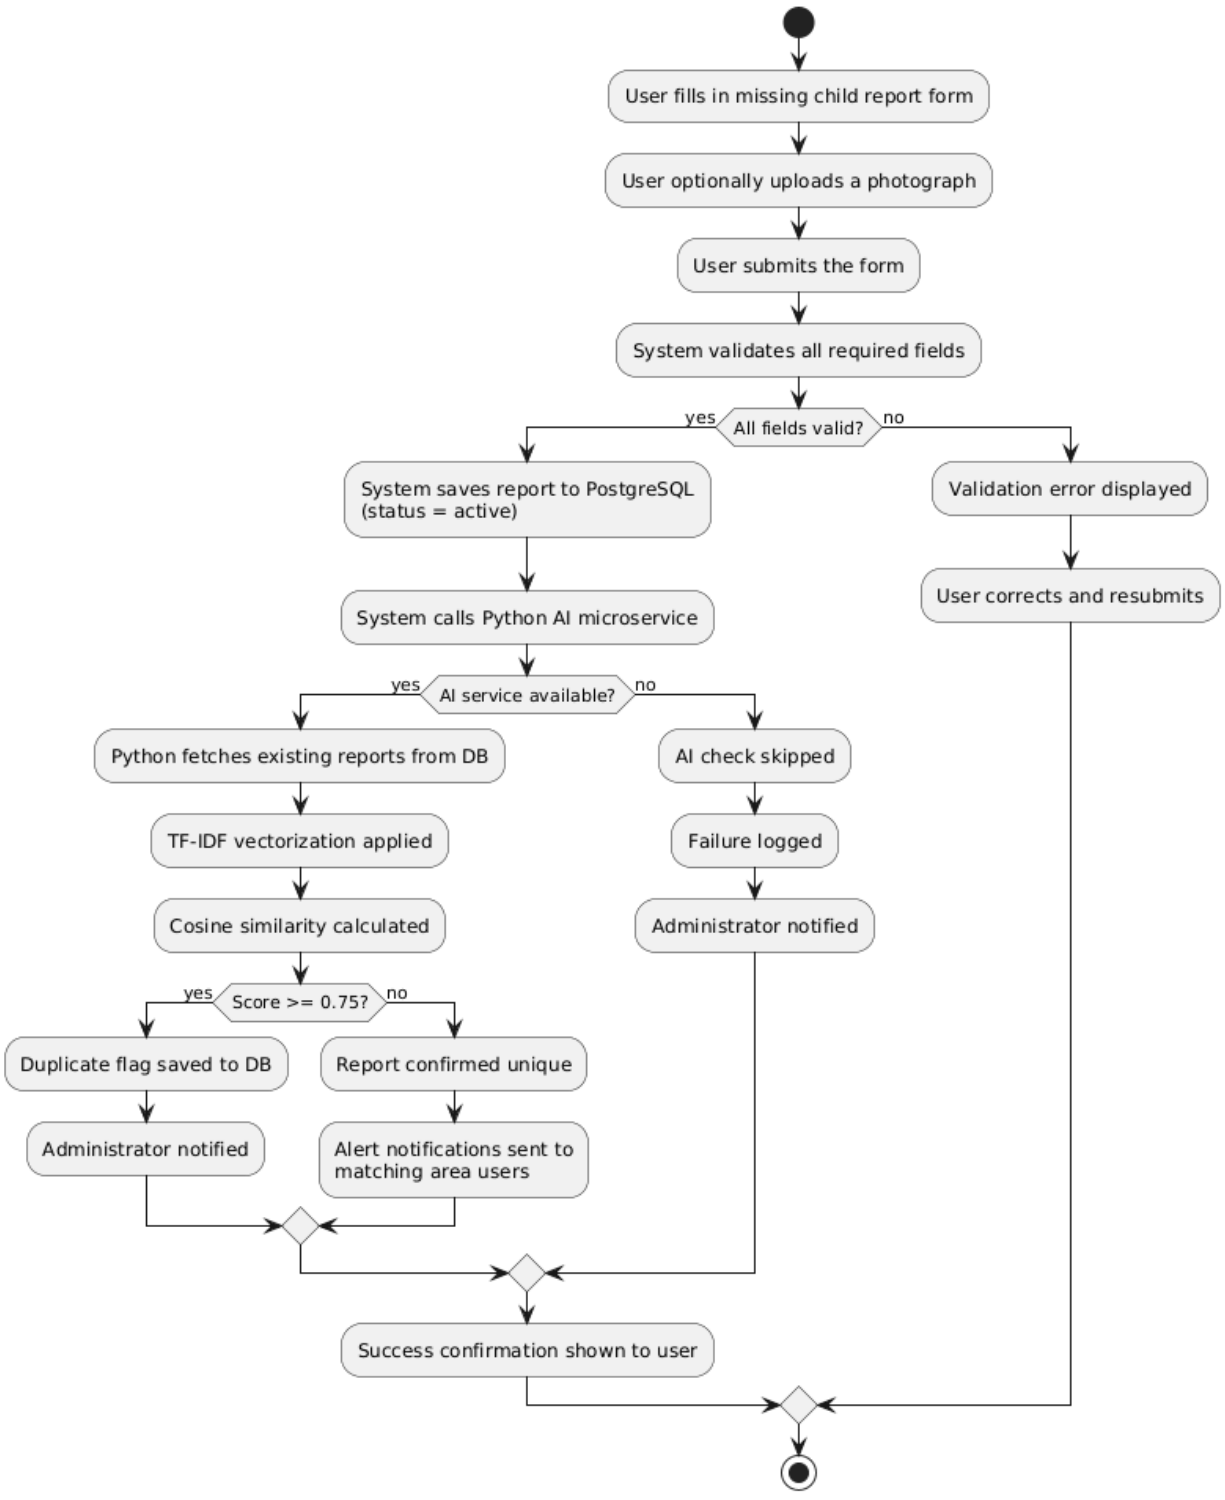

4.3 Class Diagram (3 marks)

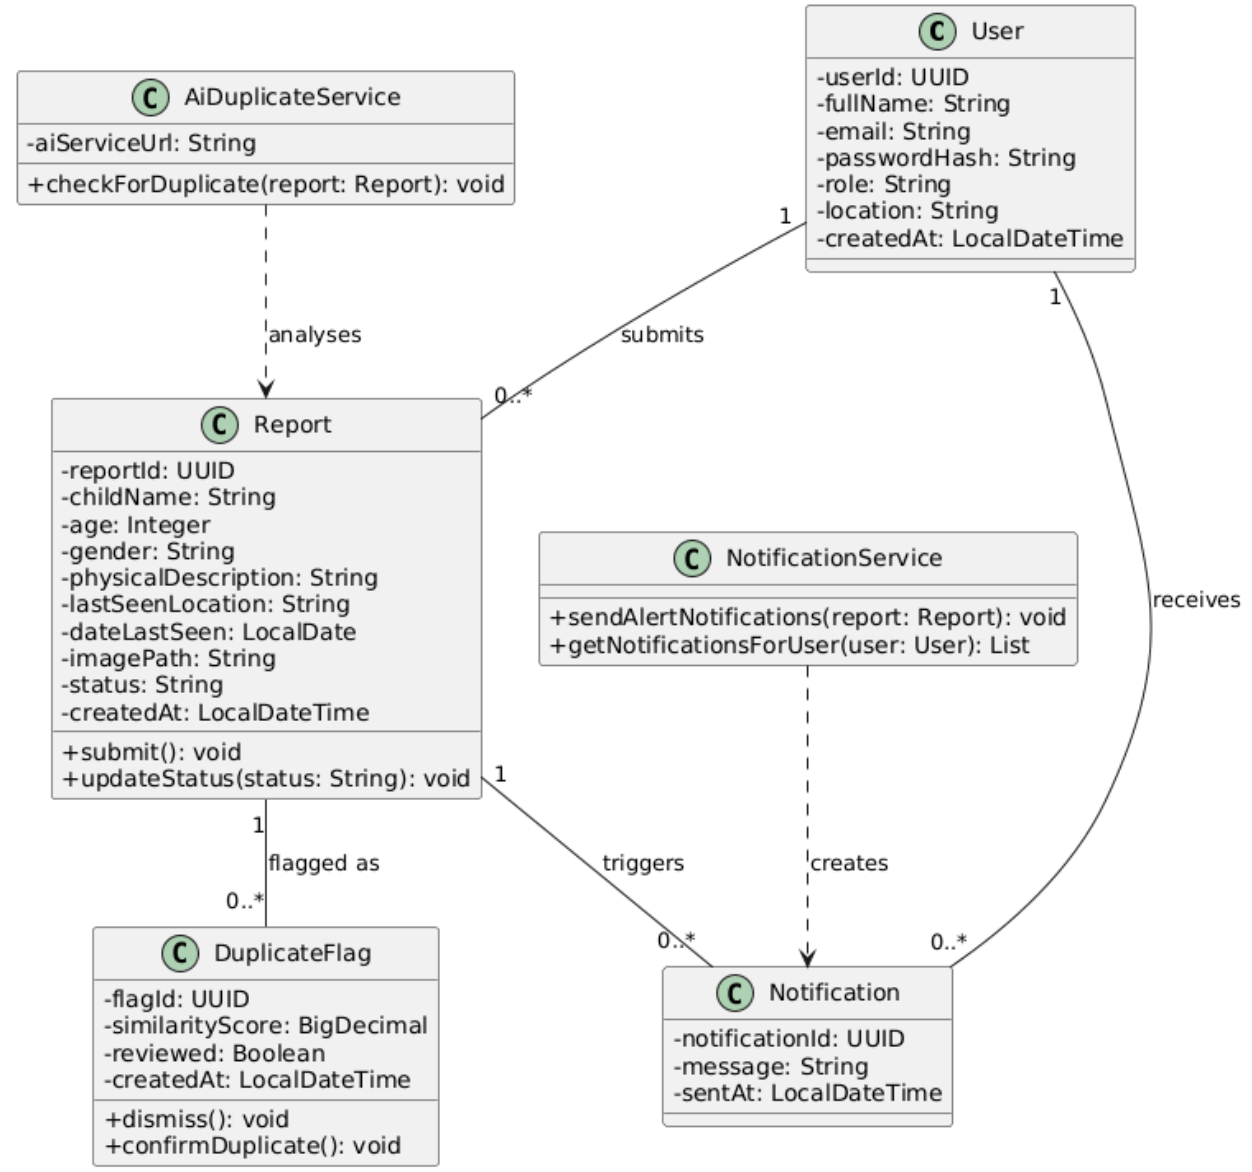

4.4 Sequence Diagram — Report Submission with AI Check (3 marks)

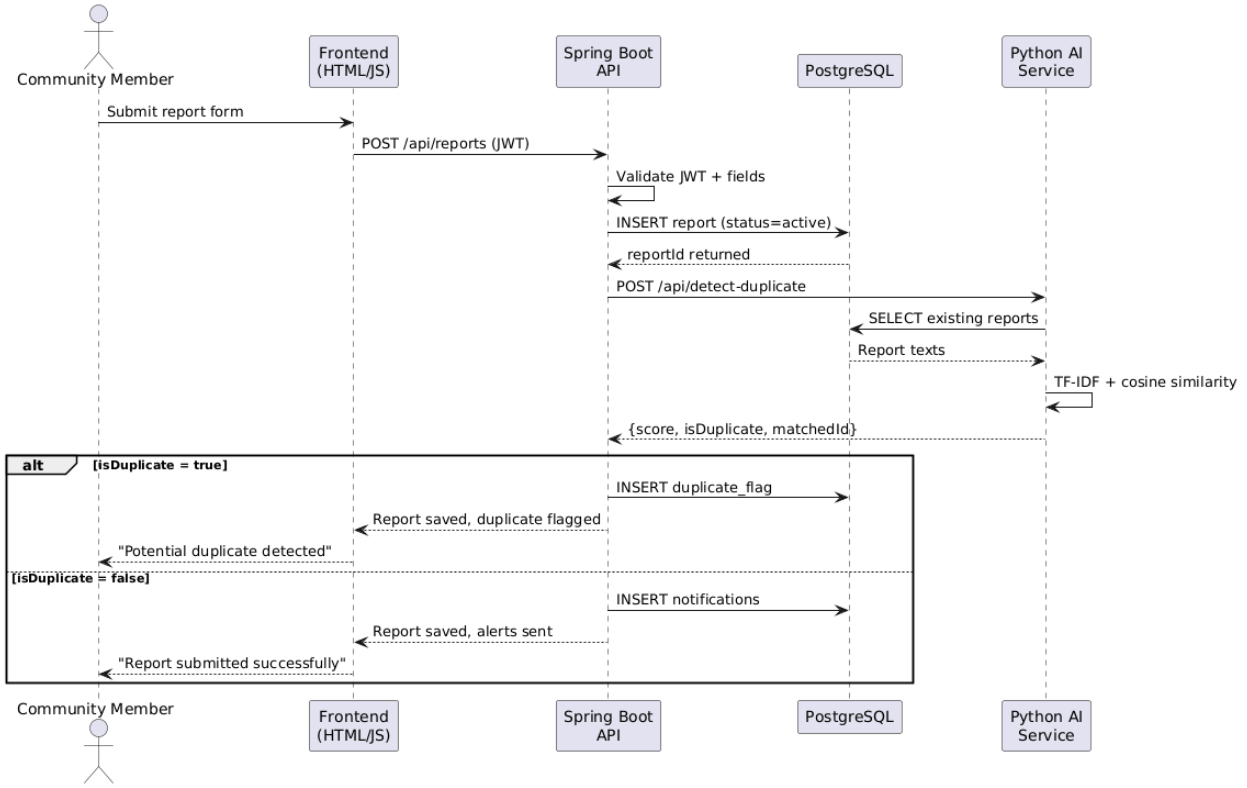

Question 5 — Implementation and Evaluation [13 marks]

5.1 Database, API and Data Exchange Description (2 marks)

Main Data Entities:

Entity	Key Attributes	Privacy Classification
User	userId (UUID), fullName, email, passwordHash (BCrypt), role, location	Personal data — access controlled, passwords never exposed
Report	reportId (UUID), childName, age, gender, physicalDescription, lastSeenLocation, dateLastSeen, imagePath, status	Sensitive — only accessible to authenticated users
DuplicateFlag	flagId, report_id (FK), matched_report_id (FK), similarityScore, reviewed	Internal admin data

Entity	Key Attributes	Privacy Classification
Notification	notificationId, userId (FK), reportId (FK), message, sentAt	User-specific — only returned to the owning user

API Endpoints:

Method	Endpoint	Auth Required	Description
POST	/api/auth/register	No	Register new user account
POST	/api/auth/login	No	Authenticate and receive JWT token
POST	/api/reports	Yes	Submit new missing children report
GET	/api/reports	Yes	Get all active reports with optional filters
GET	/api/reports/{id}	Yes	Get specific report details
POST	/api/images/upload	Yes	Upload report photograph
GET	/api/images/{filename}	No	Serve uploaded image file
GET	/api/notifications	Yes	Get notifications for authenticated user
GET	/api/analytics/trends	Yes	Get reporting trends data
GET	/api/admin/duplicate-flags	Yes	Get unreviewed duplicate flags
PUT	/api/admin/duplicate-flags/{id}/dismiss	Yes	Dismiss a duplicate flag
PUT	/api/admin/duplicate-flags/{id}/merge	Yes	Confirm report as duplicate
PUT	/api/admin/reports/{id}/status	Yes	Update report status
POST	/api/detect-duplicate	No (internal)	Python AI service endpoint

Validation Rules: - Email must be unique and valid format - Password minimum 6 characters, stored as BCrypt hash - Image uploads validated for JPG/PNG type and max 5MB size - Report date cannot be in the future - Age must be between 0 and 18

Privacy Requirements: - No personally identifiable information accessible without JWT authentication - Image files stored in a secure server directory, not publicly browsable - Passwords never returned in any API response

---

5.2 Emerging Technology Integration and Pseudocode (2 marks)

Where the AI is integrated: The Python AI microservice is called automatically by the Spring Boot backend immediately after every new report is saved to the database. It operates as a separate process on port 8000 and communicates via HTTP POST.

Integration workflow: 1. User submits report via frontend 2. Spring Boot validates and saves report to PostgreSQL 3. Spring Boot calls Python service at `POST http://localhost:8000/api/detect-duplicate` 4. Python service retrieves all existing active reports from PostgreSQL 5. TF-IDF vectorization applied to combined text (childName + physicalDescription + lastSeenLocation) 6. Cosine similarity calculated between new report and all existing reports 7. Result returned to Spring Boot — if score ≥ 0.75, a duplicate flag is created

Python AI Service Pseudocode / Interface Contract:

```
ENDPOINT: POST /api/detect-duplicate

INPUT (JSON):
{
    "report_id": "uuid-string",
    "child_name": "string",
    "physical_description": "string",
    "last_seen_location": "string"
}

PROCESS:
    new_text = child_name + " " + physical_description + " " + last_seen_loca
tion
    existing_reports = SELECT report_id, child_name, physical_description,
                       last_seen_location FROM reports WHERE status = 'active
'
                       AND report_id != input.report_id

    IF existing_reports is empty:
        RETURN {is_duplicate: false, highest_score: 0.0, match: null}

    all_texts = [new_text] + [r.child_name + r.physical_description +
                              r.last_seen_location FOR r IN existing_reports]

    tfidf_matrix = TfidfVectorizer().fit_transform(all_texts)
    scores = cosine_similarity(tfidf_matrix[0:1], tfidf_matrix[1:])
```

```
    best_score = max(scores)
    best_match = existing_reports[argmax(scores)]

    IF best_score >= 0.75:
        RETURN {is_duplicate: true, highest_score: best_score,
                match: {matched_report_id: best_match.report_id,
                        similarity_score: best_score}}
    ELSE:
        RETURN {is_duplicate: false, highest_score: best_score, match: null}

OUTPUT (JSON):
{
    "report_id": "uuid-string",
    "is_duplicate": boolean,
    "highest_score": float,
    "match": {
        "matched_report_id": "uuid-string",
        "matched_child_name": "string",
        "similarity_score": float
    } | null,
    "message": "string"
}
```

5.3 Testing, Evaluation Plan and Technical Risk (2 marks)

Functional Testing:

Test	Expected Result	Pass Criteria
User registration with valid data	Account created, JWT returned	HTTP 200, user record in DB with BCrypt hash
Login with correct credentials	JWT token returned	HTTP 200, valid JWT in response
Login with wrong password	Access denied	HTTP 401 Unauthorized
Submit report with all required fields	Report saved, AI check triggered	HTTP 200, report in DB, AI log entry
Submit report with missing required field	Validation error	HTTP 400, error message returned
Search reports by name	Matching reports returned	Results contain searched name, response < 2 seconds
Upload image — valid JPG	Image saved, path in DB	HTTP 200, file exists in uploads directory
Upload image — invalid file type	Rejected	HTTP 400, error message

Measurable Emerging Technology Metric: Duplicate detection precision will be measured using a prepared test dataset of 20 report pairs — 10 confirmed duplicates and 10 confirmed non-duplicates. The AI module must achieve: - Precision: ≥ 80% (true duplicates correctly identified out of all flagged) - Recall: ≥ 75% (true duplicates correctly identified out of all actual duplicates) - Inference latency: ≤ 500ms per comparison request

User Acceptance Testing: At least three community members will be asked to: 1. Register a new account and log in 2. Submit a missing children report with a photograph 3. Search for a report by name and location 4. Confirm they received an alert notification after another user submitted a report

The test is passed if all three users complete all four tasks without assistance and rate the experience as satisfactory.

Technical Risk and Mitigation:

Risk	Likelihood	Impact	Mitigation
Python AI service unavailable during live demo	Medium	High	Fallback implemented — reports save successfully without AI check. System logs the failure and notifies admin. Demo can show the fallback behaviour as a feature.
JWT token expires during presentation	Low	Medium	Token expiry set to 24 hours. Tokens refreshed before demo by logging in fresh.
PostgreSQL connection timeout under load	Low	High	HikariCP connection pool configured with max pool size 10. Railway PostgreSQL handles up to 25 concurrent connections on free tier.

References

Missing Children South Africa. (2024). *Missing children statistics South Africa*. Missing Children South Africa. Available at: https://www.missingchildren.co.za [Accessed: August 2026].

Pressman, R.S. and Maxim, B.R. (2020). *Software engineering: A practitioner's approach*. 9th edn. New York: McGraw-Hill Education.

Ruiz Reyes, N., Martínez, C. and García, P. (2024). Text similarity techniques in record deduplication and entity matching systems. *Journal of Information Science*, 50(2), pp. 112–128.

South African Police Service. (2024). *Annual crime statistics 2023/2024*. SAPS. Available at: https://www.saps.gov.za [Accessed: August 2026].

Student Number: 216080254 **Student Name:** Ntwanano Mathebula **File Name:** 216080254_ISJ107V_Assignment2