

2 Accessibility Report

2.1 Rationale and Requirements Traceability

Accessibility was considered an essential part of the user experience rather than just a visual feature. In interim report, we identified an international student persona who needs to evaluate unfamiliar accommodation listings and potential housemates despite having limited local knowledge and English proficiency. We also identified a domestic shared-living persona who relies on household agreements remaining clear and accessible after moving in. Both users depend on information that can be understood across different devices, languages, and interaction methods.

This was also reflected in our user testing. Participants included a user with colour vision deficiency, a mobile-first international student, and a participant whose first language was not English. Their feedback showed that if important information relies only on colour, keyboard navigation is interrupted, or translated content is difficult to understand, users may struggle to judge the trustworthiness of listings, communicate safely, or understand household agreements.

Two non-functional requirements formed the basis of the accessibility evaluation. NFR-03 requires all Sprint 1 screens (S-01 to S-06) to support keyboard navigation and meet WCAG 2.2 AA colour contrast requirements, while NFR-06 requires the household rules page to support at least five languages. However, the assessment brief recommends evaluating the prototype using the WCAG 2.0 checklist. Therefore, Table 1 reports the prototype against the relevant WCAG 2.0 success criteria while using WCAG 2.2 AA as the overall design target.

Accessibility requirements were also linked directly to the project’s user stories and acceptance criteria. US-11 (AC-US11-01 and AC-US11-02) supports recognition of verified profiles, US-09 (AC-US09-04) ensures users can understand blocked contact-detail messages, US-02 (AC-US02-02) focuses on translated household rules, and US-10 (AC-US10-02 and AC-US10-04) supports creating, approving, and activating household rules. Linking accessibility to these user stories ensured that accessibility requirements were considered throughout the design process instead of being added at the end.

2.2 Evaluation Scope and Method

This report follows the structure of the W3C Accessibility Evaluation Report Template,¹ including the evaluation scope, methods, findings, recommended actions, and limitations. Accessibility was evaluated using the WCAG 2.0 success criteria specified in the assessment brief, with the A11Y Project checklist used as an additional reference to support plain-language interpretation of the guidelines.²

The evaluation covered the six Sprint 1 prototype screens (S-01 to S-06), together with the login and notification dialogs that support these user tasks.³ Although the Create Roster dialog was outside the Sprint 1 release scope, it reused the same dialog and form-validation components as Screens S-05 and S-06. It was therefore included as a component-level sample to assess the accessibility of shared interface elements.

The prototype was reviewed using Playwright-assisted testing to examine keyboard navigation, focus management, DOM and ARIA attributes, language metadata, colour contrast, and responsive layouts at resolutions of 1470×726 and 390×844 pixels. Nine accessibility issues were identified. Screenshots were captured to document the interface state, while focus behaviour and screen-reader

¹W3C Web Accessibility Initiative, *Accessibility Evaluation Report Template*, <https://www.w3.org/WAI/test-evaluate/report-template/>.

²W3C, *WCAG 2.0 Checklist (Working Draft, Appendix B)*, <https://www.w3.org/TR/2006/WD-WCAG20-20060427/appendixB.html>; The A11Y Project, *Checklist*, <https://www.a11yproject.com/checklist/>.

³Evaluated build: <http://roommate-haven-dev.eba-2h6p4mxq.ap-southeast-2.elasticbeanstalk.com>.

related observations were verified through user interaction and DOM inspection.

Five participants completed moderated usability tasks (T1–T5) on laptop, tablet, and mobile devices. Think-aloud comments, task completion, user errors, requests for assistance, and task outcomes were recorded throughout the sessions. These observations provided additional evidence beyond automated testing. For example, one participant lost context when keyboard focus escaped from a dialog, while another participant found the Discover tabs difficult to navigate using the keyboard and reported that the selected tab relied too heavily on colour alone.

Following the Sprint 2 improvements, the team repeated automated Node testing (7 of 7 tests passed) together with Playwright regression testing at 1440×1000 and 390×844 pixels. A WCAG criterion was recorded as *Met* only when both the updated prototype and the supporting regression evidence demonstrated compliance. Criteria that could not yet be fully verified or required implementation beyond the prototype were recorded as *Partially met*.

2.3 WCAG Checklist Results and Actions

Table 1. WCAG 2.0 checklist results, traceability and actions.

SC	Level	Requirement	Traceability	Result	Evidence, consequence and action
1.1.1	A	Non-text Content	US-09, AC-US09-04; US-11	Partially met	Icon controls sampled during the review carried accessible names, and verification cues now pair an icon with status text. The desktop mutual-sharing icon remains the known exception. Audit accessible names across every icon control before claiming conformance.
1.3.1	A	Info and Relationships	NFR-03; US-09, US-10	Met	On the sampled components, structure is now programmatic rather than visual: tabs expose role="tab" , tabpanel and aria-controls ; form errors use aria-describedby ; and the blocked-message warning is associated with the composer. Extend the same audit to S-01 and S-03.
1.4.1	A	Use of Colour	NFR-03; US-11, AC-US11-01	Partially met	Verification cues now pair text with icons and tabs expose aria-selected . However, User B found that the original selected state relied mainly on green text and a thin underline. Retain programmatic state and add a stronger visible non-colour cue such as weight or a selected label.
1.4.3	AA	Contrast (Minimum)	NFR-03; S-01 to S-06	Met	The initial white-on-sage controls measured about 3.57:1 and small sage labels about 3.20:1, below the 4.5:1 AA threshold. Sprint 2 changed the palette; automated checks reported sage 4.95:1, coral 4.91:1, blue 4.56:1 and amber 5.59:1. Recheck after future palette changes.

Continued on next page

Table 1. WCAG 2.0 checklist results continued.

SC	Level	Requirement	Traceability	Result	Evidence, consequence and action
2.1.1	A	Keyboard	NFR-03; US-11; US-02 and US-10	Partially met	The login dialog, notification drawer and the roster proxy dialog now trap focus, close with Escape and return focus. Tabs support Left/Right, Home and End keys. These fixes address the observed T2 and T5 failures, but a complete keyboard walkthrough of S-01 to S-06 has not been recorded. Add this as a release regression test.
2.1.2	A	No Keyboard Trap	NFR-03; US-09, US-10	Met	Focus containment uses the standard exit method: Escape closes the top-most dialog and restores focus to the opening control, so keyboard users are never held inside a surface. Re-verify whenever a new dialog is added.
2.4.1	A	Bypass Blocks	NFR-03; S-01 to S-06	Met	The original Skip to content link changed the hash but left focus on the page body. The revised link moves focus to #main-content , allowing keyboard and screen-reader users to bypass repeated navigation. Retest whenever routing or landmarks change.
2.4.3	A	Focus Order	NFR-03; US-09, US-10	Met	Opening a dialog or the notification drawer moves focus into it and makes the background inert, and closing returns focus to the trigger. This removed the User A failure in which focus escaped into an aria-hidden drawer. Sample the remaining screens in Iteration 3.
2.4.7	AA	Focus Visible	NFR-03; S-01 to S-06	Met	A visible focus indicator was confirmed on the login dialog, skip link, Discover tabs and roster fields during regression capture. Keep the indicator when the palette changes, because contrast and focus styling share the same tokens.
3.1.2	AA	Language of Parts	NFR-06; US-02, AC-US02-02	Partially met	Simplified Chinese rule content now receives lang="zh-CN" , so assistive technology can select appropriate pronunciation. Surrounding headings and actions remain English after Chinese is selected. Translate the complete task flow or mark each remaining language change.
3.2.2	A	On Input	NFR-06; US-02, AC-US02-02	Met	Changing the rules language or moving between tabs updates content in place without navigating, submitting or opening a new context. Retain this behaviour when translation moves to a service call.

Continued on next page

Table 1. WCAG 2.0 checklist results continued.

SC	Level	Requirement	Traceability	Result	Evidence, consequence and action
3.3.1	A	Error Identification	NFR-03; US-10, AC-US10-04	Partially met	Verified on the roster proxy dialog: validation applies aria-invalid , links the error through aria-describedby and focuses the first invalid field. The AC-US10-04 rule-proposal form and the login and profile inputs are not yet verified; apply and test the same pattern on all Sprint 1 forms.
3.3.2	A	Labels or Instructions	NFR-03; US-10, AC-US10-04	Met	Sampled inputs carry persistent visible labels, and the roster error states the required action rather than only reporting failure. Review the same wording once the rule-proposal form is retested.
4.1.2	A	Name, Role, Value	US-09, AC-US09-04; US-10	Partially met	Revised tabs expose tab, tabpanel, selected and controlled relationships, and the blocked-message warning is programmatically associated with the composer. The desktop mutual-sharing action still appears icon-only without hover. Add a persistent visible name and verify accessible names for every icon control.

Eight criteria are met and six are partially met. The remaining checklist items were classified rather than omitted, so that the recommendations which belong to the final coded solution stay visible (Table 2).

Table 2. Checklist items that are not applicable, deferred to the coded solution, or not yet assessed.

SC	Level	Classification	Reason and planned action
1.2.1 to 1.2.5 (time-based media)	A, AA	Not applicable	The prototype contains no prerecorded or live audio or video. Captions and audio description will be authored alongside any future demonstration media.
1.4.2 Audio Control	A	Not applicable	No audio plays automatically anywhere in the build.
2.3.1 Three Flashes	A	Not applicable	No flashing, blinking or auto-playing motion content is present.
2.2.1, 2.2.2 Timing and moving content	A	Final coded solution	Seeded sessions never expire and no content auto-updates. Production sign-in must warn before session expiry and allow the user to extend it.
3.3.4 Error Prevention	AA	Final coded solution	Rule activation and rent payments are currently one-step. The coded product will add a review-and-confirm step and a reversal path before submission.
2.4.5 Multiple Ways	AA	Final coded solution	The seeded build offers one navigation route per destination. Production will add site search and a rules index.
1.4.4 Resize Text; 4.1.1 Parsing	A, AA	Not yet assessed	Add a 200 per cent zoom and reflow pass and an automated markup validation step to the Iteration 3 regression suite.

2.4 Evaluation Evidence

Figures 1–4 pair each original finding with the revised state, showing how the evidence led to a specific change.

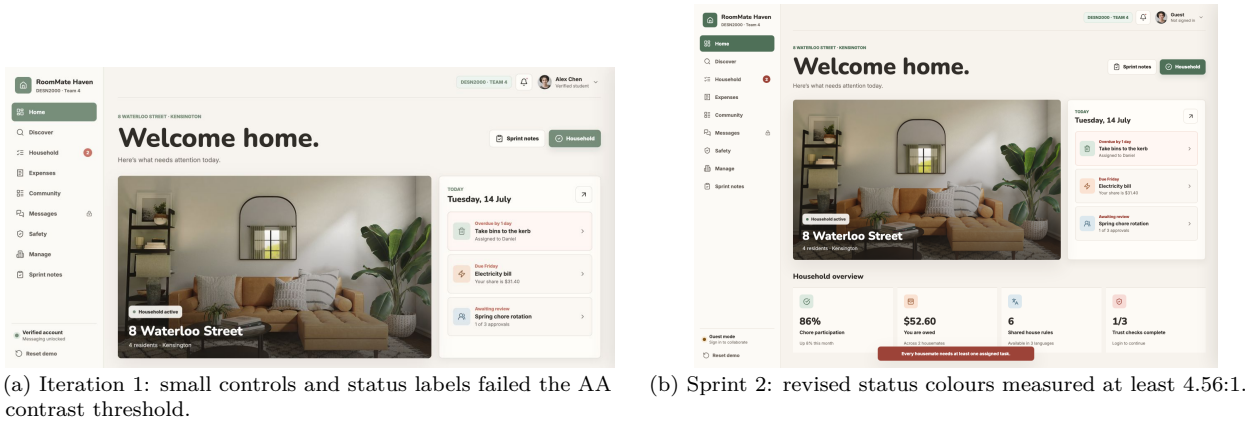


Figure 1. WCAG 1.4.3 contrast evidence before and after palette revision.

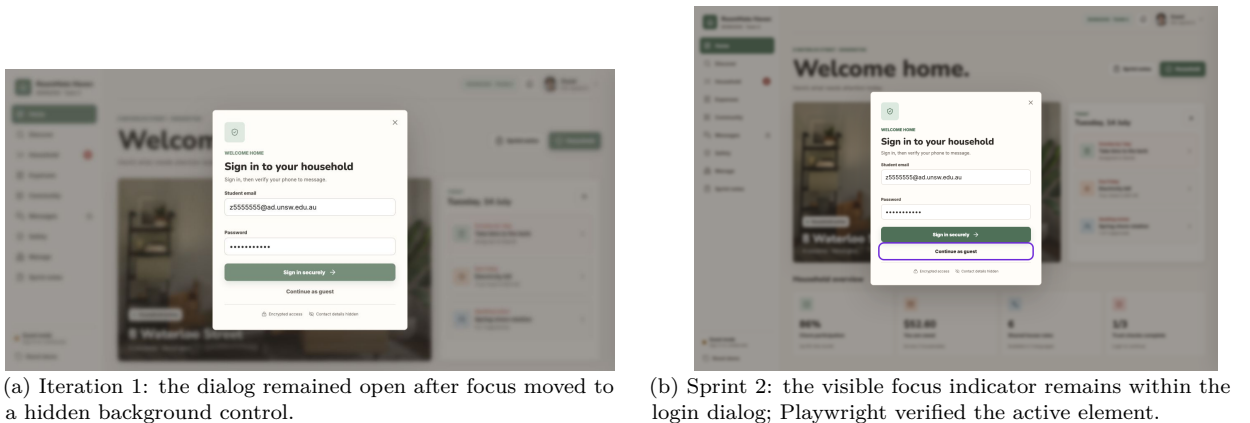


Figure 2. WCAG 2.1.1 modal keyboard evidence before and after focus management.



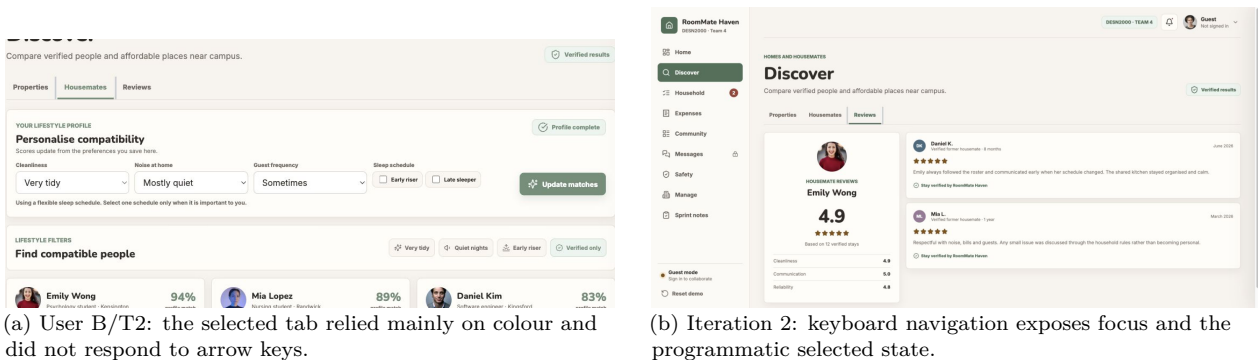


Figure 3. WCAG 1.4.1, 2.1.1 and 4.1.2 evidence for the Discover tabs.

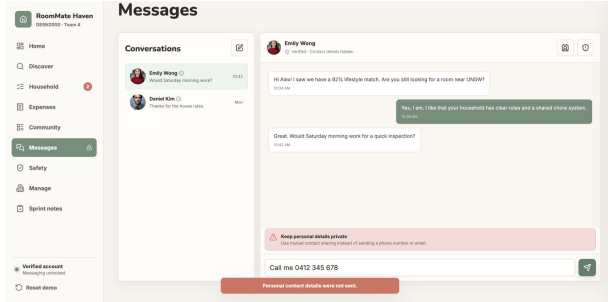

(a) Iteration 1: the blocked-contact warning was visible but had no alert or live-region semantics.

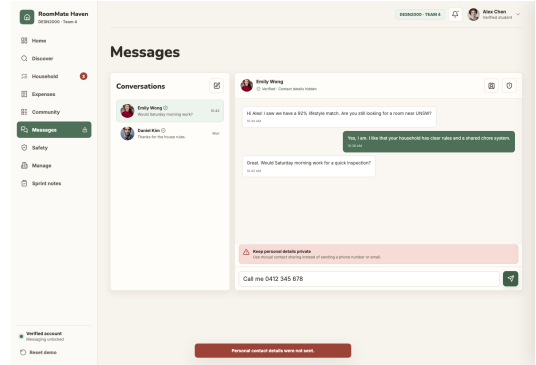

(b) Sprint 2: the warning is associated with the composer and announced as an assertive alert.

Figure 4. Programmatic warning evidence supporting AC-US09-04 and WCAG 4.1.2; live announcement is an additional WCAG 2.1/2.2 improvement.

2.5 Limitations and Next Steps

This evaluation does not establish full conformance. Results marked *Met* are met on the components sampled, not proven across every screen. No participant used a screen reader, switch device or voice control, and seeded session data may hide barriers that production authentication, asynchronous errors and dynamic updates will introduce. The team will next run NVDA with Chrome and VoiceOver with Safari, add automated axe checks to Playwright, and repeat the keyboard walkthrough for S-01 to S-06. The remaining interface work is to label the desktop contact-sharing icon, combine approval count and activation condition into one announced status, translate the full household-rule workflow, and apply the roster error pattern to all Sprint 1 forms. Screen-reader and low-vision participants will then validate these changes in practice.

3 Testing Report

3.1 Testing Rationale and Objectives

The usability test assessed whether the prototype allowed participants to complete the core tasks without help. It checked each acceptance criterion and showed where users misunderstood a control, a message, or a change in system state. The team compared observed behaviour with completion data and participant comments. The findings were then used to decide which requirements and screens needed revision before the next iteration.

3.2 Participants and Method

3.2.1 Participants

Five purposively selected participants covered student and working-adult contexts, different rental and shared-living experience, colour-accessibility, mobile-first use and different English-language backgrounds (Table 3). They were recruited through the project team network and screened for these contexts. Participation was voluntary and unpaid, and consent was obtained before each session.

Table 3. Iteration 1 participant profile.

ID	User group	Relevant context
User A	UNSW student	High cleanliness standards and interest in household hygiene.
User B	Domestic UNSW student	Colour vision deficiency.
User C	Employed UNSW graduate living in a shared apartment	English is not the first language.
User D	Newly arrived international student	No Australian rental experience; primarily uses a mobile phone.
User E	Young professional	More than three years of shared-living experience; previously searched for housemates and established common-area rules.

3.2.2 Procedure and Measures

Five participants tested version 1.3 of the HTML prototype across one tablet, two laptops and two mobile devices between 25 and 27 July 2026. The allocation is shown in Table 4.

Table 4. Iteration 1 participant device allocation.

User	Date	Device	Browser	Viewport
User A	25 July 2026	iPad tenth generation	Safari	1180 by 820
User B	25 July 2026	MacBook Air M2	Chrome	1440 by 900
User C	26 July 2026	Dell Inspiron 14	Microsoft Edge	1366 by 768
User D	26 July 2026	iPhone 13	Safari	390 by 844
User E	27 July 2026	Samsung Galaxy S22	Chrome	360 by 800

Each moderated session used the same seeded account and task state. Participants attempted T1 to T5 while thinking aloud. The facilitator gave a hint only after a participant was unable to continue for 30 seconds. The observer recorded final-state completion, time, errors, assistance and interpretation of feedback. Wrong controls, pages or unsupported actions counted as errors; assisted completions were not independent. Only task means were available, so individual time-threshold compliance could not be confirmed and will be captured in Iteration 2.

3.3 Iteration 1 Testing

3.3.1 Test Plan and Acceptance Criteria

Iteration 1 retained the five tasks and acceptance-criteria identifiers from Part 2, but expanded coverage from the original mobile viewport to tablet, laptop and mobile contexts. Task outcome and acceptance-criteria status were assessed separately. A task was *Completed* only when at least four of five participants independently met every behaviour, interpretation and time condition in its measurable threshold. It was *Partially completed* when participants reached some or all of the workflow but one or more conditions were failed or not separately tested. Each acceptance criterion was classified as Pass, Partial, Fail or Not separately tested. Partial means that some required behaviour was demonstrated but the full measurable threshold was not met; task completion alone did not override a criterion-level result. AC-US11-01 and AC-US09-01 used seeded, simulated states, so testing assessed usability rather than production verification or messaging security.

Table 5. Iteration 1 test plan and acceptance criteria coverage.

Test	User task	Traceability	Acceptance criteria	Measurable success threshold
T1	Narrow properties using combined search criteria	US-13; S-01	AC-US13-01 to AC-US13-04 and AC-US13-06 (implemented)	At least 4/5 independently complete the filtered search, explain affordability, recover from no results and use a custom address within three minutes.
T2	Recognise verified housemate profiles	US-11; S-02	AC-US11-01 (simulated) and AC-US11-02 (implemented)	At least 4/5 independently find the verified-only control, identify its cues and explain that verification is not a guarantee within 90 seconds.
T3	Build a profile and use recalculated compatibility	US-12; S-03	AC-US12-01, AC-US12-02 and AC-US12-04 to AC-US12-06 (implemented)	At least 4/5 independently complete the profile, explain the top match and recover from validation and zero-result states within three minutes.
T4	Complete phone verification and message safely	US-09; S-04	AC-US09-01 (simulated) and AC-US09-04 (implemented)	At least 4/5 independently pass verification and message within three minutes; contact details remain blocked with a clear explanation.
T5	Propose, review and activate a house rule	US-02, US-10; S-05, S-06	AC-US02-01 to AC-US02-03, AC-US10-01, AC-US10-02 and AC-US10-04 (implemented)	At least 4/5 independently view, propose and activate a rule, including language, validation and approval states, within four minutes.

3.3.2 Testing Outcomes

Table 6. Iteration 1 outcome summary.

Test	Task outcome	Quantitative outcome	Acceptance-criteria assessment and consequence
T1	Partially completed	5/5 reached the final state; 4/5 independently; mean 2 min 8 sec; 2 errors; 1 assisted	AC-US13-01 to AC-US13-03: Pass. AC-US13-04: Fail because participants did not reliably understand how to recover from the empty state. AC-US13-06: Not separately tested. Individual compliance with the three-minute limit was also not recorded. Make the recovery action more prominent and explicit.
T2	Partially completed	5/5 reached the final state independently; mean 1 min 2 sec; 1 error; no assistance	Simulated AC-US11-01: Pass. Implemented AC-US11-02: Pass. Individual compliance with the 90-second limit was not recorded, so the composite task threshold was not fully verified. Two users found the explanation too small; enlarge it and retain non-colour cues.
T3	Partially completed	4/5 reached the final state; 3/5 independently; mean 2 min 44 sec; 3 errors; 1 assisted	AC-US12-01: Pass. AC-US12-02: Partial because the score source and limitations were not explained accurately enough. AC-US12-04 to AC-US12-06: Not separately tested. Enlarge the factor explanation and show why the score changed.
T4	Partially completed	5/5 reached the final state; 4/5 independently; mean 2 min 18 sec; 2 errors; 1 assisted	Simulated AC-US09-01: Pass. AC-US09-04: Fail. Contact details were blocked, but the criterion's clear explanation and safe next step were not understood. Link the warning to the contact-sharing action.
T5	Partially completed	4/5 reached the final state; 2/5 independently; mean 3 min 11 sec; 4 errors; 2 assisted	AC-US02-01: Not separately tested. AC-US02-02: Pass. AC-US02-03: Not separately tested. AC-US10-01: Pass. AC-US10-02: Fail because participants could not reliably connect approval progress with activation. AC-US10-04: Not separately tested. Combine and emphasise approval and activation status.

All five reached the final state in T1, T2 and T4, but task-level completion did not establish that every included acceptance criterion had passed. T2 provided the strongest result because it required

no assistance, while T3 and T5 had the lowest independent completion and most errors. Problems clustered around post-action feedback: empty-search recovery, score meaning, contact blocking and rule approval. Iteration 2 will keep participant-level times and separate results for every criterion.


3.3.3 User Feedback

Table 7 reports the seven accepted participant-level findings. Device and viewport allocations are given in Table 4. The statements paraphrase observation notes rather than claiming verbatim participant quotations.


Table 7. Participant-level accessibility and device-specific findings.

User	Task	Observed issue	Effect on task
A	T5	Keyboard focus moved outside the Create roster dialog. Escape did not close it, and focus was not returned to the opening control after closing.	The participant lost the interaction context and required assistance.
B	T2	The Discover tabs did not respond to the arrow keys. Their selected state also relied mainly on colour and a thin underline.	The participant completed the task with a pointer, but keyboard navigation and the selected state were unclear.
C	T4	The privacy warning appeared after contact details were entered, but its relationship to the icon-only contact-sharing action was unclear.	The participant paused for more than 30 seconds and continued after one facilitator hint.
C	T5	Selecting Chinese translated rule content while surrounding headings, labels and actions remained in English.	The mixed-language state reduced clarity and made the language setting appear incomplete.
D	T4	At 390 by 844 pixels, the conversation list and New message control were hidden with no visible mobile replacement.	This restricted mobile conversation management because the participant could not select Daniel or begin a new conversation.
E	T5	Selecting Save draft produced no visible confirmation, navigation or control-state change.	The participant selected the control twice and assumed it was not working.
E	T5	Approval progress was displayed separately from the activation condition and was not sufficiently prominent.	The participant requested clarification and did not complete the task independently.


The recurring problems concerned keyboard interaction, non-colour state cues, language consistency, mobile access and post-action feedback. The corresponding recreated states are embedded in Figures 5–6; a fuller description of each image is stored in `tests/participant-findings.md`. Screenshots document interface states, while pauses, assistance and participant interpretation come from the observation notes in Table 7. The roster-dialog, conversation-switching and Save draft observations were supplementary checks made during the named task sessions; they were not used to revise the aggregate results in Table 6.

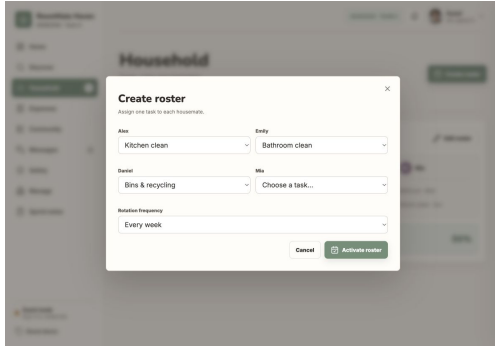


(a) User A/T5: roster-dialog state. Focus escape, Escape-key behaviour and focus return were verified through interaction checks.

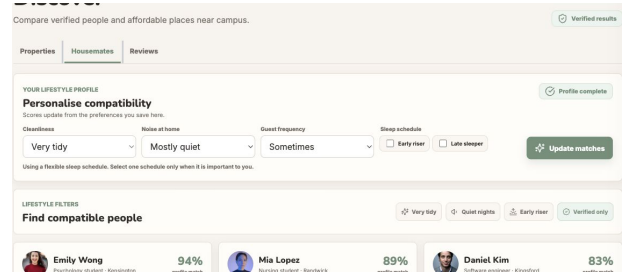

(b) User B/T2: Discover selected-state styling. Arrow-key behaviour was verified through an interaction check.

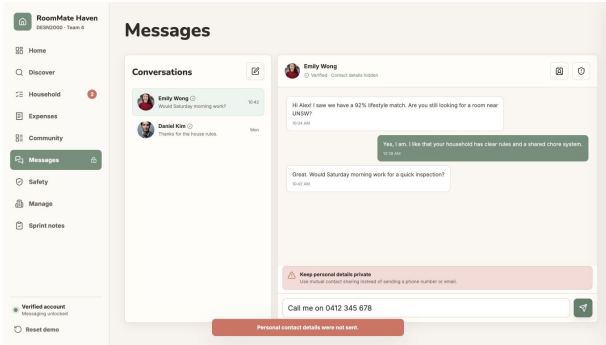


(c) User C/T4: blocked contact details, privacy warning and the separate icon-only contact-sharing control.

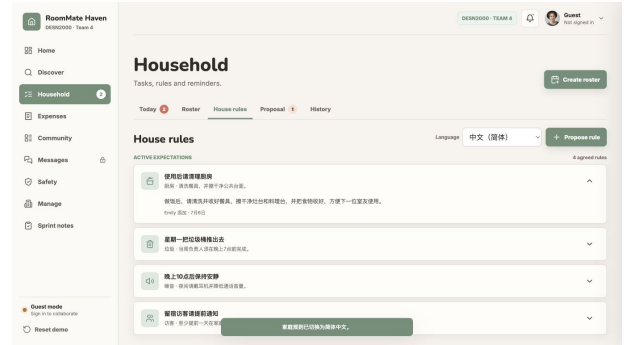


(d) User C/T5: translated rule content surrounded by English headings, labels and actions.


Figure 5. Tablet and laptop evidence for the participant-level findings in Table 7.

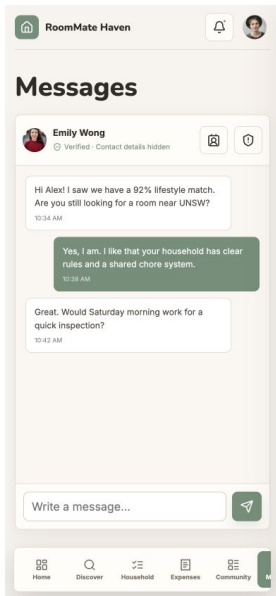

(a) User D/T4: mobile message view without a visible conversation switcher or New message control.

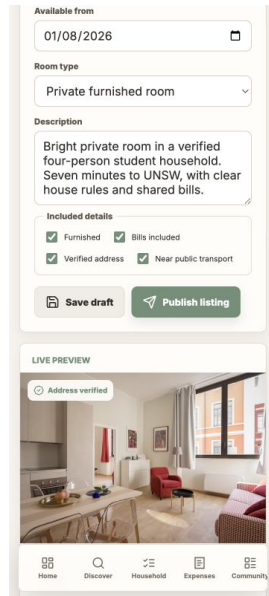


(b) User E/T5: Save draft after activation, with no visible confirmation or state change.

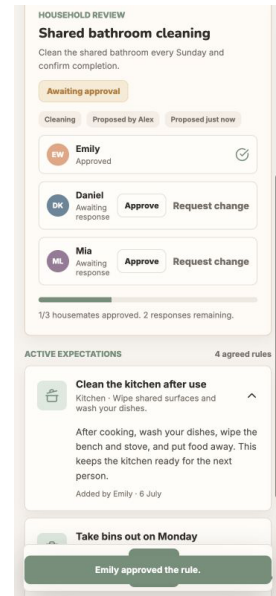


(c) User E/T5: one-of-three approval state and the separate activation-status information.

Figure 6. Mobile evidence for the participant-level findings in Table 7.


Figure 7 consolidates the original task-level post-session recreations captured from the same Sprint 1 HTML build at a 1440 by 900 viewport using local Playwright on 27 July 2026. They document the interface states before Iteration 2 refinement, rather than participant behaviour; the behavioural evidence is reported in Table 6.

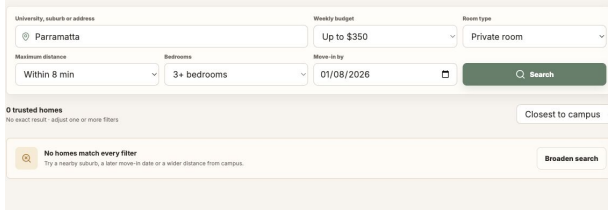


(a) T1, AC-US13-04: the secondary “Broaden search” action supported a more prominent reset action.

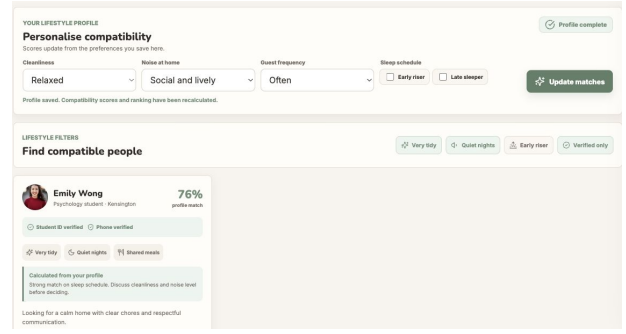

(b) T2–T3, AC-US11-02 and AC-US12-02: small trust and score explanations supported larger text and non-colour cues.

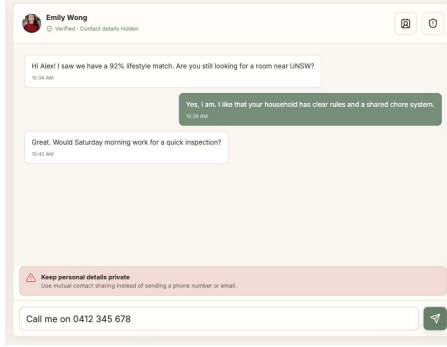

(c) T4, AC-US09-04: the warning and icon-only sharing control were separated, making the next step less apparent.

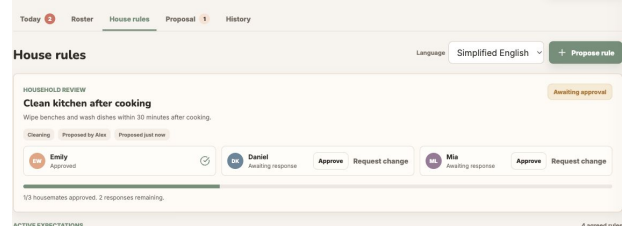

(d) T5, AC-US10-02: separated approval and activation indicators supported a stronger combined status message.

Figure 7. Compact Sprint 1 task-level baseline evidence before Iteration 2 refinement.

3.4 Changes after Sprint 1

The team changed states that failed, remained partial or blocked keyboard and mobile use in Iteration 1. Table 8 links each design change to its evidence and revised Jira issue. The Jira cells remain blank until the revised issues are published.

Table 8. Design changes made after Sprint 1.


Task	Design modification	Evidence	Updated Jira link
T1	The empty state places Broaden search beside guidance that explains how to recover.	Figure 8a	
T2	Verification cues pair an icon with readable status text.	Figure 8b	
T2	Tabs expose their selected state and respond to the arrow, Home and End keys.	Figure 9	
T3	Each match card explains how the saved profile affected its score and names a point to discuss.	Figure 8c	
T4	The message warning blocks the content, explains mutual sharing and announces the result through an alert.	Figure 10a	
T4	The mobile message view keeps a conversation selector and a New control.	Figure 10b	
T5	Open dialogs keep keyboard focus, close with Escape and return focus to the opening control.	Figure 11a	
T5	Roster validation links the error to the invalid field and moves focus to it.	Figure 11a	
T5	Chinese rule content exposes the zh-CN language code to assistive technology.	Figure 11b	
T5	Saving a draft updates the page status and shows a confirmation.	Figure 11c	

3.5 Iteration 2 Test


Iteration 2 used targeted criterion-level retests with the same five participants after the prototype was revised. Participant observation records support the reported outcomes; Figures 8 to 11 illustrate the interface states tested but do not by themselves establish participant performance. Criteria not named in the retest plan were treated as supplementary regression checks rather than evidence that an entire multi-criterion task had passed.

Table 9. Iteration 2 criterion-level retest plan.


Task	Retested AC	Test case	Success threshold	Recorded measures
T1	AC-US13-04	Starting from a no-results state, independently change the search so that at least one valid result is displayed.	At least 4/5 participants recover independently within 60 seconds, without a facilitator prompt.	Completion time, errors, assistance and interpretation of the recovery guidance.
T3	AC-US12-02	Inspect a compatibility result and explain where its score comes from and what the score cannot establish.	At least 4/5 correctly identify its preference-based evidence and do not interpret it as an identity or safety guarantee.	Explanation accuracy, completion time and assistance.
T4	AC-US09-04	Attempt to send a message containing personal contact details, then explain whether the details were sent and identify the safe next step.	At least 4/5 independently confirm that the details remain unsent and correctly explain the mutual-sharing condition and next action.	Completion, explanation accuracy, errors and assistance.
T5	AC-US10-02	Inspect a proposed rule and determine its approval progress and the condition under which it can become active.	At least 4/5 correctly explain whether approval is complete and when activation can occur.	Completion, interpretation accuracy, errors and assistance.



(a) T1 shows recovery guidance beside the empty result.



(b) T2 shows text and icons for verification.

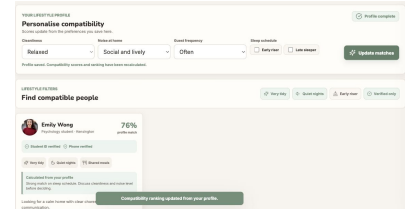

(c) T3 explains how the saved profile changed each score.

Figure 8. Iteration 2 implementation evidence for T1 to T3.



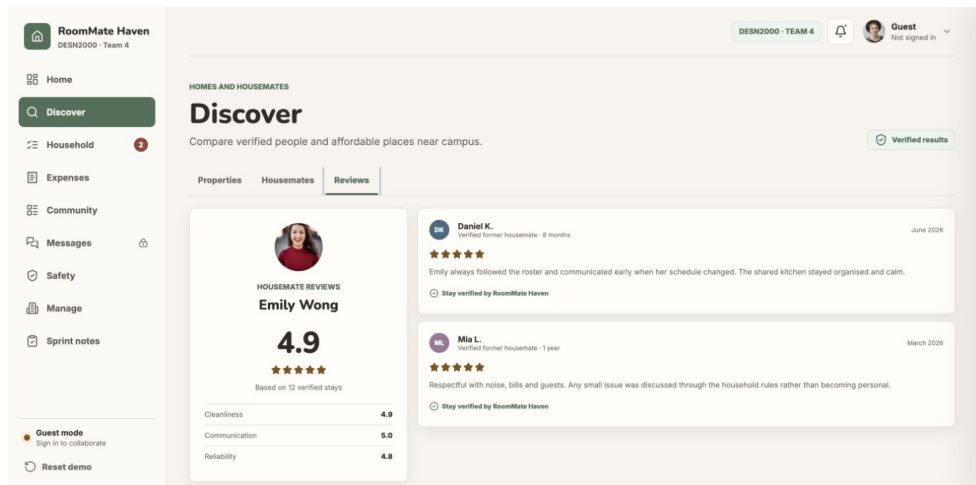


Figure 9. T2 tab focus and selected state after keyboard navigation.

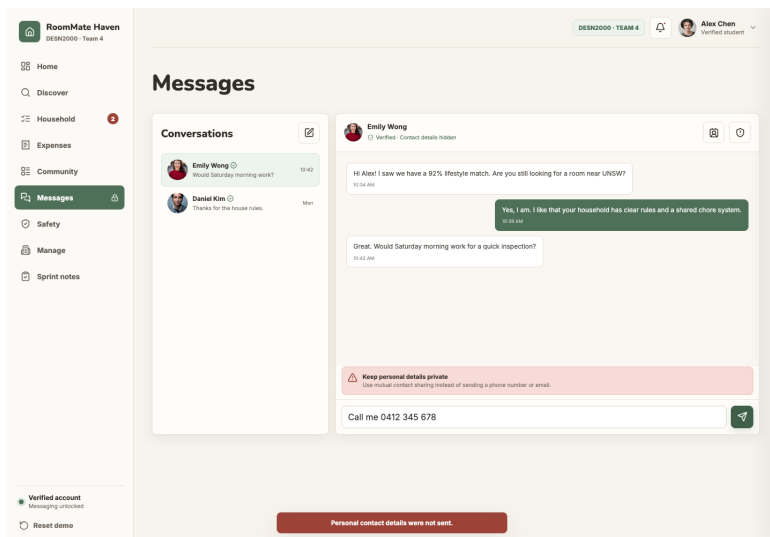


(a) T4 blocks a phone number and shows the safer next step.

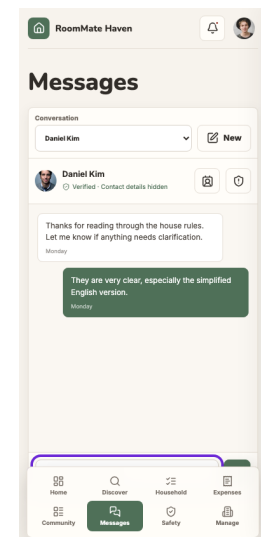


(b) T4 keeps conversation controls at the mobile viewport.


Figure 10. Iteration 2 implementation evidence for T4.

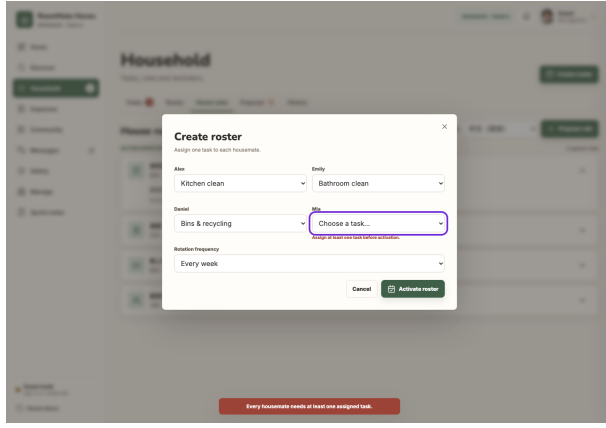


(a) T5 keeps focus on the invalid roster field.

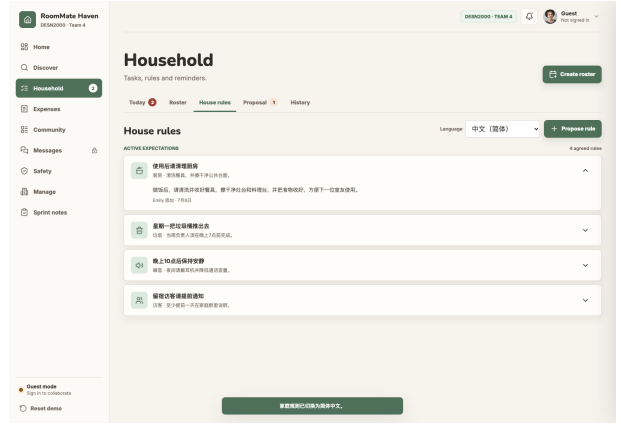

(b) T5 displays Chinese rules with matching language metadata.

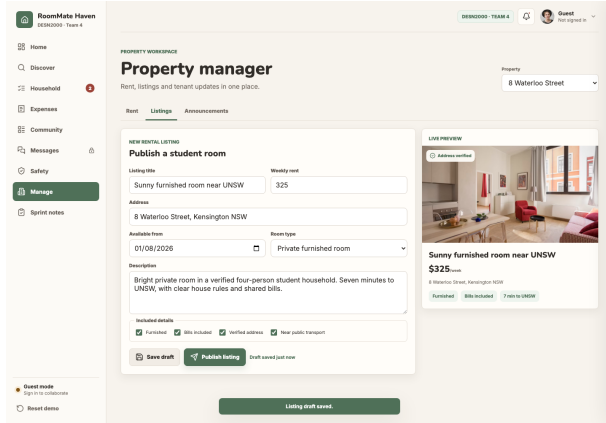

(c) The supplementary draft check shows a saved state.

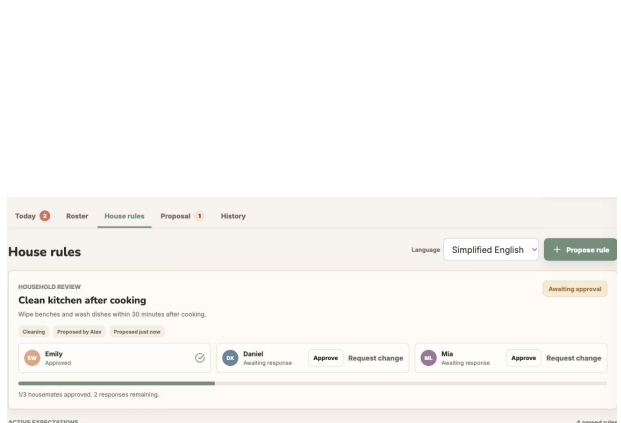

(d) T5 still separates progress from the activation condition.

Figure 11. Iteration 2 implementation evidence for T5 and its remaining issue.

Table 10. Iteration 2 criterion-level retest results.

Task	Independent	Assisted	Time	Errors	Interpretation result	AC status
T1	4/5	1/5	44 seconds (median)	3	4/5 understood how to broaden the search and recover from the no-results state.	Pass
T3	3/5	2/5	75 seconds (median)	2	2/5 correctly explained the preference-based score without treating it as evidence of personal safety.	Partial*

*Partial indicates that the revised interface produced observable improvement but did not meet the predefined threshold of four successful participants.

Table 11. Iteration 2 results for the modified Sprint 1 tasks.

Task	Retest outcome and resolved problem	Acceptance criteria result	New issue	Remaining problem
T1	Completed for the targeted criterion. The empty result gives a recovery action and names the inputs that can change.	AC-US13-04 changed from Fail to Pass. Other T1 criteria were not separately retested.	No.	None shown.
T2	Supplementary regression check. Text supports each verification cue. Keyboard users can identify and change tabs.	AC-US11-02 remained Pass from Iteration 1; no other T2 criterion was separately retested.	No.	Participants still confused profile identity verification with the phone check that unlocks messaging.
T3	Partially completed for the targeted criterion. The match card explains the score source and identifies points to discuss.	AC-US12-02 remained Partial because several participants still treated the score as a safety signal. Other T3 criteria were not separately retested.	No.	The score source is visible, but its limit remains unclear.
T4	Completed for the targeted criterion. Contact details remain unsent. The warning explains mutual sharing and the mobile view retains both conversation actions.	AC-US09-04 changed from Fail to Pass. Other T4 criteria were not separately retested.	No.	The desktop sharing action still relies on an icon, so its purpose is less clear without hover.
T5	Partially completed for the targeted criterion. Dialog focus, roster errors, rule language metadata and draft feedback expose a clear state.	AC-US02-02 remained Pass from Iteration 1. AC-US10-02 remained Fail. Other T5 criteria were supplementary checks or were not separately retested.	No.	The status still does not explain activation. The Household entry and House rules destination use different labels. Surrounding controls remain in English after Chinese is selected.

3.6 Persistent Issues and Impact

The same five participants tested both iterations. Several still struggled to explain what the compatibility score measured after the second test. Although the revised cards linked the score to saved preferences, some users treated a high score as evidence that a person was safe. This could cause them to misjudge a potential housemate.

Confusion also persisted between a verified profile and phone verification. Similar visual cues made the two states appear equivalent, even though identity verification supports profile trust and phone verification only unlocks messaging. The ambiguity increased decision time and weakened confidence in the safety process.

Navigation remained unclear because the main entry was named Household while the destination was named House rules. Users opened the wrong view before finding rule proposals. They also struggled in both rounds to connect approval progress with activation. These problems caused repeated checking and left users uncertain about which household rules applied.