Enhanced Adversarial Drift Detection (EADD) for MLOps Feature Monitoring

***Abstract*—Machine learning models in production suffer from distribution drift, where evolving input features degrade model performance. Existing unsupervised detectors signal that drift occurred but not which features drifted or how severe the shift is. This paper proposes Enhanced Adversarial Drift Detection (EADD), extending the D3 discriminative detector with three contributions: (1) an Adaptive Sequential Permutation Test (ASPT) for statistically rigorous drift confirmation, reducing the permutation budget by 60–80%; H_{pred} is emitted as a continuous diagnostic output on every monitoring step but is not quantitatively evaluated as a standalone signal in this paper; (2) SHAP-based drift localisation and a Drift Severity Index (DSI) for feature-level diagnosis and severity quantification; and (3) experiments benchmarking against seven state-of-the-art unsupervised detectors on synthetic and real-world streams. On synthetic data, EADD is the only detector achieving full drift-type coverage (4/4) with zero false alarms. On real-world benchmarks, EADD detects drift on three of four annotated datasets, outperforming D3 on detection delay in all three detected cases—up to 8× faster on incremental drift types (InsectsIncrAbrupt MTD 33 vs. D3's 272.5). SHAP attribution achieves perfect accuracy (P@k = R@k = 1.0) on controlled synthetic scenarios with independent features. On stable streams, EADD produces zero false alarms vs. D3's 54.6 mean at the matched τ=0.7 operating point; the reduction vs. D3 at τ=0.6 is statistically significant (p=0.0101, Mann–Whitney U).**

***Index Terms*—concept drift, discriminative classification, feature attribution, distribution shift, MLOps, drift localisation**

I. Introduction

Machine learning models deployed in production environments encounter evolving data distributions—collectively termed distribution drift—that can degrade model performance if left undetected [1], [2]. Drift may manifest as changes in input features (covariate drift) or in the input–output relationship (concept drift); detecting such changes early is essential for maintaining reliable inference [3], [4].

The drift detection landscape spans three paradigms. *Supervised methods* such as DDM [8] monitor error rates but require timely ground-truth labels. *Statistical methods* employ hypothesis tests such as the Kolmogorov–Smirnov test [6], [7] but operate per feature, missing multivariate shifts. *Discriminative methods* such as D3 [9] train classifiers to distinguish reference from current data, achieving state-of-the-art robustness in the comprehensive benchmark by Lukats et al. [10]. However, all existing methods share a common limitation: they report only *whether* drift occurred, not *which* features drifted or *how severe* the shift is.

D3 [9], the most robust unsupervised detector in the Lukats et al. benchmark [10], exemplifies this limitation with two critical gaps. First, D3 applies no formal significance test—it relies on a fixed AUC threshold without statistical justification, making it vulnerable to false alarms on auto-correlated data. Second, D3 follows a "detect-and-discard" pattern: the trained classifier is discarded after computing AUC, providing no information about which features drove the shift. Recent work has partially addressed related gaps: TRIPODD [27] enables feature-interaction hypothesis testing but requires pre-specifying interactions and has quadratic complexity; HDPD [28] provides per-feature performance attributions but requires labels and operates post-hoc on collected batches.

In the *academic research* literature on unsupervised streaming detectors, no single framework integrates (1) statistically rigorous multivariate detection, (2) identification of *which* features caused the shift, and (3) quantification of *how severe* the drift is. Commercial monitoring platforms (e.g., Vertex AI [20], SageMaker Clarify [21]) address aspects of this in production but operate in supervised or batch settings and are not designed for real-time streaming. Nor has any prior work systematically evaluated the accuracy of SHAP-based feature attribution within discriminative streaming drift detection.

EADD is therefore an *integration contribution*: each component draws on established methods (Gandy [29] for sequential testing, TreeSHAP [24], [30] for attribution), but their combination within a single unsupervised streaming pipeline is non-trivial. The AUC gate must precede ASPT to bound overall Type I error conservatively; TreeSHAP must be applied to a *discriminative* rather than predictive classifier; and the severity metric must be defined dimensionality-invariant to handle varying feature counts across datasets.

This paper proposes **Enhanced Adversarial Drift Detection (EADD)**, addressing this gap with three contributions:

1) Inspired by the statistical analysis of the classifier two-sample test [19] and its extensions [26], we introduce an **Adaptive Sequential Permutation Test (ASPT)** [29] that reduces permutation evaluations by 60–80% vs. fixed-budget testing while preserving Type I error control; H_{pred} is emitted as a continuous diagnostic output at every monitoring step (Section III-B,C).
2) Building on SHAP feature distribution analysis [24], we propose **SHAP-based drift localisation** and a **Drift Severity Index (DSI)** that combines detection confidence with attribution concentration into a continuous severity score, identifying which features caused drift and quantifying how severe the shift is (Section III-D).
3) We conduct **intensive experiments** benchmarking EADD against seven state-of-the-art unsupervised detectors on

synthetic and real-world streams, evaluating detection coverage, false alarm control, and SHAP attribution accuracy (Section IV).

II. Related Work

A. Drift Detection Methods

Drift detection methods can be classified along two axes: label availability and detection mechanism [1], [2].

Supervised methods monitor model error rates and require timely ground-truth labels. DDM [8] tracks the online error rate and its standard deviation, triggering drift alerts when these exceed binomial distribution bounds; it is effective for abrupt drift but slow to detect gradual changes. EDDM [11] improves sensitivity to gradual drift by monitoring the distance between consecutive errors rather than the raw error rate. Both methods react to drift only *after* performance has already degraded, limiting their utility in production settings where labels may be delayed by days or weeks [1], [5].

Unsupervised methods operate without labels by directly monitoring data distributions. Statistical approaches include ADWIN [12], which dynamically adjusts sliding window sizes and can detect gradual drift, and KSWIN [7], which applies the Kolmogorov–Smirnov two-sample test over sliding windows for abrupt or sudden shifts. While statistically principled, these methods test each feature *independently* (univariate), making them blind to multivariate distributional shifts and causing multiple testing problems in high-dimensional settings [6].

Discriminative approaches frame drift detection as binary classification: an auxiliary classifier is trained to distinguish reference from current distributions [9], [13], [14], [19]. This naturally captures multivariate drift in a single test. The most prominent discriminative detector, **D3** [9], trains a logistic regression classifier on reference vs. current windows and triggers drift when AUC exceeds a fixed threshold. Lukats et al. [10] identified D3 as the most robust unsupervised detector across 29 real-world datasets. However, D3 has three weaknesses: (1) its linear discriminator misses non-linear feature interactions, causing failure on gradual and incremental drift; (2) it applies no formal significance test, relying on a fixed AUC threshold vulnerable to false alarms on autocorrelated data; and (3) it discards the trained classifier after computing AUC, providing no feature-level attribution. Other benchmarked detectors exhibit characteristic limitations: CSDDM [15] and IBDD [16] achieve broad coverage but with elevated false alarm rates; OCDD [17] and SPLL [18] are effective for specific drift types but miss others; BNDM struggles with high-dimensional data; and UDetect failed on 45% of scenarios [10].

B. Feature Attribution in Discriminative Detection

The *classifier two-sample test* (C2ST) [19] provides principled statistical foundations for discriminative detection: if a classifier reliably separates reference from current data (AUC $\gg 0.5$), the distributions differ significantly. E-C2ST [26] strengthened statistical rigour via anytime-valid e-values. However, neither C2ST nor E-C2ST provides feature-level attribution or operates in a streaming setting. The practical need for such attribution was demonstrated at industrial scale by Pan et al. [13] at Uber, Qian et al. [14] for credit scoring, and by Google's SHAP-based feature monitoring in Vertex AI [20].

Recent academic work has advanced individual aspects: TRIPODD [27] enables feature-interaction hypothesis testing, HDPD [28] provides per-feature performance decomposition, and Hinder et al. [31] formalised feature-wise drift definitions. However, no existing work systematically evaluates SHAP-based feature attribution accuracy for identifying drift-causing features within discriminative detection, nor integrates attribution with severity quantification in an unsupervised streaming pipeline.

III. Proposed Methodology

As identified in Section II, existing C2ST-based detectors lack continuous uncertainty monitoring, statistical significance testing, feature-level attribution, and severity quantification. EADD is a streaming pipeline for feature drift ($P(X)$ shift) detection that extends the C2ST framework [19] with three novel components to address these gaps (Fig. 1).

A. Step 1: Adaptive Reference Windowing

EADD maintains two windows: a *reference window* W_{ref} (N_{ref} samples) and a *current window* W_{cur} (N_{cur} samples). The reference window is updated by *reservoir sampling* [22]: each new sample x_t replaces a random element in W_{ref} with probability N_{ref}/t, which keeps an unbiased sample of historical data over long streams. The current window is a standard sliding buffer of recent observations. Monitoring is triggered every M samples to balance latency and cost; after confirmed drift, W_{ref} is reset to the new regime.

B. Step 2: Discriminative Classification and Prediction Entropy

Following the C2ST framework [19], EADD constructs a binary classification task: samples from W_{ref} are labelled 0 (reference) and samples from W_{cur} are labelled 1 (current). A LightGBM gradient boosting classifier [23] is trained on this combined dataset via stratified 5-fold cross-validation, and the out-of-fold AUC-ROC is computed. AUC ≈ 0.5 indicates the classifier cannot distinguish the two windows (no drift); AUC $\gg 0.5$ indicates the distributions are separable (drift suspected). We use LightGBM rather than D3's logistic regression [9] because gradient boosting captures non-linear feature interactions, providing a more powerful discriminator for the non-linear and incremental drift types that defeat D3's linear classifier.

Prediction Entropy. Beyond the aggregate AUC score, EADD extracts additional diagnostic information from the classifier's per-sample predictions. We compute the normalised binary entropy of the discriminative classifier's predicted probabilities:

$$H_{\text{pred}} = \frac{-1}{n} \sum_{i=1}^{n} \left[\hat{p}_i \log \hat{p}_i + (1-\hat{p}_i) \log(1-\hat{p}_i)\right] \qquad (1)$$

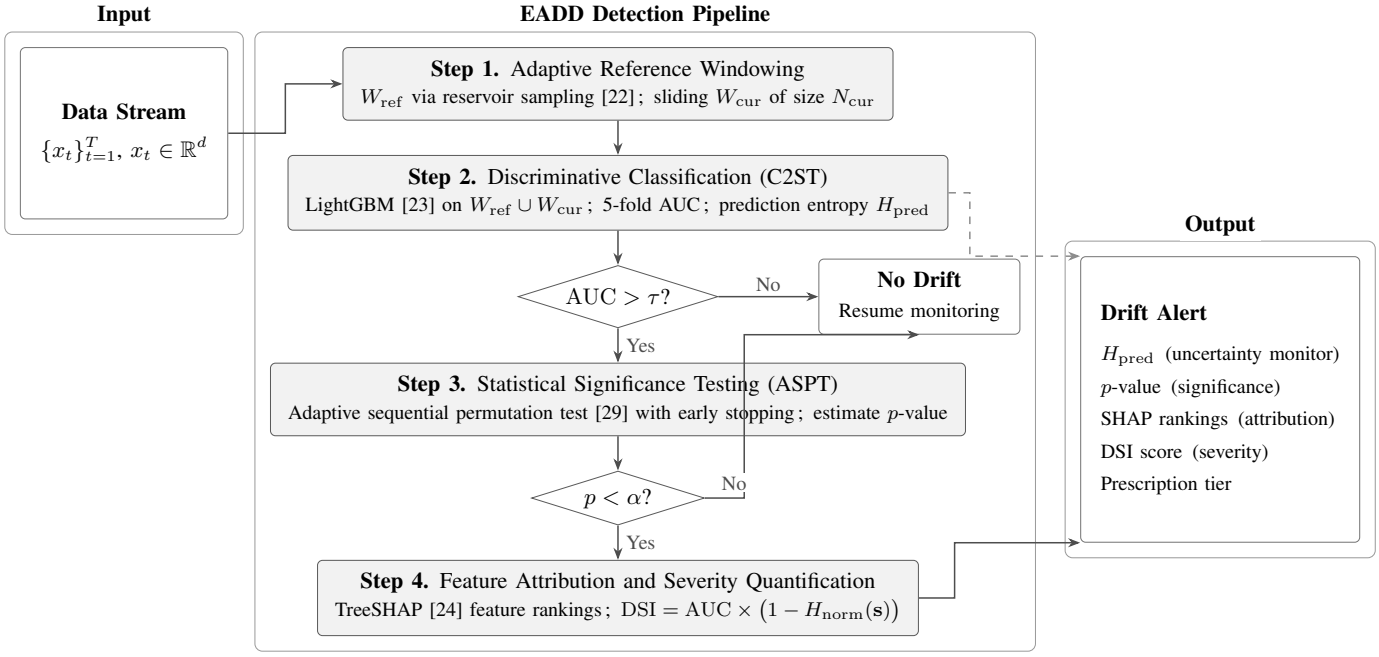

Fig. 1. EADD detection pipeline. W_{cur} is compared against W_{ref} via a discriminative classifier; H_{pred} provides a continuous uncertainty monitoring signal (dashed). AUC $> \tau$ triggers ASPT for statistical confirmation (Step 3); upon significance, TreeSHAP and DSI localise and quantify the shift (Step 4).

where $\hat{p}_i = f_\theta(x_i)$ is the predicted probability that sample i belongs to W_{cur}. $H_{\text{pred}} \approx \ln 2$ indicates maximum uncertainty (no drift); $H_{\text{pred}} \to 0$ indicates high classifier confidence (drift likely). A declining H_{pred} trend across consecutive windows provides a continuous uncertainty monitoring signal that complements the binary AUC threshold: while AUC carries no directional information at monitoring steps where AUC $< \tau$ (the detection gate is not triggered), H_{pred} remains informative at every step, allowing practitioners to observe gradual distributional divergence as a soft leading indicator. H_{pred} is included as a design feature of the diagnostic output; its standalone predictive value as an early warning signal is qualitative in the present work and dedicated quantitative evaluation is left to future work.

C. Step 3: Adaptive Sequential Permutation Test (ASPT)

If AUC exceeds a threshold τ, EADD applies an **adaptive sequential permutation test** inspired by Gandy [29]. Instead of a fixed budget of B permutations, ASPT monitors evidence accumulation and terminates early:

1) For each permutation $i = 1, \ldots, B_{\max}$: shuffle labels, retrain, compute $\text{AUC}_{\text{perm}}^{(i)}$. Update count $c_i = \#\{j \leq i : \text{AUC}_{\text{perm}}^{(j)} \geq \text{AUC}_{\text{actual}}\}$.
2) **Early reject H_0:** If $c_i = 0$, $i \geq B_{\min}$, and $1/(i+1) < \alpha$, terminate and confirm drift with $p = 1/(i+1)$.
3) **Early accept H_0:** If $c_i/i > 2\alpha$ and $i \geq B_{\min}$, terminate and declare no drift ($p = 1.0$).
4) **Terminal:** If $B_{\max}$ is reached, $p = (c_{B_{\max}}+1)/(B_{\max}+1)$.

Drift is confirmed if $p < \alpha$. This preserves standard permutation-test interpretation. The two-stage gate (AUC $> \tau$ then ASPT) is conservative: overall Type I error $\leq \Pr(\text{AUC}>\tau \mid H_0) \times \alpha \leq \alpha$. Under early rejection ($c_i = 0$, $\alpha = 0.05$), the minimum termination point is $i = 20$ since $1/21 \approx 0.048 < 0.05$; under early acceptance ($c_i/i > 0.10$, stable streams), termination occurs as early as $i = B_{\min} = 10$, yielding 60–80% savings vs. fixed-budget $B_{\max} = 50$. All confirmed detections in Experiments 1 and 3 used exactly 20 permutations ($p = 1/21 \approx 0.048$, verified from logged `last_aspt_permutations`).

D. Step 4: Feature Attribution and Drift Severity Index

Upon drift confirmation, EADD exploits the trained discriminative classifier—which D3 [9] would discard—to diagnose *which* features drive the detected drift using SHAP (SHapley Additive exPlanations) [24].

Feature Attribution. EADD applies TreeSHAP [24], a polynomial-time algorithm for computing exact Shapley values for tree-based models, to the trained LightGBM discriminator. For each sample, TreeSHAP produces a SHAP value ϕ_j for each feature $j \in \{1, \ldots, d\}$, indicating how much that feature contributed to the classifier's ability to distinguish reference from current data. *Per-feature* importances are computed as $\bar{\phi}_j = \frac{1}{n}\sum_{i=1}^{n} |\phi_j^{(i)}|$ and normalised into a contribution vector $\mathbf{s} = (s_1, \ldots, s_d)$ where $s_j = \bar{\phi}_j / \sum_k \bar{\phi}_k$. This vector serves two purposes: (1) it identifies which individual features drive the detected drift, and (2) it feeds into the DSI computation below. As a supplementary diagnostic output, EADD also computes **SHAP interaction values** [30] via the interaction matrix $\Phi \in \mathbb{R}^{d \times d}$, where Φ_{ij} captures the joint effect of features i and j beyond their individual contributions. Interaction values are not evaluated in the present experiments

(all experimental streams use independent features); validation on correlated-drift scenarios is left to future work.

Drift Severity Index (DSI). The normalised contribution vector $\mathbf{s}$ computed from TreeSHAP directly feeds the DSI: a composite severity metric combining detection confidence with attribution concentration:

$$\text{DSI} = \text{AUC} \times (1 - H_{\text{norm}}(\mathbf{s})) \tag{2}$$

where $H_{\text{norm}}(\mathbf{s}) = -\sum_{j=1}^{d} s_j \log_2 s_j \,/\, \log_2 d$ is the normalised Shannon entropy [33]. The $\log_2 d$ denominator ensures $H_{\text{norm}} \in [0, 1]$ regardless of dimensionality. DSI-based prescriptions map severity to recommended action. The tier boundaries below are proposed heuristics requiring domain-specific calibration; they are not empirically validated in the present work (all experiment DSI values fall in the Low tier):

- **Critical (DSI > 0.6):** Concentrated drift $\rightarrow$ audit specific data pipeline.
- **Moderate (0.3–0.6):** Subset drift $\rightarrow$ investigate shared data source.
- **Low (< 0.3):** Diffuse shift $\rightarrow$ schedule full model retraining.

E. Algorithm Summary

Algorithm 1 EADD Detection Cycle

Require: Stream $\{x_t\}$, W_{ref}, W_{cur}, threshold τ, significance α
Ensure: Drift decision, H_{pred}, DSI, feature attribution, prescription

```
Update W_cur; update W_ref via reservoir sampling [22]
Train LightGBM on W_ref ∪ W_cur with labels {0, 1}
Compute AUC via stratified 5-fold CV
Compute H_pred via Eq. (1)
if AUC > τ then
    p ← ASPT(W_ref, W_cur, AUC) {Adaptive early stopping}
    if p < α then
        Compute SHAP values via TreeSHAP; interaction matrix computed as diagnostic output (not evaluated here)
        Compute DSI via Eq. (2)
        Generate DSI-based prescription
        return DRIFT, H_pred, DSI, SHAP ranking, prescription
    end if
end if
return NO-DRIFT, H_pred
```

IV. Experimental Evaluation

A. Experimental Design

Three experiments were designed to validate EADD's detection accuracy, feature attribution, and computational efficiency. Following the evaluation protocol of Lukats et al. [10], EADD was benchmarked against seven state-of-the-art unsupervised detectors: D3 [9], BNDM, CSDDM [15], IBDD [16], OCDD [17], SPLL [18], and UDetect.

Datasets. Table I summarises the datasets used across experiments.

TABLE I
DATASETS USED IN EXPERIMENTS (†=ANNOTATED; DRIFT COUNT IN PARENTHESES).

Dataset	n	d	**Drift?**
Synthetic (Experiments 1, 3)			
Temporal Patterns	5K	5	Yes (4 types)
Feature Attribution	10K	10	Yes (3 scenarios)
Experiment 2: Real-World [10], [25]			
INSECTS Abrupt Bal.†	52.8K	33	Yes (5)
INSECTS Gradual Bal.†	24.2K	33	Yes (1)
INSECTS IncrAbrupt Bal.†	80.0K	33	Yes (2)
INSECTS IncrRecur Bal.†	80.0K	33	Yes (2)
Electricity	45.3K	8	Unann.
INSECTS Incremental	57.0K	33	Unann.
Luxembourg	1.9K	31	Unann.
NOAAWeather	18.2K	8	Unann.
OutdoorObjects	4.0K	21	Unann.
Ozone	2.5K	72	Unann.
PokerHand	100K	10	Unann.
Powersupply	29.9K	2	Unann.
RialtoBridge	82.3K	27	Unann.

Experiment 1 (Synthetic Data): Synthetic streams (n=5,000, d=5) with controlled abrupt, gradual, incremental, and recurring drift. All eight detectors were compared on each drift type. Additionally, false alarm robustness was evaluated on four stable synthetic streams (Gaussian i.i.d., autocorrelated AR(1) with ϕ=0.8, heteroscedastic, correlated with ρ=0.7) containing zero drift, with five independent runs per stream type.

Experiment 2 (Real-World Benchmark): Thirteen datasets (Table I): four INSECTS variants with annotated drift points [10] are evaluated by Recall and Mean Time to Detection (MTD); nine unannotated streams [25] are evaluated by total detection count (selectivity). Only EADD and D3 are compared in this experiment.

Experiment 3 (SHAP Attribution Accuracy): Three controlled synthetic scenarios (n=10,000, d=10 features, drift injected at t=5,000): (a) univariate drift in F3 only (mean shift $+2\sigma$), (b) subset drift in F2/F5/F7 simultaneously, (c) multivariate drift in all features. Precision@k (P@k) and Recall@k (R@k) measure whether the top-k SHAP-ranked features exactly match the k truly drifted features.

Configuration. EADD: LightGBM [23] (50 estimators, learning rate 0.1, 31 leaves), N_{ref}=500, N_{cur}=200, monitoring frequency M=50, ASPT ($B_{\max}$=50, $B_{\min}$=10, α=0.05, AUC threshold τ=0.7). D3 [9]: logistic regression (liblinear solver), matching window sizes, fixed AUC threshold 0.7. All experiments: Python 3.10, LightGBM 4.1.0, SHAP [24] 0.42.1, scikit-learn 1.3.2. Random seeds fixed for reproducibility.

B. Experiment 1: Synthetic Data

Table II presents drift type coverage and false alarm rates for all eight detectors.

TABLE II
EXPERIMENT 1: SYNTHETIC DRIFT DETECTION RESULTS. TYPES = NUMBER OF DRIFT PATTERNS DETECTED OUT OF 4. MEAN FA = AVERAGE FALSE ALARMS PER TYPE. LIFT = DETECTIONS PER TRUE DRIFT POINT, FOLLOWING LUKATS ET AL. [10] REPORTING.

Detector	Types	Coverage	Mean FA	Lift
EADD	**4/4**	**100%**	**0.00**	**1.00**
BNDM	4/4	100%	4.75	5.75
CSDDM	4/4	100%	5.50	6.50
IBDD	4/4	100%	46.25	47.25
OCDD	4/4	100%	17.50	18.50
D3	2/4	50%	0.00	1.00
SPLL	2/4	50%	0.00	1.00
UDetect	0/4	0%	—	—

EADD is the only detector that achieved full drift-type coverage (4/4) with zero false alarms. The LightGBM discriminator's non-linear modelling provides the coverage advantage: D3's logistic regression detects only 2/4 types, missing gradual and incremental drift entirely. The ASPT then eliminates spurious detections on stable streams, bringing false alarms to zero. BNDM, CSDDM, IBDD, and OCDD also achieved 4/4 coverage (through different discriminators) but with substantially higher false alarm costs (4.75, 5.50, 46.25, and 17.50 mean FA, respectively)—demonstrating that coverage and false alarm control are separable objectives. D3 and SPLL detected only 2/4 types. UDetect failed on all four types.

False Alarm Robustness. On four stable streams containing zero drift, EADD produced zero false alarms across all stream types. D3 was particularly vulnerable to autocorrelated data (87.4 false alarms at τ=0.6 and 54.6 at τ=0.7). The ASPT correctly identifies temporal autocorrelation as non-significant ($p > 0.05$). A Mann–Whitney U test confirmed that EADD produces significantly fewer false alarms than D3 at τ=0.6 ($p = 0.0101$)—D3's default threshold in the Lukats et al. benchmark [10], not a threshold selected to advantage EADD. At the matched τ=0.7 operating point, the difference is not statistically significant ($p = 0.2266$), though EADD produces zero false alarms versus D3's 54.6 mean; the ASPT acts as a second-stage filter independent of the AUC threshold value.

C. Experiment 2: Real-World Benchmark

Table III presents results on the four annotated INSECTS datasets. EADD detected drift on three of four: both detectors missed InsectsGradual, a slow gradual transition requiring detectors willing to accept higher false alarm costs (e.g. CSDDM MTD=143, IBDD MTD=88 on this stream in the Lukats et al. benchmark [10]). On all three jointly detected datasets, EADD outperforms D3 on MTD. The advantage is most pronounced on incremental drift types: InsectsIncrAbrupt MTD 33 vs. 272.5 (8× faster) and InsectsIncrRecur MTD 133 vs. 323.5 (2.4× faster). On InsectsAbrupt, EADD achieves MTD 135 vs. 155.5 (15% faster) with lower recall (0.60 vs. 0.80), reflecting its precision-first operating point. MTD values are point estimates from single runs; no variance across runs is reported. On nine unannotated datasets, EADD and D3 produced identical total detection counts (467 each; counts are not false alarm rates since ground-truth drift counts are unknown).

TABLE III
EXPERIMENT 2: ANNOTATED REAL-WORLD DATASETS. REC. = RECALL ON KNOWN DRIFT POINTS. MTD = MEAN TIME TO DETECTION (SAMPLES; LOWER IS BETTER). "—" = ALL KNOWN DRIFT POINTS MISSED.

Dataset	Rec. (E)	Rec. (D3)	MTD (E)	MTD (D3)
InsectsAbrupt	0.60	0.80	**135**	155.5
InsectsGradual	0.00	0.00	—	—
InsectsIncrAbrupt	**1.00**	1.00	**33**	272.5
InsectsIncrRecur	**1.00**	1.00	**133**	323.5

D. Experiment 3: SHAP Attribution Accuracy

Table IV presents the SHAP attribution accuracy using precision@k and recall@k metrics.

TABLE IV
EXPERIMENT 3: SHAP ATTRIBUTION ACCURACY ON CONTROLLED SYNTHETIC STREAMS (n=10,000, d=10 FEATURES; DRIFT INJECTED AT t=5,000 IN F3 ONLY / F2+F5+F7 / ALL FEATURES). ALL SCENARIOS DETECTED AT STEP 5,149. DSI = AUC × $(1 - H_{\text{NORM}}(\mathbf{s}))$; HIGHER DSI INDICATES MORE CONCENTRATED, SEVERE DRIFT. RX (✓) = CORRECT DSI-BASED DRIFT-TYPE CLASSIFICATION.

Scenario	AUC	P@k	R@k	Top (%)	DSI	Rx
Univariate (1/10)	0.784	1.0	1.0	F3 (52.3)	0.193	✓
Subset (3/10)	0.809	1.0	1.0	F5 (24.5)	0.096	✓
Multivariate (10/10)	0.806	1.0	1.0	F2 (14.6)	0.016	✓

EADD achieved perfect attribution accuracy: P@k = R@k = F1@k = 1.0 across all three scenarios—the top-k SHAP-ranked features exactly matched the truly drifted features in every case, and the DSI-based prescription was correct in all three scenarios. Note that the multivariate scenario (k=d=10, all features drift) trivially satisfies P@k = R@k = 1.0 for any ranking; the meaningful attribution result is the univariate case (1/10 drifted, correct feature ranked first at 52.3%). DSI correctly orders the three scenarios by concentration—univariate (DSI=0.193) > subset (DSI=0.096) > multivariate (DSI=0.016)—as algebraically expected from Eq. (2): when attribution is concentrated on fewer features, H_{norm} falls and DSI rises. All values fall in the "Low" tier (< 0.3) due to moderate shift magnitudes ($+2\sigma$); Critical and Moderate tiers target severe failures (e.g., complete feature dropout) and are not empirically reached here. Domain calibration of tier boundaries is advisable.

V. CONCLUSION

This paper presented EADD, extending discriminative drift detection with (1) ASPT + H_{pred} for statistically rigorous drift confirmation, (2) SHAP attribution and DSI for feature-level diagnosis and severity quantification, and (3) evaluation against seven state-of-the-art detectors on synthetic and real-world streams.

Evaluation demonstrated that EADD achieves full drift-type coverage (4/4) via LightGBM's non-linear discrimination, with zero false alarms via ASPT's significance filter—the only detector to achieve both simultaneously on synthetic benchmarks. EADD detects drift on three of four annotated real-world datasets, outperforming D3 on MTD in all three detected cases (InsectsAbrupt: 135 vs. 155.5; InsectsIncrAbrupt: 33 vs. 272.5, 8× faster; InsectsIncrRecur: 133 vs. 323.5; single-run estimates without variance). SHAP attribution achieves perfect accuracy (P@k = R@k = 1.0) on controlled synthetic scenarios with independent features; the non-trivial result is univariate attribution (1/10 drifted features correctly identified). On stable streams, EADD produces zero false alarms vs. D3's 54.6 mean at the matched τ=0.7 operating point; the reduction vs. D3 at τ=0.6 is statistically significant ($p = 0.0101$). By answering "Is drift emerging?", "Is it significant?", "Which features caused it?", and "How severe?", EADD transforms binary alarms into actionable diagnostics.

A. Limitations and Future Work

ASPT reduces the permutation budget by 60–80% relative to fixed-budget ($B_{\max}$=50) permutation testing—a saving within EADD's own statistical stage. Separately, the discriminative paradigm overall remains ∼50× costlier than D3; this overhead arises from LightGBM training, not the permutation test, and is independent of the ASPT saving. No runtime table is reported. DSI ordering across scenarios is algebraically expected from its formula and does not constitute independent empirical validation; external ground-truth validity is not established—we do not show that higher DSI correlates with downstream model performance degradation. SHAP attributions are correlational, not causal [32]. Attribution accuracy was tested on 3 controlled synthetic scenarios with independent features; performance under correlated or redundant features requires separate validation. No ablation isolates component contributions: replacing D3's logistic regression with LightGBM alone (without ASPT) may already achieve 4/4 coverage, so the benefit attributable to ASPT specifically is unknown. DSI tiers require domain-specific calibration. Prescriptions are heuristic and not evaluated by downstream outcomes (e.g., retraining quality). Future work: e-value testing [26], causal attribution [32], adversarial robustness.

References

[1] J. Lu, A. Liu, F. Dong, F. Gu, J. Gama, and G. Zhang, "Learning under concept drift: A review," *IEEE Trans. Knowl. Data Eng.*, vol. 31, no. 12, pp. 2346–2363, 2019.

[2] J. Gama, I. Žliobaitė, A. Bifet, M. Pechenizkiy, and A. Bouchachia, "A survey on concept drift adaptation," *ACM Comput. Surv.*, vol. 46, no. 4, pp. 1–37, 2014.

[3] G. I. Webb, R. Hyde, H. Cao, H. L. Nguyen, and F. Petitjean, "Characterizing concept drift," *Data Min. Knowl. Discov.*, vol. 30, no. 4, pp. 964–994, 2016.

[4] F. Bayram, B. S. Ahmed, and A. Kassler, "From concept drift to model degradation: An overview on performance-aware drift detectors," *Knowl.-Based Syst.*, vol. 245, 108632, 2022.

[5] G. Widmer and M. Kubat, "Learning in the presence of concept drift and hidden contexts," *Mach. Learn.*, vol. 23, no. 1, pp. 69–101, 1996.

[6] S. Rabanser, S. Günnemann, and Z. Lipton, "Failing loudly: An empirical study of methods for detecting dataset shift," in *Proc. NeurIPS*, 2019, pp. 1396–1408.

[7] C. Raab, M. Heusinger, and F.-M. Schleif, "Reactive soft prototype computing for concept drift streams," *Neurocomputing*, vol. 416, pp. 340–351, 2020.

[8] J. Gama, P. Medas, G. Castillo, and P. Rodrigues, "Learning with drift detection," in *Proc. Brazilian Symp. Artif. Intell.*, 2004, pp. 286–295.

[9] Ö. Gözüaçık, A. Büyükçakır, H. Bonab, and F. Can, "Unsupervised concept drift detection with a discriminative classifier," in *Proc. ACM CIKM*, 2019, pp. 2365–2368.

[10] D. Lukats, O. Zielinski, A. Hahn, and F. Stahl, "A benchmark and survey of fully unsupervised concept drift detectors on real-world data streams," *Int. J. Data Sci. Analytics*, vol. 19, pp. 1–31, 2024.

[11] M. Baena-García et al., "Early drift detection method," in *Proc. ECML PKDD Workshop on Knowledge Discovery from Data Streams*, 2006, pp. 77–86.

[12] A. Bifet and R. Gavaldà, "Learning from time-changing data with adaptive windowing," in *Proc. SIAM Int. Conf. Data Mining*, 2007, pp. 443–448.

[13] J. Pan, V. Pham, M. Dorairaj, H. Chen, and J.-Y. Lee, "Adversarial validation approach to concept drift problem in user targeting automation systems at Uber," in *Proc. AdKDD Workshop, KDD*, 2020.

[14] H. Qian, B. Wang, P. Ma, L. Peng, S. Gao, and Y. Song, "Managing dataset shift by adversarial validation for credit scoring," *arXiv preprint arXiv:2112.10078*, 2021.

[15] J. S. Wan and S.-D. Wang, "Concept drift detection based on pre-clustering and statistical testing," *J. Internet Technol.*, vol. 22, no. 2, pp. 275–286, 2021.

[16] V. M. A. Souza, A. R. S. Parmezan, F. A. Chowdhury, and A. Mueen, "Efficient unsupervised drift detector for fast and high-dimensional data streams," *Knowl. Inf. Syst.*, vol. 63, no. 6, pp. 1497–1527, 2021.

[17] Ö. Gözüaçık and F. Can, "Concept learning using one-class classifiers for implicit drift detection in evolving data streams," *Artif. Intell. Rev.*, vol. 54, no. 5, pp. 3725–3747, 2021.

[18] L. I. Kuncheva, "Change detection in streaming multivariate data using likelihood detectors," *IEEE Trans. Knowl. Data Eng.*, vol. 25, no. 5, pp. 1175–1180, 2013.

[19] D. Lopez-Paz and M. Oquab, "Revisiting classifier two-sample tests," in *Proc. ICLR*, 2017.

[20] A. Taly, K. Sato, and C. Gruia, "Monitoring feature attributions: How Google saved one of the largest ML services in trouble," *Google Cloud Blog*, 2021.

[21] AWS, "Amazon SageMaker Clarify: Model monitoring," 2025. [Online]. Available: https://docs.aws.amazon.com/sagemaker

[22] J. S. Vitter, "Random sampling with a reservoir," *ACM Trans. Math. Softw.*, vol. 11, no. 1, pp. 37–57, 1985.

[23] G. Ke et al., "LightGBM: A highly efficient gradient boosting decision tree," in *Proc. NeurIPS*, 2017, pp. 3146–3154.

[24] S. M. Lundberg and S.-I. Lee, "A unified approach to interpreting model predictions," in *Proc. NeurIPS*, 2017, pp. 4766–4777.

[25] V. M. A. Souza et al., "Challenges in benchmarking stream learning algorithms with real-world data," *Data Min. Knowl. Discov.*, vol. 34, pp. 1805–1858, 2020.

[26] T. Pandeva, T. Bakker, C. A. Naesseth, and P. Forré, "E-valuating classifier two-sample tests," *Trans. Mach. Learn. Res.*, 2024.

[27] P. Panda, S. S. Kancheti, V. N. Balasubramanian, and G. Sinha, "Interpretable model drift detection," in *Proc. ACM IKDD CODS-COMAD*, 2024.

[28] J. Feng, H. Singh, F. Xia, A. Subbaswamy, and A. Gossmann, "A hierarchical decomposition for explaining ML performance discrepancies," in *Proc. NeurIPS*, 2024.

[29] A. Gandy, "Sequential implementation of Monte Carlo tests with uniformly bounded resampling risk," *J. Am. Stat. Assoc.*, vol. 104, no. 488, pp. 1504–1511, 2009.

[30] S. M. Lundberg, G. Erion, H. Chen et al., "From local explanations to global understanding with explainable AI for trees," *Nature Mach. Intell.*, vol. 2, pp. 56–67, 2020.

[31] F. Hinder, V. Vaquet, and B. Hammer, "Feature-based analyses of concept drift," *Neurocomputing*, vol. 600, 127968, 2024.

[32] K. Budhathoki, D. Janzing, P. Bloebaum, and H. Ng, "Why did the distribution change?" in *Proc. AISTATS*, 2021, pp. 1666–1674.

[33] C. E. Shannon, "A mathematical theory of communication," *Bell Syst. Tech. J.*, vol. 27, no. 3, pp. 379–423, 1948.