

Table of Contents

- [1. Weird Algorithm](#)
- [2. Missing Number](#)
- [3. Repetitions](#)
- [4. Increasing Array](#)
- [5. Permutations](#)
- [6. Number Spiral](#)
- [7. Two Knights](#)
- [8. Two Sets](#)
- [9. Bit Strings](#)
- [10. Trailing Zeros](#)
- [11. Coin Piles](#)
- [12. Palindrome Reorder](#)
- [13. Gray Code](#)
- [14. Tower of Hanoi](#)
- [15. Creating Strings](#)
- [16. Apple Division](#)
- [17. Chessboard and Queens](#)
- [18. Digit Queries](#)
- [19. Grid Paths](#)
- [20. Distinct Numbers](#)
- [21. Apartments](#)
- [22. Ferris Wheel](#)
- [23. Concert Tickets](#)
- [24. Restaurant Customers](#)
- [25. Movie Festival](#)
- [26. Sum of Two Values](#)
- [27. Maximum Subarray Sum](#)
- [28. Stick Lengths](#)
- [29. Missing Coin Sum](#)
- [30. Collecting Numbers](#)
- [31. Collecting Numbers II](#)
- [32. Playlist](#)
- [33. Towers](#)
- [34. Traffic Lights](#)
- [35. Josephus Problem I](#)
- [36. Josephus Problem II](#)
- [37. Nested Ranges Check](#)
- [38. Nested Ranges Count](#)
- [39. Room Allocation](#)
- [40. Factory Machines](#)
- [41. Tasks and Deadlines](#)
- [42. Reading Books](#)
- [43. Sum of Three Values](#)
- [44. Sum of Four Values](#)
- [45. Nearest Smaller Values](#)
- [46. Subarray Sums I](#)
- [47. Subarray Sums II](#)
- [48. Subarray Divisibility](#)
- [49. Subarray Distinct Values](#)
- [50. Array Division](#)
- [51. Sliding Window Median](#)
- [52. Sliding Window Cost](#)
- [53. Movie Festival II](#)
- [54. Maximum Subarray Sum II](#)

- [55. Dice Combinations](#)
- [56. Minimizing Coins](#)
- [57. Coin Combinations I](#)
- [58. Coin Combinations II](#)
- [59. Removing Digits](#)
- [60. Grid Paths](#)
- [61. Book Shop](#)
- [62. Array Description](#)
- [63. Counting Towers](#)
- [64. Edit Distance](#)
- [65. Rectangle Cutting](#)
- [66. Money Sums](#)
- [67. Removal Game](#)
- [68. Two Sets II](#)
- [69. Increasing Subsequence](#)
- [70. Projects](#)
- [71. Elevator Rides](#)
- [72. Counting Tilings](#)
- [73. Counting Numbers](#)
- [74. Counting Rooms](#)
- [75. Labyrinth](#)
- [76. Building Roads](#)
- [77. Message Route](#)
- [78. Building Teams](#)
- [79. Round Trip](#)
- [80. Monsters](#)
- [81. Shortest Routes I](#)
- [82. Shortest Routes II](#)
- [83. High Score](#)
- [84. Flight Discount](#)
- [85. Cycle Finding](#)
- [86. Flight Routes](#)
- [87. Round Trip II](#)
- [88. Course Schedule](#)
- [89. Longest Flight Route](#)
- [90. Game Routes](#)
- [91. Investigation](#)
- [92. Planets Queries I](#)
- [93. Planets Queries II](#)
- [94. Planets Cycles](#)
- [95. Road Reparation](#)
- [96. Road Construction](#)
- [97. Flight Routes Check](#)
- [98. Planets and Kingdoms](#)
- [99. Giant Pizza](#)
- [100. Coin Collector](#)
- [101. Mail Delivery](#)
- [102. De Bruijn Sequence](#)
- [103. Teleporters Path](#)
- [104. Hamiltonian Flights](#)
- [105. Knight's Tour](#)
- [106. Download Speed](#)
- [107. Police Chase](#)
- [108. School Dance](#)
- [109. Distinct Routes](#)
- [110. Static Range Sum Queries](#)

- 111. Static Range Minimum Queries
- 112. Dynamic Range Sum Queries
- 113. Dynamic Range Minimum Queries
- 114. Range Xor Queries
- 115. Range Update Queries
- 116. Forest Queries
- 117. Hotel Queries
- 118. List Removals
- 119. Salary Queries
- 120. Prefix Sum Queries
- 121. Pizzeria Queries
- 122. Subarray Sum Queries
- 123. Distinct Values Queries
- 124. Increasing Array Queries
- 125. Forest Queries II
- 126. Range Updates and Sums
- 127. Polynomial Queries
- 128. Range Queries and Copies
- 129. Subordinates
- 130. Tree Matching
- 131. Tree Diameter
- 132. Tree Distances I
- 133. Tree Distances II
- 134. Company Queries I
- 135. Company Queries II
- 136. Distance Queries
- 137. Counting Paths
- 138. Subtree Queries
- 139. Path Queries
- 140. Path Queries II
- 141. Distinct Colors
- 142. Finding a Centroid
- 143. Fixed-Length Paths I
- 144. Fixed-Length Paths II
- 145. Josephus Queries
- 146. Exponentiation
- 147. Exponentiation II
- 148. Counting Divisors
- 149. Common Divisors
- 150. Sum of Divisors
- 151. Divisor Analysis
- 152. Prime Multiples
- 153. Counting Coprime Pairs
- 154. Binomial Coefficients
- 155. Creating Strings II
- 156. Distributing Apples
- 157. Christmas Party
- 158. Bracket Sequences I
- 159. Bracket Sequences II
- 160. Counting Necklaces
- 161. Counting Grids
- 162. Fibonacci Numbers
- 163. Throwing Dice
- 164. Graph Paths I
- 165. Graph Paths II
- 166. Dice Probability

- [167. Moving Robots](#)
- [168. Candy Lottery](#)
- [169. Inversion Probability](#)
- [170. Stick Game](#)
- [171. Nim Game I](#)
- [172. Nim Game II](#)
- [173. Stair Game](#)
- [174. Grundy's Game](#)
- [175. Another Game](#)
- [176. Word Combinations](#)
- [177. String Matching](#)
- [178. Finding Borders](#)
- [179. Finding Periods](#)
- [180. Minimal Rotation](#)
- [181. Longest Palindrome](#)
- [182. Required Substring](#)
- [183. Palindrome Queries](#)
- [184. Finding Patterns](#)
- [185. Counting Patterns](#)
- [186. Pattern Positions](#)
- [187. Distinct Substrings](#)
- [188. Repeating Substring](#)
- [189. String Functions](#)
- [190. Substring Order I](#)
- [191. Substring Order II](#)
- [192. Substring Distribution](#)
- [193. Point Location Test](#)
- [194. Line Segment Intersection](#)
- [195. Polygon Area](#)
- [196. Point in Polygon](#)
- [197. Polygon Lattice Points](#)
- [198. Minimum Euclidean Distance](#)
- [199. Convex Hull](#)
- [200. Meet in the Middle](#)
- [201. Hamming Distance](#)
- [202. Beautiful Subgrids](#)
- [203. Reachable Nodes](#)
- [204. Reachability Queries](#)
- [205. Cut and Paste](#)
- [206. Substring Reversals](#)
- [207. Reversals and Sums](#)
- [208. Necessary Roads](#)
- [209. Necessary Cities](#)
- [210. Eulerian Subgraphs](#)
- [211. Monster Game I](#)
- [212. Monster Game II](#)
- [213. Subarray Squares](#)
- [214. Houses and Schools](#)
- [215. Knuth Division](#)
- [216. Apples and Bananas](#)
- [217. One Bit Positions](#)
- [218. Signal Processing](#)
- [219. New Roads Queries](#)
- [220. Dynamic Connectivity](#)
- [221. Parcel Delivery](#)
- [222. Task Assignment](#)

- [223. Distinct Routes II](#)
- [224. Shortest Subsequence](#)
- [225. Counting Bits](#)
- [226. Swap Game](#)
- [227. Prüfer Code](#)
- [228. Acyclic Graph Edges](#)
- [229. Strongly Connected Edges](#)
- [230. Even Outdegree Edges](#)
- [231. Multiplication Table](#)
- [232. Advertisement](#)
- [233. Special Substrings](#)
- [234. Permutation Inversions](#)
- [235. Maximum Xor Subarray](#)
- [236. Movie Festival Queries](#)
- [237. Chess Tournament](#)
- [238. Tree Traversals](#)
- [239. Network Renovation](#)
- [240. Graph Girth](#)
- [241. Intersection Points](#)
- [242. Inverse Inversions](#)
- [243. Monotone Subsequences](#)
- [244. String Reorder](#)
- [245. Stack Weights](#)
- [246. Pyramid Array](#)
- [247. Increasing Subsequence II](#)
- [248. String Removals](#)
- [249. Bit Inversions](#)
- [250. Xor Pyramid](#)
- [251. Writing Numbers](#)
- [252. String Transform](#)
- [253. Letter Pair Move Game](#)
- [254. Maximum Building I](#)
- [255. Sorting Methods](#)
- [256. Cyclic Array](#)
- [257. List of Sums](#)
- [258. Increasing Array II](#)
- [259. Food Division](#)
- [260. Bit Problem](#)
- [261. Swap Round Sorting](#)
- [262. Binary Subsequences](#)
- [263. Tree Isomorphism I](#)
- [264. Counting Sequences](#)
- [265. Critical Cities](#)
- [266. School Excursion](#)
- [267. Coin Grid](#)
- [268. Robot Path](#)
- [269. Programmers and Artists](#)
- [270. Course Schedule II](#)
- [271. Removing Digits II](#)
- [272. Coin Arrangement](#)
- [273. Counting Bishops](#)
- [274. Grid Puzzle I](#)
- [275. Grid Puzzle II](#)
- [276. Empty String](#)
- [277. Grid Paths](#)
- [278. Bit Substrings](#)

- [279. Reversal Sorting](#)
- [280. Counting Reorders](#)
- [281. Book Shop II](#)
- [282. Network Breakdown](#)
- [283. Visiting Cities](#)
- [284. Missing Coin Sum Queries](#)
- [285. Number Grid](#)
- [286. Maximum Building II](#)
- [287. Filling Trominos](#)
- [288. Stick Divisions](#)
- [289. Coding Company](#)
- [290. Flight Route Requests](#)
- [291. Two Stacks Sorting](#)
- [292. Tree Isomorphism II](#)
- [293. Forbidden Cities](#)
- [294. Area of Rectangles](#)
- [295. Grid Completion](#)
- [296. Creating Offices](#)
- [297. Permutations II](#)
- [298. Functional Graph Distribution](#)
- [299. New Flight Routes](#)
- [300. Grid Path Construction](#)

Problem 1: Weird Algorithm

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1068 |

Consider an algorithm that takes as input a positive integer n . If n is even, the algorithm divides it by two, and if n is odd, the algorithm multiplies it by three and adds one. The algorithm repeats this, until n is one. For example, the sequence for $n=3$ is as follows: $3 \rightarrow 10 \rightarrow 5 \rightarrow 16 \rightarrow 8 \rightarrow 4 \rightarrow 2 \rightarrow 1$. Your task is to simulate the execution of the algorithm for a given value of n .

Input

The only input line contains an integer n .

Output

Print a line that contains all values of n during the algorithm.

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

3

Output:

3 10 5 16 8 4 2 1

(Write your solution here...)

Problem 2: Missing Number

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1069 |

You are given a DNA sequence: a string consisting of characters A, C, G, and T. Your task is to find the longest repetition in the sequence. This is a maximum-length substring containing only one type of character.

Input

The only input line contains a string of n characters.

Output

Print one integer: the length of the longest repetition.

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

ATTCGGGA

Output:

3

(Write your solution here...)

Problem 3: Repetitions

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1070 |

A permutation of integers $1, 2, \dots, n$ is called *beautiful* if there are no adjacent elements whose difference is 1.

Given n , construct a beautiful permutation if such a permutation exists.

Input

The only input line contains an integer n .

Output

Print a beautiful permutation of integers $1, 2, \dots, n$. If there are several solutions, you may print any of them. If there are no solutions, print "NO SOLUTION".

Constraints

- $1 \leq n \leq 10^6$

Example 1

Input:

5

Output:

4 2 5 3 1

Example 2

Input:

3

Output:

NO SOLUTION

(Write your solution here...)

Problem 4: Increasing Array

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1071 |

A number spiral is an infinite grid whose upper-left square has number 1. Here are the first five layers of the spiral:

Your task is to find out the number in row y and column x .

Input

The first input line contains an integer t : the number of tests.

After this, there are t lines, each containing integers y and x .

Output

For each test, print the number in row y and column x .

Constraints

- $1 \leq t \leq 10^5$
- $1 \leq y, x \leq 10^9$

Example

Input:

```
3
2 3
1 1
4 2
```

Output:

```
8
1
15
```

(Write your solution here...)

Problem 5: Permutations

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1072 |

Your task is to count for $k=1,2,\dots,n$ the number of ways two knights can be placed on a $k \times k$ chessboard so that they do not attack each other.

Input

The only input line contains an integer n .

Output

Print n integers: the results.

Constraints

- $1 \leq n \leq 10000$

Example

Input:

8

Output:

0
6
28
96
252
550
1056
1848

(Write your solution here...)

Problem 6: Number Spiral

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1073 |

You are given n cubes in a certain order, and your task is to build towers using them. Whenever two cubes are one on top of the other, the upper cube must be smaller than the lower cube.

You must process the cubes in the given order. You can always either place the cube on top of an existing tower, or begin a new tower. What is the minimum possible number of towers?

Input

The first input line contains an integer n : the number of cubes.

The next line contains n integers k_1, k_2, \dots, k_n : the sizes of the cubes.

Output

Print one integer: the minimum number of towers.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq k_i \leq 10^9$

Example

Input:

```
5
3 8 2 1 5
```

Output:

```
2
```

(Write your solution here...)

Problem 7: Two Knights

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1074 |

There are n sticks with some lengths. Your task is to modify the sticks so that each stick has the same length.

You can either lengthen and shorten each stick. Both operations cost x where x is the difference between the new and original length.

What is the minimum total cost?

Input

The first input line contains an integer n : the number of sticks.

Then there are n integers: p_1, p_2, \dots, p_n : the lengths of the sticks.

Output

Print one integer: the minimum total cost.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq p_i \leq 10^9$

Example

Input:

```
5
2 3 1 5 2
```

Output:

```
5
```

(Write your solution here...)

Problem 8: Two Sets

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1075 |

A permutation of integers $1, 2, \dots, n$ is called *beautiful* if there are no adjacent elements whose difference is 1.

Given n , your task is to count the number of beautiful permutations.

Input

The only input line contains an integer n .

Output

Print the number of beautiful permutations of $1, 2, \dots, n$ modulo 10^9+7 .

Constraints

- $1 \leq n \leq 1000$

Example

Input:

5

Output:

14

(Write your solution here...)

Problem 9: Bit Strings

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1076 |

You are given an array of n integers. Your task is to calculate the median of each window of k elements, from left to right.

The median is the middle element when the elements are sorted. If the number of elements is even, there are two possible medians and we assume that the median is the smaller of them.

Input

The first line contains two integers n and k : the number of elements and the size of the window.

Then there are n integers x_1, x_2, \dots, x_n : the contents of the array.

Output

Print $n-k+1$ values: the medians.

Constraints

- $1 \leq k \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$

Example

Input:

```
8 3
2 4 3 5 8 1 2 1
```

Output:

```
3 4 5 5 2 1
```

(Write your solution here...)

Problem 10: Trailing Zeros

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1077 |

You are given an array of n integers. Your task is to calculate for each window of k elements, from left to right, the minimum total cost of making all elements equal.

You can increase or decrease each element with cost x where x is the difference between the new and the original value. The total cost is the sum of such costs.

Input

The first line contains two integers n and k : the number of elements and the size of the window.

Then there are n integers x_1, x_2, \dots, x_n : the contents of the array.

Output

Output $n-k+1$ values: the costs.

Constraints

- $1 \leq k \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$

Example

Input:

```
8 3
2 4 3 5 8 1 2 1
```

Output:

```
2 2 5 7 7 1
```

(Write your solution here...)

Problem 11: Coin Piles

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1078 |

Consider an $n \times n$ grid whose top-left square is $(1,1)$ and bottom-right square is (n,n) .

Your task is to move from the top-left square to the bottom-right square. On each step you may move one square right or down. In addition, there are m traps in the grid. You cannot move to a square with a trap.

What is the total number of possible paths?

Input

The first input line contains two integers n and m : the size of the grid and the number of traps.

After this, there are m lines describing the traps. Each such line contains two integers y and x : the location of a trap.

You can assume that there are no traps in the top-left and bottom-right square.

Output

Print the number of paths modulo 10^9+7 .

Constraints

- $1 \leq n \leq 10^6$
- $1 \leq m \leq 1000$
- $1 \leq y, x \leq n$

Example

Input:

```
3 1
2 2
```

Output:

```
2
```

(Write your solution here...)

Problem 12: Palindrome Reorder

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1079 |

Your task is to calculate n binomial coefficients modulo 10^9+7 .

A binomial coefficient $\binom{a}{b}$ can be calculated using the formula $\frac{a!}{b!(a-b)!}$. We assume that a and b are integers and $0 \leq b \leq a$.

Input

The first input line contains an integer n : the number of calculations.

After this, there are n lines, each of which contains two integers a and b .

Output

Print each binomial coefficient modulo 10^9+7 .

Constraints

- $1 \leq n \leq 10^5$
- $0 \leq b \leq a \leq 10^6$

Example

Input:

```
3
5 3
8 1
9 5
```

Output:

```
10
8
126
```

(Write your solution here...)

Problem 13: Gray Code

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1080 |

You are given a string consisting of n characters between a and z .

On each turn, you may remove any two adjacent characters that are equal. Your goal is to construct an empty string by removing all the characters.

In how many ways can you do this?

Input

The only input line has a string of length n .

Output

Print one integer: the number of ways modulo 10^9+7 .

Constraints

- $1 \leq n \leq 500$

Example

Input:

aabccb

Output:

3

(Write your solution here...)

Problem 14: Tower of Hanoi

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1081 |

You are given an array of n positive integers. Your task is to find two integers such that their greatest common divisor is as large as possible.

Input

The first input line has an integer n : the size of the array.

The second line has n integers x_1, x_2, \dots, x_n : the contents of the array.

Output

Print the maximum greatest common divisor.

Constraints

- $2 \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^6$

Example

Input:

```
5
3 14 15 7 9
```

Output:

```
7
```

(Write your solution here...)

Problem 15: Creating Strings

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1082 |

Let $\sigma(n)$ denote the sum of divisors of an integer n . For example, $\sigma(12)=1+2+3+4+6+12=28$.

Your task is to calculate the sum $\sum_{i=1}^n \sigma(i)$ modulo 10^9+7 .

Input

The only input line has an integer n .

Output

Print $\sum_{i=1}^n \sigma(i)$ modulo 10^9+7 .

Constraints

- $1 \leq n \leq 10^{12}$

Example

Input:

5

Output:

21

(Write your solution here...)

Problem 16: Apple Division

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1083 |

You are given all numbers between $1, 2, \dots, n$ except one. Your task is to find the missing number.

Input

The first input line contains an integer n .

The second line contains $n-1$ numbers. Each number is distinct and between 1 and n (inclusive).

Output

Print the missing number.

Constraints

- $2 \leq n \leq 2 \cdot 10^5$

Example

Input:

```
5
2 3 1 5
```

Output:

```
4
```

(Write your solution here...)

Problem 17: Chessboard and Queens

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1084 |

There are n applicants and m free apartments. Your task is to distribute the apartments so that as many applicants as possible will get an apartment.

Each applicant has a desired apartment size, and they will accept any apartment whose size is close enough to the desired size.

Input

The first input line has three integers n , m , and k : the number of applicants, the number of apartments, and the maximum allowed difference.

The next line contains n integers a_1, a_2, \dots, a_n : the desired apartment size of each applicant. If the desired size of an applicant is x , they will accept any apartment whose size is between $x-k$ and $x+k$.

The last line contains m integers b_1, b_2, \dots, b_m : the size of each apartment.

Output

Print one integer: the number of applicants who will get an apartment.

Constraints

- $1 \leq n, m \leq 2 \cdot 10^5$
- $0 \leq k \leq 10^9$
- $1 \leq a_i, b_i \leq 10^9$

Example

Input:

```
4 3 5
60 45 80 60
30 60 75
```

Output:

```
2
```

(Write your solution here...)

Problem 18: Digit Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1085 |

You are given an array containing n positive integers.

Your task is to divide the array into k subarrays so that the maximum sum in a subarray is as small as possible.

Input

The first input line contains two integers n and k : the size of the array and the number of subarrays in the division.

The next line contains n integers x_1, x_2, \dots, x_n : the contents of the array.

Output

Print one integer: the maximum sum in a subarray in the optimal division.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq k \leq n$
- $1 \leq x_i \leq 10^9$

Example

Input:

```
5 3
2 4 7 3 5
```

Output:

```
8
```

Explanation: An optimal division is $[2,4],[7],[3,5]$ where the sums of the subarrays are 6,7,8. The largest sum is the last sum 8.

(Write your solution here...)

Problem 19: Grid Paths

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1086 |

You would like to write a list of positive integers $1, 2, 3, \dots$ using your computer. However, you can press each key 0–9 at most n times during the process.

What is the last number you can write?

Input

The only input line contains the value of n .

Output

Print the last number you can write.

Constraints

- $1 \leq n \leq 10^{18}$

Example

Input:

5

Output:

12

Explanation: You can write the numbers $1, 2, \dots, 12$. This requires that you press key 1 five times, so you cannot write the number 13.

(Write your solution here...)

Problem 20: Distinct Numbers

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1087 |

You are given a DNA sequence consisting of characters A, C, G, and T.

Your task is to find the shortest DNA sequence that is not a subsequence of the original sequence.

Input

The only input line contains a DNA sequence with n characters.

Output

Print the shortest DNA sequence that is not a subsequence of the original sequence. If there are several solutions, you may print any of them.

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

ACGTACGT

Output:

AAA

(Write your solution here...)

Problem 21: Apartments

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1090 |

There are n children who want to go to a Ferris wheel, and your task is to find a gondola for each child.

Each gondola may have one or two children in it, and in addition, the total weight in a gondola may not exceed x . You know the weight of every child.

What is the minimum number of gondolas needed for the children?

Input

The first input line contains two integers n and x : the number of children and the maximum allowed weight.

The next line contains n integers p_1, p_2, \dots, p_n : the weight of each child.

Output

Print one integer: the minimum number of gondolas.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x \leq 10^9$
- $1 \leq p_i \leq x$

Example

Input:

```
4 10
7 2 3 9
```

Output:

```
3
```

(Write your solution here...)

Problem 22: Ferris Wheel

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1091 |

There are n concert tickets available, each with a certain price. Then, m customers arrive, one after another.

Each customer announces the maximum price they are willing to pay for a ticket, and after this, they will get a ticket with the nearest possible price such that it does not exceed the maximum price.

Input

The first input line contains integers n and m : the number of tickets and the number of customers.

The next line contains n integers h_1, h_2, \dots, h_n : the price of each ticket.

The last line contains m integers t_1, t_2, \dots, t_m : the maximum price for each customer in the order they arrive.

Output

Print, for each customer, the price that they will pay for their ticket. After this, the ticket cannot be purchased again.

If a customer cannot get any ticket, print -1.

Constraints

- $1 \leq n, m \leq 2 \cdot 10^5$
- $1 \leq h_i, t_i \leq 10^9$

Example

Input:

```
5 3
5 3 7 8 5
4 8 3
```

Output:

```
3
8
-1
```

(Write your solution here...)

Problem 23: Concert Tickets

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1092 |

Your task is to divide the numbers $1, 2, \dots, n$ into two sets of equal sum.

Input

The only input line contains an integer n .

Output

Print "YES", if the division is possible, and "NO" otherwise.

After this, if the division is possible, print an example of how to create the sets. First, print the number of elements in the first set followed by the elements themselves in a separate line, and then, print the second set in a similar way.

Constraints

- $1 \leq n \leq 10^6$

Example 1

Input:

7

Output:

YES

4

1 2 4 7

3

3 5 6


Example 2

Input:

6

Output:

NO

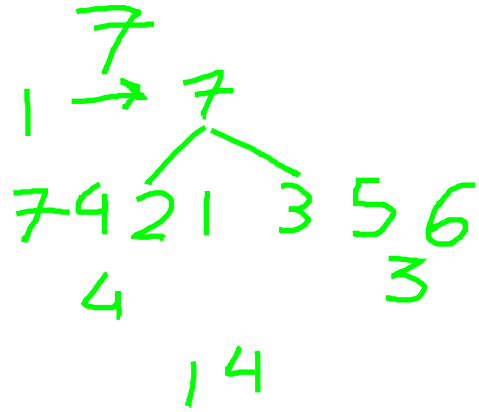

(Write your solution here...)

Problem 24: Restaurant Customers

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1093 |

Your task is to count the number of ways numbers $1, 2, \dots, n$ can be divided into two sets of equal sum.

For example, if $n=7$, there are four solutions:

- $\{1, 3, 4, 6\}$ and $\{2, 5, 7\}$
- $\{1, 2, 5, 6\}$ and $\{3, 4, 7\}$
- $\{1, 2, 4, 7\}$ and $\{3, 5, 6\}$
- $\{1, 6, 7\}$ and $\{2, 3, 4, 5\}$

Input

The only input line contains an integer n .

Output

Print the answer modulo 10^9+7 .

Constraints

- $1 \leq n \leq 500$

Example

Input:

7

Output:

4

(Write your solution here...)

Problem 25: Movie Festival

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1094 |

You are given an array of n integers. You want to modify the array so that it is increasing, i.e., every element is at least as large as the previous element.

On each move, you may increase the value of any element by one. What is the minimum number of moves required?

Input

The first input line contains an integer n : the size of the array.

Then, the second line contains n integers x_1, x_2, \dots, x_n : the contents of the array.

Output

Print the minimum number of moves.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$

Example

Input:

```
5
3 2 5 1 7
```

Output:

```
5
```

(Write your solution here...)

Problem 26: Sum of Two Values

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1095 |

Your task is to efficiently calculate values a^b modulo 10^9+7 .

Note that in this task we assume that $0^0=1$.

Input

The first input line contains an integer n : the number of calculations.

After this, there are n lines, each containing two integers a and b .

Output

Print each value a^b modulo 10^9+7 .

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $0 \leq a, b \leq 10^9$

Example

Input:

```
3
3 4
2 8
123 123
```

Output:

```
81
256
921450052
```

(Write your solution here...)

Problem 27: Maximum Subarray Sum

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1096 |

Your task is to calculate the number of ways to get a sum n by throwing dice. Each throw yields an integer between 1 and 6.

For example, if $n=10$, some possible ways are $3+3+4$, $1+4+1+4$ and $1+1+6+1+1$.

Input

The only input line contains an integer n .

Output

Print the number of ways modulo 10^9+7 .

Constraints

- $1 \leq n \leq 10^{18}$

Example

Input:

8

Output:

125

(Write your solution here...)

Problem 28: Stick Lengths

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1097 |

There is a list of n numbers and two players who move alternately. On each move, a player removes either the first or last number from the list, and their score increases by that number. Both players try to maximize their scores.

What is the maximum possible score for the first player when both players play optimally?

Input

The first input line contains an integer n : the size of the list.

The next line has n integers x_1, x_2, \dots, x_n : the contents of the list.

Output

Print the maximum possible score for the first player.

Constraints

- $1 \leq n \leq 5000$
- $-10^9 \leq x_i \leq 10^9$

Example

Input:

```
4
4 5 1 3
```

Output:

```
8
```

(Write your solution here...)

Problem 29: Missing Coin Sum

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1098 |

There are n heaps of sticks and two players who move alternately. On each move, a player chooses a non-empty heap and removes 1, 2, or 3 sticks. The player who removes the last stick wins the game.

Your task is to find out who wins if both players play optimally.

Input

The first input line contains an integer t : the number of tests. After this, t test cases are described:

The first line contains an integer n : the number of heaps.

The next line has n integers x_1, x_2, \dots, x_n : the number of sticks in each heap.

Output

For each test case, print "first" if the first player wins the game and "second" if the second player wins the game.

Constraints

- $1 \leq t \leq 2 \cdot 10^5$
- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$
- the sum of all n is at most $2 \cdot 10^5$

Example

Input:

```
3
4
5 7 2 5
2
4 1
3
4 4 4
```

Output:

```
first
first
second
```

(Write your solution here...)

Problem 30: Collecting Numbers

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1099 |

There is a staircase consisting of n stairs, numbered $1, 2, \dots, n$. Initially, each stair has some number of balls.

There are two players who move alternately. On each move, a player chooses a stair k where $k \neq 1$ and it has at least one ball. Then, the player moves any number of balls from stair k to stair $k-1$. The player who moves last wins the game.

Your task is to find out who wins the game when both players play optimally.

Note that if there are no possible moves at all, the second player wins.

Input

The first input line has an integer t : the number of tests. After this, t test cases are described:

The first line contains an integer n : the number of stairs.

The next line has n integers p_1, p_2, \dots, p_n : the initial number of balls on each stair.

Output

For each test, print "first" if the first player wins the game and "second" if the second player wins the game.

Constraints

- $1 \leq t \leq 2 \cdot 10^5$
- $1 \leq n \leq 2 \cdot 10^5$
- $0 \leq p_i \leq 10^9$
- the sum of all n is at most $2 \cdot 10^5$

Example

Input:

```
3
3
0 2 1
4
1 1 1 1
2
5 3
```

Output:

```
first
second
first
```

(Write your solution here...)

Problem 31: Collecting Numbers II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1110 |

A rotation of a string can be generated by moving characters one after another from beginning to end. For example, the rotations of acab are acab, caba, abac, and baca.

Your task is to determine the lexicographically minimal rotation of a string.

Input

The only input line contains a string of length n . Each character is one of a–z.

Output

Print the lexicographically minimal rotation.

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

acab

Output:

abac

(Write your solution here...)

Problem 32: Playlist

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1111 |

Given a string, your task is to determine the longest palindromic substring of the string. For example, the longest palindrome in aybabbtu is bab.

Input

The only input line contains a string of length n . Each character is one of a–z.

Output

Print the longest palindrome in the string. If there are several solutions, you may print any of them.

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

aybabbtu

Output:

bab

(Write your solution here...)

Problem 33: Towers

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1112 |

Your task is to calculate the number of strings of length n having a given pattern of length m as their substring. All strings consist of characters A–Z.

Input

The first input line has an integer n : the length of the final string.

The second line has a pattern of length m .

Output

Print the number of strings modulo 10^9+7 .

Constraints

- $1 \leq n \leq 1000$
- $1 \leq m \leq 100$

Example

Input:

6
ABCDB

Output:

52

Explanation: The final string will be of the form ABCDBx or xABCDB where x is any character between A–Z.

(Write your solution here...)

Problem 34: Traffic Lights

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1113 |

Consider the following string transformation:

1. append the character # to the string (we assume that # is lexicographically smaller than all other characters of the string)
2. generate all rotations of the string
3. sort the rotations in increasing order
4. based on this order, construct a new string that contains the last character of each rotation

For example, the string `bab` becomes `bab#`. Then, the sorted list of rotations is `#bab`, `abc#b`, `bab#c`, `bc#ba`, and `c#bab`. This yields a string `cb#ab`.

Input

The only input line contains the transformed string of length $n+1$. Each character of the original string is one of `a-z`.

Output

Print the original string of length n .

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

`cb#ab`

Output:

`bab`

(Write your solution here...)

Problem 35: Josephus Problem I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1130 |

You are given a tree consisting of n nodes.

A *matching* is a set of edges where each node is an endpoint of at most one edge. What is the maximum number of edges in a matching?

Input

The first input line contains an integer n : the number of nodes. The nodes are numbered $1, 2, \dots, n$.

Then there are $n-1$ lines describing the edges. Each line contains two integers a and b : there is an edge between nodes a and b .

Output

Print one integer: the maximum number of pairs.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5
1 2
1 3
3 4
3 5
```

Output:

```
2
```

Explanation: One possible matching is (1,2) and (3,4).

(Write your solution here...)

Problem 36: Josephus Problem II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1131 |

You are given a tree consisting of n nodes.

The *diameter* of a tree is the maximum distance between two nodes. Your task is to determine the diameter of the tree.

Input

The first input line contains an integer n : the number of nodes. The nodes are numbered $1, 2, \dots, n$.

Then there are $n-1$ lines describing the edges. Each line contains two integers a and b : there is an edge between nodes a and b .

Output

Print one integer: the diameter of the tree.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5
1 2
1 3
3 4
3 5
```

Output:

```
3
```

Explanation: The diameter corresponds to the path $2 \rightarrow 1 \rightarrow 3 \rightarrow 5$.

(Write your solution here...)

Problem 37: Nested Ranges Check

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1132 |

You are given a tree consisting of n nodes.

Your task is to determine for each node the maximum distance to another node.

Input

The first input line contains an integer n : the number of nodes. The nodes are numbered $1, 2, \dots, n$.

Then there are $n-1$ lines describing the edges. Each line contains two integers a and b : there is an edge between nodes a and b .

Output

Print n integers: for each node $1, 2, \dots, n$, the maximum distance to another node.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5
1 2
1 3
3 4
3 5
```

Output:

```
2 3 2 3 3
```

(Write your solution here...)

Problem 38: Nested Ranges Count

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1133 |

You are given a tree consisting of n nodes.

Your task is to determine for each node the sum of the distances from the node to all other nodes.

Input

The first input line contains an integer n : the number of nodes. The nodes are numbered $1, 2, \dots, n$.

Then there are $n-1$ lines describing the edges. Each line contains two integers a and b : there is an edge between nodes a and b .

Output

Print n integers: for each node $1, 2, \dots, n$, the sum of the distances.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5
1 2
1 3
3 4
3 5
```

Output:

```
6 9 5 8 8
```

(Write your solution here...)

Problem 39: Room Allocation

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1134 |

A *Prüfer code* of a tree of n nodes is a sequence of $n-2$ integers that uniquely specifies the structure of the tree.

The code is constructed as follows: As long as there are at least three nodes left, find a leaf with the smallest label, add the label of its only neighbor to the code, and remove the leaf from the tree.

Given a Prüfer code of a tree, your task is to construct the original tree.

Input

The first input line contains an integer n : the number of nodes. The nodes are numbered $1, 2, \dots, n$.

The second line contains $n-2$ integers: the Prüfer code.

Output

Print $n-1$ lines describing the edges of the tree. Each line has to contain two integers a and b : there is an edge between nodes a and b . You can print the edges in any order.

Constraints

- $3 \leq n \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5
2 2 4
```

Output:

```
1 2
2 3
2 4
4 5
```

(Write your solution here...)

Problem 40: Factory Machines

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1135 |

You are given a tree consisting of n nodes.

Your task is to process q queries of the form: what is the distance between nodes a and b ?

Input

The first input line contains two integers n and q : the number of nodes and queries. The nodes are numbered $1, 2, \dots, n$.

Then there are $n-1$ lines describing the edges. Each line contains two integers a and b : there is an edge between nodes a and b .

Finally, there are q lines describing the queries. Each line contains two integers a and b : what is the distance between nodes a and b ?

Output

Print q integers: the answer to each query.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 3
1 2
1 3
3 4
3 5
1 3
2 5
1 4
```

Output:

```
1
3
2
```

(Write your solution here...)

Problem 41: Tasks and Deadlines

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1136 |

You are given a tree consisting of n nodes, and m paths in the tree.

Your task is to calculate for each node the number of paths containing that node.

Input

The first input line contains integers n and m : the number of nodes and paths. The nodes are numbered $1, 2, \dots, n$.

Then there are $n-1$ lines describing the edges. Each line contains two integers a and b : there is an edge between nodes a and b .

Finally, there are m lines describing the paths. Each line contains two integers a and b : there is a path between nodes a and b .

Output

Print n integers: for each node $1, 2, \dots, n$, the number of paths containing that node.

Constraints

- $1 \leq n, m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 3
1 2
1 3
3 4
3 5
1 3
2 5
1 4
```

Output:

```
3 1 3 1 1
```

(Write your solution here...)

Problem 42: Reading Books

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1137 |

You are given a rooted tree consisting of n nodes. The nodes are numbered $1, 2, \dots, n$, and node 1 is the root. Each node has a value.

Your task is to process following types of queries:

1. change the value of node s to x
2. calculate the sum of values in the subtree of node s

Input

The first input line contains two integers n and q : the number of nodes and queries. The nodes are numbered $1, 2, \dots, n$.

The next line has n integers v_1, v_2, \dots, v_n : the value of each node.

Then there are $n-1$ lines describing the edges. Each line contains two integers a and b : there is an edge between nodes a and b .

Finally, there are q lines describing the queries. Each query is either of the form " $1\ s\ x$ " or " $2\ s$ ".

Output

Print the answer to each query of type 2.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq a, b, s \leq n$
- $1 \leq v_i, x \leq 10^9$

Example

Input:

```
5 3
4 2 5 2 1
1 2
1 3
3 4
3 5
2 3
1 5 3
2 3
```

Output:

```
8
10
```

(Write your solution here...)

Problem 43: Sum of Three Values

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1138 |

You are given a rooted tree consisting of n nodes. The nodes are numbered $1, 2, \dots, n$, and node 1 is the root. Each node has a value.

Your task is to process following types of queries:

1. change the value of node s to x
2. calculate the sum of values on the path from the root to node s

Input

The first input line contains two integers n and q : the number of nodes and queries. The nodes are numbered $1, 2, \dots, n$.

The next line has n integers v_1, v_2, \dots, v_n : the value of each node.

Then there are $n-1$ lines describing the edges. Each line contains two integers a and b : there is an edge between nodes a and b .

Finally, there are q lines describing the queries. Each query is either of the form " $1\ s\ x$ " or " $2\ s$ ".

Output

Print the answer to each query of type 2.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq a, b, s \leq n$
- $1 \leq v_i, x \leq 10^9$

Example

Input:

```
5 3
4 2 5 2 1
1 2
1 3
3 4
3 5
2 4
1 3 2
2 4
```

Output:

```
11
8
```

(Write your solution here...)

Problem 44: Sum of Four Values

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1139 |

You are given a rooted tree consisting of n nodes. The nodes are numbered $1, 2, \dots, n$, and node 1 is the root. Each node has a color.

Your task is to determine for each node the number of distinct colors in the subtree of the node.

Input

The first input line contains an integer n : the number of nodes. The nodes are numbered $1, 2, \dots, n$.

The next line consists of n integers c_1, c_2, \dots, c_n : the color of each node.

Then there are $n-1$ lines describing the edges. Each line contains two integers a and b : there is an edge between nodes a and b .

Output

Print n integers: for each node $1, 2, \dots, n$, the number of distinct colors.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$
- $1 \leq c_i \leq 10^9$

Example

Input:

```
5
2 3 2 2 1
1 2
1 3
3 4
3 5
```

Output:

```
3 1 2 1 1
```

(Write your solution here...)

Problem 45: Nearest Smaller Values

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1140 |

There are n projects you can attend. For each project, you know its starting and ending days and the amount of money you would get as reward. You can only attend one project during a day.

What is the maximum amount of money you can earn?

Input

The first input line contains an integer n : the number of projects.

After this, there are n lines. Each such line has three integers a_i , b_i , and p_i : the starting day, the ending day, and the reward.

Output

Print one integer: the maximum amount of money you can earn.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq a_i \leq b_i \leq 10^9$
- $1 \leq p_i \leq 10^9$

Example

Input:

```
4
2 4 4
3 6 6
6 8 2
5 7 3
```

Output:

```
7
```

(Write your solution here...)

Problem 46: Subarray Sums I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1141 |

You are given a playlist of a radio station since its establishment. The playlist has a total of n songs.

What is the longest sequence of successive songs where each song is unique?

Input

The first input line contains an integer n : the number of songs.

The next line has n integers k_1, k_2, \dots, k_n : the id number of each song.

Output

Print the length of the longest sequence of unique songs.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq k_i \leq 10^9$

Example

Input:

```
8
1 2 1 3 2 7 4 2
```

Output:

```
5
```

(Write your solution here...)

Problem 47: Subarray Sums II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1142 |

A fence consists of n vertical boards. The width of each board is 1 and their heights may vary.

You want to attach a rectangular advertisement to the fence. What is the maximum area of such an advertisement?

Input

The first input line contains an integer n : the width of the fence.

After this, there are n integers k_1, k_2, \dots, k_n : the height of each board.

Output

Print one integer: the maximum area of an advertisement.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq k_i \leq 10^9$

Example

Input:

```
8
4 1 5 3 3 2 4 1
```

Output:

```
10
```

(Write your solution here...)

Problem 48: Subarray Divisibility

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1143 |

There are n hotels on a street. For each hotel you know the number of free rooms. Your task is to assign hotel rooms for groups of tourists. All members of a group want to stay in the same hotel.

The groups will come to you one after another, and you know for each group the number of rooms it requires. You always assign a group to the first hotel having enough rooms. After this, the number of free rooms in the hotel decreases.

Input

The first input line contains two integers n and m : the number of hotels and the number of groups. The hotels are numbered $1, 2, \dots, n$.

The next line contains n integers h_1, h_2, \dots, h_n : the number of free rooms in each hotel.

The last line contains m integers r_1, r_2, \dots, r_m : the number of rooms each group requires.

Output

Print the assigned hotel for each group. If a group cannot be assigned a hotel, print 0 instead.

Constraints

- $1 \leq n, m \leq 2 \cdot 10^5$
- $1 \leq h_i \leq 10^9$
- $1 \leq r_i \leq 10^9$

Example

Input:

```
8 5
3 2 4 1 5 5 2 6
4 4 7 1 1
```

Output:

```
3 5 0 1 1
```

(Write your solution here...)

Problem 49: Subarray Distinct Values

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1144 |

A company has n employees with certain salaries. Your task is to keep track of the salaries and process queries.

Input

The first input line contains two integers n and q : the number of employees and queries. The employees are numbered $1, 2, \dots, n$.

The next line has n integers p_1, p_2, \dots, p_n : each employee's salary.

After this, there are q lines describing the queries. Each line has one of the following forms:

- $! k x$: change the salary of employee k to x
- $? a b$: count the number of employees whose salary is between a and b

Output

Print the answer to each $?$ query.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq p_i \leq 10^9$
- $1 \leq k \leq n$
- $1 \leq x \leq 10^9$
- $1 \leq a \leq b \leq 10^9$

Example

Input:

```
5 3
3 7 2 2 5
? 2 3
! 3 6
? 2 3
```

Output:

```
3
2
```

(Write your solution here...)

Problem 50: Array Division

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1145 |

You are given an array containing n integers. Your task is to determine the longest increasing subsequence in the array, i.e., the longest subsequence where every element is larger than the previous one.

A subsequence is a sequence that can be derived from the array by deleting some elements without changing the order of the remaining elements.

Input

The first line contains an integer n : the size of the array.

After this there are n integers x_1, x_2, \dots, x_n : the contents of the array.

Output

Print the length of the longest increasing subsequence.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$

Example

Input:

```
8
7 3 5 3 6 2 9 8
```

Output:

```
4
```

(Write your solution here...)

Problem 51: Sliding Window Median

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1146 |

Your task is to count the number of one bits in the binary representations of integers between 1 and n .

Input

The only input line has an integer n .

Output

Print the number of one bits in the binary representations of integers between 1 and n .

Constraints

- $1 \leq n \leq 10^{15}$

Example

Input:

7

Output:

12

Explanation: The binary representations of $1 \dots 7$ are 1, 10, 11, 100, 101, 110, and 111, so there are a total of 12 one bits.

(Write your solution here...)

Problem 52: Sliding Window Cost

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1147 |

You are given a map of a forest where some squares are empty and some squares have trees.

What is the maximum area of a rectangular building that can be placed in the forest so that no trees must be cut down?

Input

The first input line contains integers n and m : the size of the forest.

After this, the forest is described. Each square is empty (.) or has trees (*).

Input

Print the maximum area of a rectangular building.

Constraints

- $1 \leq n, m \leq 1000$

Example

Input:

```
4 7
...*.*.
.*.....
.....
.....*
```

Output:

```
12
```

(Write your solution here...)

Problem 53: Movie Festival II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1148 |

You are given a map of a forest where some squares are empty and some squares have trees.

You want to place a rectangular building in the forest so that no trees need to be cut down. For each building size, your task is to calculate the number of ways you can do this.

Input

The first input line contains integers n and m : the size of the forest.

After this, the forest is described. Each square is empty (.) or has trees (*).

Output

Print n lines each containing m integers.

Constraints

- $1 \leq n, m \leq 1000$

Example

Input:

```
4 7
...*.*.
.*.....
.....
.....*
```

Output:

```
24 17 13 9 6 3 1
16 9 7 5 3 1 0
9 3 2 1 0 0 0
3 0 0 0 0 0 0
```

Explanation: For example, there are 5 possible places for a building of size 2×4 .

(Write your solution here...)

Problem 54: Maximum Subarray Sum II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1149 |

You are given a string. You can remove any number of characters from it, but you cannot change the order of the remaining characters.

How many different strings can you generate?

Input

The first input line contains a string of size n . Each character is one of a–z.

Output

Print one integer: the number of strings modulo 10^9+7 .

Constraints

- $1 \leq n \leq 5 \cdot 10^5$

Example

Input:

aybabtu

Output:

103

(Write your solution here...)

Problem 55: Dice Combinations

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1157 |

Consider a two-dimensional grid whose rows and columns are 1-indexed. Each square contains the smallest nonnegative integer that does not appear to the left on the same row or above on the same column.

Your task is to calculate the value at square (y,x) .

Input

The only input line contains two integers y and x .

Output

Print one integer: the value at square (y,x) .

Constraints

- $1 \leq y, x \leq 10^9$

Example

Input:

3 5

Output:

6

(Write your solution here...)

Problem 56: Minimizing Coins

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1158 |

You are in a book shop which sells n different books. You know the price and number of pages of each book.

You have decided that the total price of your purchases will be at most x . What is the maximum number of pages you can buy? You can buy each book at most once.

Input

The first input line contains two integers n and x : the number of books and the maximum total price.

The next line contains n integers h_1, h_2, \dots, h_n : the price of each book.

The last line contains n integers s_1, s_2, \dots, s_n : the number of pages of each book.

Output

Print one integer: the maximum number of pages.

Constraints

- $1 \leq n \leq 1000$
- $1 \leq x \leq 10^5$
- $1 \leq h_i, s_i \leq 1000$

Example

Input:

```
4 10
4 8 5 3
5 12 8 1
```

Output:

```
13
```

Explanation: You can buy books 1 and 3. Their price is $4+5=9$ and the number of pages is $5+8=13$.

(Write your solution here...)

Problem 57: Coin Combinations I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1159 |

You are in a book shop which sells n different books. You know the price, the number of pages and the number of copies of each book.

You have decided that the total price of your purchases will be at most x . What is the maximum number of pages you can buy? You can buy several copies of the same book.

Input

The first input line contains two integers n and x : the number of book and the maximum total price.

The next line contains n integers h_1, h_2, \dots, h_n : the price of each book.

The next line contains n integers s_1, s_2, \dots, s_n : the number of pages of each book.

The last line contains n integers k_1, k_2, \dots, k_n : the number of copies of each book.

Output

Print one integer: the maximum number of pages.

Constraints

- $1 \leq n \leq 100$
- $1 \leq x \leq 10^5$
- $1 \leq h_i, s_i, k_i \leq 1000$

Example

Input:

```
3 10
2 6 3
8 5 4
3 5 2
```

Output:

```
28
```

Explanation: You can buy three copies of book 1 and one copy of book 3. The price is $3 \cdot 2 + 3 = 9$ and the number of pages is $3 \cdot 8 + 4 = 28$.

(Write your solution here...)

Problem 58: Coin Combinations II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1160 |

You are playing a game consisting of n planets. Each planet has a teleporter to another planet (or the planet itself).

You have to process q queries of the form: You are now on planet a and want to reach planet b . What is the minimum number of teleportations?

Input

The first input line contains two integers n and q : the number of planets and queries. The planets are numbered $1, 2, \dots, n$.

The second line contains n integers t_1, t_2, \dots, t_n : for each planet, the destination of the teleporter.

Finally, there are q lines describing the queries. Each line has two integers a and b : you are now on planet a and want to reach planet b .

Output

For each query, print the minimum number of teleportations. If it is not possible to reach the destination, print -1 .

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 3
2 3 2 3 2
1 2
1 3
1 4
```

Output:

```
1
2
-1
```

(Write your solution here...)

Problem 59: Removing Digits

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1161 |

You have a stick of length x and you want to divide it into n sticks, with given lengths, whose total length is x .

On each move you can take any stick and divide it into two sticks. The cost of such an operation is the length of the original stick.

What is the minimum cost needed to create the sticks?

Input

The first input line has two integers x and n : the length of the stick and the number of sticks in the division.

The second line has n integers d_1, d_2, \dots, d_n : the length of each stick in the division.

Output

Print one integer: the minimum cost of the division.

Constraints

- $1 \leq x \leq 10^9$
- $1 \leq n \leq 2 \cdot 10^5$
- $\sum d_j = x$

Example

Input:

```
8 3
2 3 3
```

Output:

```
13
```

Explanation: You first divide the stick of length 8 into sticks of length 3 and 5 (cost 8). After this, you divide the stick of length 5 into sticks of length 2 and 3 (cost 5). The total cost is $8+5=13$.

(Write your solution here...)

Problem 60: Grid Paths

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1162 |

Here are some possible methods using which we can sort the elements of an array in increasing order:

1. At each step, choose two adjacent elements and swap them.
2. At each step, choose any two elements and swap them.
3. At each step, choose any element and move it to another position.
4. At each step, choose any element and move it to the front of the array.

Given a permutation of numbers $1, 2, \dots, n$, calculate the minimum number of steps to sort the array using the above methods.

Input

The first input line contains an integer n .

The second line contains n integers describing the permutation.

Output

Print four numbers: the minimum number of steps using each method.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$

Example

Input:

```
8
7 8 2 6 5 1 3 4
```

Output:

```
20 6 5 6
```

(Write your solution here...)

Problem 61: Book Shop

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1163 |

There is a street of length x whose positions are numbered $0, 1, \dots, x$. Initially there are no traffic lights, but n sets of traffic lights are added to the street one after another.

Your task is to calculate the length of the longest passage without traffic lights after each addition.

Input

The first input line contains two integers x and n : the length of the street and the number of sets of traffic lights.

Then, the next line contains n integers p_1, p_2, \dots, p_n : the position of each set of traffic lights. Each position is distinct.

Output

Print the length of the longest passage without traffic lights after each addition.

Constraints

- $1 \leq x \leq 10^9$
- $1 \leq n \leq 2 \cdot 10^5$
- $0 < p_i < x$

Example

Input:

```
8 3
3 6 2
```

Output:

```
5 3 3
```

(Write your solution here...)

Problem 62: Array Description

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1164 |

There is a large hotel, and n customers will arrive soon. Each customer wants to have a single room.

You know each customer's arrival and departure day. Two customers can stay in the same room if the departure day of the first customer is earlier than the arrival day of the second customer.

What is the minimum number of rooms that are needed to accommodate all customers? And how can the rooms be allocated?

Input

The first input line contains an integer n : the number of customers.

Then there are n lines, each of which describes one customer. Each line has two integers a and b : the arrival and departure day.

Output

Print first an integer k : the minimum number of rooms required.

After that, print a line that contains the room number of each customer in the same order as in the input. The rooms are numbered $1, 2, \dots, k$. You can print any valid solution.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq a \leq b \leq 10^9$

Example

Input:

```
3
1 2
2 4
4 4
```

Output:

```
2
1 2 1
```

(Write your solution here...)

Problem 63: Counting Towers

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1188 |

There is a bit string consisting of n bits. Then, there are some changes that invert one given bit. Your task is to report, after each change, the length of the longest substring whose each bit is the same.

Input

The first input line has a bit string consisting of n bits. The bits are numbered $1, 2, \dots, n$.

The next line contains an integer m : the number of changes.

The last line contains m integers x_1, x_2, \dots, x_m describing the changes.

Output

After each change, print the length of the longest substring whose each bit is the same.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq x_i \leq n$

Example

Input:

```
001011
3
3 2 5
```

Output:

```
4 2 3
```

Explanation: The bit string first becomes 000011, then 010011, and finally 010001.

(Write your solution here...)

Problem 64: Edit Distance

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1189 |

There are n children around a round table. For each child, you know the amount of food they currently have and the amount of food they want. The total amount of food in the table is correct.

At each step, a child can give one unit of food to his or her neighbour. What is the minimum number of steps needed?

Input

The first input line contains an integer n : the number of children.

The next line has n integers a_1, a_2, \dots, a_n : the current amount of food for each child.

The last line has n integers b_1, b_2, \dots, b_n : the required amount of food for each child.

Output

Print one integer: the minimum number of steps.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $0 \leq a_i, b_i \leq 10^6$

Example

Input:

```
3
3 5 0
2 4 2
```

Output:

```
2
```

Explanation: Child 1 gives one unit of food to child 3, and child 2 gives one unit of food to child 3.

(Write your solution here...)

Problem 65: Rectangle Cutting

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1190 |

There is an array consisting of n integers. Some values of the array will be updated, and after each update, your task is to report the maximum subarray sum in the array.

Input

The first input line contains integers n and m : the size of the array and the number of updates. The array is indexed $1, 2, \dots, n$.

The next line has n integers: x_1, x_2, \dots, x_n : the initial contents of the array.

Then there are m lines describing the changes. Each line has two integers k and x : the value at position k becomes x .

Output

After each update, print the maximum subarray sum. Empty subarrays (with sum 0) are allowed.

Constraints

- $1 \leq n, m \leq 2 \cdot 10^5$
- $-10^9 \leq x_i \leq 10^9$
- $1 \leq k \leq n$
- $-10^9 \leq x \leq 10^9$

Example

Input:

```
5 3
1 2 -3 5 -1
2 6
3 1
2 -2
```

Output:

```
9
13
6
```

(Write your solution here...)

Problem 66: Money Sums

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1191 |

You are given a cyclic array consisting of n values. Each element has two neighbors; the elements at positions n and 1 are also considered neighbors.

Your task is to divide the array into subarrays so that the sum of each subarray is at most k . What is the minimum number of subarrays?

Input

The first input line contains integers n and k .

The next line has n integers x_1, x_2, \dots, x_n : the contents of the array.

There is always at least one division (i.e., no value in the array is larger than k).

Output

Print one integer: the minimum number of subarrays.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$
- $1 \leq k \leq 10^{18}$

Example

Input:

```
8 5
2 2 2 1 3 1 2 1
```

Output:

```
3
```

Explanation: We can create three subarrays: $[2, 2, 1]$, $[3, 1]$, and $[2, 1, 2]$ (remember that the array is cyclic).

(Write your solution here...)

Problem 67: Removal Game

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1192 |

You are given a map of a building, and your task is to count the number of its rooms. The size of the map is $n \times m$ squares, and each square is either floor or wall. You can walk left, right, up, and down through the floor squares.

Input

The first input line has two integers n and m : the height and width of the map.

Then there are n lines of m characters describing the map. Each character is either `.` (floor) or `#` (wall).

Output

Print one integer: the number of rooms.

Constraints

- $1 \leq n, m \leq 1000$

Example

Input:

```
5 8
#####
#.#...#
####.#.#
#.#...#
#####
```

Output:

```
3
```

(Write your solution here...)

Problem 68: Two Sets II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1193 |

You are given a map of a labyrinth, and your task is to find a path from start to end. You can walk left, right, up and down.

Input

The first input line has two integers n and m : the height and width of the map.

Then there are n lines of m characters describing the labyrinth. Each character is `.` (floor), `#` (wall), `A` (start), or `B` (end). There is exactly one `A` and one `B` in the input.

Output

First print "YES", if there is a path, and "NO" otherwise.

If there is a path, print the length of the shortest such path and its description as a string consisting of characters `L` (left), `R` (right), `U` (up), and `D` (down). You can print any valid solution.

Constraints

- $1 \leq n, m \leq 1000$

Example

Input:

```
5 8
#####
#.A#...#
#.#.#B#
#.....#
#####
```

Output:

```
YES
9
LDDRRRRRU
```

(Write your solution here...)

Problem 69: Increasing Subsequence

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1194 |

You and some monsters are in a labyrinth. When taking a step to some direction in the labyrinth, each monster may simultaneously take one as well. Your goal is to reach one of the boundary squares without ever sharing a square with a monster.

Your task is to find out if your goal is possible, and if it is, print a path that you can follow. Your plan has to work in any situation; even if the monsters know your path beforehand.

Input

The first input line has two integers n and m : the height and width of the map.

After this there are n lines of m characters describing the map. Each character is `.` (floor), `#` (wall), `A` (start), or `M` (monster). There is exactly one `A` in the input.

Output

First print "YES" if your goal is possible, and "NO" otherwise.

If your goal is possible, also print an example of a valid path (the length of the path and its description using characters `D`, `U`, `L`, and `R`). You can print any path, as long as its length is at most $n \cdot m$ steps.

Constraints

- $1 \leq n, m \leq 1000$

Example

Input:

```
5 8
#####
#M..A..#
#.#.M#.#
#M#..#..
#.#####
```

Output:

```
YES
5
RRDDR
```

(Write your solution here...)

Problem 70: Projects

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1195 |

Your task is to find a minimum-price flight route from Syrjälä to Metsälä. You have one discount coupon, using which you can halve the price of any single flight during the route. However, you can only use the coupon once.

When you use the discount coupon for a flight whose price is x , its price becomes $\lfloor x/2 \rfloor$ (it is rounded down to an integer).

Input

The first input line has two integers n and m : the number of cities and flight connections. The cities are numbered $1, 2, \dots, n$. City 1 is Syrjälä, and city n is Metsälä.

After this there are m lines describing the flights. Each line has three integers a , b , and c : a flight begins at city a , ends at city b , and its price is c . Each flight is unidirectional.

You can assume that it is always possible to get from Syrjälä to Metsälä.

Output

Print one integer: the price of the cheapest route from Syrjälä to Metsälä.

Constraints

- $2 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$
- $1 \leq c \leq 10^9$

Example

Input:

```
3 4
1 2 3
2 3 1
1 3 7
2 1 5
```

Output:

```
2
```

(Write your solution here...)

Problem 71: Elevator Rides

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1196 |

Your task is to find the k shortest flight routes from Syrjälä to Metsälä. A route can visit the same city several times.

Note that there can be several routes with the same price and each of them should be considered (see the example).

Input

The first input line has three integers n , m , and k : the number of cities, the number of flights, and the parameter k . The cities are numbered $1, 2, \dots, n$. City 1 is Syrjälä, and city n is Metsälä.

After this, the input has m lines describing the flights. Each line has three integers a , b , and c : a flight begins at city a , ends at city b , and its price is c . All flights are one-way flights.

You may assume that there are at least k distinct routes from Syrjälä to Metsälä.

Output

Print k integers: the prices of the k cheapest routes sorted according to their prices.

Constraints

- $2 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$
- $1 \leq c \leq 10^9$
- $1 \leq k \leq 10$

Example

Input:

```
4 6 3
1 2 1
1 3 3
2 3 2
2 4 6
3 2 8
3 4 1
```

Output:

```
4 4 7
```

Explanation: The cheapest routes are $1 \rightarrow 3 \rightarrow 4$ (price 4), $1 \rightarrow 2 \rightarrow 3 \rightarrow 4$ (price 4) and $1 \rightarrow 2 \rightarrow 4$ (price 7).

(Write your solution here...)

Problem 72: Counting Tilings

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1197 |

You are given a directed graph, and your task is to find out if it contains a negative cycle, and also give an example of such a cycle.

Input

The first input line has two integers n and m : the number of nodes and edges. The nodes are numbered $1, 2, \dots, n$.

After this, the input has m lines describing the edges. Each line has three integers a , b , and c : there is an edge from node a to node b whose length is c .

Output

If the graph contains a negative cycle, print first "YES", and then the nodes in the cycle in their correct order. If there are several negative cycles, you can print any of them. If there are no negative cycles, print "NO".

Constraints

- $1 \leq n \leq 2500$
- $1 \leq m \leq 5000$
- $1 \leq a, b \leq n$
- $-10^9 \leq c \leq 10^9$

Example

Input:

```
4 5
1 2 1
2 4 1
3 1 1
4 1 -3
4 3 -2
```

Output:

```
YES
1 2 4 1
```

(Write your solution here...)

Problem 73: Counting Numbers

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1202 |

You are going to travel from Syrjälä to Lehmälä by plane. You would like to find answers to the following questions:

- what is the minimum price of such a route?
- how many minimum-price routes are there? (modulo 10^9+7)
- what is the minimum number of flights in a minimum-price route?
- what is the maximum number of flights in a minimum-price route?

Input

The first input line contains two integers n and m : the number of cities and the number of flights. The cities are numbered $1, 2, \dots, n$. City 1 is Syrjälä, and city n is Lehmälä.

After this, there are m lines describing the flights. Each line has three integers a , b , and c : there is a flight from city a to city b with price c . All flights are one-way flights.

You may assume that there is a route from Syrjälä to Lehmälä.

Output

Print four integers according to the problem statement.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$
- $1 \leq c \leq 10^9$

Example

Input:

```
4 5
1 4 5
1 2 4
2 4 5
1 3 2
3 4 3
```

Output:

```
5 2 1 2
```

(Write your solution here...)

Problem 74: Counting Rooms

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1203 |

You want to travel from Syrjälä to Lehmälä by plane using a minimum-price route. Which cities will you certainly visit?

Input

The first input line contains two integers n and m : the number of cities and the number of flights. The cities are numbered $1, 2, \dots, n$. City 1 is Syrjälä, and city n is Lehmälä.

After this, there are m lines describing the flights. Each line has three integers a , b , and c : there is a flight from city a to city b with price c . All flights are one-way flights.

You may assume that there is a route from Syrjälä to Lehmälä.

Output

First print an integer k : the number of cities that are certainly in the route. After this, print the k cities sorted in increasing order.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$
- $1 \leq c \leq 10^9$

Example

Input:

```
5 6
1 2 3
1 3 4
2 3 1
2 4 5
3 4 1
4 5 8
```

Output:

```
4
1 3 4 5
```

(Write your solution here...)

Problem 75: Labyrinth

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1617 |

Your task is to calculate the number of bit strings of length n .

For example, if $n=3$, the correct answer is 8, because the possible bit strings are 000, 001, 010, 011, 100, 101, 110, and 111.

Input

The only input line has an integer n .

Output

Print the result modulo 10^9+7 .

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

3

Output:

8

(Write your solution here...)

Problem 76: Building Roads

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1618 |

Your task is to calculate the number of trailing zeros in the factorial $n!$.

For example, $20! = 2432902008176640000$ and it has 4 trailing zeros.

Input

The only input line has an integer n .

Output

Print the number of trailing zeros in $n!$.

Constraints

- $1 \leq n \leq 10^9$

Example

Input:

20

Output:

4

(Write your solution here...)

Problem 77: Message Route

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1619 |

You are given the arrival and leaving times of n customers in a restaurant.

What was the maximum number of customers in the restaurant at any time?

Input

The first input line has an integer n : the number of customers.

After this, there are n lines that describe the customers. Each line has two integers a and b : the arrival and leaving times of a customer.

You may assume that all arrival and leaving times are distinct.

Output

Print one integer: the maximum number of customers.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq a < b \leq 10^9$

Example

Input:

```
3
5 8
2 4
3 9
```

Output:

```
2
```

(Write your solution here...)

Problem 78: Building Teams

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1620 |

A factory has n machines which can be used to make products. Your goal is to make a total of t products.

For each machine, you know the number of seconds it needs to make a single product. The machines can work simultaneously, and you can freely decide their schedule.

What is the shortest time needed to make t products?

Input

The first input line has two integers n and t : the number of machines and products.

The next line has n integers k_1, k_2, \dots, k_n : the time needed to make a product using each machine.

Output

Print one integer: the minimum time needed to make t products.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq t \leq 10^9$
- $1 \leq k_i \leq 10^9$

Example

Input:

```
3 7
3 2 5
```

Output:

```
8
```

Explanation: Machine 1 makes two products, machine 2 makes four products and machine 3 makes one product.

(Write your solution here...)

Problem 79: Round Trip

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1621 |

You are given a list of n integers, and your task is to calculate the number of *distinct* values in the list.

Input

The first input line has an integer n : the number of values.

The second line has n integers x_1, x_2, \dots, x_n .

Output

Print one integer: the number of distinct values.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$

Example

Input:

```
5
2 3 2 2 3
```

Output:

```
2
```

(Write your solution here...)

Problem 80: Monsters

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1622 |

Given a string, your task is to generate all different strings that can be created using its characters.

Input

The only input line has a string of length n . Each character is between a–z.

Output

First print an integer k : the number of strings. Then print k lines: the strings in alphabetical order.

Constraints

- $1 \leq n \leq 8$

Example

Input:

aabac

Output:

20
aaabc
aaacb
aabac
aabca
aacab
aacba
abaac
abaca
abcaa
acaab
acaba
acbaa
baaac
baaca
bacaa
bcaaa
caaab
caaba
cabaa
cbaaa

(Write your solution here...)

Problem 81: Shortest Routes I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1623 |

There are n apples with known weights. Your task is to divide the apples into two groups so that the difference between the weights of the groups is minimal.

Input

The first input line has an integer n : the number of apples.

The next line has n integers p_1, p_2, \dots, p_n : the weight of each apple.

Output

Print one integer: the minimum difference between the weights of the groups.

Constraints

- $1 \leq n \leq 20$
- $1 \leq p_i \leq 10^9$

Example

Input:

```
5
3 2 7 4 1
```

Output:

```
1
```

Explanation: Group 1 has weights 2, 3 and 4 (total weight 9), and group 2 has weights 1 and 7 (total weight 8).

(Write your solution here...)

Problem 82: Shortest Routes II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1624 |

Your task is to place eight queens on a chessboard so that no two queens are attacking each other. As an additional challenge, each square is either free or reserved, and you can only place queens on the free squares. However, the reserved squares do not prevent queens from attacking each other.

How many possible ways are there to place the queens?

Input

The input has eight lines, and each of them has eight characters. Each square is either free (.) or reserved (*).

Output

Print one integer: the number of ways you can place the queens.

Example

Input:

```

.....
.....
..*.....
.....
.....
.....**..
...*.....
.....

```

Output:

65

(Write your solution here...)

Problem 83: High Score

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1625 |

There are 88418 paths in a 7×7 grid from the upper-left square to the lower-left square. Each path corresponds to a 48-character description consisting of characters D (down), U (up), L (left) and R (right).

For example, the path

corresponds to the description DRURRRRRDDDLUULDDDLDRRURDDLLLLLURULURRUULDLLDDDD.

You are given a description of a path which may also contain characters ? (any direction). Your task is to calculate the number of paths that match the description.

Input

The only input line has a 48-character string of characters ?, D, U, L and R.

Output

Print one integer: the total number of paths.

Example

Input:

?????R?????U????????????????????????????LD????D?

Output:

201

(Write your solution here...)

Problem 84: Flight Discount

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1628 |

You are given an array of n numbers. In how many ways can you choose a subset of the numbers with sum x ?

Input

The first input line has two numbers n and x : the array size and the required sum.

The second line has n integers t_1, t_2, \dots, t_n : the numbers in the array.

Output

Print the number of ways you can create the sum x .

Constraints

- $1 \leq n \leq 40$
- $1 \leq x \leq 10^9$
- $1 \leq t_i \leq 10^9$

Example

Input:

```
4 5
1 2 3 2
```

Output:

```
3
```

(Write your solution here...)

Problem 85: Cycle Finding

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1629 |

In a movie festival n movies will be shown. You know the starting and ending time of each movie. What is the maximum number of movies you can watch entirely?

Input

The first input line has an integer n : the number of movies.

After this, there are n lines that describe the movies. Each line has two integers a and b : the starting and ending times of a movie.

Output

Print one integer: the maximum number of movies.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq a < b \leq 10^9$

Example

Input:

```
3
3 5
4 9
5 8
```

Output:

```
2
```

(Write your solution here...)

Problem 86: Flight Routes

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1630 |

You have to process n tasks. Each task has a duration and a deadline, and you will process the tasks in some order one after another. Your reward for a task is $d - f$ where d is its deadline and f is your finishing time. (The starting time is 0, and you have to process all tasks even if a task would yield negative reward.)

What is your maximum reward if you act optimally?

Input

The first input line has an integer n : the number of tasks.

After this, there are n lines that describe the tasks. Each line has two integers a and d : the duration and deadline of the task.

Output

Print one integer: the maximum reward.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq a, d \leq 10^6$

Example

Input:

```
3
6 10
8 15
5 12
```

Output:

```
2
```

(Write your solution here...)

Problem 87: Round Trip II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1631 |

There are n books, and Kotivalo and Justiina are going to read them all. For each book, you know the time it takes to read it.

They both read each book from beginning to end, and they cannot read a book at the same time. What is the minimum total time required?

Input

The first input line has an integer n : the number of books.

The second line has n integers t_1, t_2, \dots, t_n : the time required to read each book.

Output

Print one integer: the minimum total time.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq t_i \leq 10^9$

Example

Input:

```
3
2 8 3
```

Output:

```
16
```

(Write your solution here...)

Problem 88: Course Schedule

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1632 |

In a movie festival, n movies will be shown. Syrjälä's movie club consists of k members, who will be all attending the festival.

You know the starting and ending time of each movie. What is the maximum total number of movies the club members can watch entirely if they act optimally?

Input

The first input line has two integers n and k : the number of movies and club members.

After this, there are n lines that describe the movies. Each line has two integers a and b : the starting and ending time of a movie.

Output

Print one integer: the maximum total number of movies.

Constraints

- $1 \leq k \leq n \leq 2 \cdot 10^5$
- $1 \leq a < b \leq 10^9$

Example

Input:

```
5 2
1 5
8 10
3 6
2 5
6 9
```

Output:

```
4
```

(Write your solution here...)

Problem 89: Longest Flight Route

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1633 |

Your task is to count the number of ways to construct sum n by throwing a dice one or more times. Each throw produces an outcome between 1 and 6.

For example, if $n=3$, there are 4 ways:

- 1+1+1
- 1+2
- 2+1
- 3

Input

The only input line has an integer n .

Output

Print the number of ways modulo 10^9+7 .

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

3

Output:

4

(Write your solution here...)

Problem 90: Game Routes

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1634 |

Consider a money system consisting of n coins. Each coin has a positive integer value. Your task is to produce a sum of money x using the available coins in such a way that the number of coins is minimal.

For example, if the coins are $\{1, 5, 7\}$ and the desired sum is 11, an optimal solution is $5+5+1$ which requires 3 coins.

Input

The first input line has two integers n and x : the number of coins and the desired sum of money.

The second line has n distinct integers c_1, c_2, \dots, c_n : the value of each coin.

Output

Print one integer: the minimum number of coins. If it is not possible to produce the desired sum, print -1.

Constraints

- $1 \leq n \leq 100$
- $1 \leq x \leq 10^6$
- $1 \leq c_i \leq 10^6$

Example

Input:

```
3 11
1 5 7
```

Output:

```
3
```

(Write your solution here...)

Problem 91: Investigation

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1635 |

Consider a money system consisting of n coins. Each coin has a positive integer value. Your task is to calculate the number of distinct ways you can produce a money sum x using the available coins.

For example, if the coins are $\{2,3,5\}$ and the desired sum is 9, there are 8 ways:

- $2+2+5$
- $2+5+2$
- $5+2+2$
- $3+3+3$
- $2+2+2+3$
- $2+2+3+2$
- $2+3+2+2$
- $3+2+2+2$

Input

The first input line has two integers n and x : the number of coins and the desired sum of money.

The second line has n distinct integers c_1, c_2, \dots, c_n : the value of each coin.

Output

Print one integer: the number of ways modulo 10^9+7 .

Constraints

- $1 \leq n \leq 100$
- $1 \leq x \leq 10^6$
- $1 \leq c_i \leq 10^6$

Example

Input:

```
3 9
2 3 5
```

Output:

```
8
```

(Write your solution here...)

Problem 92: Planets Queries I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1636 |

Consider a money system consisting of n coins. Each coin has a positive integer value. Your task is to calculate the number of distinct *ordered* ways you can produce a money sum x using the available coins.

For example, if the coins are $\{2,3,5\}$ and the desired sum is 9, there are 3 ways:

- $2+2+5$
- $3+3+3$
- $2+2+2+3$

Input

The first input line has two integers n and x : the number of coins and the desired sum of money.

The second line has n distinct integers c_1, c_2, \dots, c_n : the value of each coin.

Output

Print one integer: the number of ways modulo 10^9+7 .

Constraints

- $1 \leq n \leq 100$
- $1 \leq x \leq 10^6$
- $1 \leq c_i \leq 10^6$

Example

Input:

```
3 9
2 3 5
```

Output:

```
3
```

(Write your solution here...)

Problem 93: Planets Queries II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1637 |

You are given an integer n . On each step, you may subtract one of the digits from the number.

How many steps are required to make the number equal to 0?

Input

The only input line has an integer n .

Output

Print one integer: the minimum number of steps.

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

27

Output:

5

Explanation: An optimal solution is $27 \rightarrow 20 \rightarrow 18 \rightarrow 10 \rightarrow 9 \rightarrow 0$.

(Write your solution here...)

Problem 94: Planets Cycles

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1638 |

Consider an $n \times n$ grid whose squares may have traps. It is not allowed to move to a square with a trap.

Your task is to calculate the number of paths from the upper-left square to the lower-right square. You can only move right or down.

Input

The first input line has an integer n : the size of the grid.

After this, there are n lines that describe the grid. Each line has n characters: `.` denotes an empty cell, and `*` denotes a trap.

Output

Print the number of paths modulo 10^9+7 .

Constraints

- $1 \leq n \leq 1000$

Example

Input:

```
4
....
.*..
...*
*...
```

Output:

```
3
```

(Write your solution here...)

Problem 95: Road Reparation

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1639 |

The *edit distance* between two strings is the minimum number of operations required to transform one string into the other.

The allowed operations are:

- Add one character to the string.
- Remove one character from the string.
- Replace one character in the string.

For example, the edit distance between LOVE and MOVIE is 2, because you can first replace L with M, and then add I.

Your task is to calculate the edit distance between two strings.

Input

The first input line has a string that contains n characters between A–Z.

The second input line has a string that contains m characters between A–Z.

Output

Print one integer: the edit distance between the strings.

Constraints

- $1 \leq n, m \leq 5000$

Example

Input:

LOVE
MOVIE

Output:

2

(Write your solution here...)

Problem 96: Road Construction

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1640 |

You are given an array of n integers, and your task is to find two values (at distinct positions) whose sum is x .

Input

The first input line has two integers n and x : the array size and the target sum.

The second line has n integers a_1, a_2, \dots, a_n : the array values.

Output

Print two integers: the positions of the values. If there are several solutions, you may print any of them. If there are no solutions, print IMPOSSIBLE.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x, a_i \leq 10^9$

Example

Input:

```
4 8
2 7 5 1
```

Output:

```
2 4
```

(Write your solution here...)

Problem 97: Flight Routes Check

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1641 |

You are given an array of n integers, and your task is to find three values (at distinct positions) whose sum is x .

Input

The first input line has two integers n and x : the array size and the target sum.

The second line has n integers a_1, a_2, \dots, a_n : the array values.

Output

Print three integers: the positions of the values. If there are several solutions, you may print any of them. If there are no solutions, print IMPOSSIBLE.

Constraints

- $1 \leq n \leq 5000$
- $1 \leq x, a_i \leq 10^9$

Example

Input:

```
4 8
2 7 5 1
```

Output:

```
1 3 4
```

(Write your solution here...)

Problem 98: Planets and Kingdoms

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1642 |

You are given an array of n integers, and your task is to find four values (at distinct positions) whose sum is x .

Input

The first input line has two integers n and x : the array size and the target sum.

The second line has n integers a_1, a_2, \dots, a_n : the array values.

Output

Print four integers: the positions of the values. If there are several solutions, you may print any of them. If there are no solutions, print IMPOSSIBLE.

Constraints

- $1 \leq n \leq 1000$
- $1 \leq x, a_i \leq 10^9$

Example

Input:

```
8 15
3 2 5 8 1 3 2 3
```

Output:

```
2 4 6 7
```

(Write your solution here...)

Problem 99: Giant Pizza

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1643 |

Given an array of n integers, your task is to find the maximum sum of values in a contiguous, nonempty subarray.

Input

The first input line has an integer n : the size of the array.

The second line has n integers x_1, x_2, \dots, x_n : the array values.

Output

Print one integer: the maximum subarray sum.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $-10^9 \leq x_i \leq 10^9$

Example

Input:

8
-1 3 -2 5 3 -5 2 2

Output:

9

(Write your solution here...)

Problem 100: Coin Collector

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1644 |

Given an array of n integers, your task is to find the maximum sum of values in a contiguous subarray with length between a and b .

Input

The first input line has three integers n , a and b : the size of the array and the minimum and maximum subarray length.

The second line has n integers x_1, x_2, \dots, x_n : the array values.

Output

Print one integer: the maximum subarray sum.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq a \leq b \leq n$
- $-10^9 \leq x_i \leq 10^9$

Example

Input:

```
8 1 2
-1 3 -2 5 3 -5 2 2
```

Output:

```
8
```

(Write your solution here...)

Problem 101: Mail Delivery

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1645 |

Given an array of n integers, your task is to find for each array position the nearest position to its left having a smaller value.

Input

The first input line has an integer n : the size of the array.

The second line has n integers x_1, x_2, \dots, x_n : the array values.

Output

Print n integers: for each array position the nearest position with a smaller value. If there is no such position, print 0.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$

Example

Input:

```
8
2 5 1 4 8 3 2 5
```

Output:

```
0 1 0 3 4 3 3 7
```

(Write your solution here...)

Problem 102: De Bruijn Sequence

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1646 |

Given an array of n integers, your task is to process q queries of the form: what is the sum of values in range $[a,b]$?

Input

The first input line has two integers n and q : the number of values and queries.

The second line has n integers x_1, x_2, \dots, x_n : the array values.

Finally, there are q lines describing the queries. Each line has two integers a and b : what is the sum of values in range $[a,b]$?

Output

Print the result of each query.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$
- $1 \leq a \leq b \leq n$

Example

Input:

```
8 4
3 2 4 5 1 1 5 3
2 4
5 6
1 8
3 3
```

Output:

```
11
2
24
4
```

(Write your solution here...)

Problem 103: Teleporters Path

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1647 |

Given an array of n integers, your task is to process q queries of the form: what is the minimum value in range $[a,b]$?

Input

The first input line has two integers n and q : the number of values and queries.

The second line has n integers x_1, x_2, \dots, x_n : the array values.

Finally, there are q lines describing the queries. Each line has two integers a and b : what is the minimum value in range $[a,b]$?

Output

Print the result of each query.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$
- $1 \leq a \leq b \leq n$

Example

Input:

```
8 4
3 2 4 5 1 1 5 3
2 4
5 6
1 8
3 3
```

Output:

```
2
1
1
4
```

(Write your solution here...)

Problem 104: Hamiltonian Flights

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1648 |

Given an array of n integers, your task is to process q queries of the following types:

1. update the value at position k to u
2. what is the sum of values in range $[a,b]$?

Input

The first input line has two integers n and q : the number of values and queries.

The second line has n integers x_1, x_2, \dots, x_n : the array values.

Finally, there are q lines describing the queries. Each line has three integers: either "1 k u " or "2 a b ".

Output

Print the result of each query of type 2.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq x_i, u \leq 10^9$
- $1 \leq k \leq n$
- $1 \leq a \leq b \leq n$

Example

Input:

```
8 4
3 2 4 5 1 1 5 3
2 1 4
2 5 6
1 3 1
2 1 4
```

Output:

```
14
2
11
```

(Write your solution here...)

Problem 105: Knight's Tour

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1649 |

Given an array of n integers, your task is to process q queries of the following types:

1. update the value at position k to u
2. what is the minimum value in range $[a,b]$?

Input

The first input line has two integers n and q : the number of values and queries.

The second line has n integers x_1, x_2, \dots, x_n : the array values.

Finally, there are q lines describing the queries. Each line has three integers: either "1 k u " or "2 a b ".

Output

Print the result of each query of type 2.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq x_i, u \leq 10^9$
- $1 \leq k \leq n$
- $1 \leq a \leq b \leq n$

Example

Input:

```
8 4
3 2 4 5 1 1 5 3
2 1 4
2 5 6
1 2 3
2 1 4
```

Output:

```
2
1
3
```

(Write your solution here...)

Problem 106: Download Speed

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1650 |

Given an array of n integers, your task is to process q queries of the form: what is the xor sum of values in range $[a,b]$?

Input

The first input line has two integers n and q : the number of values and queries.

The second line has n integers x_1, x_2, \dots, x_n : the array values.

Finally, there are q lines describing the queries. Each line has two integers a and b : what is the xor sum of values in range $[a,b]$?

Output

Print the result of each query.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$
- $1 \leq a \leq b \leq n$

Example

Input:

```
8 4
3 2 4 5 1 1 5 3
2 4
5 6
1 8
3 3
```

Output:

```
3
0
6
4
```

(Write your solution here...)

Problem 107: Police Chase

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1651 |

Given an array of n integers, your task is to process q queries of the following types:

1. increase each value in range $[a,b]$ by u
2. what is the value at position k ?

Input

The first input line has two integers n and q : the number of values and queries.

The second line has n integers x_1, x_2, \dots, x_n : the array values.

Finally, there are q lines describing the queries. Each line has three integers: either "1 a b u " or "2 k ".

Output

Print the result of each query of type 2.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq x_i, u \leq 10^9$
- $1 \leq k \leq n$
- $1 \leq a \leq b \leq n$

Example

Input:

```
8 3
3 2 4 5 1 1 5 3
2 4
1 2 5 1
2 4
```

Output:

```
5
6
```

(Write your solution here...)

Problem 108: School Dance

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1652 |

You are given an $n \times n$ grid representing the map of a forest. Each square is either empty or contains a tree. The upper-left square has coordinates $(1,1)$, and the lower-right square has coordinates (n,n) .

Your task is to process q queries of the form: how many trees are inside a given rectangle in the forest?

Input

The first input line has two integers n and q : the size of the forest and the number of queries.

Then, there are n lines describing the forest. Each line has n characters: `.` is an empty square and `*` is a tree.

Finally, there are q lines describing the queries. Each line has four integers y_1, x_1, y_2, x_2 corresponding to the corners of a rectangle.

Output

Print the number of trees inside each rectangle.

Constraints

- $1 \leq n \leq 1000$
- $1 \leq q \leq 2 \cdot 10^5$
- $1 \leq y_1 \leq y_2 \leq n$
- $1 \leq x_1 \leq x_2 \leq n$

Example

Input:

```
4 3
.*..
*.*
**..
****
2 2 3 4
3 1 3 1
1 1 2 2
```

Output:

```
3
1
2
```

(Write your solution here...)

Problem 109: Distinct Routes

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1653 |

There are n people who want to get to the top of a building which has only one elevator. You know the weight of each person and the maximum allowed weight in the elevator. What is the minimum number of elevator rides?

Input

The first input line has two integers n and x : the number of people and the maximum allowed weight in the elevator.

The second line has n integers w_1, w_2, \dots, w_n : the weight of each person.

Output

Print one integer: the minimum number of rides.

Constraints

- $1 \leq n \leq 20$
- $1 \leq x \leq 10^9$
- $1 \leq w_i \leq x$

Example

Input:

```
4 10
4 8 6 1
```

Output:

```
2
```

(Write your solution here...)

Problem 110: Static Range Sum Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1654 |

Given a list of n integers, your task is to calculate for each element x :

1. the number of elements y such that $x \mid y = x$
2. the number of elements y such that $x \mathrel{\&} y = x$
3. the number of elements y such that $x \mathrel{\&} y \neq 0$

Input

The first line has an integer n : the size of the list.

The next line has n integers x_1, x_2, \dots, x_n : the elements of the list.

Output

Print n lines: for each element the required values.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^6$

Example

Input:

```
5
3 7 2 9 2
```

Output:

```
3 2 5
4 1 5
2 4 4
1 1 3
2 4 4
```

(Write your solution here...)

Problem 111: Static Range Minimum Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1655 |

Given an array of n integers, your task is to find the maximum xor sum of a subarray.

Input

The first line has an integer n : the size of the array.

The next line has n integers x_1, x_2, \dots, x_n : the contents of the array.

Output

Print one integer: the maximum xor sum in a subarray.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $0 \leq x_i \leq 10^9$

Example

Input:

```
4
5 1 5 9
```

Output:

```
13
```

(Write your solution here...)

Problem 112: Dynamic Range Sum Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1660 |

Given an array of n positive integers, your task is to count the number of subarrays having sum x .

Input

The first input line has two integers n and x : the size of the array and the target sum x .

The next line has n integers a_1, a_2, \dots, a_n : the contents of the array.

Output

Print one integer: the required number of subarrays.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x, a_i \leq 10^9$

Example

Input:

```
5 7
2 4 1 2 7
```

Output:

```
3
```

(Write your solution here...)

Problem 113: Dynamic Range Minimum Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1661 |

Given an array of n integers, your task is to count the number of subarrays having sum x .

Input

The first input line has two integers n and x : the size of the array and the target sum x .

The next line has n integers a_1, a_2, \dots, a_n : the contents of the array.

Output

Print one integer: the required number of subarrays.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $-10^9 \leq x, a_i \leq 10^9$

Example

Input:

```
5 7
2 -1 3 5 -2
```

Output:

```
2
```

(Write your solution here...)

Problem 114: Range Xor Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1662 |

Given an array of n integers, your task is to count the number of subarrays where the sum of values is divisible by n .

Input

The first input line has an integer n : the size of the array.

The next line has n integers a_1, a_2, \dots, a_n : the contents of the array.

Output

Print one integer: the required number of subarrays.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $-10^9 \leq a_i \leq 10^9$

Example

Input:

```
5
3 1 2 7 4
```

Output:

```
1
```

(Write your solution here...)

Problem 115: Range Update Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1664 |

In a movie festival, n movies will be shown. You know the starting and ending time of each movie.

Your task is to process q queries of the form: if you arrive and leave the festival at specific times, what is the maximum number of movies you can watch?

You can watch two movies if the first movie ends before or exactly when the second movie starts. You can start the first movie exactly when you arrive and leave exactly when the last movie ends.

Input

The first input line has two integers n and q : the number of movies and queries.

After this, there are n lines describing the movies. Each line has two integers a and b : the starting and ending time of a movie.

Finally, there are q lines describing the queries. Each line has two integers a and b : your arrival and leaving time.

Output

Print the maximum number of movies for each query.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq a < b \leq 10^6$

Example

Input:

```
4 3
2 5
6 10
4 7
9 10
5 9
2 10
7 10
```

Output:

```
0
2
1
```

(Write your solution here...)

Problem 116: Forest Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1665 |

Your company has n coders, and each of them has a skill level between 0 and 100. Your task is to divide the coders into teams that work together.

Based on your experience, you know that teams work well when the skill levels of the coders are about the same. For this reason, the penalty for creating a team is the skill level difference between the best and the worst coder.

In how many ways can you divide the coders into teams such that the sum of the penalties is at most x ?

Input

The first input line has two integers n and x : the number of coders and the maximum allowed penalty sum.

The next line has n integers t_1, t_2, \dots, t_n : the skill level of each coder.

Output

Print one integer: the number of valid divisions modulo 10^9+7 .

Constraints

- $1 \leq n \leq 100$
- $0 \leq x \leq 5000$
- $0 \leq t_i \leq 100$

Example

Input:

```
3 2
2 5 3
```

Output:

```
3
```

(Write your solution here...)

Problem 117: Hotel Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1666 |

Byteland has n cities, and m roads between them. The goal is to construct new roads so that there is a route between any two cities.

Your task is to find out the minimum number of roads required, and also determine which roads should be built.

Input

The first input line has two integers n and m : the number of cities and roads. The cities are numbered $1, 2, \dots, n$.

After that, there are m lines describing the roads. Each line has two integers a and b : there is a road between those cities.

A road always connects two different cities, and there is at most one road between any two cities.

Output

First print an integer k : the number of required roads.

Then, print k lines that describe the new roads. You can print any valid solution.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
4 2
1 2
3 4
```

Output:

```
1
2 3
```

(Write your solution here...)

Problem 118: List Removals

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1667 |

Syrjälä's network has n computers and m connections. Your task is to find out if Uolevi can send a message to Maija, and if it is possible, what is the minimum number of computers on such a route.

Input

The first input line has two integers n and m : the number of computers and connections. The computers are numbered $1, 2, \dots, n$. Uolevi's computer is 1 and Maija's computer is n .

Then, there are m lines describing the connections. Each line has two integers a and b : there is a connection between those computers.

Every connection is between two different computers, and there is at most one connection between any two computers.

Output

If it is possible to send a message, first print k : the minimum number of computers on a valid route. After this, print an example of such a route. You can print any valid solution.

If there are no routes, print "IMPOSSIBLE".

Constraints

- $2 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 5
1 2
1 3
1 4
2 3
5 4
```

Output:

```
3
1 4 5
```

(Write your solution here...)

Problem 119: Salary Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1668 |

There are n pupils in Uolevi's class, and m friendships between them. Your task is to divide the pupils into two teams in such a way that no two pupils in a team are friends. You can freely choose the sizes of the teams.

Input

The first input line has two integers n and m : the number of pupils and friendships. The pupils are numbered $1, 2, \dots, n$.

Then, there are m lines describing the friendships. Each line has two integers a and b : pupils a and b are friends.

Every friendship is between two different pupils. You can assume that there is at most one friendship between any two pupils.

Output

Print an example of how to build the teams. For each pupil, print "1" or "2" depending on to which team the pupil will be assigned. You can print any valid team.

If there are no solutions, print "IMPOSSIBLE".

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 3
1 2
1 3
4 5
```

Output:

```
1 2 2 1 2
```

(Write your solution here...)

Problem 120: Prefix Sum Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1669 |

Byteland has n cities and m roads between them. Your task is to design a round trip that begins in a city, goes through two or more other cities, and finally returns to the starting city. Every intermediate city on the route has to be distinct.

Input

The first input line has two integers n and m : the number of cities and roads. The cities are numbered $1, 2, \dots, n$.

Then, there are m lines describing the roads. Each line has two integers a and b : there is a road between those cities.

Every road is between two different cities, and there is at most one road between any two cities.

Output

First print an integer k : the number of cities on the route. Then print k cities in the order they will be visited. You can print any valid solution.

If there are no solutions, print "IMPOSSIBLE".

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 6
1 3
1 2
5 3
1 5
2 4
4 5
```

Output:

```
4
3 5 1 3
```

(Write your solution here...)

Problem 121: Pizzeria Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1670 |

You are given a 3×3 grid containing the numbers $1, 2, \dots, 9$. Your task is to perform a sequence of moves so that the grid will look like this: $\begin{matrix} 1 & 2 & 3 \\ 4 & 5 & 6 \\ 7 & 8 & 9 \end{matrix}$. On each move, you can swap the numbers in any two adjacent squares (horizontally or vertically). What is the minimum number of moves required?

Input

The input has three lines, and each of them has three integers.

Output

Print one integer: the minimum number of moves.

Example

Input:

```
2 1 3
7 5 9
8 4 6
```

Output:

```
4
```

(Write your solution here...)

Problem 122: Subarray Sum Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1671 |

There are n cities and m flight connections between them. Your task is to determine the length of the shortest route from Syrjälä to every city.

Input

The first input line has two integers n and m : the number of cities and flight connections. The cities are numbered $1, 2, \dots, n$, and city 1 is Syrjälä.

After that, there are m lines describing the flight connections. Each line has three integers a , b and c : a flight begins at city a , ends at city b , and its length is c . Each flight is a one-way flight.

You can assume that it is possible to travel from Syrjälä to all other cities.

Output

Print n integers: the shortest route lengths from Syrjälä to cities $1, 2, \dots, n$.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$
- $1 \leq c \leq 10^9$

Example

Input:

```
3 4
1 2 6
1 3 2
3 2 3
1 3 4
```

Output:

```
0 5 2
```

(Write your solution here...)

Problem 123: Distinct Values Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1672 |

There are n cities and m roads between them. Your task is to process q queries where you have to determine the length of the shortest route between two given cities.

Input

The first input line has three integers n , m and q : the number of cities, roads, and queries.

Then, there are m lines describing the roads. Each line has three integers a , b and c : there is a road between cities a and b whose length is c . All roads are two-way roads.

Finally, there are q lines describing the queries. Each line has two integers a and b : determine the length of the shortest route between cities a and b .

Output

Print the length of the shortest route for each query. If there is no route, print -1 instead.

Constraints

- $1 \leq n \leq 500$
- $1 \leq m \leq n^2$
- $1 \leq q \leq 10^5$
- $1 \leq a, b \leq n$
- $1 \leq c \leq 10^9$

Example

Input:

```
4 3 5
1 2 5
1 3 9
2 3 3
1 2
2 1
1 3
1 4
3 2
```

Output:

```
5
5
8
-1
3
```

(Write your solution here...)

Problem 124: Increasing Array Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1673 |

You play a game consisting of n rooms and m tunnels. Your initial score is 0, and each tunnel increases your score by x where x may be both positive or negative. You may go through a tunnel several times.

Your task is to walk from room 1 to room n . What is the maximum score you can get?

Input

The first input line has two integers n and m : the number of rooms and tunnels. The rooms are numbered $1, 2, \dots, n$.

Then, there are m lines describing the tunnels. Each line has three integers a , b and x : the tunnel starts at room a , ends at room b , and it increases your score by x . All tunnels are one-way tunnels.

You can assume that it is possible to get from room 1 to room n .

Output

Print one integer: the maximum score you can get. However, if you can get an arbitrarily large score, print -1.

Constraints

- $1 \leq n \leq 2500$
- $1 \leq m \leq 5000$
- $1 \leq a, b \leq n$
- $-10^9 \leq x \leq 10^9$

Example

Input:

```
4 5
1 2 3
2 4 -1
1 3 -2
3 4 7
1 4 4
```

Output:

```
5
```

(Write your solution here...)

Problem 125: Forest Queries II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1674 |

Given the structure of a company, your task is to calculate for each employee the number of their subordinates.

Input

The first input line has an integer n : the number of employees. The employees are numbered $1, 2, \dots, n$, and employee 1 is the general director of the company.

After this, there are $n-1$ integers: for each employee $2, 3, \dots, n$ their direct boss in the company.

Output

Print n integers: for each employee $1, 2, \dots, n$ the number of their subordinates.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$

Example

Input:

```
5
1 1 2 3
```

Output:

```
4 1 1 0 0
```

(Write your solution here...)

Problem 126: Range Updates and Sums

- **Time limit:** 1.00 s
- **Memory limit:** 128 MB

| |
|------------|
| problemset |
| 1675 |

There are n cities and m roads between them. Unfortunately, the condition of the roads is so poor that they cannot be used. Your task is to repair some of the roads so that there will be a decent route between any two cities.

For each road, you know its reparation cost, and you should find a solution where the total cost is as small as possible.

Input

The first input line has two integers n and m : the number of cities and roads. The cities are numbered $1, 2, \dots, n$.

Then, there are m lines describing the roads. Each line has three integers a , b and c : there is a road between cities a and b , and its reparation cost is c . All roads are two-way roads.

Every road is between two different cities, and there is at most one road between two cities.

Output

Print one integer: the minimum total reparation cost. However, if there are no solutions, print "IMPOSSIBLE".

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$
- $1 \leq c \leq 10^9$

Example

Input:

```
5 6
1 2 3
2 3 5
2 4 2
3 4 8
5 1 7
5 4 4
```

Output:

```
14
```

(Write your solution here...)

Problem 127: Polynomial Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1676 |

There are n cities and initially no roads between them. However, every day a new road will be constructed, and there will be a total of m roads.

A component is a group of cities where there is a route between any two cities using the roads. After each day, your task is to find the number of components and the size of the largest component.

Input

The first input line has two integers n and m : the number of cities and roads. The cities are numbered $1, 2, \dots, n$.

Then, there are m lines describing the new roads. Each line has two integers a and b : a new road is constructed between cities a and b .

You may assume that every road will be constructed between two different cities.

Output

Print m lines: the required information after each day.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 3
1 2
1 3
4 5
```

Output:

```
4 2
3 3
2 3
```

(Write your solution here...)

Problem 128: Range Queries and Copies

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1677 |

Syrjälä's network has n computers and m connections between them. The network consists of components of computers that can send messages to each other.

Nobody in Syrjälä understands how the network works. For this reason, if a connection breaks down, nobody will repair it. In this situation a component may be divided into two components.

Your task is to calculate the number of components after each connection breakdown.

Input

The first input line has three integers n , m and k : the number of computers, connections and breakdowns. The computers are numbered $1, 2, \dots, n$.

Then, there are m lines describing the connections. Each line has two integers a and b : there is a connection between computers a and b . Each connection is between two different computers, and there is at most one connection between two computers.

Finally, there are k lines describing the breakdowns. Each line has two integers a and b : the connection between computers a and b breaks down.

Output

After each breakdown, print the number of components.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq k \leq m$
- $1 \leq a, b \leq n$

Example

Input:

```
5 5 3
1 2
1 3
2 3
3 4
4 5
3 4
2 3
4 5
```

Output:

```
2 2 3
```

(Write your solution here...)

Problem 129: Subordinates

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1678 |

Byteland has n cities and m flight connections. Your task is to design a round trip that begins in a city, goes through one or more other cities, and finally returns to the starting city. Every intermediate city on the route has to be distinct.

Input

The first input line has two integers n and m : the number of cities and flights. The cities are numbered $1, 2, \dots, n$.

Then, there are m lines describing the flights. Each line has two integers a and b : there is a flight connection from city a to city b . All connections are one-way flights from a city to another city.

Output

First print an integer k : the number of cities on the route. Then print k cities in the order they will be visited. You can print any valid solution.

If there are no solutions, print "IMPOSSIBLE".

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
4 5
1 3
2 1
2 4
3 2
3 4
```

Output:

```
4
2 1 3 2
```

(Write your solution here...)

Problem 130: Tree Matching

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1679 |

You have to complete n courses. There are m requirements of the form "course a has to be completed before course b ". Your task is to find an order in which you can complete the courses.

Input

The first input line has two integers n and m : the number of courses and requirements. The courses are numbered $1, 2, \dots, n$.

After this, there are m lines describing the requirements. Each line has two integers a and b : course a has to be completed before course b .

Output

Print an order in which you can complete the courses. You can print any valid order that includes all the courses.

If there are no solutions, print "IMPOSSIBLE".

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 3
1 2
3 1
4 5
```

Output:

```
3 4 1 5 2
```

(Write your solution here...)

Problem 131: Tree Diameter

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1680 |

Uolevi has won a contest, and the prize is a free flight trip that can consist of one or more flights through cities. Of course, Uolevi wants to choose a trip that has as many cities as possible.

Uolevi wants to fly from Syrjälä to Lehmälä so that he visits the maximum number of cities. You are given the list of possible flights, and you know that there are no directed cycles in the flight network.

Input

The first input line has two integers n and m : the number of cities and flights. The cities are numbered $1, 2, \dots, n$. City 1 is Syrjälä, and city n is Lehmälä.

After this, there are m lines describing the flights. Each line has two integers a and b : there is a flight from city a to city b . Each flight is a one-way flight.

Output

First print the maximum number of cities on the route. After this, print the cities in the order they will be visited. You can print any valid solution.

If there are no solutions, print "IMPOSSIBLE".

Constraints

- $2 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 5
1 2
2 5
1 3
3 4
4 5
```

Output:

```
4
1 3 4 5
```

(Write your solution here...)

Problem 132: Tree Distances I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1681 |

A game has n levels, connected by m teleporters, and your task is to get from level 1 to level n . The game has been designed so that there are no directed cycles in the underlying graph. In how many ways can you complete the game?

Input

The first input line has two integers n and m : the number of levels and teleporters. The levels are numbered $1, 2, \dots, n$.

After this, there are m lines describing the teleporters. Each line has two integers a and b : there is a teleporter from level a to level b .

Output

Print one integer: the number of ways you can complete the game. Since the result may be large, print it modulo 10^9+7 .

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
4 5
1 2
2 4
1 3
3 4
1 4
```

Output:

```
3
```

(Write your solution here...)

Problem 133: Tree Distances II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1682 |

There are n cities and m flight connections. Your task is to check if you can travel from any city to any other city using the available flights.

Input

The first input line has two integers n and m : the number of cities and flights. The cities are numbered $1, 2, \dots, n$.

After this, there are m lines describing the flights. Each line has two integers a and b : there is a flight from city a to city b . All flights are one-way flights.

Output

Print "YES" if all routes are possible, and "NO" otherwise. In the latter case also print two cities a and b such that you cannot travel from city a to city b . If there are several possible solutions, you can print any of them.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
4 5
1 2
2 3
3 1
1 4
3 4
```

Output:

```
NO
4 2
```

(Write your solution here...)

Problem 134: Company Queries I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1683 |

A game has n planets, connected by m teleporters. Two planets a and b belong to the same kingdom exactly when there is a route both from a to b and from b to a . Your task is to determine for each planet its kingdom.

Input

The first input line has two integers n and m : the number of planets and teleporters. The planets are numbered $1, 2, \dots, n$.

After this, there are m lines describing the teleporters. Each line has two integers a and b : you can travel from planet a to planet b through a teleporter.

Output

First print an integer k : the number of kingdoms. After this, print for each planet a kingdom label between 1 and k . You can print any valid solution.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 6
1 2
2 3
3 1
3 4
4 5
5 4
```

Output:

```
2
1 1 1 2 2
```

(Write your solution here...)

Problem 135: Company Queries II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1684 |

Uolevi's family is going to order a large pizza and eat it together. A total of n family members will join the order, and there are m possible toppings. The pizza may have any number of toppings.

Each family member gives two wishes concerning the toppings of the pizza. The wishes are of the form "topping x is good/bad". Your task is to choose the toppings so that at least one wish from everybody becomes true (a good topping is included in the pizza or a bad topping is not included).

Input

The first input line has two integers n and m : the number of family members and toppings. The toppings are numbered $1, 2, \dots, m$.

After this, there are n lines describing the wishes. Each line has two wishes of the form "+ x " (topping x is good) or "- x " (topping x is bad).

Output

Print a line with m symbols: for each topping "+" if it is included and "-" if it is not included. You can print any valid solution.

If there are no valid solutions, print "IMPOSSIBLE".

Constraints

- $1 \leq n, m \leq 10^5$
- $1 \leq x \leq m$

Example

Input:

```
3 5
+ 1 + 2
- 1 + 3
+ 4 - 2
```

Output:

```
- + + + -
```

(Write your solution here...)

Problem 136: Distance Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1685 |

There are n cities and m flight connections between them. Your task is to add new flights so that it will be possible to travel from any city to any other city. What is the minimum number of new flights required?

Input

The first input line has two integers n and m : the number of cities and flights. The cities are numbered $1, 2, \dots, n$.

After this, there are m lines describing the flights. Each line has two integers a and b : there is a flight from city a to city b . All flights are one-way flights.

Output

First print an integer k : the required number of new flights. After this, print k lines describing the new flights. You can print any valid solution.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
4 5
1 2
2 3
3 1
1 4
3 4
```

Output:

```
1
4 2
```

(Write your solution here...)

Problem 137: Counting Paths

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1686 |

A game has n rooms and m tunnels between them. Each room has a certain number of coins. What is the maximum number of coins you can collect while moving through the tunnels when you can freely choose your starting and ending room?

Input

The first input line has two integers n and m : the number of rooms and tunnels. The rooms are numbered $1, 2, \dots, n$.

Then, there are n integers k_1, k_2, \dots, k_n : the number of coins in each room.

Finally, there are m lines describing the tunnels. Each line has two integers a and b : there is a tunnel from room a to room b . Each tunnel is a one-way tunnel.

Output

Print one integer: the maximum number of coins you can collect.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq k_i \leq 10^9$
- $1 \leq a, b \leq n$

Example

Input:

```
4 4
4 5 2 7
1 2
2 1
1 3
2 4
```

Output:

```
16
```

(Write your solution here...)

Problem 138: Subtree Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1687 |

A company has n employees, who form a tree hierarchy where each employee has a boss, except for the general director.

Your task is to process q queries of the form: who is employee x 's boss k levels higher up in the hierarchy?

Input

The first input line has two integers n and q : the number of employees and queries. The employees are numbered $1, 2, \dots, n$, and employee 1 is the general director.

The next line has $n-1$ integers e_2, e_3, \dots, e_n : for each employee $2, 3, \dots, n$ their boss.

Finally, there are q lines describing the queries. Each line has two integers x and k : who is employee x 's boss k levels higher up?

Output

Print the answer for each query. If such a boss does not exist, print -1.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq e_i \leq i-1$
- $1 \leq x \leq n$
- $1 \leq k \leq n$

Example

Input:

```
5 3
1 1 3 3
4 1
4 2
4 3
```

Output:

```
3
1
-1
```

(Write your solution here...)

Problem 139: Path Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1688 |

A company has n employees, who form a tree hierarchy where each employee has a boss, except for the general director.

Your task is to process q queries of the form: who is the lowest common boss of employees a and b in the hierarchy?

Input

The first input line has two integers n and q : the number of employees and queries. The employees are numbered $1, 2, \dots, n$, and employee 1 is the general director.

The next line has $n-1$ integers e_2, e_3, \dots, e_n : for each employee $2, 3, \dots, n$ their boss.

Finally, there are q lines describing the queries. Each line has two integers a and b : who is the lowest common boss of employees a and b ?

Output

Print the answer for each query.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq e_i \leq i-1$
- $1 \leq a, b \leq n$

Example

Input:

```
5 3
1 1 3 3
4 5
2 5
1 4
```

Output:

```
3
1
1
```

(Write your solution here...)

Problem 140: Path Queries II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1689 |

Given a starting position of a knight on an 8×8 chessboard, your task is to find a sequence of moves such that it visits every square exactly once.

On each move, the knight may either move two steps horizontally and one step vertically, or one step horizontally and two steps vertically.

Input

The only line has two integers x and y : the knight's starting position.

Output

Print a grid that shows how the knight moves (according to the example). You can print any valid solution.

Constraints

- $1 \leq x, y \leq 8$

Example

Input:

2 1

Output:

```
8 1 10 13 6 3 20 17
11 14 7 2 19 16 23 4
26 9 12 15 24 5 18 21
49 58 25 28 51 22 33 30
40 27 50 59 32 29 52 35
57 48 41 44 37 34 31 62
42 39 46 55 60 63 36 53
47 56 43 38 45 54 61 64
```

(Write your solution here...)

Problem 141: Distinct Colors

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1690 |

There are n cities and m flight connections between them. You want to travel from Syrjälä to Lehmälä so that you visit each city exactly once. How many possible routes are there?

Input

The first input line has two integers n and m : the number of cities and flights. The cities are numbered $1, 2, \dots, n$. City 1 is Syrjälä, and city n is Lehmälä.

Then, there are m lines describing the flights. Each line has two integers a and b : there is a flight from city a to city b . All flights are one-way flights.

Output

Print one integer: the number of routes modulo 10^9+7 .

Constraints

- $2 \leq n \leq 20$
- $1 \leq m \leq n^2$
- $1 \leq a, b \leq n$

Example

Input:

```
4 6
1 2
1 3
2 3
3 2
2 4
3 4
```

Output:

```
2
```

(Write your solution here...)

Problem 142: Finding a Centroid

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1691 |

Your task is to deliver mail to the inhabitants of a city. For this reason, you want to find a route whose starting and ending point are the post office, and that goes through every street exactly once.

Input

The first input line has two integers n and m : the number of crossings and streets. The crossings are numbered $1, 2, \dots, n$, and the post office is located at crossing 1.

After that, there are m lines describing the streets. Each line has two integers a and b : there is a street between crossings a and b . All streets are two-way streets.

Every street is between two different crossings, and there is at most one street between two crossings.

Output

Print all the crossings on the route in the order you will visit them. You can print any valid solution.

If there are no solutions, print "IMPOSSIBLE".

Constraints

$2 \leq n \leq 10^5$
 $1 \leq m \leq 2 \cdot 10^5$
 $1 \leq a, b \leq n$

Example

Input:

```
6 8
1 2
1 3
2 3
2 4
2 6
3 5
3 6
4 5
```

Output:

```
1 2 6 3 2 4 5 3 1
```

(Write your solution here...)

Problem 143: Fixed-Length Paths I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1692 |

Your task is to construct a minimum-length bit string that contains all possible substrings of length n . For example, when $n=2$, the string 00110 is a valid solution, because its substrings of length 2 are 00, 01, 10 and 11.

Input

The only input line has an integer n .

Output

Print a minimum-length bit string that contains all substrings of length n . You can print any valid solution.

Constraints

- $1 \leq n \leq 15$

Example

Input:

2

Output:

00110

(Write your solution here...)

Problem 144: Fixed-Length Paths II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1693 |

A game has n levels and m teleporters between them. You win the game if you move from level 1 to level n using every teleporter exactly once.

Can you win the game, and what is a possible way to do it?

Input

The first input line has two integers n and m : the number of levels and teleporters. The levels are numbered $1, 2, \dots, n$.

Then, there are m lines describing the teleporters. Each line has two integers a and b : there is a teleporter from level a to level b .

You can assume that each pair (a, b) in the input is distinct.

Output

Print $m+1$ integers: the sequence in which you visit the levels during the game. You can print any valid solution.

If there are no solutions, print "IMPOSSIBLE".

Constraints

- $2 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 6
1 2
1 3
2 4
2 5
3 1
4 2
```

Output:

```
1 3 1 2 4 2 5
```

(Write your solution here...)

Problem 145: Josephus Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1694 |

Consider a network consisting of n computers and m connections. Each connection specifies how fast a computer can send data to another computer.

Kotivalo wants to download some data from a server. What is the maximum speed he can do this, using the connections in the network?

Input

The first input line has two integers n and m : the number of computers and connections. The computers are numbered $1, 2, \dots, n$. Computer 1 is the server and computer n is Kotivalo's computer.

After this, there are m lines describing the connections. Each line has three integers a , b and c : computer a can send data to computer b at speed c .

Output

Print one integer: the maximum speed Kotivalo can download data.

Constraints

- $1 \leq n \leq 500$
- $1 \leq m \leq 1000$
- $1 \leq a, b \leq n$
- $1 \leq c \leq 10^9$

Example

Input:

```
4 5
1 2 3
2 4 2
1 3 4
3 4 5
4 1 3
```

Output:

```
6
```

(Write your solution here...)

Problem 146: Exponentiation

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1695 |

Kaaleppi has just robbed a bank and is now heading to the harbor. However, the police wants to stop him by closing some streets of the city.

What is the minimum number of streets that should be closed so that there is no route between the bank and the harbor?

Input

The first input line has two integers n and m : the number of crossings and streets. The crossings are numbered $1, 2, \dots, n$. The bank is located at crossing 1, and the harbor is located at crossing n .

After this, there are m lines that describing the streets. Each line has two integers a and b : there is a street between crossings a and b . All streets are two-way streets, and there is at most one street between two crossings.

Output

First print an integer k : the minimum number of streets that should be closed. After this, print k lines describing the streets. You can print any valid solution.

Constraints

- $2 \leq n \leq 500$
- $1 \leq m \leq 1000$
- $1 \leq a, b \leq n$

Example

Input:

```
4 5
1 2
1 3
2 3
3 4
1 4
```

Output:

```
2
3 4
1 4
```

(Write your solution here...)

Problem 147: Exponentiation II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1696 |

There are n boys and m girls in a school. Next week a school dance will be organized. A dance pair consists of a boy and a girl, and there are k potential pairs.

Your task is to find out the maximum number of dance pairs and show how this number can be achieved.

Input

The first input line has three integers n , m and k : the number of boys, girls, and potential pairs. The boys are numbered $1, 2, \dots, n$, and the girls are numbered $1, 2, \dots, m$.

After this, there are k lines describing the potential pairs. Each line has two integers a and b : boy a and girl b are willing to dance together.

Output

First print one integer r : the maximum number of dance pairs. After this, print r lines describing the pairs. You can print any valid solution.

Constraints

- $1 \leq n, m \leq 500$
- $1 \leq k \leq 1000$
- $1 \leq a \leq n$
- $1 \leq b \leq m$

Example

Input:

```
3 2 4
1 1
1 2
2 1
3 1
```

Output:

```
2
1 2
3 1
```

(Write your solution here...)

Problem 148: Counting Divisors

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1697 |

There will be a chess tournament of n players. Each player has announced the number of games they want to play.

Each pair of players can play at most one game. Your task is to determine which games will be played so that everybody will be happy.

Input

The first input line has an integer n : the number of players. The players are numbered $1, 2, \dots, n$.

The next line has n integers x_1, x_2, \dots, x_n : for each player, the number of games they want to play.

Output

First print an integer k : the number of games. Then, print k lines describing the games. You can print any valid solution.

If there are no solutions, print "IMPOSSIBLE".

Constraints

- $1 \leq n \leq 10^5$
- $\sum_{i=1}^n x_i \leq 2 \cdot 10^5$

Example

Input:

```
5
1 3 2 0 2
```

Output:

```
4
1 2
2 3
2 5
3 5
```

(Write your solution here...)

Problem 149: Common Divisors

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1698 |

You are given an array containing a permutation of numbers $1, 2, \dots, n$, and your task is to sort the array using *swap rounds*. On each swap round, you can choose any number of distinct pairs of elements and swap each pair.

Your task is to find the minimum number of rounds and show how you can choose the pairs in each round.

Input

The first input line has an integer n : the size of the array.

The second line has n integers x_1, x_2, \dots, x_n : the initial permutation.

Output

First print an integer k : the minimum number of rounds.

Then, for each round, print the number of swaps and the indices of each swap. You can print any valid solution.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$

Example

Input:

```
5
5 2 1 3 4
```

Output:

```
2
2
1 3
4 5
1
3 5
```

Explanation: The initial array is $[5, 2, 1, 3, 4]$. After round 1, the array becomes $[1, 2, 5, 4, 3]$. After round 2, the array becomes $[1, 2, 3, 4, 5]$.

(Write your solution here...)

Problem 150: Sum of Divisors

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1699 |

There are n cities with airports but no flight connections. You are given m requests which routes should be possible to travel.

Your task is to determine the minimum number of one-way flight connections which makes it possible to fulfil all requests.

Input

The first input line has two integers n and m : the number of cities and requests. The cities are numbered $1, 2, \dots, n$.

After this, there are m lines describing the requests. Each line has two integers a and b : there has to be a route from city a to city b . Each request is unique.

Output

Print one integer: the minimum number of flight connections.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
4 5
1 2
2 3
2 4
3 1
3 4
```

Output:

```
4
```

Explanation: You can create the connections $1 \rightarrow 2$, $2 \rightarrow 3$, $2 \rightarrow 4$ and $3 \rightarrow 1$. Then you can also fly from city 3 to city 4 using the route $3 \rightarrow 1 \rightarrow 2 \rightarrow 4$.

(Write your solution here...)

Problem 151: Divisor Analysis

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1700 |

Given two rooted trees, your task is to find out if they are *isomorphic*, i.e., it is possible to draw them so that they look the same.

Input

The first input line has an integer t : the number of tests. Then, there are t tests described as follows:

The first line has an integer n : the number of nodes in both trees. The nodes are numbered $1, 2, \dots, n$, and node 1 is the root.

Then, there are $n-1$ lines describing the edges of the first tree, and finally $n-1$ lines describing the edges of the second tree.

Output

For each test, print "YES", if the trees are isomorphic, and "NO" otherwise.

Constraints

- $1 \leq t \leq 1000$
- $2 \leq n \leq 10^5$
- the sum of all values of n is at most 10^5

Example

Input:

```
2
3
1 2
2 3
1 2
1 3
3
1 2
2 3
1 3
3 2
```

Output:

```
NO
YES
```

(Write your solution here...)

Problem 152: Prime Multiples

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1701 |

Given two (not rooted) trees, your task is to find out if they are *isomorphic*, i.e., it is possible to draw them so that they look the same.

Input

The first input line has an integer t : the number of tests. Then, there are t tests described as follows:

The first line has an integer n : the number of nodes in both trees. The nodes are numbered $1, 2, \dots, n$.

Then, there are $n-1$ lines describing the edges of the first tree, and finally $n-1$ lines describing the edges of the second tree.

Output

For each test, print "YES", if the trees are isomorphic, and "NO" otherwise.

Constraints

- $1 \leq t \leq 1000$
- $2 \leq n \leq 10^5$
- the sum of all values of n is at most 10^5

Example

Input:

```
2
3
1 2
2 3
1 2
1 3
3
1 2
2 3
1 3
3 2
```

Output:

```
YES
YES
```

(Write your solution here...)

Problem 153: Counting Coprime Pairs

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1702 |

There are three common ways to traverse the nodes of a binary tree:

- *Preorder*: First process the root, then the left subtree, and finally the right subtree.
- *Inorder*: First process the left subtree, then the root, and finally the right subtree.
- *Postorder*: First process the left subtree, then the right subtree, and finally the root.

There is a binary tree of n nodes with distinct labels. You are given the preorder and inorder traversals of the tree, and your task is to determine its postorder traversal.

Input

The first input line has an integer n : the number of nodes. The nodes are numbered $1, 2, \dots, n$.

After this, there are two lines describing the preorder and inorder traversals of the tree. Both lines consist of n integers.

You can assume that the input corresponds to a binary tree.

Output

Print the postorder traversal of the tree.

Constraints

- $1 \leq n \leq 10^5$

Example

Input:

```
5
5 3 2 1 4
3 5 1 2 4
```

Output:

```
3 1 4 2 5
```

(Write your solution here...)

Problem 154: Binomial Coefficients

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1703 |

There are n cities and m flight connections between them. A city is called a *critical city* if it appears on every route from a city to another city.

Your task is to find all critical cities from Syrjälä to Lehmälä.

Input

The first input line has two integers n and m : the number of cities and flights. The cities are numbered $1, 2, \dots, n$. City 1 is Syrjälä, and city n is Lehmälä.

Then, there are m lines describing the connections. Each line has two integers a and b : there is a flight from city a to city b . All flights are one-way.

You may assume that there is a route from Syrjälä to Lehmälä.

Output

First print an integer k : the number of critical cities. After this, print k integers: the critical cities in increasing order.

Constraints

- $2 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 5
1 2
2 3
2 4
3 5
4 5
```

Output:

```
3
1 2 5
```

(Write your solution here...)

Problem 155: Creating Strings II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1704 |

Syrjälä's network consists of n computers and $n-1$ connections between them. It is possible to send data between any two computers.

However, if any connection breaks down, it will no longer be possible to send data between some computers. Your task is to add the minimum number of new connections in such a way that you can still send data between any two computers even if any single connection breaks down.

Input

The first input line has an integer n : the number of computers. The computers are numbered $1, 2, \dots, n$.

After this, there are $n-1$ lines describing the connections. Each line has two integers a and b : there is a connection between computers a and b .

Output

First print an integer k : the minimum number of new connections. After this, print k lines describing the connections. You can print any valid solution.

Constraints

- $3 \leq n \leq 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5
1 2
1 3
3 4
3 5
```

Output:

```
2
2 4
4 5
```

(Write your solution here...)

Problem 156: Distributing Apples

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1705 |

There are n cities and m roads between them. Kaaleppi is currently in city a and wants to travel to city b .

However, there is a problem: Kaaleppi has recently robbed a bank in city c and can't enter the city, because the local police would catch him. Your task is to find out if there is a route from city a to city b that does not visit city c .

As an additional challenge, you have to process q queries where a , b and c vary.

Input

The first input line has three integers n , m and q : the number of cities, roads and queries. The cities are numbered $1, 2, \dots, n$.

Then, there are m lines describing the roads. Each line has two integers a and b : there is a road between cities a and b . Each road is bidirectional.

Finally, there are q lines describing the queries. Each line has three integers a , b and c : is there a route from city a to city b that does not visit city c ?

You can assume that there is a route between any two cities.

Output

For each query, print "YES", if there is such a route, and "NO" otherwise.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq q \leq 10^5$
- $1 \leq a, b, c \leq n$

Example

Input:

```
5 6 3
1 2
1 3
2 3
2 4
3 4
4 5
1 4 2
3 5 4
3 5 2
```

Output:

```
YES
NO
YES
```

(Write your solution here...)

Problem 157: Christmas Party

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1706 |

A group of n children are coming to Helsinki. There are two possible attractions: a child can visit either Korkeasaari (zoo) or Linnanmäki (amusement park).

There are m pairs of children who want to visit the same attraction. Your task is to find all possible alternatives for the number of children that will visit Korkeasaari. The children's wishes have to be taken into account.

Input

The first input line has two integers n and m : the number of children and their wishes. The children are numbered $1, 2, \dots, n$.

After this, there are m lines describing the children's wishes. Each line has two integers a and b : children a and b want to visit the same attraction.

Output

Print a bit string of length n where a one-bit at index i indicates that it is possible that exactly i children visit Korkeasaari (the bit string is to be considered one-indexed).

Constraints

- $1 \leq n \leq 10^5$
- $0 \leq m \leq 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 3
1 2
2 3
1 5
```

Output:

```
10011
```

Explanation: The number of children visiting Korkeasaari can be 1, 4 or 5.

(Write your solution here...)

Problem 158: Bracket Sequences I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1707 |

Given an undirected graph, your task is to determine its *girth*, i.e., the length of its shortest cycle.

Input

The first input line has two integers n and m : the number of nodes and edges. The nodes are numbered $1, 2, \dots, n$.

After this, there are m lines describing the edges. Each line has two integers a and b : there is an edge between nodes a and b .

You may assume that there is at most one edge between each two nodes.

Output

Print one integer: the girth of the graph. If there are no cycles, print -1.

Constraints

- $1 \leq n \leq 2500$
- $1 \leq m \leq 5000$

Example

Input:

```
5 6
1 2
1 3
2 4
2 5
3 4
4 5
```

Output:

```
3
```

(Write your solution here...)

Problem 159: Bracket Sequences II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1709 |

There is an $n \times n$ grid whose each square is empty or has a coin. On each move, you can remove all coins in a row or column.

What is the minimum number of moves after which the grid is empty?

Input

The first input line has an integer n : the size of the grid. The rows and columns are numbered $1, 2, \dots, n$.

After this, there are n lines describing the grid. Each line has n characters: each character is either `.` (empty) or `o` (coin).

Output

First print an integer k : the minimum number of moves. After this, print k lines describing the moves.

On each line, first print 1 (row) or 2 (column), and then the number of a row or column. You can print any valid solution.

Constraints

- $1 \leq n \leq 100$

Example

Input:

```
3
..o
o.o
...
```

Output:

```
2
1 2
2 3
```

(Write your solution here...)

Problem 160: Counting Necklaces

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1711 |

A game consists of n rooms and m teleporters. At the beginning of each day, you start in room 1 and you have to reach room n .

You can use each teleporter at most once during the game. How many days can you play if you choose your routes optimally?

Input

The first input line has two integers n and m : the number of rooms and teleporters. The rooms are numbered $1, 2, \dots, n$.

After this, there are m lines describing the teleporters. Each line has two integers a and b : there is a teleporter from room a to room b .

There are no two teleporters whose starting and ending room are the same.

Output

First print an integer k : the maximum number of days you can play the game. Then, print k route descriptions according to the example. You can print any valid solution.

Constraints

- $2 \leq n \leq 500$
- $1 \leq m \leq 1000$
- $1 \leq a, b \leq n$

Example

Input:

```
6 7
1 2
1 3
2 6
3 4
3 5
4 6
5 6
```

Output:

```
2
3
1 2 6
4
1 3 4 6
```

(Write your solution here...)

Problem 161: Counting Grids

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1712 |

Your task is to efficiently calculate values a^{b^c} modulo 10^9+7 .

Note that in this task we assume that $0^0=1$.

Input

The first input line has an integer n : the number of calculations.

After this, there are n lines, each containing three integers a , b and c .

Output

Print each value a^{b^c} modulo 10^9+7 .

Constraints

- $1 \leq n \leq 10^5$
- $0 \leq a, b, c \leq 10^9$

Example

Input:

```
3
3 7 1
15 2 2
3 4 5
```

Output:

```
2187
50625
763327764
```

(Write your solution here...)

Problem 162: Fibonacci Numbers

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1713 |

Given n integers, your task is to report for each integer the number of its divisors.

For example, if $x=18$, the correct answer is 6 because its divisors are 1,2,3,6,9,18.

Input

The first input line has an integer n : the number of integers.

After this, there are n lines, each containing an integer x .

Output

For each integer, print the number of its divisors.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq x \leq 10^6$

Example

Input:

```
3
16
17
18
```

Output:

```
5
2
6
```

(Write your solution here...)

Problem 163: Throwing Dice

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1715 |

Given a string, your task is to calculate the number of different strings that can be created using its characters.

Input

The only input line has a string of length n . Each character is between a–z.

Output

Print the number of different strings modulo 10^9+7 .

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

aabac

Output:

20

(Write your solution here...)

Problem 164: Graph Paths I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1716 |

There are n children and m apples that will be distributed to them. Your task is to count the number of ways this can be done.

For example, if $n=3$ and $m=2$, there are 6 ways: $[0,0,2]$, $[0,1,1]$, $[0,2,0]$, $[1,0,1]$, $[1,1,0]$ and $[2,0,0]$.

Input

The only input line has two integers n and m .

Output

Print the number of ways modulo 10^9+7 .

Constraints

- $1 \leq n, m \leq 10^6$

Example

Input:

3 2

Output:

6

(Write your solution here...)

Problem 165: Graph Paths II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1717 |

There are n children at a Christmas party, and each of them has brought a gift. The idea is that everybody will get a gift brought by someone else.

In how many ways can the gifts be distributed?

Input

The only input line has an integer n : the number of children.

Output

Print the number of ways modulo 10^9+7 .

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

4

Output:

9

(Write your solution here...)

Problem 166: Dice Probability

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1722 |

The Fibonacci numbers can be defined as follows:

- $F_0=0$
- $F_1=1$
- $F_n = F_{n-2}+F_{n-1}$

Your task is to calculate the value of F_n for a given n .

Input

The only input line has an integer n .

Output

Print the value of F_n modulo 10^9+7 .

Constraints

- $0 \leq n \leq 10^{18}$

Example

Input:

10

Output:

55

(Write your solution here...)

Problem 167: Moving Robots

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1723 |

Consider a directed graph that has n nodes and m edges. Your task is to count the number of paths from node 1 to node n with exactly k edges.

Input

The first input line contains three integers n , m and k : the number of nodes and edges, and the length of the path. The nodes are numbered $1, 2, \dots, n$.

Then, there are m lines describing the edges. Each line contains two integers a and b : there is an edge from node a to node b .

Output

Print the number of paths modulo 10^9+7 .

Constraints

- $1 \leq n \leq 100$
- $1 \leq m \leq n(n-1)$
- $1 \leq k \leq 10^9$
- $1 \leq a, b \leq n$

Example

Input:

```
3 4 8
1 2
2 3
3 1
3 2
```

Output:

```
2
```

Explanation: The paths are $1 \rightarrow 2 \rightarrow 3 \rightarrow 1 \rightarrow 2 \rightarrow 3 \rightarrow 1 \rightarrow 2 \rightarrow 3$ and $1 \rightarrow 2 \rightarrow 3 \rightarrow 2 \rightarrow 3 \rightarrow 2 \rightarrow 3 \rightarrow 2 \rightarrow 3$.

(Write your solution here...)

Problem 168: Candy Lottery

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1724 |

Consider a directed weighted graph having n nodes and m edges. Your task is to calculate the minimum path length from node 1 to node n with exactly k edges.

Input

The first input line contains three integers n , m and k : the number of nodes and edges, and the length of the path. The nodes are numbered $1, 2, \dots, n$.

Then, there are m lines describing the edges. Each line contains three integers a , b and c : there is an edge from node a to node b with weight c .

Output

Print the minimum path length. If there are no such paths, print -1.

Constraints

- $1 \leq n \leq 100$
- $1 \leq m \leq n(n-1)$
- $1 \leq k \leq 10^9$
- $1 \leq a, b \leq n$
- $1 \leq c \leq 10^9$

Example

Input:

```
3 4 8
1 2 5
2 3 4
3 1 1
3 2 2
```

Output:

```
27
```

(Write your solution here...)

Problem 169: Inversion Probability

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1725 |

You throw a dice n times, and every throw produces an outcome between 1 and 6. What is the probability that the sum of outcomes is between a and b ?

Input

The only input line contains three integers n , a and b .

Output

Print the probability rounded to six decimal places (rounding half to even).

Constraints

- $1 \leq n \leq 100$
- $1 \leq a \leq b \leq 6n$

Example

Input:

2 9 10

Output:

0.194444

(Write your solution here...)

Problem 170: Stick Game

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1726 |

Each square of an 8×8 chessboard has a robot. Each robot independently moves k steps, and there can be many robots on the same square.

On each turn, a robot moves one step left, right, up or down, but not outside the board. It randomly chooses a direction among those where it can move.

Your task is to calculate the expected number of *empty* squares after k turns.

Input

The only input line has an integer k .

Output

Print the expected number of empty squares rounded to six decimal places (rounding half to even).

Constraints

- $1 \leq k \leq 100$

Example

Input:

10

Output:

23.120740

(Write your solution here...)

Problem 171: Nim Game I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1727 |

There are n children, and each of them independently gets a random integer number of candies between 1 and k .
What is the expected maximum number of candies a child gets?

Input

The only input line contains two integers n and k .

Output

Print the expected number rounded to six decimal places (rounding half to even).

Constraints

- $1 \leq n \leq 100$
- $1 \leq k \leq 100$

Example

Input:

2 3

Output:

2.444444

(Write your solution here...)

Problem 172: Nim Game II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1728 |

An array has n integers x_1, x_2, \dots, x_n , and each of them has been randomly chosen between 1 and r_i . An inversion is a pair (a, b) where $a < b$ and $x_a > x_b$.

What is the expected number of inversions in the array?

Input

The first input line contains an integer n : the size of the array.

The second line contains n integers r_1, r_2, \dots, r_n : the range of possible values for each array position.

Output

Print the expected number of inversions rounded to six decimal places (rounding half to even).

Constraints

- $1 \leq n \leq 100$
- $1 \leq r_i \leq 100$

Example

Input:

```
3
5 2 7
```

Output:

```
1.057143
```

(Write your solution here...)

Problem 173: Stair Game

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1729 |

Consider a game where two players remove sticks from a heap. The players move alternately, and the player who removes the last stick wins the game.

A set $P = \{p_1, p_2, \dots, p_k\}$ determines the allowed moves. For example, if $P = \{1, 3, 4\}$, a player may remove 1, 3 or 4 sticks.

Your task is find out for each number of sticks $1, 2, \dots, n$ if the first player has a winning or losing position.

Input

The first input line has two integers n and k : the number of sticks and moves.

The next line has k integers p_1, p_2, \dots, p_k that describe the allowed moves. All integers are distinct, and one of them is 1.

Output

Print a string containing n characters: W means a winning position, and L means a losing position.

Constraints

- $1 \leq n \leq 10^6$
- $1 \leq k \leq 100$
- $1 \leq p_i \leq n$

Example

Input:

```
10 3
1 3 4
```

Output:

```
WLWWWLWLW
```

(Write your solution here...)

Problem 174: Grundy's Game

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1730 |

There are n heaps of sticks and two players who move alternately. On each move, a player chooses a non-empty heap and removes any number of sticks. The player who removes the last stick wins the game.

Your task is to find out who wins if both players play optimally.

Input

The first input line contains an integer t : the number of tests. After this, t test cases are described:

The first line contains an integer n : the number of heaps.

The next line has n integers x_1, x_2, \dots, x_n : the number of sticks in each heap.

Output

For each test case, print "first" if the first player wins the game and "second" if the second player wins the game.

Constraints

- $1 \leq t \leq 2 \cdot 10^5$
- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$
- the sum of all n is at most $2 \cdot 10^5$

Example

Input:

```
3
4
5 7 2 5
2
4 1
3
3 5 6
```

Output:

```
first
first
second
```

(Write your solution here...)

Problem 175: Another Game

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1731 |

You are given a string of length n and a dictionary containing k words. In how many ways can you create the string using the words?

Input

The first input line has a string containing n characters between a–z.

The second line has an integer k : the number of words in the dictionary.

Finally there are k lines describing the words. Each word is unique and consists of characters a–z.

Output

Print the number of ways modulo 10^9+7 .

Constraints

- $1 \leq n \leq 5000$
- $1 \leq k \leq 10^5$
- the total length of the words is at most 10^6

Example

Input:

```
ababc
4
ab
abab
c
cb
```

Output:

```
2
```

Explanation: The possible ways are $ab+ab+c$ and $abab+c$.

(Write your solution here...)

Problem 176: Word Combinations

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1732 |

A *border* of a string is a prefix that is also a suffix of the string but not the whole string. For example, the borders of `abcababcab` are `ab` and `abcab`.

Your task is to find all border lengths of a given string.

Input

The only input line has a string of length n consisting of characters `a–z`.

Output

Print all border lengths of the string in increasing order.

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

`abcababcab`

Output:

`2 5`

(Write your solution here...)

Problem 177: String Matching

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1733 |

A *period* of a string is a prefix that can be used to generate the whole string by repeating the prefix. The last repetition may be partial. For example, the periods of `abcbca` are `abc`, `abcbca` and `abcbca`.

Your task is to find all period lengths of a string.

Input

The only input line has a string of length n consisting of characters `a–z`.

Output

Print all period lengths in increasing order.

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

`abcbca`

Output:

`3 6 7`

(Write your solution here...)

Problem 178: Finding Borders

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1734 |

You are given an array of n integers and q queries of the form: how many distinct values are there in a range $[a,b]$?

Input

The first input line has two integers n and q : the array size and number of queries.

The next line has n integers x_1, x_2, \dots, x_n : the array values.

Finally, there are q lines describing the queries. Each line has two integers a and b .

Output

For each query, print the number of distinct values in the range.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$
- $1 \leq a \leq b \leq n$

Example

Input:

```
5 3
3 2 3 1 2
1 3
2 4
1 5
```

Output:

```
2
3
3
```

(Write your solution here...)

Problem 179: Finding Periods

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1735 |

Your task is to maintain an array of n values and efficiently process the following types of queries:

1. Increase each value in range $[a,b]$ by x .
2. Set each value in range $[a,b]$ to x .
3. Calculate the sum of values in range $[a,b]$.

Input

The first input line has two integers n and q : the array size and the number of queries.

The next line has n values t_1, t_2, \dots, t_n : the initial contents of the array.

Finally, there are q lines describing the queries. The format of each line is one of the following: "1 a b x", "2 a b x", or "3 a b".

Output

Print the answer to each sum query.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq t_i, x \leq 10^6$
- $1 \leq a \leq b \leq n$

Example

Input:

```
6 5
2 3 1 1 5 3
3 3 5
1 2 4 2
3 3 5
2 2 4 5
3 3 5
```

Output:

```
7
11
15
```

(Write your solution here...)

Problem 180: Minimal Rotation

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1736 |

Your task is to maintain an array of n values and efficiently process the following types of queries:

1. Increase the first value in range $[a,b]$ by 1, the second value by 2, the third value by 3, and so on.
2. Calculate the sum of values in range $[a,b]$.

Input

The first input line has two integers n and q : the size of the array and the number of queries.

The next line has n values t_1, t_2, \dots, t_n : the initial contents of the array.

Finally, there are q lines describing the queries. The format of each line is either "1 a b" or "2 a b".

Output

Print the answer to each sum query.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq t_i \leq 10^6$
- $1 \leq a \leq b \leq n$

Example

Input:

```
5 3
4 2 3 1 7
2 1 5
1 1 5
2 1 5
```

Output:

```
17
32
```

(Write your solution here...)

Problem 181: Longest Palindrome

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1737 |

Your task is to maintain a list of arrays which initially has a single array. You have to process the following types of queries:

1. Set the value a in array k to x .
2. Calculate the sum of values in range $[a,b]$ in array k .
3. Create a copy of array k and add it to the end of the list.

Input

The first input line has two integers n and q : the array size and the number of queries.

The next line has n integers t_1, t_2, \dots, t_n : the initial contents of the array.

Finally, there are q lines describing the queries. The format of each line is one of the following: " $1\ k\ a\ x$ ", " $2\ k\ a\ b$ " or " $3\ k$ ".

Output

Print the answer to each sum query.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq t_i, x \leq 10^9$
- $1 \leq a \leq b \leq n$

Example

Input:

```
5 6
2 3 1 2 5
3 1
2 1 1 5
2 2 1 5
1 2 2 5
2 1 1 5
2 2 1 5
```

Output:

```
13
13
13
15
```

(Write your solution here...)

Problem 182: Required Substring

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1739 |

You are given an $n \times n$ grid representing the map of a forest. Each square is either empty or has a tree. Your task is to process q queries of the following types:

1. Change the state (empty/tree) of a square.
2. How many trees are inside a rectangle in the forest?

Input

The first input line has two integers n and q : the size of the forest and the number of queries.

Then, there are n lines describing the forest. Each line has n characters: `.` is an empty square and `*` is a tree.

Finally, there are q lines describing the queries. The format of each line is either `"1 y x"` or `"2 y_1 x_1 y_2 x_2"`.

Output

Print the answer to each query of the second type.

Constraints

- $1 \leq n \leq 1000$
- $1 \leq q \leq 2 \cdot 10^5$
- $1 \leq y, x \leq n$
- $1 \leq y_1 \leq y_2 \leq n$
- $1 \leq x_1 \leq x_2 \leq n$

Example

Input:

```
4 3
.*..
*..**
**..
****
2 2 2 3 4
1 3 3
2 2 2 3 4
```

Output:

```
3
4
```

(Write your solution here...)

Problem 183: Palindrome Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1740 |

Given n horizontal and vertical line segments, your task is to calculate the number of their intersection points.

You can assume that no parallel line segments intersect, and no endpoint of a line segment is an intersection point.

Input

The first input line has an integer n : the number of line segments.

Then there are n lines describing the line segments. Each line has four integers: x_1 , y_1 , x_2 and y_2 : a line segment begins at point (x_1, y_1) and ends at point (x_2, y_2) .

Output

Print the number of intersection points.

Constraints

- $1 \leq n \leq 10^5$
- $-10^6 \leq x_1 \leq x_2 \leq 10^6$
- $-10^6 \leq y_1 \leq y_2 \leq 10^6$
- $(x_1, y_1) \neq (x_2, y_2)$

Example

Input:

```
3
2 3 7 3
3 1 3 5
6 2 6 6
```

Output:

```
2
```

(Write your solution here...)

Problem 184: Finding Patterns

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1741 |

Given n rectangles, your task is to determine the total area of their union.

Input

The first input line has an integer n : the number of rectangles.

After that, there are n lines describing the rectangles. Each line has four integers x_1 , y_1 , x_2 and y_2 : a rectangle begins at point (x_1, y_1) and ends at point (x_2, y_2) .

Output

Print the total area covered by the rectangles.

Constraints

- $1 \leq n \leq 10^5$
- $-10^6 \leq x_1 < x_2 \leq 10^6$
- $-10^6 \leq y_1 < y_2 \leq 10^6$

Example

Input:

```
3
1 3 4 5
3 1 7 4
5 3 8 6
```

Output:

```
24
```

(Write your solution here...)

Problem 185: Counting Patterns

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1742 |

You are given a description of a robot's path. The robot begins at point (0,0) and performs n commands. Each command moves the robot some distance up, down, left or right.

The robot will stop when it has performed all commands, or immediately when it returns to a point that it has already visited. Your task is to calculate the total distance the robot moves.

Input

The first input line has an integer n : the number of commands.

After that, there are n lines describing the commands. Each line has a character d and an integer x : the robot moves the distance x to the direction d . Each direction is U (up), D (down), L (left), or R (right).

Output

Print the total distance the robot moves.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq x \leq 10^6$

Example

Input:

```
5
U 2
R 3
D 1
L 5
U 2
```

Output:

```
9
```

(Write your solution here...)

Problem 186: Pattern Positions

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1743 |

Your task is to reorder the characters of a string so that no two adjacent characters are the same. What is the lexicographically minimal such string?

Input

The only line has a string of length n consisting of characters A–Z.

Output

Print the lexicographically minimal reordered string where no two adjacent characters are the same. If it is not possible to create such a string, print -1.

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

HATTIVATTI

Output:

AHATITITVT

(Write your solution here...)

Problem 187: Distinct Substrings

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1744 |

Given an $a \times b$ rectangle, your task is to cut it into squares. On each move you can select a rectangle and cut it into two rectangles in such a way that all side lengths remain integers. What is the minimum possible number of moves?

Input

The only input line has two integers a and b .

Output

Print one integer: the minimum number of moves.

Constraints

- $1 \leq a, b \leq 500$

Example

Input:

3 5

Output:

3

(Write your solution here...)

Problem 188: Repeating Substring

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1745 |

You have n coins with certain values. Your task is to find all money sums you can create using these coins.

Input

The first input line has an integer n : the number of coins.

The next line has n integers x_1, x_2, \dots, x_n : the values of the coins.

Output

First print an integer k : the number of distinct money sums. After this, print all possible sums in increasing order.

Constraints

- $1 \leq n \leq 100$
- $1 \leq x_i \leq 1000$

Example

Input:

```
4
4 2 5 2
```

Output:

```
9
2 4 5 6 7 8 9 11 13
```

(Write your solution here...)

Problem 189: String Functions

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1746 |

You know that an array has n integers between 1 and m , and the absolute difference between two adjacent values is at most 1.

Given a description of the array where some values may be unknown, your task is to count the number of arrays that match the description.

Input

The first input line has two integers n and m : the array size and the upper bound for each value.

The next line has n integers x_1, x_2, \dots, x_n : the contents of the array. Value 0 denotes an unknown value.

Output

Print one integer: the number of arrays modulo 10^9+7 .

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 100$
- $0 \leq x_i \leq m$

Example

Input:

```
3 5
2 0 2
```

Output:

```
3
```

Explanation: The arrays $[2, 1, 2]$, $[2, 2, 2]$ and $[2, 3, 2]$ match the description.

(Write your solution here...)

Problem 190: Substring Order I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1747 |

You are given an array consisting of n distinct integers. On each move, you can swap any two adjacent values.

You want to transform the array into a *pyramid array*. This means that the final array has to be first increasing and then decreasing. It is also allowed that the final array is only increasing or decreasing.

What is the minimum number of moves needed?

Input

The first input line has an integer n : the size of the array.

The next line has n distinct integers x_1, x_2, \dots, x_n : the contents of the array.

Output

Print one integer: the minimum number of moves.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$

Example

Input:

```
4
2 1 5 3
```

Output:

```
1
```

Explanation: You may swap the first two values which creates a pyramid array [1,2,5,3].

(Write your solution here...)

Problem 191: Substring Order II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1748 |

Given an array of n integers, your task is to calculate the number of increasing subsequences it contains. If two subsequences have the same values but in different positions in the array, they are counted separately.

Input

The first input line has an integer n : the size of the array.

The second line has n integers x_1, x_2, \dots, x_n : the contents of the array.

Output

Print one integer: the number of increasing subsequences modulo 10^9+7 .

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$

Example

Input:

```
3
2 1 3
```

Output:

```
5
```

Explanation: The increasing subsequences are [2], [1], [3], [2,3] and [1,3].

(Write your solution here...)

Problem 192: Substring Distribution

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1749 |

You are given a list consisting of n integers. Your task is to remove elements from the list at given positions, and report the removed elements.

Input

The first input line has an integer n : the initial size of the list. During the process, the elements are numbered $1, 2, \dots, k$ where k is the current size of the list.

The second line has n integers x_1, x_2, \dots, x_n : the contents of the list.

The last line has n integers p_1, p_2, \dots, p_n : the positions of the elements to be removed.

Output

Print the elements in the order they are removed.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$
- $1 \leq p_i \leq n-i+1$

Example

Input:

```
5
2 6 1 4 2
3 1 3 1 1
```

Output:

```
1 2 2 6 4
```

Explanation: The contents of the list are $[2, 6, 1, 4, 2]$, $[2, 6, 4, 2]$, $[6, 4, 2]$, $[6, 4]$, $[4]$ and $[]$.

(Write your solution here...)

Problem 193: Point Location Test

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1750 |

You are playing a game consisting of n planets. Each planet has a teleporter to another planet (or the planet itself).

Your task is to process q queries of the form: when you begin on planet x and travel through k teleporters, which planet will you reach?

Input

The first input line has two integers n and q : the number of planets and queries. The planets are numbered $1, 2, \dots, n$.

The second line has n integers t_1, t_2, \dots, t_n : for each planet, the destination of the teleporter. It is possible that $t_i = i$.

Finally, there are q lines describing the queries. Each line has two integers x and k : you start on planet x and travel through k teleporters.

Output

Print the answer to each query.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq t_i \leq n$
- $1 \leq x \leq n$
- $0 \leq k \leq 10^9$

Example

Input:

```
4 3
2 1 1 4
1 2
3 4
4 1
```

Output:

```
1
2
4
```

(Write your solution here...)

Problem 194: Line Segment Intersection

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1751 |

You are playing a game consisting of n planets. Each planet has a teleporter to another planet (or the planet itself).

You start on a planet and then travel through teleporters until you reach a planet that you have already visited before.

Your task is to calculate for each planet the number of teleportations there would be if you started on that planet.

Input

The first input line has an integer n : the number of planets. The planets are numbered $1, 2, \dots, n$.

The second line has n integers t_1, t_2, \dots, t_n : for each planet, the destination of the teleporter. It is possible that $t_i = i$.

Output

Print n integers according to the problem statement.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq t_i \leq n$

Example

Input:

```
5
2 4 3 1 4
```

Output:

```
3 3 1 3 4
```

(Write your solution here...)

Problem 195: Polygon Area

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1752 |

There are n cities and $n-1$ roads between them. There is a unique route between any two cities, and their distance is the number of roads on that route.

A company wants to have offices in some cities, but the distance between any two offices has to be at least d . What is the maximum number of offices they can have?

Input

The first input line has two integers n and d : the number of cities and the minimum distance. The cities are numbered $1, 2, \dots, n$.

After this, there are $n-1$ lines describing the roads. Each line has two integers a and b : there is a road between cities a and b .

Output

First print an integer k : the maximum number of offices. After that, print the cities which will have offices. You can print any valid solution.

Constraints

- $1 \leq n, d \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 3
1 2
2 3
3 4
3 5
```

Output:

```
2
1 4
```

(Write your solution here...)

Problem 196: Point in Polygon

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1753 |

Given a string and a pattern, your task is to count the number of positions where the pattern occurs in the string.

Input

The first input line has a string of length n , and the second input line has a pattern of length m . Both of them consist of characters a–z.

Output

Print one integer: the number of occurrences.

Constraints

- $1 \leq n, m \leq 10^6$

Example

Input:

saippuakauppias
pp

Output:

2

(Write your solution here...)

Problem 197: Polygon Lattice Points

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1754 |

You have two coin piles containing a and b coins. On each move, you can either remove one coin from the left pile and two coins from the right pile, or two coins from the left pile and one coin from the right pile.

Your task is to efficiently find out if you can empty both the piles.

Input

The first input line has an integer t : the number of tests.

After this, there are t lines, each of which has two integers a and b : the numbers of coins in the piles.

Output

For each test, print "YES" if you can empty the piles and "NO" otherwise.

Constraints

- $1 \leq t \leq 10^5$
- $0 \leq a, b \leq 10^9$

Example

Input:

```
3
2 1
2 2
3 3
```

Output:

```
YES
NO
YES
```

(Write your solution here...)

Problem 198: Minimum Euclidean Distance

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1755 |

Given a string, your task is to reorder its letters in such a way that it becomes a palindrome (i.e., it reads the same forwards and backwards).

Input

The only input line has a string of length n consisting of characters A–Z.

Output

Print a palindrome consisting of the characters of the original string. You may print any valid solution. If there are no solutions, print "NO SOLUTION".

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

AAAACACBA

Output:

AACABACAA

(Write your solution here...)

Problem 199: Convex Hull

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1756 |

Given an undirected graph, your task is to choose a direction for each edge so that the resulting directed graph is acyclic.

Input

The first input line has two integers n and m : the number of nodes and edges. The nodes are numbered $1, 2, \dots, n$.

After this, there are m lines describing the edges. Each line has two distinct integers a and b : there is an edge between nodes a and b .

Output

Print m lines describing the directions of the edges. Each line has two integers a and b : there is an edge from node a to node b . You can print any valid solution.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
3 3
1 2
2 3
3 1
```

Output:

```
1 2
3 2
3 1
```

(Write your solution here...)

Problem 200: Meet in the Middle

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 1757 |

You want to complete n courses that have requirements of the form "course a has to be completed before course b ".

You want to complete course 1 as soon as possible. If there are several ways to do this, you want then to complete course 2 as soon as possible, and so on.

Your task is to determine the order in which you complete the courses.

Input

The first input line has two integers n and m : the number of courses and requirements. The courses are numbered $1, 2, \dots, n$.

Then, there are m lines describing the requirements. Each line has two integers a and b : course a has to be completed before course b .

You can assume that there is at least one valid schedule.

Output

Print one line having n integers: the order in which you complete the courses.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
4 2
2 1
2 3
```

Output:

```
2 1 3 4
```

(Write your solution here...)

Problem 201: Hamming Distance

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2064 |

Your task is to calculate the number of valid bracket sequences of length n . For example, when $n=6$, there are 5 sequences:

- `()()()`
- `()(())`
- `((()))`
- `((()())`
- `((())())`

Input

The only input line has an integer n .

Output

Print the number of sequences modulo 10^9+7 .

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

6

Output:

5

(Write your solution here...)

Problem 202: Beautiful Subgrids

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2072 |

Given a string, your task is to process operations where you cut a substring and paste it to the end of the string. What is the final string after all the operations?

Input

The first input line has two integers n and m : the length of the string and the number of operations. The characters of the string are numbered $1, 2, \dots, n$.

The next line has a string of length n that consists of characters A–Z.

Finally, there are m lines that describe the operations. Each line has two integers a and b : you cut a substring from position a to position b .

Output

Print the final string after all the operations.

Constraints

- $1 \leq n, m \leq 2 \cdot 10^5$
- $1 \leq a \leq b \leq n$

Example

Input:

```
7 2
AYBABTU
3 5
3 5
```

Output:

```
AYABTUB
```

(Write your solution here...)

Problem 203: Reachable Nodes

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2073 |

Given a string, your task is to process operations where you reverse a substring of the string. What is the final string after all the operations?

Input

The first input line has two integers n and m : the length of the string and the number of operations. The characters of the string are numbered $1, 2, \dots, n$.

The next line has a string of length n that consists of characters A–Z.

Finally, there are m lines that describe the operations. Each line has two integers a and b : you reverse a substring from position a to position b .

Output

Print the final string after all the operations.

Constraints

- $1 \leq n, m \leq 2 \cdot 10^5$
- $1 \leq a \leq b \leq n$

Example

Input:

```
7 2
AYBABTU
3 4
4 7
```

Output:

```
AYAUTBB
```

(Write your solution here...)

Problem 204: Reachability Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2074 |

Given an array of n integers, you have to process following operations:

1. reverse a subarray
2. calculate the sum of values in a subarray

Input

The first input line has two integers n and m : the size of the array and the number of operations. The array elements are numbered $1, 2, \dots, n$.

The next line has n integers x_1, x_2, \dots, x_n : the contents of the array.

Finally, there are m lines that describe the operations. Each line has three integers t , a and b . If $t=1$, you should reverse a subarray from a to b . If $t=2$, you should calculate the sum of values from a to b .

Output

Print the answer to each operation where $t=2$.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq m \leq 10^5$
- $0 \leq x_i \leq 10^9$
- $1 \leq a \leq b \leq n$

Example

Input:

```
8 3
2 1 3 4 5 3 4 4
2 2 4
1 3 6
2 2 4
```

Output:

```
8
9
```

(Write your solution here...)

Problem 205: Cut and Paste

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2075 |

You have an array that contains a permutation of integers $1, 2, \dots, n$. Your task is to sort the array in increasing order by reversing subarrays. You can construct any solution that has at most n reversals.

Input

The first input line has an integer n : the size of the array. The array elements are numbered $1, 2, \dots, n$.

The next line has n integers x_1, x_2, \dots, x_n : the contents of the array.

Output

First print an integer k : the number of reversals.

After that, print k lines that describe the reversals. Each line has two integers a and b : you reverse a subarray from position a to position b .

Constraints

- $1 \leq n \leq 2 \cdot 10^5$

Example

Input:

```
4
2 3 1 4
```

Output:

```
2
1 3
2 3
```

(Write your solution here...)

Problem 206: Substring Reversals

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2076 |

There are n cities and m roads between them. There is a route between any two cities.

A road is called *necessary* if there is no route between some two cities after removing that road. Your task is to find all necessary roads.

Input

The first input line has two integers n and m : the number of cities and roads. The cities are numbered $1, 2, \dots, n$.

After this, there are m lines that describe the roads. Each line has two integers a and b : there is a road between cities a and b . There is at most one road between two cities, and every road connects two distinct cities.

Output

First print an integer k : the number of necessary roads. After that, print k lines that describe the roads. You may print the roads in any order.

Constraints

- $2 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 5
1 2
1 4
2 4
3 5
4 5
```

Output:

```
2
3 5
4 5
```

(Write your solution here...)

Problem 207: Reversals and Sums

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2077 |

There are n cities and m roads between them. There is a route between any two cities.

A city is called *necessary* if there is no route between some other two cities after removing that city (and adjacent roads). Your task is to find all necessary cities.

Input

The first input line has two integers n and m : the number of cities and roads. The cities are numbered $1, 2, \dots, n$.

After this, there are m lines that describe the roads. Each line has two integers a and b : there is a road between cities a and b . There is at most one road between two cities, and every road connects two distinct cities.

Output

First print an integer k : the number of necessary cities. After that, print a list of k cities. You may print the cities in any order.

Constraints

- $2 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 5
1 2
1 4
2 4
3 5
4 5
```

Output:

```
2
4 5
```

(Write your solution here...)

Problem 208: Necessary Roads

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2078 |

You are given an undirected graph that has n nodes and m edges.

We consider subgraphs that have all nodes of the original graph and some of its edges. A subgraph is called *Eulerian* if each node has even degree.

Your task is to count the number of Eulerian subgraphs modulo 10^9+7 .

Input

The first input line has two integers n and m : the number of nodes and edges. The nodes are numbered $1, 2, \dots, n$.

After this, there are m lines that describe the edges. Each line has two integers a and b : there is an edge between nodes a and b . There is at most one edge between two nodes, and each edge connects two distinct nodes.

Output

Print the number of Eulerian subgraphs modulo 10^9+7 .

Constraints

- $1 \leq n \leq 10^5$
- $0 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
4 3
1 2
1 3
2 3
```

Output:

```
2
```

Explanation: You can either keep or remove all edges, so there are two possible Eulerian subgraphs.

(Write your solution here...)

Problem 209: Necessary Cities

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2079 |

Given a tree of n nodes, your task is to find a *centroid*, i.e., a node such that when it is appointed the root of the tree, each subtree has at most $\lfloor n/2 \rfloor$ nodes.

Input

The first input line contains an integer n : the number of nodes. The nodes are numbered $1, 2, \dots, n$.

Then there are $n-1$ lines describing the edges. Each line contains two integers a and b : there is an edge between nodes a and b .

Output

Print one integer: a centroid node. If there are several possibilities, you can choose any of them.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5
1 2
2 3
3 4
3 5
```

Output:

```
3
```

(Write your solution here...)

Problem 210: Eulerian Subgraphs

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2080 |

Given a tree of n nodes, your task is to count the number of distinct paths that consist of exactly k edges.

Input

The first input line contains two integers n and k : the number of nodes and the path length. The nodes are numbered $1, 2, \dots, n$.

Then there are $n-1$ lines describing the edges. Each line contains two integers a and b : there is an edge between nodes a and b .

Output

Print one integer: the number of paths.

Constraints

- $1 \leq k \leq n \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 2
1 2
2 3
3 4
3 5
```

Output:

```
4
```

(Write your solution here...)

Problem 211: Monster Game I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2081 |

Given a tree of n nodes, your task is to count the number of distinct paths that have at least k_1 and at most k_2 edges.

Input

The first input line contains three integers n , k_1 and k_2 : the number of nodes and the path lengths. The nodes are numbered $1, 2, \dots, n$.

Then there are $n-1$ lines describing the edges. Each line contains two integers a and b : there is an edge between nodes a and b .

Output

Print one integer: the number of paths.

Constraints

- $1 \leq k_1 \leq k_2 \leq n \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 2 3
1 2
2 3
3 4
3 5
```

Output:

```
6
```

(Write your solution here...)

Problem 212: Monster Game II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2084 |

You are playing a game that consists of n levels. Each level has a monster. On levels $1, 2, \dots, n-1$, you can either kill or escape the monster. However, on level n you must kill the final monster to win the game.

Killing a monster takes sf time where s is the monster's strength and f is your skill factor (lower skill factor is better). After killing a monster, you get a new skill factor. What is the minimum total time in which you can win the game?

Input

The first input line has two integers n and x : the number of levels and your initial skill factor.

The second line has n integers s_1, s_2, \dots, s_n : each monster's strength.

The third line has n integers f_1, f_2, \dots, f_n : your new skill factor after killing a monster.

Output

Print one integer: the minimum total time to win the game.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x \leq 10^6$
- $1 \leq s_1 \leq s_2 \leq \dots \leq s_n \leq 10^6$
- $x \geq f_1 \geq f_2 \geq \dots \geq f_n \geq 1$

Example

Input:

```
5 100
20 30 30 50 90
90 60 20 20 10
```

Output:

```
4800
```

Explanation: The best way to play is to kill the third and fifth monster.

(Write your solution here...)

Problem 213: Subarray Squares

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2085 |

You are playing a game that consists of n levels. Each level has a monster. On levels $1, 2, \dots, n-1$, you can either kill or escape the monster. However, on level n you must kill the final monster to win the game.

Killing a monster takes sf time where s is the monster's strength and f is your skill factor. After killing a monster, you get a new skill factor (lower skill factor is better). What is the minimum total time in which you can win the game?

Input

The first input line has two integers n and x : the number of levels and your initial skill factor.

The second line has n integers s_1, s_2, \dots, s_n : each monster's strength.

The third line has n integers f_1, f_2, \dots, f_n : your new skill factor after killing a monster.

Output

Print one integer: the minimum total time to win the game.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x \leq 10^6$
- $1 \leq s_i, f_i \leq 10^6$

Example

Input:

```
5 100
50 20 30 90 30
60 20 20 10 90
```

Output:

```
2600
```

Explanation: The best way to play is to kill the second and fifth monster.

(Write your solution here...)

Problem 214: Houses and Schools

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2086 |

Given an array of n elements, your task is to divide into k subarrays. The cost of each subarray is the square of the sum of the values in the subarray. What is the minimum total cost if you act optimally?

Input

The first input line has two integers n and k : the array elements and the number of subarrays. The array elements are numbered $1, 2, \dots, n$.

The second line has n integers x_1, x_2, \dots, x_n : the contents of the array.

Output

Print one integer: the minimum total cost.

Constraints

- $1 \leq k \leq n \leq 3000$
- $1 \leq x_i \leq 10^5$

Example

Input:

```
8 3
2 3 1 2 2 3 4 1
```

Output:

```
110
```

Explanation: An optimal solution is $[2, 3, 1]$, $[2, 2, 3]$, $[4, 1]$, whose cost is $(2+3+1)^2 + (2+2+3)^2 + (4+1)^2 = 110$.

(Write your solution here...)

Problem 215: Knuth Division

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2087 |

There are n houses on a street, numbered $1, 2, \dots, n$. The distance of houses a and b is $|a - b|$. You know the number of children in each house.

Your task is to establish k schools in such a way that each school is in some house. Then, each child goes to the nearest school. What is the minimum total walking distance of the children if you act optimally?

Input

The first input line has two integers n and k : the number of houses and the number of schools. The houses are numbered $1, 2, \dots, n$.

After this, there are n integers c_1, c_2, \dots, c_n : the number of children in each house.

Output

Print the minimum total distance.

Constraints

- $1 \leq k \leq n \leq 3000$
- $1 \leq c_i \leq 10^9$

Example

Input:

```
6 2
2 7 1 4 6 4
```

Output:

```
11
```

Explanation: Houses 2 and 5 will have schools.

(Write your solution here...)

Problem 216: Apples and Bananas

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2088 |

Given an array of n numbers, your task is to divide it into n subarrays, each of which has a single element.

On each move, you may choose any subarray and split it into two subarrays. The cost of such a move is the sum of values in the chosen subarray.

What is the minimum total cost if you act optimally?

Input

The first input line has an integer n : the array size. The array elements are numbered $1, 2, \dots, n$.

The second line has n integers x_1, x_2, \dots, x_n : the contents of the array.

Output

Print one integer: the minimum total cost.

Constraints

- $1 \leq n \leq 5000$
- $1 \leq x_i \leq 10^9$

Example

Input:

```
5
2 7 3 2 5
```

Output:

```
43
```

(Write your solution here...)

Problem 217: One Bit Positions

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2101 |

There are n cities in Byteland but no roads between them. However, each day, a new road will be built. There will be a total of m roads.

Your task is to process q queries of the form: "after how many days can we travel from city a to city b for the first time?"

Input

The first input line has three integers n , m and q : the number of cities, roads and queries. The cities are numbered $1, 2, \dots, n$.

After this, there are m lines that describe the roads in the order they are built. Each line has two integers a and b : there will be a road between cities a and b .

Finally, there are q lines that describe the queries. Each line has two integers a and b : we want to travel from city a to city b .

Output

For each query, print the number of days, or -1 if it is never possible.

Constraints

- $1 \leq n, m, q \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 4 3
1 2
2 3
1 3
2 5
1 3
3 4
3 5
```

Output:

```
2
-1
4
```

(Write your solution here...)

Problem 218: Signal Processing

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2102 |

Given a string and patterns, check for each pattern if it appears in the string.

Input

The first input line has a string of length n .

The next input line has an integer k : the number of patterns. Finally, there are k lines that describe the patterns.

The string and the patterns consist of characters a – z .

Output

For each pattern, print "YES" if it appears in the string and "NO" otherwise.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq k \leq 5 \cdot 10^5$
- the total length of the patterns is at most $5 \cdot 10^5$

Example

Input:

```
aybabbtu
3
bab
abc
ayba
```

Output:

```
YES
NO
YES
```

(Write your solution here...)

Problem 219: New Roads Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2103 |

Given a string and patterns, count for each pattern the number of positions where it appears in the string.

Input

The first input line has a string of length n .

The next input line has an integer k : the number of patterns. Finally, there are k lines that describe the patterns.

The string and the patterns consist of characters a – z .

Output

For each pattern, print the number of positions.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq k \leq 5 \cdot 10^5$
- the total length of the patterns is at most $5 \cdot 10^5$

Example

Input:

```
aybabbtu
3
bab
abc
a
```

Output:

```
1
0
2
```

(Write your solution here...)

Problem 220: Dynamic Connectivity

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2104 |

Given a string and patterns, find for each pattern the first position (1-indexed) where it appears in the string.

Input

The first input line has a string of length n .

The next input line has an integer k : the number of patterns. Finally, there are k lines that describe the patterns.

The string and the patterns consist of characters a – z .

Output

Print the first position for each pattern (or -1 if it does not appear at all).

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq k \leq 5 \cdot 10^5$
- the total length of the patterns is at most $5 \cdot 10^5$

Example

Input:

```
aybabbtu
3
bab
abc
a
```

Output:

```
3
-1
1
```

(Write your solution here...)

Problem 221: Parcel Delivery

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2105 |

Count the number of distinct substrings that appear in a string.

Input

The only input line has a string of length n that consists of characters a – z .

Output

Print one integer: the number of substrings.

Constraints

- $1 \leq n \leq 10^5$

Example

Input:

abaa

Output:

8

Explanation: the substrings are a, b, aa, ab, ba, aba, baa and abaa.

(Write your solution here...)

Problem 222: Task Assignment

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2106 |

A repeating substring is a substring that occurs in two (or more) locations in the string. Your task is to find the longest repeating substring in a given string.

Input

The only input line has a string of length n that consists of characters a–z.

Output

Print the longest repeating substring. If there are several possibilities, you can print any of them. If there is no repeating substring, print -1.

Constraints

- $1 \leq n \leq 10^5$

Example

Input:

cabababc

Output:

abab

(Write your solution here...)

Problem 223: Distinct Routes II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2107 |

We consider a string of n characters, indexed $1, 2, \dots, n$. Your task is to calculate all values of the following functions:

- $z(i)$ denotes the maximum length of a substring that begins at position i and is a prefix of the string. In addition, $z(1)=0$.
- $\pi(i)$ denotes the maximum length of a substring that ends at position i , is a prefix of the string, and whose length is at most $i-1$.

Note that the function z is used in the Z-algorithm, and the function π is used in the KMP algorithm.

Input

The only input line has a string of length n . Each character is between a – z .

Output

Print two lines: first the values of the z function, and then the values of the π function.

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

abaabca

Output:

```
0 0 1 2 0 0 1
0 0 1 1 2 0 1
```

(Write your solution here...)

Problem 224: Shortest Subsequence

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2108 |

You are given a string of length n . If all of its distinct substrings are ordered lexicographically, what is the k th smallest of them?

Input

The first input line has a string of length n that consists of characters a – z .

The second input line has an integer k .

Output

Print the k th smallest distinct substring in lexicographical order.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq k \leq \frac{n(n+1)}{2}$
- It is guaranteed that k does not exceed the number of distinct substrings.

Example

Input:

```
babaacbaab
10
```

Output:

```
aba
```

Explanation: The 10 smallest distinct substrings in order are a , aa , aab , aac , $aacb$, $aacba$, $aacbaa$, $aacbaab$, ab , and aba .

(Write your solution here...)

Problem 225: Counting Bits

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2109 |

You are given a string of length n . If all of its substrings (not necessarily distinct) are ordered lexicographically, what is the k th smallest of them?

Input

The first input line has a string of length n that consists of characters a – z .

The second input line has an integer k .

Output

Print the k th smallest substring in lexicographical order.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq k \leq \frac{n(n+1)}{2}$

Example

Input:

baabaa
10

Output:

ab

Explanation: The 10 smallest substrings in order are a , a , a , a , aa , aa , aab , $aaba$, $aabaa$, and ab .

(Write your solution here...)

Problem 226: Swap Game

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2110 |

You are given a string of length n . For every integer between 1 and n you need to print the number of distinct substrings of that length.

Input

The only input line has a string of length n that consists of characters a – z .

Output

For each integer between 1 and n print the number of distinct substrings of that length.

Constraints

- $1 \leq n \leq 10^5$

Example

Input:

abab

Output:

2 2 2 1

(Write your solution here...)

Problem 227: Prüfer Code

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2111 |

There are n apples and m bananas, and each of them has an integer weight between 1 and k . Your task is to calculate, for each weight w between 2 and $2k$, the number of ways we can choose an apple and a banana whose combined weight is w .

Input

The first input line contains three integers k , n and m : the number k , the number of apples and the number of bananas.

The next line contains n integers a_1, a_2, \dots, a_n : weight of each apple.

The last line contains m integers b_1, b_2, \dots, b_m : weight of each banana.

Output

For each integer w between 2 and $2k$ print the number of ways to choose an apple and a banana whose combined weight is w .

Constraints

- $1 \leq k, n, m \leq 2 \cdot 10^5$
- $1 \leq a_i \leq k$
- $1 \leq b_i \leq k$

Example

Input:

```
5 3 4
5 2 5
4 3 2 3
```

Output:

```
0 0 1 2 1 2 4 2 0
```

Explanation: For example for $w = 8$ there are 4 different ways: we can pick an apple of weight 5 in two different ways and a banana of weight 3 in two different ways.

(Write your solution here...)

Problem 228: Acyclic Graph Edges

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2112 |

You are given a binary string of length n . Your task is to calculate, for every k between $1 \dots n-1$, the number of ways we can choose two positions i and j such that $i-j=k$ and there is a one-bit at both positions.

Input

The only input line has a string that consists only of characters 0 and 1.

Output

For every distance k between $1 \dots n-1$ print the number of ways we can choose two such positions.

Constraints

- $2 \leq n \leq 2 \cdot 10^5$

Example

Input:

1001011010

Output:

1 2 3 0 2 1 0 1 0

(Write your solution here...)

Problem 229: Strongly Connected Edges

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2113 |

You are given two integer sequences: a signal and a mask. Your task is to process the signal by moving the mask through the signal from left to right. At each mask position calculate the sum of products of aligned signal and mask values in the part where the signal and the mask overlap.

Input

The first input line consists of two integers n and m : the length of the signal and the length of the mask.

The next line consists of n integers a_1, a_2, \dots, a_n defining the signal.

The last line consists of m integers b_1, b_2, \dots, b_m defining the mask.

Output

Print $n+m-1$ integers: the sum of products of aligned values at each mask position from left to right.

Constraints

- $1 \leq n, m \leq 2 \cdot 10^5$
- $1 \leq a_i, b_i \leq 100$

Example

Input:

```
5 3
1 3 2 1 4
1 2 3
```

Output:

```
3 11 13 10 16 9 4
```

Explanation: For example, at the second mask position the sum of aligned products is $2 \cdot 1 + 3 \cdot 3 = 11$.

(Write your solution here...)

Problem 230: Even Outdegree Edges

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2115 |

You are given a bit string of length n . Your task is to calculate for each k between $0 \leq k \leq n$ the number of non-empty substrings that contain exactly k ones.

For example, if the string is 101, there are:

- 1 substring that contains 0 ones: 0
- 4 substrings that contain 1 one: 01, 1, 1, 10
- 1 substring that contains 2 ones: 101
- 0 substrings that contain 3 ones

Input

The only input line contains a binary string of length n .

Output

Print $n+1$ values as specified above.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$

Example

Input:

101

Output:

1 4 1 0

(Write your solution here...)

Problem 231: Multiplication Table

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2121 |

There are n cities and m routes through which parcels can be carried from one city to another city. For each route, you know the maximum number of parcels and the cost of a single parcel.

You want to send k parcels from Syrjäla to Lehmälä. What is the cheapest way to do that?

Input

The first input line has three integers n , m and k : the number of cities, routes and parcels. The cities are numbered $1, 2, \dots, n$. City 1 is Syrjäla and city n is Lehmälä.

After this, there are m lines that describe the routes. Each line has four integers a , b , r and c : there is a route from city a to city b , at most r parcels can be carried through the route, and the cost of each parcel is c .

Output

Print one integer: the minimum total cost or -1 if there are no solutions.

Constraints

- $2 \leq n \leq 500$
- $1 \leq m \leq 1000$
- $1 \leq k \leq 100$
- $1 \leq a, b \leq n$
- $1 \leq r, c \leq 1000$

Example

Input:

```
4 5 3
1 2 5 100
1 3 10 50
1 4 7 500
2 4 8 350
3 4 2 100
```

Output:

```
750
```

Explanation: One parcel is delivered through route $1 \rightarrow 2 \rightarrow 4$ (cost $1 \cdot 450 = 450$) and two parcels are delivered through route $1 \rightarrow 3 \rightarrow 4$ (cost $2 \cdot 150 = 300$).

(Write your solution here...)

Problem 232: Advertisement

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2129 |

A company has n employees and there are n tasks that need to be done. We know for each employee the cost of carrying out each task. Every employee should be assigned to exactly one task. What is the minimum total cost if we assign the tasks optimally and how could they be assigned?

Input

The first input line has one integer n : the number of employees and the number of tasks that need to be done.

After this, there are n lines each consisting of n integers. The i th line consists of integers $c_{i1}, c_{i2}, \dots, c_{in}$: the cost of each task when it is assigned to the i th employee.

Output

First print the minimum total cost.

Then print n lines each consisting of two integers a and b : you assign the b th task to the a th employee.

If there are multiple solutions you can print any of them.

Constraints

- $1 \leq n \leq 200$
- $1 \leq c_{ij} \leq 1000$

Example

Input:

```
4
17 8 16 9
7 15 12 19
6 9 10 11
14 7 13 10
```

Output:

```
33
1 4
2 1
3 3
4 2
```

Explanation: The minimum total cost is 33. We can reach this by assigning employee 1 task 4, employee 2 task 1, employee 3 task 3 and employee 4 task 2. This will cost $9 + 7 + 10 + 7 = 33$.

(Write your solution here...)

Problem 233: Special Substrings

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2130 |

A game consists of n rooms and m teleporters. At the beginning of each day, you start in room 1 and you have to reach room n .

You can use each teleporter at most once during the game. You want to play the game for exactly k days. Every time you use any teleporter you have to pay one coin. What is the minimum number of coins you have to pay during k days if you play optimally?

Input

The first input line has three integers n , m and k : the number of rooms, the number of teleporters and the number of days you play the game. The rooms are numbered $1, 2, \dots, n$.

After this, there are m lines describing the teleporters. Each line has two integers a and b : there is a teleporter from room a to room b .

There are no two teleporters whose starting and ending room are the same.

Output

First print one integer: the minimum number of coins you have to pay if you play optimally. Then, print k route descriptions according to the example. You can print any valid solution.

If it is not possible to play the game for k days, print only -1.

Constraints

- $2 \leq n \leq 500$
- $1 \leq m \leq 1000$
- $1 \leq k \leq n-1$
- $1 \leq a, b \leq n$

Example

Input:

```
8 10 2
1 2
1 3
2 5
2 4
3 5
3 6
4 8
5 8
6 7
7 8
```

Output:

```
6
4
1 2 4 8
4
1 3 5 8
```

(Write your solution here...)

Problem 234: Permutation Inversions

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2131 |

There is an $n \times n$ grid whose each square has some number of coins in it.

You know for each row and column how many squares you must choose from that row or column. You get all coins from every square you choose. What is the maximum number of coins you can collect and how could you choose the squares so that the given conditions are satisfied?

Input

The first input line has an integer n : the size of the grid. The rows and columns are numbered $1, 2, \dots, n$.

The next line has n integers a_1, a_2, \dots, a_n : You must choose exactly a_i squares from the i th row.

The next line has n integers b_1, b_2, \dots, b_n : You must choose exactly b_j squares from the j th column.

Finally, there are n lines describing the grid. You can assume that the sums of a_1, a_2, \dots, a_n and b_1, b_2, \dots, b_n are equal.

Output

First print an integer k : the maximum number of coins you can collect. After this print n lines describing which squares you choose (X means that you choose a square, . means that you don't choose it).

If it is not possible to satisfy the conditions print only -1.

Constraints

- $1 \leq n \leq 50$
- $0 \leq a_i \leq n$
- $0 \leq b_j \leq n$
- $0 \leq c_{ij} \leq 1000$

Example

Input:

```
5
0 1 3 2 0
1 2 2 0 1
2 5 1 5 1
0 2 5 1 2
3 8 9 3 5
1 4 3 7 3
0 3 6 2 8
```

Output:

```
32
.....
..X..
.XX.X
XX...
.....
```

(Write your solution here...)

Problem 235: Maximum Xor Subarray

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2132 |

You are given an array of n integers. You want to modify the array so that it is increasing, i.e., every element is at least as large as the previous element.

On each move, you can increase or decrease the value of any element by one. What is the minimum number of moves required?

Input

The first input line contains an integer n : the size of the array.

Then, the second line contains n integers x_1, x_2, \dots, x_n : the contents of the array.

Output

Print the minimum number of moves.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$

Example

Input:

```
5
3 8 5 6 5
```

Output:

```
4
```

(Write your solution here...)

Problem 236: Movie Festival Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2133 |

Consider an undirected graph that consists of n nodes and m edges. There are two types of events that can happen:

1. A new edge is created between nodes a and b .
2. An existing edge between nodes a and b is removed.

Your task is to report the number of components after every event.

Input

The first input line has three integers n , m and k : the number of nodes, edges and events.

After this there are m lines describing the edges. Each line has two integers a and b : there is an edge between nodes a and b . There is at most one edge between any pair of nodes.

Then there are k lines describing the events. Each line has the form " t a b " where t is 1 (create a new edge) or 2 (remove an edge). A new edge is always created between two nodes that do not already have an edge between them, and only existing edges can get removed.

Output

Print $k+1$ integers: first the number of components before the first event, and after this the new number of components after each event.

Constraints

- $2 \leq n \leq 10^5$
- $1 \leq m, k \leq 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 3 3
1 4
2 3
3 5
1 2 5
2 3 5
1 1 2
```

Output:

```
2 2 2 1
```

(Write your solution here...)

Problem 237: Chess Tournament

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2134 |

You are given a tree consisting of n nodes. The nodes are numbered $1, 2, \dots, n$. Each node has a value.

Your task is to process following types of queries:

1. change the value of node s to x
2. find the maximum value on the path between nodes a and b .

Input

The first input line contains two integers n and q : the number of nodes and queries. The nodes are numbered $1, 2, \dots, n$.

The next line has n integers v_1, v_2, \dots, v_n : the value of each node.

Then there are $n-1$ lines describing the edges. Each line contains two integers a and b : there is an edge between nodes a and b .

Finally, there are q lines describing the queries. Each query is either of the form " $1\ s\ x$ " or " $2\ a\ b$ ".

Output

Print the answer to each query of type 2.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq a, b, s \leq n$
- $1 \leq v_i, x \leq 10^9$

Example

Input:

```
5 3
2 4 1 3 3
1 2
1 3
2 4
2 5
2 3 5
1 2 2
2 3 5
```

Output:

```
4 3
```

(Write your solution here...)

Problem 238: Tree Traversals

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2136 |

The Hamming distance between two strings a and b of equal length is the number of positions where the strings differ.

You are given n bit strings, each of length k and your task is to calculate the minimum Hamming distance between two strings.

Input

The first input line has two integers n and k : the number of bit strings and their length.

Then there are n lines each consisting of one bit string of length k .

Output

Print the minimum Hamming distance between two strings.

Constraints

- $2 \leq n \leq 2 \cdot 10^4$
- $1 \leq k \leq 30$

Example

Input:

```
5 6
110111
001000
100001
101000
101110
```

Output:

```
1
```

Explanation: The strings `101000` and `001000` differ only at the first position.

(Write your solution here...)

Problem 239: Network Renovation

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2137 |

You are given an $n \times n$ grid whose each square is either black or white. A subgrid is called *beautiful* if its height and width is at least two and all of its corners are black. How many beautiful subgrids are there within the given grid?

Input

The first input line has an integer n : the size of the grid.

Then there are n lines describing the grid: 1 means that a square is black and 0 means it is white.

Output

Print the number of beautiful subgrids.

Constraints

- $1 \leq n \leq 3000$

Example

Input:

```
5
00010
11111
00110
11001
00010
```

Output:

```
4
```

(Write your solution here...)

Problem 240: Graph Girth

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2138 |

A directed acyclic graph consists of n nodes and m edges. The nodes are numbered $1, 2, \dots, n$.

Calculate for each node the number of nodes you can reach from that node (including the node itself).

Input

The first input line has two integers n and m : the number of nodes and edges.

Then there are m lines describing the edges. Each line has two distinct integers a and b : there is an edge from node a to node b .

Output

Print n integers: for each node the number of reachable nodes.

Constraints

- $1 \leq n \leq 5 \cdot 10^4$
- $1 \leq m \leq 10^5$

Example

Input:

```
5 6
1 2
1 3
1 4
2 3
3 5
4 5
```

Output:

```
5 3 2 2 1
```

(Write your solution here...)

Problem 241: Intersection Points

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2143 |

A directed graph consists of n nodes and m edges. The edges are numbered $1, 2, \dots, n$.

Your task is to answer q queries of the form "can you reach node b from node a ?"

Input

The first input line has three integers n , m and q : the number of nodes, edges and queries.

Then there are m lines describing the edges. Each line has two distinct integers a and b : there is an edge from node a to node b .

Finally there are q lines describing the queries. Each line consists of two integers a and b : "can you reach node b from node a ?"

Output

Print the answer for each query: either "YES" or "NO".

Constraints

- $1 \leq n \leq 5 \cdot 10^4$
- $1 \leq m, q \leq 10^5$

Example

Input:

```
4 4 3
1 2
2 3
3 1
4 3
1 3
1 4
4 1
```

Output:

```
YES
NO
YES
```

(Write your solution here...)

Problem 242: Inverse Inversions

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2162 |

Consider a game where there are n children (numbered $1, 2, \dots, n$) in a circle. During the game, every other child is removed from the circle until there are no children left. In which order will the children be removed?

Input

The only input line has an integer n .

Output

Print n integers: the removal order.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$

Example

Input:

7

Output:

2 4 6 1 5 3 7

(Write your solution here...)

Problem 243: Monotone Subsequences

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2163 |

Consider a game where there are n children (numbered $1, 2, \dots, n$) in a circle. During the game, repeatedly k children are skipped and one child is removed from the circle. In which order will the children be removed?

Input

The only input line has two integers n and k .

Output

Print n integers: the removal order.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $0 \leq k \leq 10^9$

Example

Input:

7 2

Output:

3 6 2 7 5 1 4

(Write your solution here...)

Problem 244: String Reorder

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2164 |

Consider a game where there are n children (numbered $1, 2, \dots, n$) in a circle. During the game, every second child is removed from the circle, until there are no children left.

Your task is to process q queries of the form: "when there are n children, who is the k th child that will be removed?"

Input

The first input line has an integer q : the number of queries.

After this, there are q lines that describe the queries. Each line has two integers n and k : the number of children and the position of the child.

Output

Print q integers: the answer for each query.

Constraints

- $1 \leq q \leq 10^5$
- $1 \leq k \leq n \leq 10^9$

Example

Input:

```
4
7 1
7 3
2 2
1337 1313
```

Output:

```
2
6
1
1107
```

(Write your solution here...)

Problem 245: Stack Weights

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2165 |

The Tower of Hanoi game consists of three stacks (left, middle and right) and n round disks of different sizes. Initially, the left stack has all the disks, in increasing order of size from top to bottom.

The goal is to move all the disks to the right stack using the middle stack. On each move you can move the uppermost disk from a stack to another stack. In addition, it is not allowed to place a larger disk on a smaller disk.

Your task is to find a solution that minimizes the number of moves.

Input

The only input line has an integer n : the number of disks.

Output

First print an integer k : the minimum number of moves.

After this, print k lines that describe the moves. Each line has two integers a and b : you move a disk from stack a to stack b .

Constraints

- $1 \leq n \leq 16$

Example

Input:

2

Output:

3

1 2

1 3

2 3

(Write your solution here...)

Problem 246: Pyramid Array

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2166 |

Given an array of n integers, your task is to process q queries of the following types:

1. update the value at position k to u
2. what is the maximum prefix sum in range $[a,b]$?

Input

The first input line has two integers n and q : the number of values and queries.

The second line has n integers x_1, x_2, \dots, x_n : the array values.

Finally, there are q lines describing the queries. Each line has three integers: either "1 k u " or "2 a b ".

Output

Print the result of each query of type 2.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $-10^9 \leq x_i, u \leq 10^9$
- $1 \leq k \leq n$
- $1 \leq a \leq b \leq n$

Example

Input:

```
8 4
1 2 -1 3 1 -5 1 4
2 2 6
1 4 -2
2 2 6
2 3 4
```

Output:

```
5
2
0
```

(Write your solution here...)

Problem 247: Increasing Subsequence II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2168 |

Given n ranges, your task is to determine for each range if it contains some other range and if some other range contains it.

Range $[a,b]$ contains range $[c,d]$ if $a \leq c$ and $d \leq b$.

Input

The first input line has an integer n : the number of ranges.

After this, there are n lines that describe the ranges. Each line has two integers x and y : the range is $[x,y]$.

You may assume that no range appears more than once in the input.

Output

First print a line that describes for each range (in the input order) if it contains some other range (1) or not (0).

Then print a line that describes for each range (in the input order) if some other range contains it (1) or not (0).

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x < y \leq 10^9$

Example

Input:

```
4
1 6
2 4
4 8
3 6
```

Output:

```
1 0 0 0
0 1 0 1
```

(Write your solution here...)

Problem 248: String Removals

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2169 |

Given n ranges, your task is to count for each range how many other ranges it contains and how many other ranges contain it.

Range $[a,b]$ contains range $[c,d]$ if $a \leq c$ and $d \leq b$.

Input

The first input line has an integer n : the number of ranges.

After this, there are n lines that describe the ranges. Each line has two integers x and y : the range is $[x,y]$.

You may assume that no range appears more than once in the input.

Output

First print a line that describes for each range (in the input order) how many other ranges it contains.

Then print a line that describes for each range (in the input order) how many other ranges contain it.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x < y \leq 10^9$

Example

Input:

```
4
1 6
2 4
4 8
3 6
```

Output:

```
2 0 0 0
0 1 0 1
```

(Write your solution here...)

Problem 249: Bit Inversions

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2174 |

You are given an integer n . On each step, you may subtract from it any one-digit number that appears in it. How many steps are required to make the number equal to 0?

Input

The only input line has an integer n .

Output

Print one integer: the minimum number of steps.

Constraints

- $1 \leq n \leq 10^{18}$

Example

Input:

27

Output:

5

Explanation: An optimal solution is $27 \rightarrow 20 \rightarrow 18 \rightarrow 10 \rightarrow 9 \rightarrow 0$.

(Write your solution here...)

Problem 250: Xor Pyramid

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2176 |

Your task is to count the number of ways k bishops can be placed on an $n \times n$ chessboard so that no two bishops attack each other.

Two bishops attack each other if they are on the same diagonal.

Input

The only input line has two integers n and k : the board size and the number of bishops.

Output

Print one integer: the number of ways modulo 10^9+7 .

Constraints

- $1 \leq n \leq 500$
- $1 \leq k \leq n^2$

Example

Input:

5 4

Output:

2728

(Write your solution here...)

Problem 251: Writing Numbers

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2177 |

Given an undirected graph, your task is to choose a direction for each edge so that the resulting directed graph is strongly connected.

Input

The first input line has two integers n and m : the number of nodes and edges. The nodes are numbered $1, 2, \dots, n$.

After this, there are m lines describing the edges. Each line has two integers a and b : there is an edge between nodes a and b .

You may assume that the graph is simple, i.e., there are at most one edge between two nodes and every edge connects two distinct nodes.

Output

Print m lines describing the directions of the edges. Each line has two integers a and b : there is an edge from node a to node b . You can print any valid solution.

If there are no solutions, only print IMPOSSIBLE.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
3 3
1 2
1 3
2 3
```

Output:

```
1 2
2 3
3 1
```

(Write your solution here...)

Problem 252: String Transform

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2179 |

Given an undirected graph, your task is to choose a direction for each edge so that in the resulting directed graph each node has an even outdegree. The outdegree of a node is the number of edges coming out of that node.

Input

The first input line has two integers n and m : the number of nodes and edges. The nodes are numbered $1, 2, \dots, n$.

After this, there are m lines describing the edges. Each line has two integers a and b : there is an edge between nodes a and b .

You may assume that the graph is simple, i.e., there is at most one edge between any two nodes and every edge connects two distinct nodes.

Output

Print m lines describing the directions of the edges. Each line has two integers a and b : there is an edge from node a to node b . You can print any valid solution.

If there are no solutions, only print IMPOSSIBLE.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
4 4
1 2
2 3
3 4
1 4
```

Output:

```
1 2
3 2
3 4
1 4
```

(Write your solution here...)

Problem 253: Letter Pair Move Game

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2180 |

There is a $2 \times n$ grid whose each cell contains some number of coins. The total number of coins is $2n$.

Your task is to arrange the coins so that each cell contains exactly one coin. On each move you can choose any coin and move it one step left, right, up or down.

What is the minimum number of moves if you act optimally?

Input

The first input line has an integer n : the width of the grid.

After this, there are two lines that describe the grid. Each line has n integers: the number of coins in each cell.

Output

Print one integer: the minimum number of moves.

Constraints

- $1 \leq n \leq 10^5$

Example

Input:

```
4
0 1 0 1
2 0 1 3
```

Output:

```
5
```

(Write your solution here...)

Problem 254: Maximum Building I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2181 |

Your task is to count the number of ways you can fill an $n \times m$ grid using 1×2 and 2×1 tiles.

Input

The only input line has two integers n and m .

Output

Print one integer: the number of ways modulo 10^9+7 .

Constraints

- $1 \leq n \leq 10$
- $1 \leq m \leq 1000$

Example

Input:

4 7

Output:

781

(Write your solution here...)

Problem 255: Sorting Methods

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2182 |

Given an integer, your task is to find the number, sum and product of its divisors. As an example, let us consider the number 12:

- the number of divisors is 6 (they are 1, 2, 3, 4, 6, 12)
- the sum of divisors is $1+2+3+4+6+12=28$
- the product of divisors is $1 \cdot 2 \cdot 3 \cdot 4 \cdot 6 \cdot 12 = 1728$

Since the input number may be large, it is given as a prime factorization.

Input

The first line has an integer n : the number of parts in the prime factorization.

After this, there are n lines that describe the factorization. Each line has two numbers x and k where x is a prime and k is its power.

Output

Print three integers modulo 10^9+7 : the number, sum and product of the divisors.

Constraints

- $1 \leq n \leq 10^5$
- $2 \leq x \leq 10^6$
- each x is a distinct prime
- $1 \leq k \leq 10^9$

Example

Input:

```
2
2 2
3 1
```

Output:

```
6 28 1728
```

(Write your solution here...)

Problem 256: Cyclic Array

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2183 |

You have n coins with positive integer values. What is the smallest sum you cannot create using a subset of the coins?

Input

The first line has an integer n : the number of coins.

The second line has n integers x_1, x_2, \dots, x_n : the value of each coin.

Output

Print one integer: the smallest coin sum.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$

Example

Input:

```
5
2 9 1 2 7
```

Output:

```
6
```

(Write your solution here...)

Problem 257: List of Sums

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2184 |

You have n coins with positive integer values. The coins are numbered $1, 2, \dots, n$.

Your task is to process q queries of the form: "if you can use coins $a \dots b$, what is the smallest sum you cannot produce?"

Input

The first input line has two integers n and q : the number of coins and queries.

The second line has n integers x_1, x_2, \dots, x_n : the value of each coin.

Finally, there are q lines that describe the queries. Each line has two values a and b : you can use coins $a \dots b$.

Output

Print the answer for each query.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$
- $1 \leq a \leq b \leq n$

Example

Input:

```
5 3
2 9 1 2 7
2 4
4 4
1 5
```

Output:

```
4
1
6
```

Explanation: First you can use coins $[9, 1, 2]$, then coins $[2]$ and finally coins $[2, 9, 1, 2, 7]$.

(Write your solution here...)

Problem 258: Increasing Array II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2185 |

You are given k distinct prime numbers a_1, a_2, \dots, a_k and an integer n .

Your task is to calculate how many of the first n positive integers are divisible by at least one of the given prime numbers.

Input

The first input line has two integers n and k .

The second line has k prime numbers a_1, a_2, \dots, a_k .

Output

Print one integer: the number integers within the interval $1, 2, \dots, n$ that are divisible by at least one of the prime numbers.

Constraints

- $1 \leq n \leq 10^{18}$
- $1 \leq k \leq 20$
- $2 \leq a_i \leq n$

Example

Input:

```
20 2
2 5
```

Output:

```
12
```

Explanation: the 12 numbers are 2,4,5,6,8,10,12,14,15,16,18,20.

(Write your solution here...)

Problem 259: Food Division

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2186 |

A substring is called *special* if every character that appears in the string appears the same number of times in the substring.

Your task is to count the number of special substrings in a given string.

Input

The only input line has a string of length n . Every character is between a...z.

Output

Print one integer: the number of special substrings.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$

Example

Input:

abccabab

Output:

5

Explanation: The special substrings are abc, cab, abccab, bccaba and ccabab.

(Write your solution here...)

Problem 260: Bit Problem

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2187 |

Your task is to calculate the number of valid bracket sequences of length n when a *prefix* of the sequence is given.

Input

The first input line has an integer n .

The second line has a string of k characters: the prefix of the sequence.

Output

Print the number of sequences modulo 10^9+7 .

Constraints

- $1 \leq k \leq n \leq 10^6$

Example

Input:

6
(()

Output:

2

Explanation: There are two possible sequences: $(())()$ and $((())())$.

(Write your solution here...)

Problem 261: Swap Round Sorting

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2189 |

There is a line that goes through the points $p_1=(x_1,y_1)$ and $p_2=(x_2,y_2)$. There is also a point $p_3=(x_3,y_3)$.

Your task is to determine whether p_3 is located on the left or right side of the line or if it touches the line when we are looking from p_1 to p_2 .

Input

The first input line has an integer t : the number of tests.

After this, there are t lines that describe the tests. Each line has six integers: x_1, y_1, x_2, y_2, x_3 and y_3 .

Output

For each test, print "LEFT", "RIGHT" or "TOUCH".

Constraints

- $1 \leq t \leq 10^5$
- $-10^9 \leq x_1, y_1, x_2, y_2, x_3, y_3 \leq 10^9$
- $x_1 \neq x_2$ or $y_1 \neq y_2$

Example

Input:

```
3
1 1 5 3 2 3
1 1 5 3 4 1
1 1 5 3 3 2
```

Output:

```
LEFT
RIGHT
TOUCH
```

(Write your solution here...)

Problem 262: Binary Subsequences

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2190 |

There are two line segments: the first goes through the points (x_1, y_1) and (x_2, y_2) , and the second goes through the points (x_3, y_3) and (x_4, y_4) .

Your task is to determine if the line segments intersect, i.e., they have at least one common point.

Input

The first input line has an integer t : the number of tests.

After this, there are t lines that describe the tests. Each line has eight integers $x_1, y_1, x_2, y_2, x_3, y_3, x_4$ and y_4 .

Output

For each test, print "YES" if the line segments intersect and "NO" otherwise.

Constraints

- $1 \leq t \leq 10^5$
- $-10^9 \leq x_1, y_1, x_2, y_2, x_3, y_3, x_4, y_4 \leq 10^9$
- $(x_1, y_1) \neq (x_2, y_2)$
- $(x_3, y_3) \neq (x_4, y_4)$

Example

Input:

```
5
1 1 5 3 1 2 4 3
1 1 5 3 1 1 4 3
1 1 5 3 2 3 4 1
1 1 5 3 2 4 4 1
1 1 5 3 3 2 7 4
```

Output:

```
NO
YES
YES
YES
YES
```

(Write your solution here...)

Problem 263: Tree Isomorphism I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2191 |

Your task is to calculate the area of a given polygon.

The polygon consists of n vertices $(x_1, y_1), (x_2, y_2), \dots, (x_n, y_n)$. The vertices (x_i, y_i) and (x_{i+1}, y_{i+1}) are adjacent for $i=1, 2, \dots, n-1$, and the vertices (x_1, y_1) and (x_n, y_n) are also adjacent.

Input

The first input line has an integer n : the number of vertices.

After this, there are n lines that describe the vertices. The i th such line has two integers x_i and y_i .

You may assume that the polygon is simple, i.e., it does not intersect itself.

Output

Print one integer: $2a$ where the area of the polygon is a (this ensures that the result is an integer).

Constraints

- $3 \leq n \leq 1000$
- $-10^9 \leq x_i, y_i \leq 10^9$

Example

Input:

```
4
1 1
4 2
3 5
1 4
```

Output:

```
16
```

(Write your solution here...)

Problem 264: Counting Sequences

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2192 |

You are given a polygon of n vertices and a list of m points. Your task is to determine for each point if it is inside, outside or on the boundary of the polygon.

The polygon consists of n vertices $(x_1, y_1), (x_2, y_2), \dots, (x_n, y_n)$. The vertices (x_i, y_i) and (x_{i+1}, y_{i+1}) are adjacent for $i=1, 2, \dots, n-1$, and the vertices (x_1, y_1) and (x_n, y_n) are also adjacent.

Input

The first input line has two integers n and m : the number of vertices in the polygon and the number of points.

After this, there are n lines that describe the polygon. The i th such line has two integers x_i and y_i .

You may assume that the polygon is simple, i.e., it does not intersect itself.

Finally, there are m lines that describe the points. Each line has two integers x and y .

Output

For each point, print "INSIDE", "OUTSIDE" or "BOUNDARY".

Constraints

- $3 \leq n, m \leq 1000$
- $-10^9 \leq x_i, y_i \leq 10^9$
- $-10^9 \leq x, y \leq 10^9$

Example

Input:

```
4 3
1 1
4 2
3 5
1 4
2 3
3 1
1 3
```

Output:

```
INSIDE
OUTSIDE
BOUNDARY
```

(Write your solution here...)

Problem 265: Critical Cities

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2193 |

Given a polygon, your task is to calculate the number of lattice points inside the polygon and on its boundary. A lattice point is a point whose coordinates are integers.

The polygon consists of n vertices $(x_1, y_1), (x_2, y_2), \dots, (x_n, y_n)$. The vertices (x_i, y_i) and (x_{i+1}, y_{i+1}) are adjacent for $i=1, 2, \dots, n-1$, and the vertices (x_1, y_1) and (x_n, y_n) are also adjacent.

Input

The first input line has an integer n : the number of vertices.

After this, there are n lines that describe the vertices. The i th such line has two integers x_i and y_i .

You may assume that the polygon is simple, i.e., it does not intersect itself.

Output

Print two integers: the number of lattice points inside the polygon and on its boundary.

Constraints

- $3 \leq n \leq 10^5$
- $-10^9 \leq x_i, y_i \leq 10^9$

Example

Input:

```
4
1 1
5 3
3 5
1 4
```

Output:

```
6 8
```

(Write your solution here...)

Problem 266: School Excursion

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2194 |

Given a set of points in the two-dimensional plane, your task is to find the minimum Euclidean distance between two distinct points.

The Euclidean distance of points (x_1, y_1) and (x_2, y_2) is $\sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}$.

Input

The first input line has an integer n : the number of points.

After this, there are n lines that describe the points. Each line has two integers x and y . You may assume that each point is distinct.

Output

Print one integer: d^2 where d is the minimum Euclidean distance (this ensures that the result is an integer).

Constraints

- $2 \leq n \leq 2 \cdot 10^5$
- $-10^9 \leq x, y \leq 10^9$

Example

Input:

```
4
2 1
4 4
1 2
6 3
```

Output:

```
2
```

(Write your solution here...)

Problem 267: Coin Grid

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2195 |

Given a set of n points in the two-dimensional plane, your task is to determine the convex hull of the points.

Input

The first input line has an integer n : the number of points.

After this, there are n lines that describe the points. Each line has two integers x and y : the coordinates of a point.

You may assume that each point is distinct, and the area of the hull is positive.

Output

First print an integer k : the number of points in the convex hull.

After this, print k lines that describe the points. You can print the points in any order. Print all points that lie on the convex hull.

Constraints

- $3 \leq n \leq 2 \cdot 10^5$
- $-10^9 \leq x, y \leq 10^9$

Example

Input:

```
6
2 1
2 5
3 3
4 3
4 4
6 3
```

Output:

```
4
2 1
2 5
4 4
6 3
```

(Write your solution here...)

Problem 268: Robot Path

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2205 |

A Gray code is a list of all 2^n bit strings of length n , where any two successive strings differ in exactly one bit (i.e., their Hamming distance is one).

Your task is to create a Gray code for a given length n .

Input

The only input line has an integer n .

Output

Print 2^n lines that describe the Gray code. You can print any valid solution.

Constraints

- $1 \leq n \leq 16$

Example

Input:

2

Output:

00
01
11
10

(Write your solution here...)

Problem 269: Programmers and Artists

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2206 |

There are n buildings on a street, numbered $1, 2, \dots, n$. Each building has a pizzeria and an apartment.

The pizza price in building k is p_k . If you order a pizza from building a to building b , its price (with delivery) is $p_a + |a - b|$.

Your task is to process two types of queries:

1. The pizza price p_k in building k becomes x .
2. You are in building k and want to order a pizza. What is the minimum price?

Input

The first input line has two integers n and q : the number of buildings and queries.

The second line has n integers p_1, p_2, \dots, p_n : the initial pizza price in each building.

Finally, there are q lines that describe the queries. Each line is either " $1 \ k \ x$ " or " $2 \ k$ ".

Output

Print the answer for each query of type 2.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq p_i, x \leq 10^9$
- $1 \leq k \leq n$

Example

Input:

```
6 3
8 6 4 5 7 5
2 2
1 5 1
2 2
```

Output:

```
5
4
```

(Write your solution here...)

Problem 270: Course Schedule II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2207 |

There is a heap of n coins and two players who move alternately. On each move, a player chooses a heap and divides into two nonempty heaps that have a different number of coins. The player who makes the last move wins the game.

Your task is to find out who wins if both players play optimally.

Input

The first input line contains an integer t : the number of tests.

After this, there are t lines that describe the tests. Each line has an integer n : the number of coins in the initial heap.

Output

For each test case, print "first" if the first player wins the game and "second" if the second player wins the game.

Constraints

- $1 \leq t \leq 10^5$
- $1 \leq n \leq 10^6$

Example

Input:

```
3
6
7
8
```

Output:

```
first
second
first
```

(Write your solution here...)

Problem 271: Removing Digits II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2208 |

There are n heaps of coins and two players who move alternately. On each move, a player selects some of the nonempty heaps and removes one coin from each heap. The player who removes the last coin wins the game.

Your task is to find out who wins if both players play optimally.

Input

The first input line contains an integer t : the number of tests. After this, t test cases are described:

The first line contains an integer n : the number of heaps.

The next line has n integers x_1, x_2, \dots, x_n : the number of coins in each heap.

Output

For each test case, print "first" if the first player wins the game and "second" if the second player wins the game.

Constraints

- $1 \leq t \leq 2 \cdot 10^5$
- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$
- the sum of all n is at most $2 \cdot 10^5$

Example

Input:

```
3
3
1 2 3
2
2 2
4
5 5 4 5
```

Output:

```
first
second
first
```

(Write your solution here...)

Problem 272: Coin Arrangement

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2209 |

Your task is to count the number of different necklaces that consist of n pearls and each pearl has m possible colors.

Two necklaces are considered to be different if it is not possible to rotate one of them so that they look the same.

Input

The only input line has two numbers n and m : the number of pearls and colors.

Output

Print one integer: the number of different necklaces modulo 10^9+7 .

Constraints

- $1 \leq n, m \leq 10^6$

Example

Input:

4 3

Output:

24

(Write your solution here...)

Problem 273: Counting Bishops

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2210 |

Your task is to count the number of different $n \times n$ grids whose each square is black or white.

Two grids are considered to be different if it is not possible to rotate one of them so that they look the same.

Input

The only input line has an integer n : the size of the grid.

Output

Print one integer: the number of grids modulo 10^9+7 .

Constraints

- $1 \leq n \leq 10^9$

Example

Input:

4

Output:

16456

(Write your solution here...)

Problem 274: Grid Puzzle I

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2214 |

Your task is to create a permutation of numbers $1, 2, \dots, n$ that has exactly k inversions.

An inversion is a pair (a, b) where $a < b$ and $p_a > p_b$ where p_i denotes the number at position i in the permutation.

Input

The only input line has two integers n and k .

Output

Print a line that contains the permutation. You can print any valid solution.

Constraints

- $1 \leq n \leq 10^6$
- $0 \leq k \leq \frac{n(n-1)}{2}$

Example

Input:

5 4

Output:

1 5 2 4 3

(Write your solution here...)

Problem 275: Grid Puzzle II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2215 |

Your task is to create a permutation of numbers $1, 2, \dots, n$ whose longest monotone subsequence has exactly k elements.

A monotone subsequence is either increasing or decreasing. For example, some monotone subsequences in $[2, 1, 4, 5, 3]$ are $[2, 4, 5]$ and $[4, 3]$.

Input

The first input line has an integer t : the number of tests.

After this, there are t lines. Each line has two integers n and k .

Output

For each test, print a line that contains the permutation. You can print any valid solution. If there are no solutions, print IMPOSSIBLE.

Constraints

- $1 \leq t \leq 1000$
- $1 \leq k \leq n \leq 100$

Example

Input:

```
3
5 3
5 2
7 7
```

Output:

```
2 1 4 5 3
IMPOSSIBLE
1 2 3 4 5 6 7
```

(Write your solution here...)

Problem 276: Empty String

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2216 |

You are given an array that contains each number between $1 \dots n$ exactly once. Your task is to collect the numbers from 1 to n in increasing order.

On each round, you go through the array from left to right and collect as many numbers as possible. What will be the total number of rounds?

Input

The first line has an integer n : the array size.

The next line has n integers x_1, x_2, \dots, x_n : the numbers in the array.

Output

Print one integer: the number of rounds.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$

Example

Input:

```
5
4 2 1 5 3
```

Output:

```
3
```

(Write your solution here...)

Problem 277: Grid Paths

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2217 |

You are given an array that contains each number between $1 \dots n$ exactly once. Your task is to collect the numbers from 1 to n in increasing order.

On each round, you go through the array from left to right and collect as many numbers as possible.

Given m operations that swap two numbers in the array, your task is to report the number of rounds after each operation.

Input

The first line has two integers n and m : the array size and the number of operations.

The next line has n integers x_1, x_2, \dots, x_n : the numbers in the array.

Finally, there are m lines that describe the operations. Each line has two integers a and b : the numbers at positions a and b are swapped.

Output

Print m integers: the number of rounds after each swap.

Constraints

- $1 \leq n, m \leq 2 \cdot 10^5$
- $1 \leq a, b \leq n$

Example

Input:

```
5 3
4 2 1 5 3
2 3
1 5
2 3
```

Output:

```
2
3
4
```

(Write your solution here...)

Problem 278: Bit Substrings

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2220 |

Your task is to count the number of integers between a and b where no two adjacent digits are the same.

Input

The only input line has two integers a and b .

Output

Print one integer: the answer to the problem.

Constraints

- $0 \leq a \leq b \leq 10^{18}$

Example

Input:

123 321

Output:

171

(Write your solution here...)

Problem 279: Reversal Sorting

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2228 |

Your task is to count the number of sequences of length n where each element is an integer between $1 \dots k$ and each integer between $1 \dots k$ appears at least once in the sequence.

For example, when $n=6$ and $k=4$, some valid sequences are $[1,3,1,4,3,2]$ and $[2,2,1,3,4,2]$.

Input

The only input line has two integers n and k .

Output

Print one integer: the number of sequences modulo 10^9+7 .

Constraints

- $1 \leq k \leq n \leq 10^6$

Example

Input:

6 4

Output:

1560

(Write your solution here...)

Problem 280: Counting Reorders

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2229 |

Your task is to count the number of permutations of $1, 2, \dots, n$ that have exactly k inversions (i.e., pairs of elements in the wrong order).

For example, when $n=4$ and $k=3$, there are 6 such permutations:

- $[1, 4, 3, 2]$
- $[2, 3, 4, 1]$
- $[2, 4, 1, 3]$
- $[3, 1, 4, 2]$
- $[3, 2, 1, 4]$
- $[4, 1, 2, 3]$

Input

The only input line has two integers n and k .

Output

Print the answer modulo 10^9+7 .

Constraints

- $1 \leq n \leq 500$
- $0 \leq k \leq \frac{n(n-1)}{2}$

Example

Input:

4 3

Output:

6

(Write your solution here...)

Problem 281: Book Shop II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2402 |

You are given an input list that consists of n numbers. Each integer between 1 and n appears exactly once in the list.

Your task is to create a sorted output list using two stacks. On each move you can do one of the following:

- Move the first number from the input list to a stack
- Move a number from a stack to the end of the output list

Input

The first input line has an integer n .

The second line has n integers: the contents of the input list.

Output

Print n integers: for each number the stack where it is moved (1 or 2).

You can print any valid solution. If there are no solutions, print **IMPOSSIBLE**.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$

Example

Input:

```
5
2 3 1 5 4
```

Output:

```
1 2 1 1 2
```

(Write your solution here...)

Problem 282: Network Breakdown

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2413 |

Your task is to build a tower whose width is 2 and height is n . You have an unlimited supply of blocks whose width and height are integers.

For example, here are some possible solutions for $n=6$:

Given n , how many different towers can you build? Mirrored and rotated towers are counted separately if they look different.

Input

The first input line contains an integer t : the number of tests.

After this, there are t lines, and each line contains an integer n : the height of the tower.

Output

For each test, print the number of towers modulo 10^9+7 .

Constraints

- $1 \leq t \leq 100$
- $1 \leq n \leq 10^6$

Example

Input:

```
3
2
6
1337
```

Output:

```
8
2864
640403945
```

(Write your solution here...)

Problem 283: Visiting Cities

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2414 |

List A consists of n positive integers, and list B contains the sum of each element pair of list A.

For example, if $A=[1,2,3]$, then $B=[3,4,5]$, and if $A=[1,3,3,3]$, then $B=[4,4,4,6,6,6]$.

Given list B, your task is to reconstruct list A.

Input

The first input line has an integer n : the size of list A.

The next line has $\frac{n(n-1)}{2}$ integers: the contents of list B.

You can assume that there is a list A that corresponds to the input, and each value in A is between 1 and k .

Output

Print n integers: the contents of list A.

You can print the values in any order. If there are more than one solution, you can print any of them.

Constraints

- $3 \leq n \leq 100$
- $1 \leq k \leq 10^9$

Example

Input:

```
4
4 4 4 6 6 6
```

Output:

```
1 3 3 3
```

Explanation: In this case list A can be either $[1,3,3,3]$ or $[2,2,2,4]$ and both solutions are accepted.

(Write your solution here...)

Problem 284: Missing Coin Sum Queries

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2415 |

A *functional graph* is a directed graph where each node has outdegree 1. For example, here is a functional graph that has 9 nodes and 2 components:

Given n , your task is to calculate for each $k=1 \dots n$ the number of functional graphs that have n nodes and k components.

Input

The only input line has an integer n : the number of nodes.

Output

Print n lines: for each $k=1 \dots n$ the number of graphs modulo 10^9+7 .

Constraints

- $1 \leq n \leq 5000$

Example

Input:

3

Output:

17
9
1

(Write your solution here...)

Problem 285: Number Grid

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2416 |

You are given an array that consists of n integers. The array elements are indexed $1, 2, \dots, n$.

You can modify the array using the following operation: choose an array element and increase its value by one.

Your task is to process q queries of the form: when we consider a subarray from position a to position b , what is the minimum number of operations after which the subarray is increasing?

An array is increasing if each element is greater than or equal with the previous element.

Input

The first input line has two integers n and q : the size of the array and the number of queries.

The next line has n integers x_1, x_2, \dots, x_n : the contents of the array.

Finally, there are q lines that describe the queries. Each line has two integers a and b : the starting and ending position of a subarray.

Output

For each query, print the minimum number of operations.

Constraints

- $1 \leq n, q \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$
- $1 \leq a \leq b \leq n$

Example

Input:

```
5 3
2 10 4 2 5
3 5
2 2
1 4
```

Output:

```
2
0
14
```

(Write your solution here...)

Problem 286: Maximum Building II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2417 |

Given a list of n positive integers, your task is to count the number of pairs of integers that are coprime (i.e., their greatest common divisor is one).

Input

The first input line has an integer n : the number of elements.

The next line has n integers x_1, x_2, \dots, x_n : the contents of the list.

Output

Print one integer: the answer for the task.

Constraints

- $1 \leq n \leq 10^5$
- $1 \leq x_i \leq 10^6$

Example

Input:

```
8
5 4 20 1 16 17 5 15
```

Output:

```
19
```

(Write your solution here...)

Problem 287: Filling Trominos

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2418 |

Given an $n \times m$ grid and two squares $a=(y_1, x_1)$ and $b=(y_2, x_2)$, create a path from a to b that visits each square exactly once.

For example, here is a path from $a=(1,3)$ to $b=(3,6)$ in a 4×7 grid:

Input

The first input line has an integer t : the number of tests.

After this, there are t lines that describe the tests. Each line has six integers n, m, y_1, x_1, y_2 and x_2 .

In all tests $1 \leq y_1, y_2 \leq n$ and $1 \leq x_1, x_2 \leq m$. In addition, $y_1 \neq y_2$ or $x_1 \neq x_2$.

Output

Print YES, if it is possible to construct a path, and NO otherwise.

If there is a path, also print its description which consists of characters U (up), D (down), L (left) and R (right). If there are several paths, you can print any of them.

Constraints

- $1 \leq t \leq 100$
- $1 \leq n \leq 50$
- $1 \leq m \leq 50$

Example

Input:

```
5
1 3 1 1 1 3
1 3 1 2 1 3
2 2 1 1 2 2
2 2 1 1 2 1
4 7 1 3 3 6
```

Output:

```
YES
RR
NO
NO
YES
RDL
YES
RRRRDDLLLLLUURDDRURDRURD
```

(Write your solution here...)

Problem 288: Stick Divisions

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2419 |

Consider a xor pyramid where each number is the xor of lower-left and lower-right numbers. Here is an example pyramid:

Given the bottom row of the pyramid, your task is to find the topmost number.

Input

The first line has an integer n : the size of the pyramid.

The next line has n integers a_1, a_2, \dots, a_n : the bottom row of the pyramid.

Output

Print one integer: the topmost number.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $1 \leq a_i \leq 10^9$

Example

Input:

```
8
2 10 5 12 9 5 1 5
```

Output:

```
9
```

(Write your solution here...)

Problem 289: Coding Company

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2420 |

You are given a string that consists of n characters between a – z . The positions of the string are indexed $1, 2, \dots, n$.

Your task is to process m operations of the following types:

1. Change the character at position k to x
2. Check if the substring from position a to position b is a palindrome

Input

The first input line has two integers n and m : the length of the string and the number of operations.

The next line has a string that consists of n characters.

Finally, there are m lines that describe the operations. Each line is of the form " $1\ k\ x$ " or " $2\ a\ b$ ".

Output

For each operation 2, print YES if the substring is a palindrome and NO otherwise.

Constraints

- $1 \leq n, m \leq 2 \cdot 10^5$
- $1 \leq k \leq n$
- $1 \leq a \leq b \leq n$

Example

Input:

```
7 5
aybabbu
2 3 5
1 3 x
2 3 5
1 5 x
2 3 5
```

Output:

```
YES
NO
YES
```

(Write your solution here...)

Problem 290: Flight Route Requests

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2421 |

Calculate the number of ways you can reorder the characters of a string so that no two adjacent characters are the same.

For example, the answer for aabc is 6, because the possible orders are abac, abca, acab, acba, baca, and caba.

Input

The only input line has a string that consists of n characters between a–z.

Output

Print an integer: the answer modulo 10^9+7 .

Constraints

- $1 \leq n \leq 5000$

Example

Input:

aabc

Output:

6

(Write your solution here...)

Problem 291: Two Stacks Sorting

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2422 |

Find the middle element when the numbers in an $n \times n$ multiplication table are sorted in increasing order. It is assumed that n is odd.

For example, the 3×3 multiplication table is as follows: $\begin{matrix} 1 & 2 & 3 \\ 2 & 4 & 6 \\ 3 & 6 & 9 \end{matrix}$ The numbers in increasing order are $[1, 2, 2, 3, 3, 4, 6, 6, 9]$, so the answer is 3.

Input

The only input line has an integer n .

Output

Print one integer: the answer to the task.

Constraints

- $1 \leq n < 10^6$

Example

Input:

3

Output:

3

(Write your solution here...)

Problem 292: Tree Isomorphism II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2423 |

Your task is to fill an $n \times m$ grid using L-trominos (three squares that have an L-shape). For example, here is one way to fill a 4×6 grid:

Input

The first input line has an integer t : the number of tests.

After that, there are t lines that describe the tests. Each line has two integers n and m .

Output

For each test, print YES if there is a solution, and NO otherwise.

If there is a solution, also print n lines that each contain m letters between A–Z. Adjacent squares must have the same letter exactly when they belong to the same tromino. You can print any valid solution.

Constraints

- $1 \leq t \leq 100$
- $1 \leq n, m \leq 100$

Example

Input:

```
2
4 6
4 7
```

Output:

```
YES
AADDDB
ACCDEB
BCAEEC
BBAACC
NO
```

(Write your solution here...)

Problem 293: Forbidden Cities

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2425 |

You have n coins, each of which has a distinct weight.

There are two stacks which are initially empty. On each step you move one coin to a stack. You never remove a coin from a stack.

After each move, your task is to determine which stack is heavier (if we can be sure that either stack is heavier).

Input

The first input line has an integer n : the number of coins. The coins are numbered $1, 2, \dots, n$. You know that coin i is always heavier than coin $i-1$, but you don't know their exact weights.

After this, there are n lines that describe the moves. Each line has two integers c and s : move coin c to stack s (1 = left, 2 = right).

Output

After each move, print $<$ if the right stack is heavier, $>$ if the left stack is heavier, and $?$ if we can't know which stack is heavier.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$

Example

Input:

```
3
2 1
3 2
1 1
```

Output:

```
>
<
?
```

Explanation: After the last move, if the coins are $[2, 3, 4]$, the left stack is heavier, but if the coins are $[1, 2, 5]$, the right stack is heavier.

(Write your solution here...)

Problem 294: Area of Rectangles

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2426 |

A company wants to hire a programmers and b artists.

There are a total of n applicants, and each applicant can become either a programmer or an artist. You know each applicant's programming and artistic skills.

Your task is to select the new employees so that the sum of their skills is maximum.

Input

The first input line has three integers a , b and n : the required number of programmers and artists, and the total number of applicants.

After this, there are n lines that describe the applicants. Each line has two integers x and y : the applicant's programming and artistic skills.

Output

Print one integer: the maximum sum of skills.

Constraints

- $1 \leq n \leq 2 \cdot 10^5$
- $0 \leq a, b \leq n$
- $a + b \leq n$
- $1 \leq x, y \leq 10^9$

Example

Input:

```
2 1 4
3 7
9 8
1 5
4 2
```

Output:

```
20
```

Explanation: An optimal solution is to hire two programmers with skills 9 and 4 and one artist with skill 7. The sum of the skills is $9+4+7=20$.

(Write your solution here...)

Problem 295: Grid Completion

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2427 |

There are $2n$ boxes in a line. Two adjacent boxes are empty, and all other boxes have a letter "A" or "B". Both letters appear in exactly $n-1$ boxes.

Your task is to move the letters so that all letters "A" appear before any letter "B". On each turn you can choose any two adjacent boxes that have a letter and move the letters to the two adjacent empty boxes, preserving their order.

It can be proven that either there is a solution that consists of at most $10n$ turns or there are no solutions.

Input

The first line has an integer n : there are $2n$ boxes.

The second line has a string of $2n$ characters which describes the starting position. Each character is "A", "B" or "." (empty box).

Output

First print an integer k : the number of turns. After this, print k lines that describe the moves. You can print any solution, as long as $k \leq 1000$.

If there are no solutions, print only "-1".

Constraints

- $1 \leq n \leq 100$

Example 1

Input:

```
3
AB. .BA
```

Output:

```
2
ABBA. .
A. .ABB
```

Example 2

Input:

```
3
ABAB. .
```

Output:

```
-1
```

(Write your solution here...)

Problem 296: Creating Offices

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2428 |

Given an array of n integers, your task is to calculate the number of subarrays that have at most k distinct values.

Input

The first input line has two integers n and k .

The next line has n integers x_1, x_2, \dots, x_n : the contents of the array.

Output

Print one integer: the number of subarrays.

Constraints

- $1 \leq k \leq n \leq 2 \cdot 10^5$
- $1 \leq x_i \leq 10^9$

Example

Input:

```
5 2
1 2 3 1 1
```

Output:

```
10
```

(Write your solution here...)

Problem 297: Permutations II

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2429 |

Your task is to create an $n \times n$ grid whose each row and column has exactly one A and B. Some of the characters have already been placed. In how many ways can you complete the grid?

Input

The first input line has an integer n : the size of the grid.

After this, there are n lines that describe the grid. Each line has n characters: . means an empty square, and A and B show the characters already placed.

You can assume that every row and column has at most one A and B.

Output

Print one integer: the number of ways modulo 10^9+7 .

Constraints

- $2 \leq n \leq 500$

Example

Input:

```
5
.....
..AB.
.....
B....
...A.
```

Output:

```
16
```

(Write your solution here...)

Problem 298: Functional Graph Distribution

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2430 |

Your task is to find a minimum length bit string that has exactly n distinct subsequences.

For example, a correct solution for $n=6$ is `101` whose distinct subsequences are `0`, `1`, `01`, `10`, `11` and `101`.

Input

The only input line has an integer n .

Output

Print one bit string: a solution to the task. You can print any valid solution.

Constraints

- $1 \leq n \leq 10^6$

Example

Input:

6

Output:

101

(Write your solution here...)

Problem 299: New Flight Routes

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2431 |

Consider an infinite string that consists of all positive integers in increasing order:

12345678910111213141516171819202122232425...

Your task is to process q queries of the form: what is the digit at position k in the string?

Input

The first input line has an integer q : the number of queries.

After this, there are q lines that describe the queries. Each line has an integer k : a 1-indexed position in the string.

Output

For each query, print the corresponding digit.

Constraints

- $1 \leq q \leq 1000$
- $1 \leq k \leq 10^{18}$

Example

Input:

```
3
7
19
12
```

Output:

```
7
4
1
```

(Write your solution here...)

Problem 300: Grid Path Construction

- **Time limit:** 1.00 s
- **Memory limit:** 512 MB

| |
|------------|
| problemset |
| 2432 |

There is an $n \times n$ grid, and your task is to choose from each row and column some number of squares. How can you do that?

Input

The first input line has an integer n : the size of the grid. The rows and columns are numbered $1, 2, \dots, n$.

The next line has n integers a_1, a_2, \dots, a_n : You must choose exactly a_i squares from the i th row.

The last line has n integers b_1, b_2, \dots, b_n : You must choose exactly b_j squares from the j th column.

Output

Print n lines describing which squares you choose (X means that you choose a square, . means that you don't choose it). You can print any valid solution.

If it is not possible to satisfy the conditions print only -1.

Constraints

- $1 \leq n \leq 50$
- $0 \leq a_i \leq n$
- $0 \leq b_j \leq n$

Example

Input:

```
5
0 1 3 2 0
1 2 2 0 1
```

Output:

```
.....
..X..
.XX.X
XX...
.....
```

(Write your solution here...)