


main_program/test1
_noMQTT/commandprocessor.h

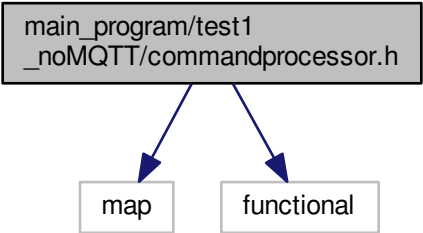

```
graph TD; A["main_program/test1  
_noMQTT/commandprocessor.h"] --> B["map"]; A --> C["functional"]
```

map

functional