

# Cucumber Report

14 Feb 2022, 19:13:52

Start : Feb 14, 7:13:52.007 pm

End : Feb 14, 7:13:52.039 pm

Duration : 0.032 s

Features


Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0


PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 1  
SKIPPED - 2

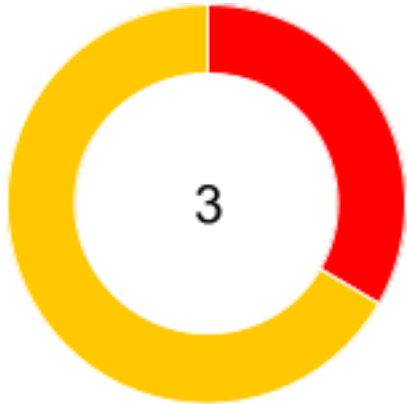



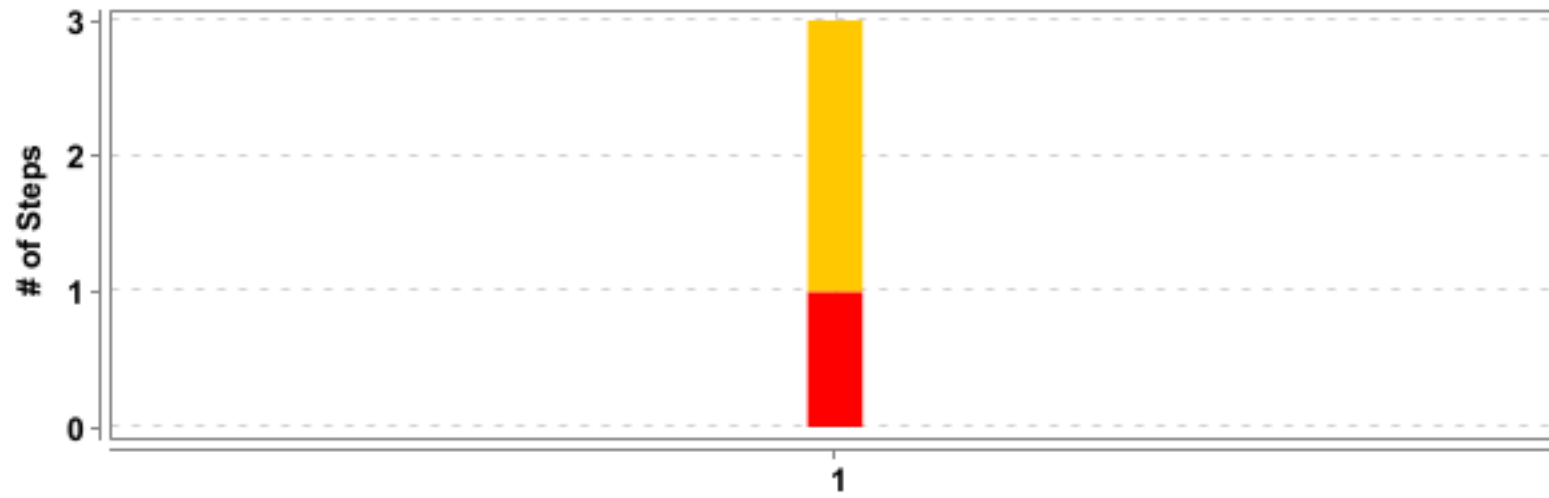

#	Feature Name	T	P	F	S	Duration
1	<u>Get a user by username</u>	1	0	1	0	0.032 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Get a user by username</u>	<u>End user makes call to web service to retrieve user by username</u>	3	0	1	2	0.026 s

**(F)- Get a user by username**

<b>FAILED</b>	<b>DURATION - 0.032 s</b>	Scenarios		Steps	
/ 7:13:52.007 pm // 7:13:52.039 pm /		Total - 1		Total - 3	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 2	

**(S)- End user makes call to web service to retrieve user by username**
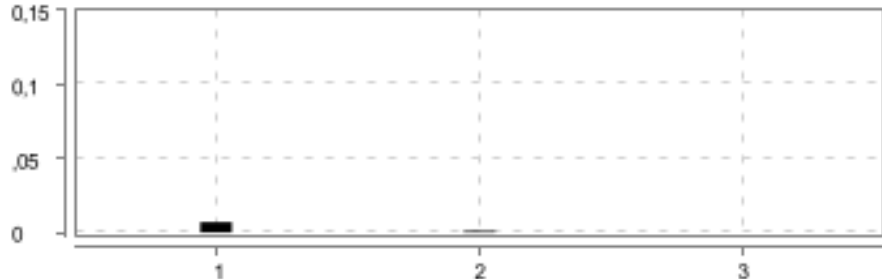
<div>FAILED</div> <div>DURATION - 0.026 s</div>			Steps	
/ 7:13:52.013 pm // 7:13:52.039 pm /			Total - 3	
Get a user by username			Pass - 0	
			Fail - 1	
			Skip - 2	

#	Step / Hook Details	Status	Duration
1	<p>Given a user exists with username "Delphine"</p> <p>io.cucumber.core.exception.CucumberException: class stepDefinitions.SearchStepsUser doesn't have an empty constructor. If you need dependency injection, put cucumber-picocontainer on the classpath</p> <p>at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:145)</p> <p>at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p> <p>at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)</p> <p>at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)</p> <p>at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:64)</p> <p>at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:104)</p> <p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:73)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27)</p>	FAILED	0.007 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:89) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:541) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:768) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:464) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.NoSuchMethodException: stepDefinitions.SearchStepsUser.&lt;init&gt;() at java.base/java.lang.Class.getConstructor0(Class.java:3508) at java.base/java.lang.Class.getConstructor(Class.java:2244) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:140) </pre>		
2	When an end user retrieves the user by username	SKIPPED	0.001 s
3	Then the status code is 200	SKIPPED	0.000 s