

Marker10 v2: disease-centered concordance, network, and pathway-proximity context

All panels use human disease cohorts. CKD is only one domain among the ontology-ordered disease contexts.




B. Marker concordance by human disease cohort

Each row includes disease name, accession/cohort number, case/control labels, and n case/control. Concordance is against the supplied Marker10 reference direction.




C. Marker10 STRING/pathway proximity network

Fixed Marker10 layout using STRING direct edges and enriched role zones. Node size reflects detected cohorts; node color reflects aggregate concordance across human disease cohorts.

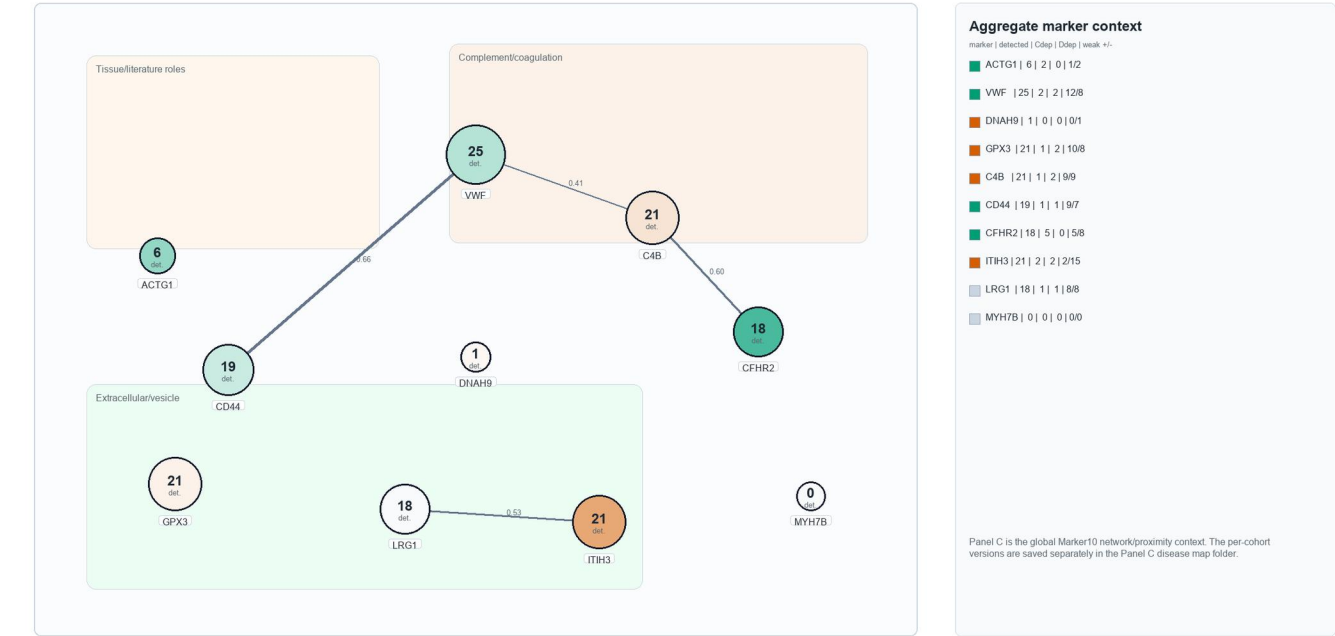

D. Disease pathway-proximity overlap

Rows are disease cohorts; columns are STRINGdatabase roles. Color shows role-level Marker10 concordance proximity scores.

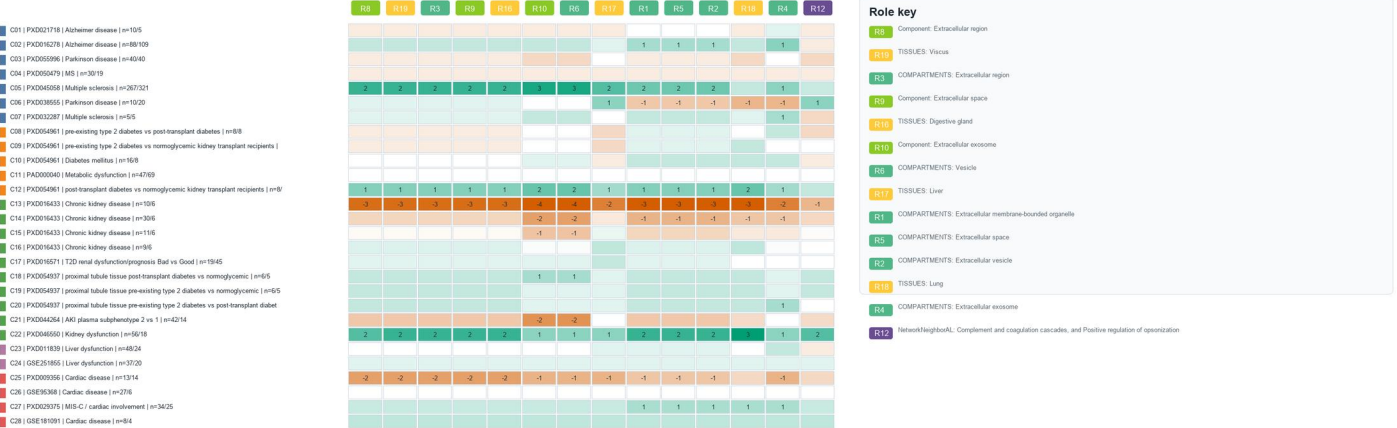

E. Marker pathway/database-role matrix

Expanded role-level matrix with database category, term ID, FDR, and marker membership.

