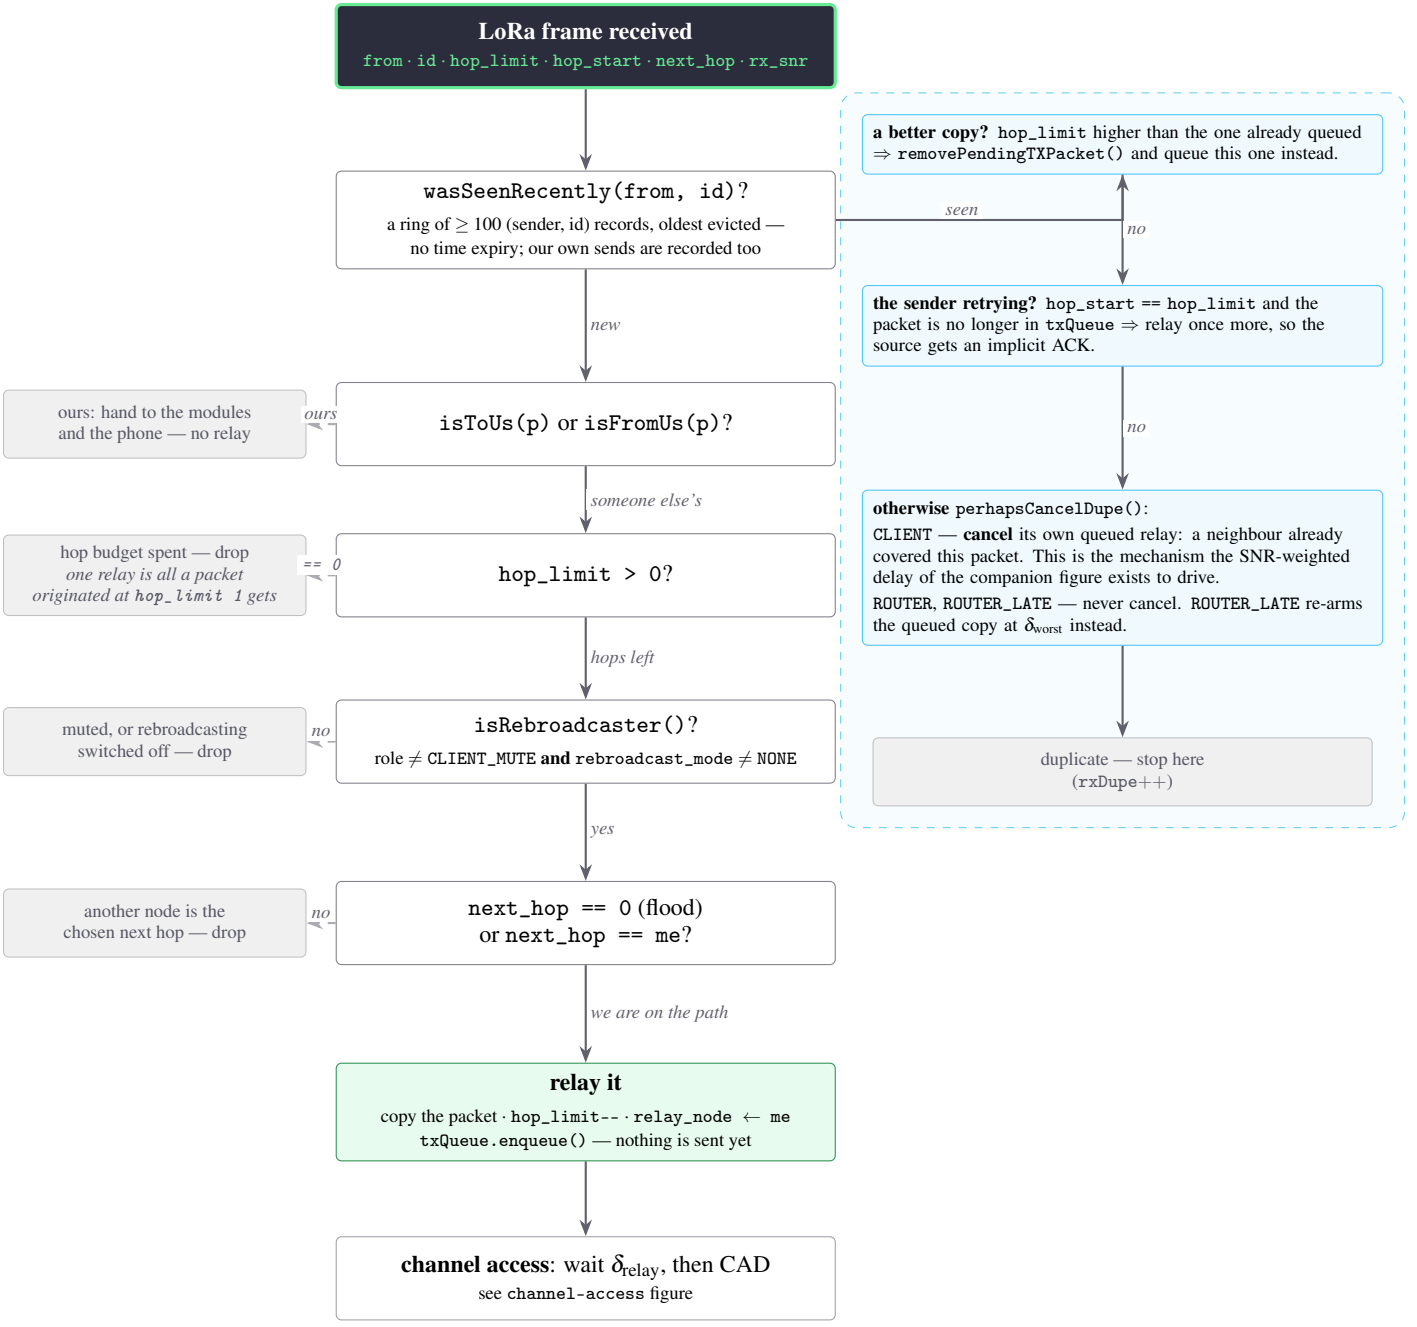


Earlier gates, not shown. LOCAL_ONLY and KNOWN_ONLY drop at decode time (unknown sender / foreign channel), and CORE_PORTNUMS_ONLY cancels after decode on a non-core portnum — all three reach isRebroadcaster() as a frame already thrown away.