
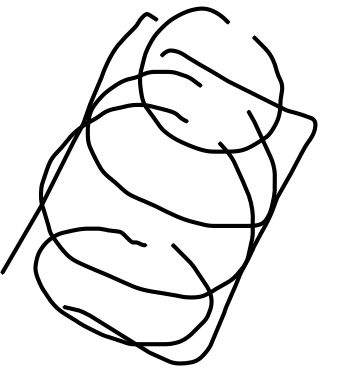
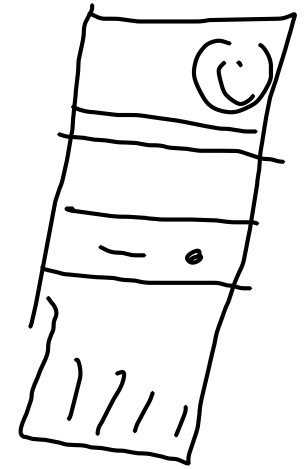


WRRE

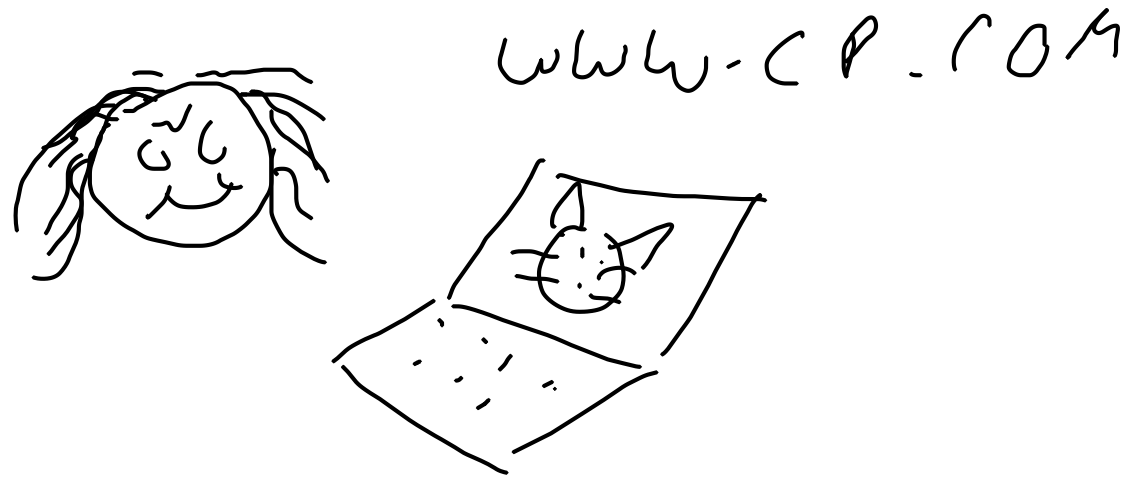


function sort (ARR) {


—

}

sort(myARR);

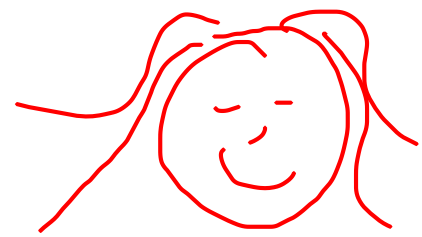

INDEX.HTML F MARKUP

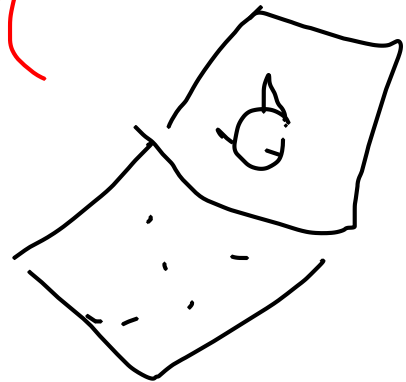


→ ROUTER - COMCAST

?
IP
CATS.COM


ICANN → GGRADY → DNS





NAME SERVER

1 ROUTER
COMCAST
ICANN


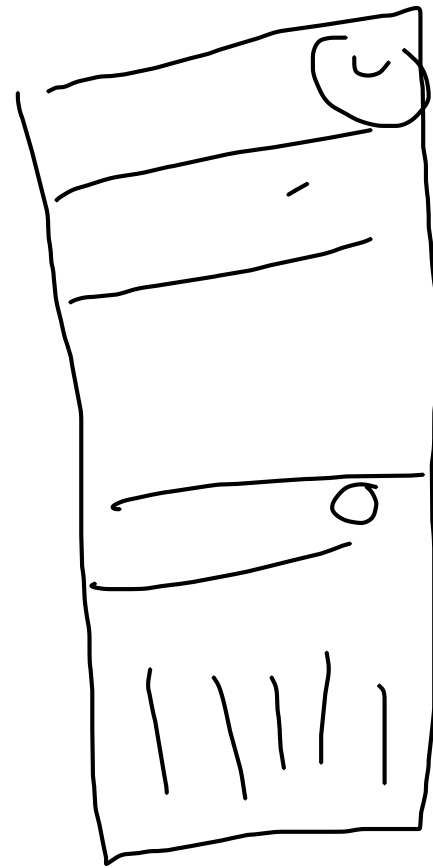


244.163.12.17

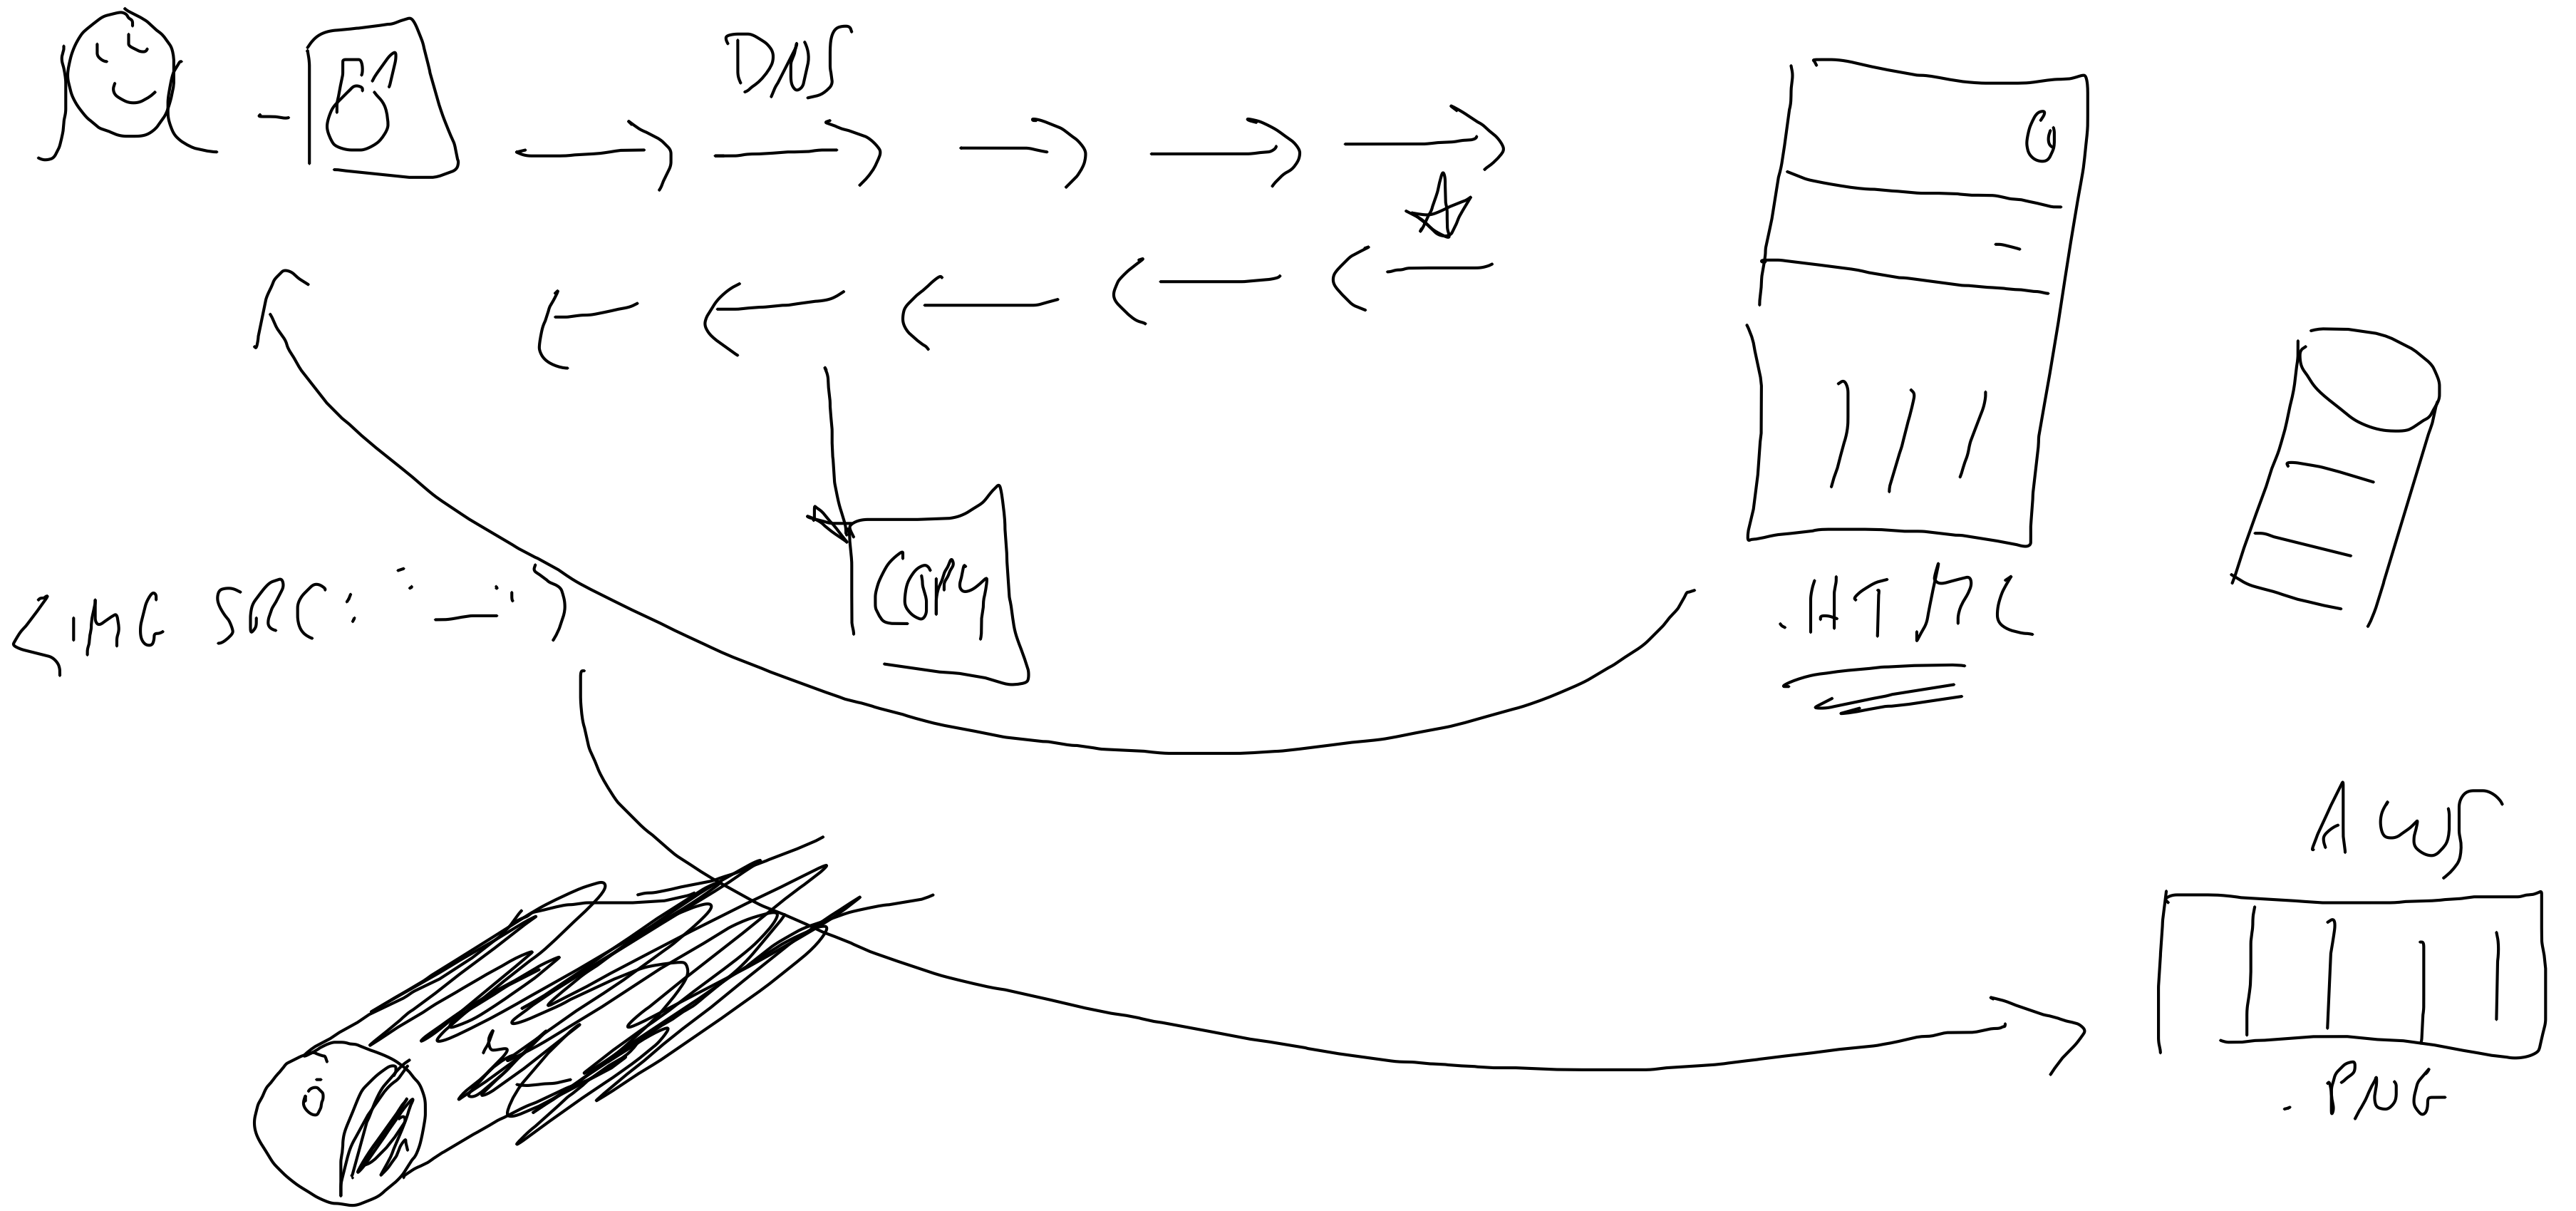

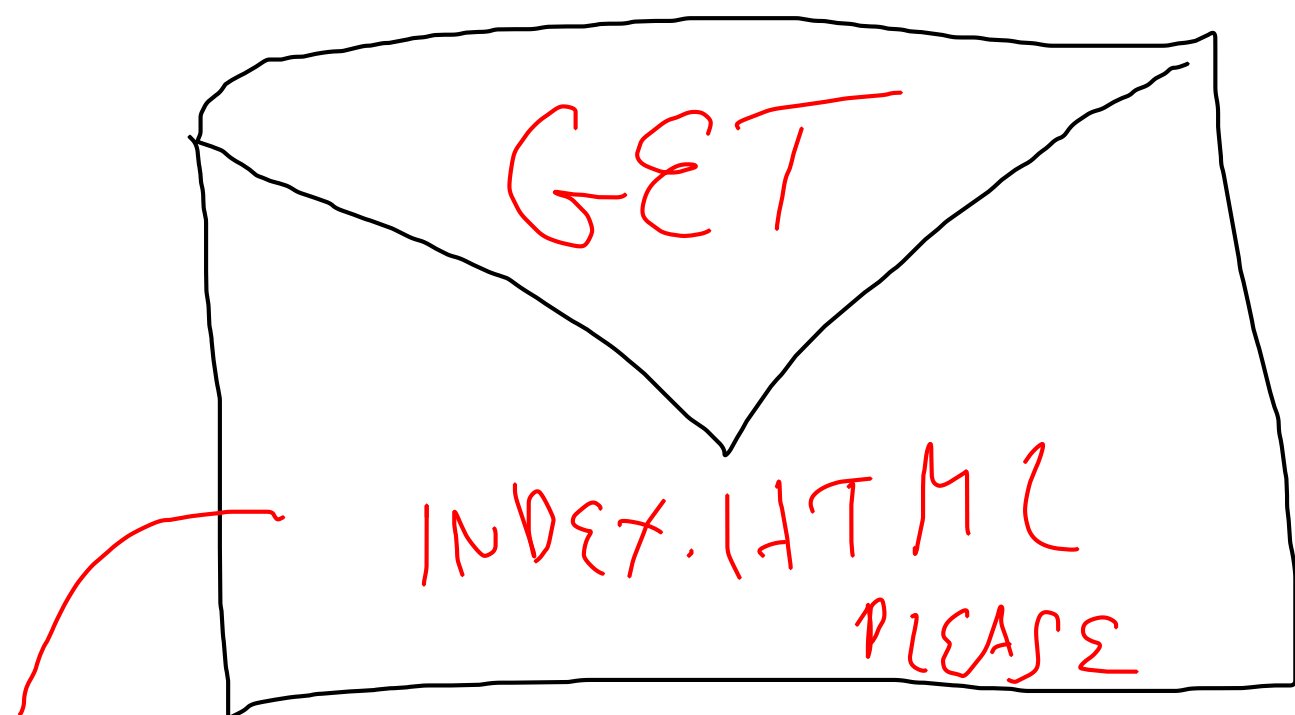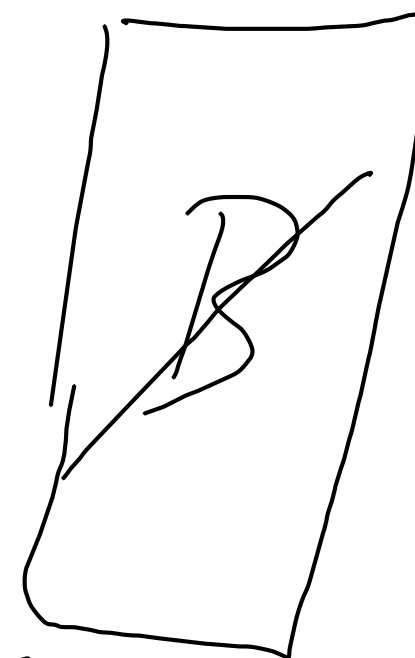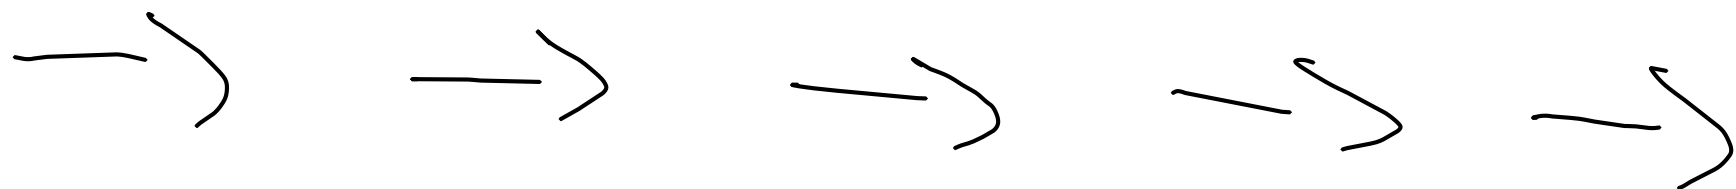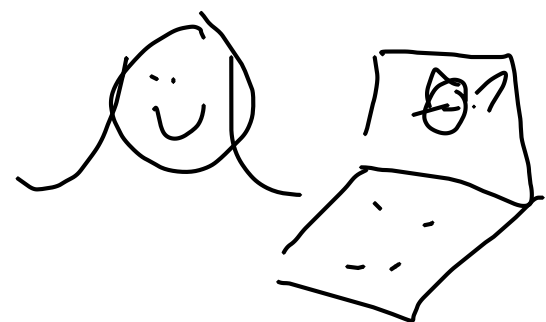

UN: JGHN
PW: 100700

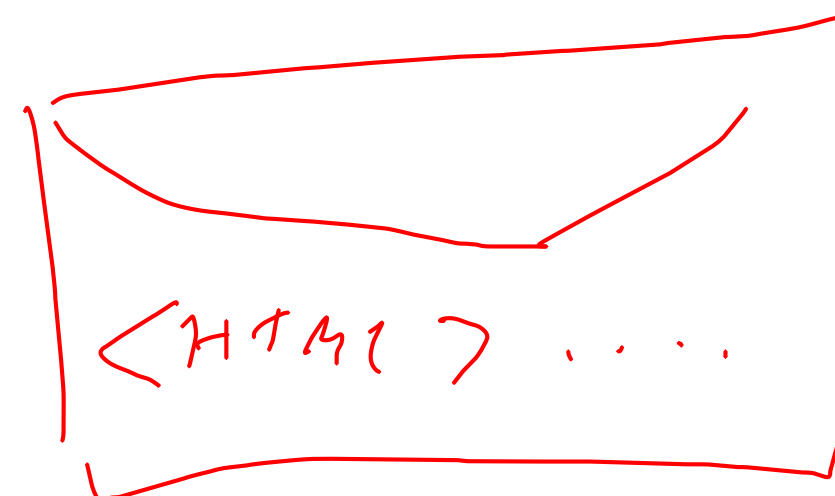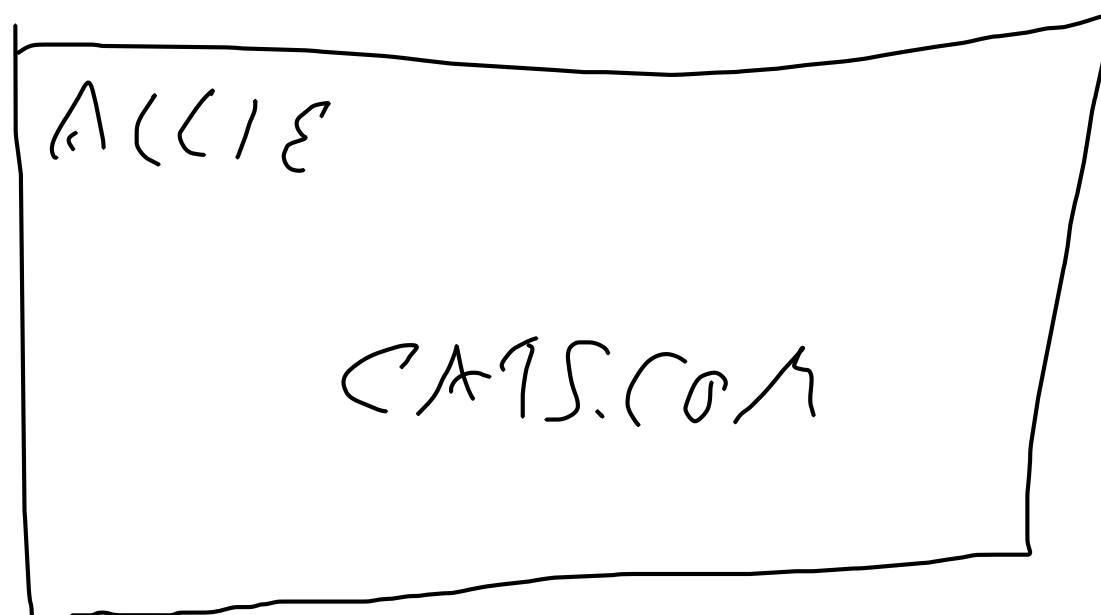

HTTP: | HYPERTEXT | TRANSPORT PROTOCOL
HTML: | HYPERTEXT | MARKUP LANGUAGE

GET

POST

DELETE

PUT

PATCH

= VERB

NOUNS =>

INDEX.HTML

CUTIE.PNG

SCRATCH.MOV

JSON

ID#

REQUEST / ENVELOPE

REQUEST HEADER

- SERVER IP
- YOUR IP
- DATE
- METHOD (GET, PUT, POST, etc)
- RESOURCE

SERVER GIVES STATUS CODE

• TOKEN

- BODY →
INSIDE
ENVELOPE

7(-) →

\$. GET (DATA) . THEN (—)

1261255c

"CACHE"

STORE TEMPORILLY
FOR LATER

DATA?

URL? IN LOCAL STORAGE?

get that

NO? GET + STORE IT IN C.S.