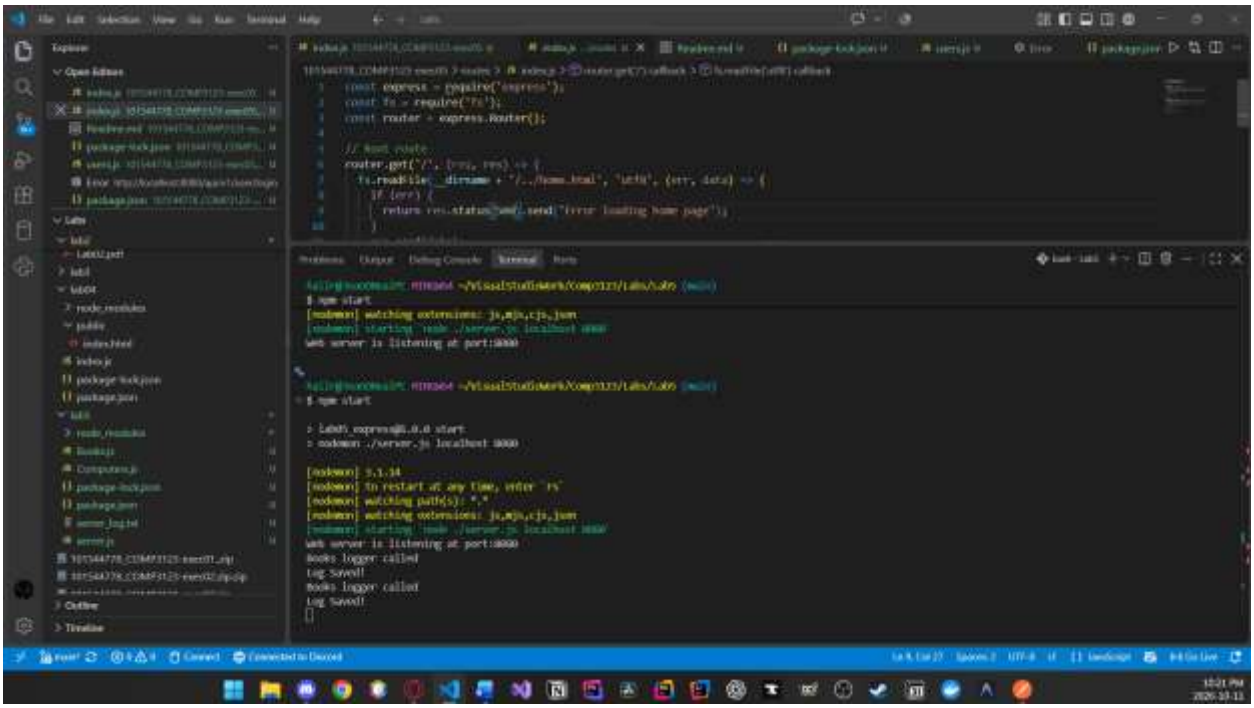
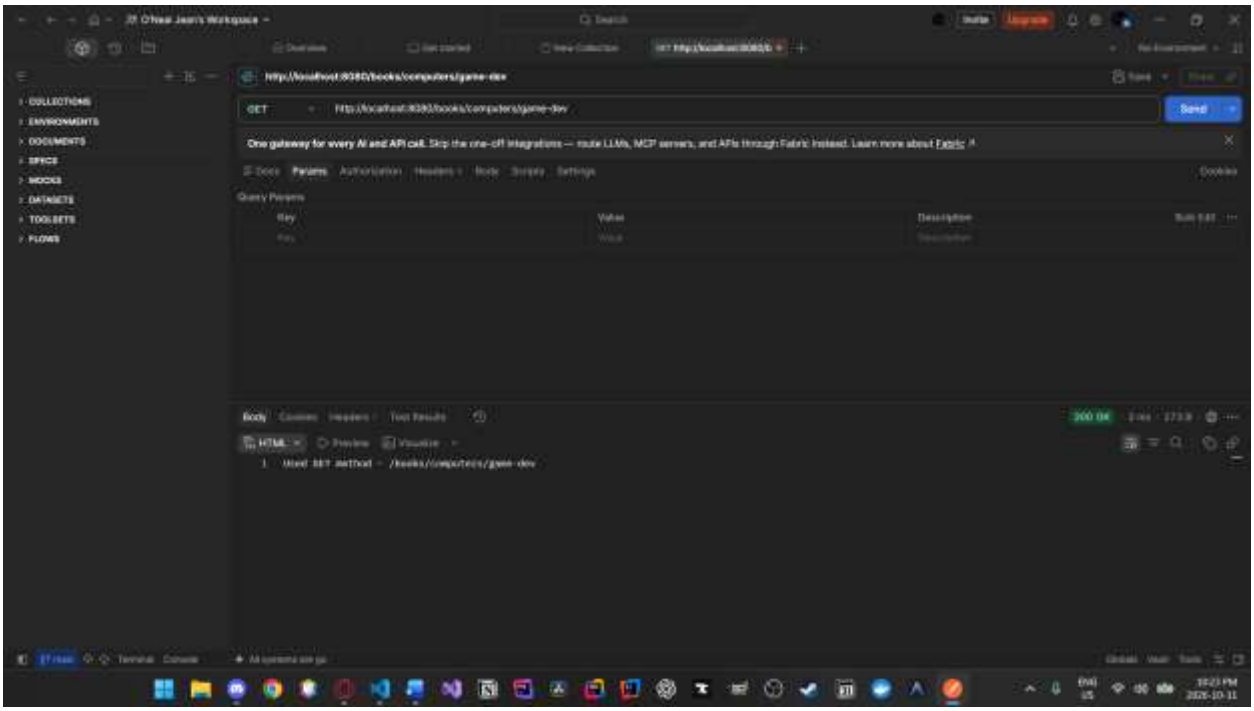
Name: O’Neal Jean
Student ID: 101544778
Course: COMP3123

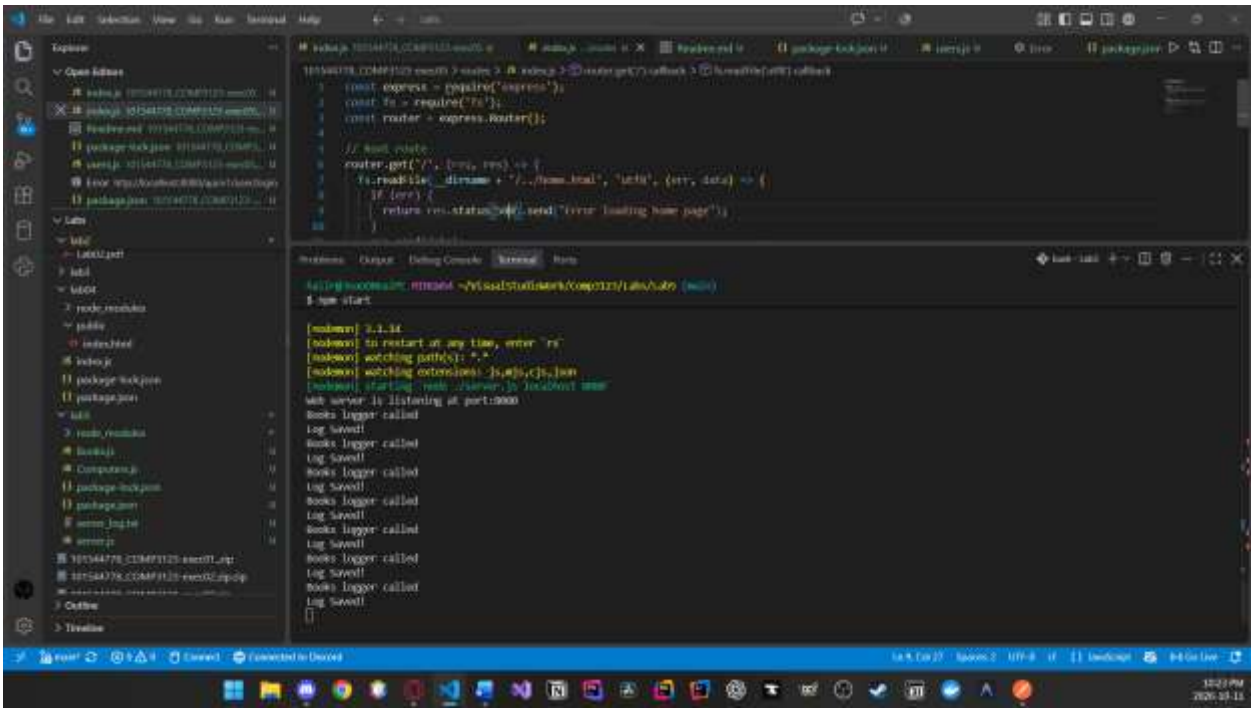
Github Link: https://github.com/OJean2468/OMP3123-Lab-2026.git

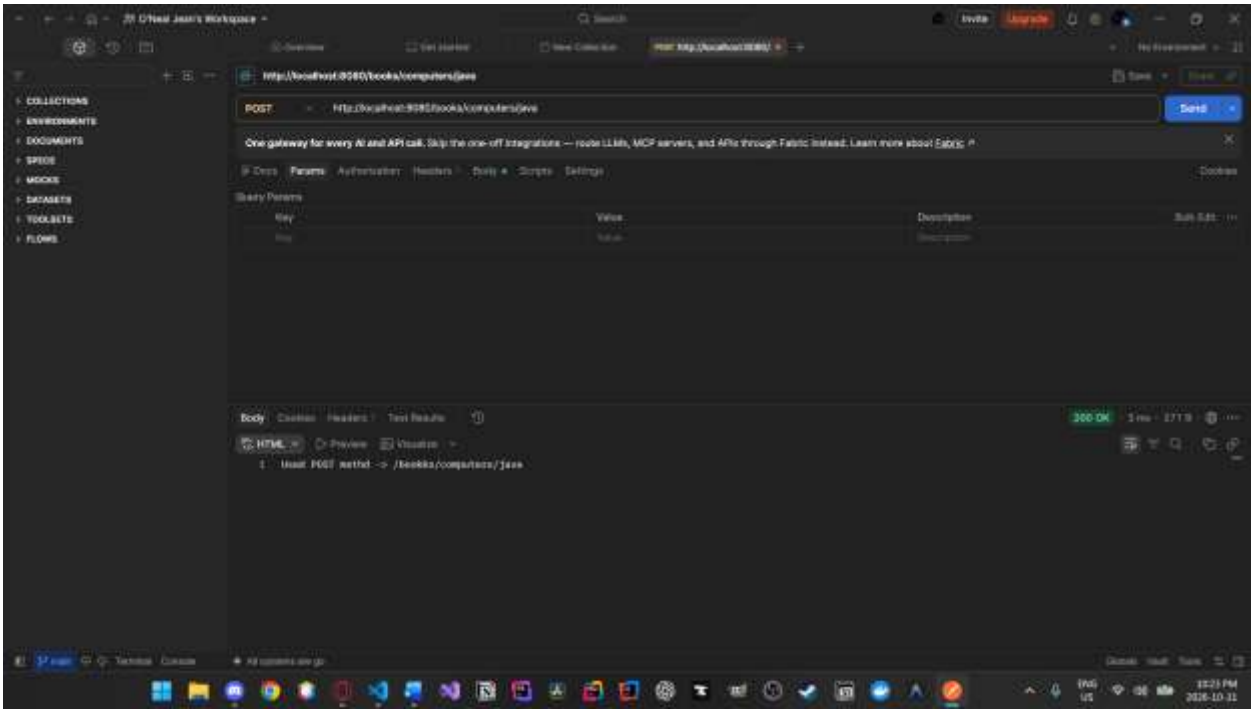
Screenshots:

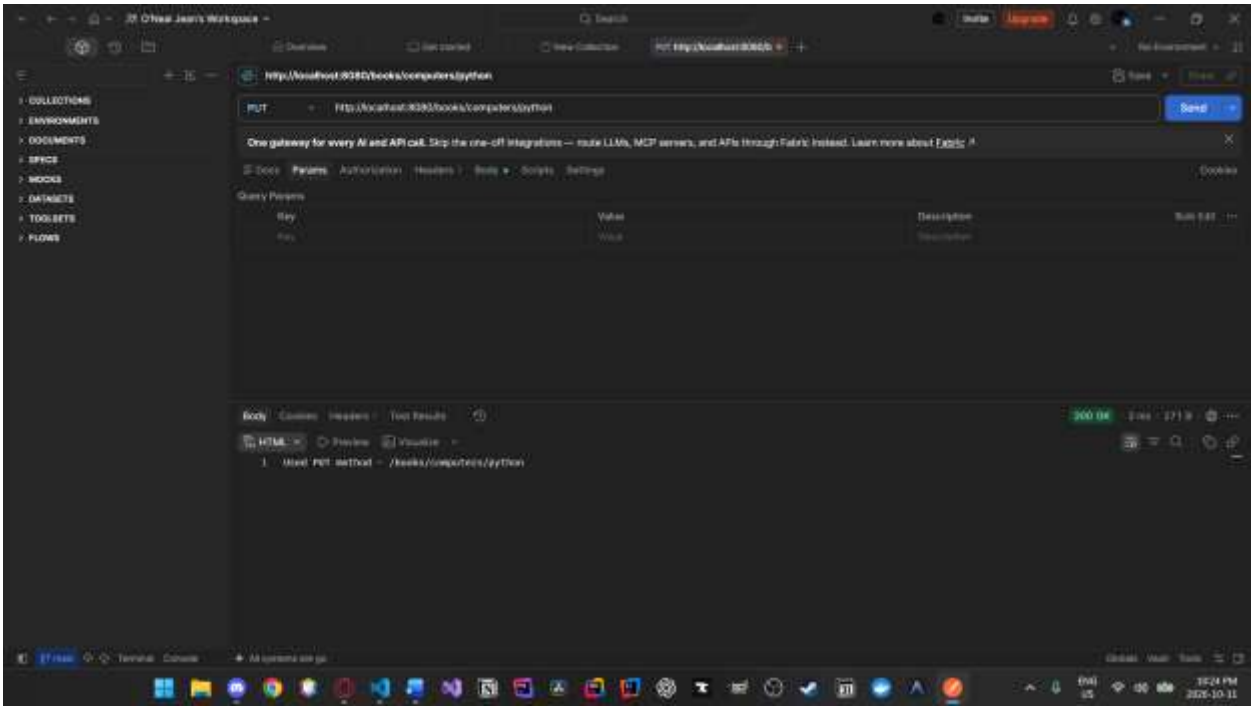
Laily Lab Screenshots (Lab 05):

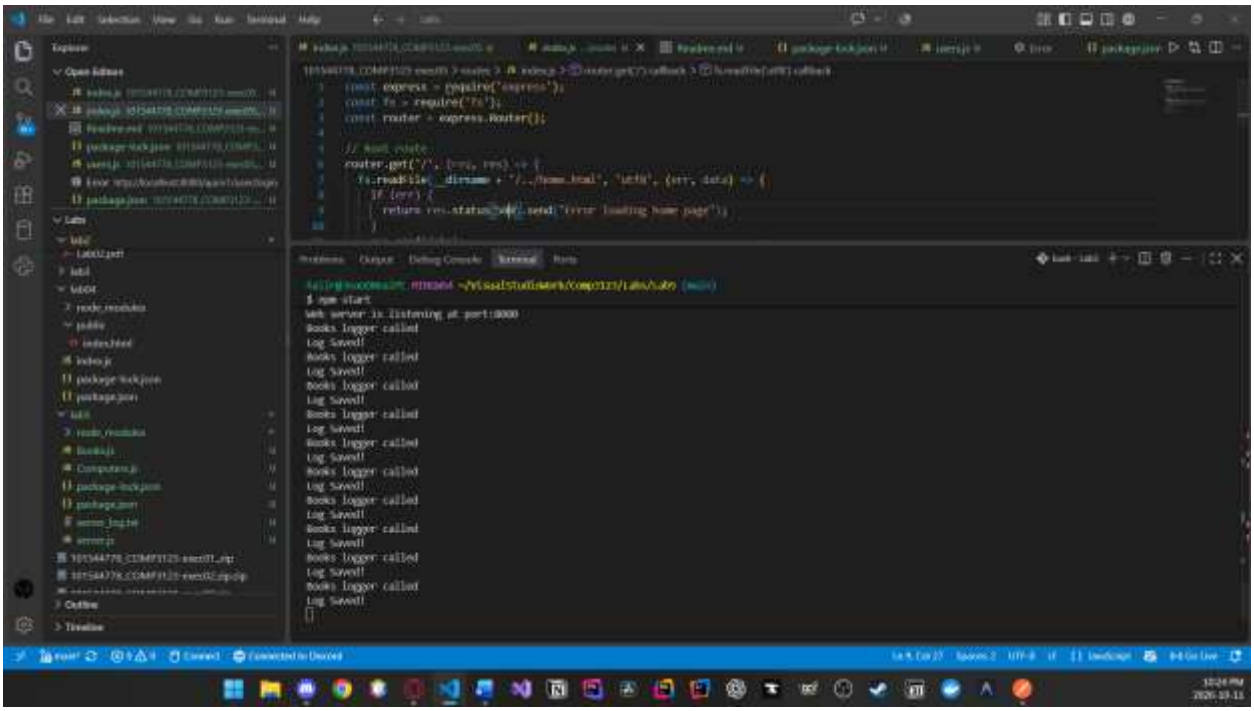



GET
http://localhost:8080/books/computers/game-dev
Send
Params
Body
HTML
1 Used GET method - /books/computers/game-dev

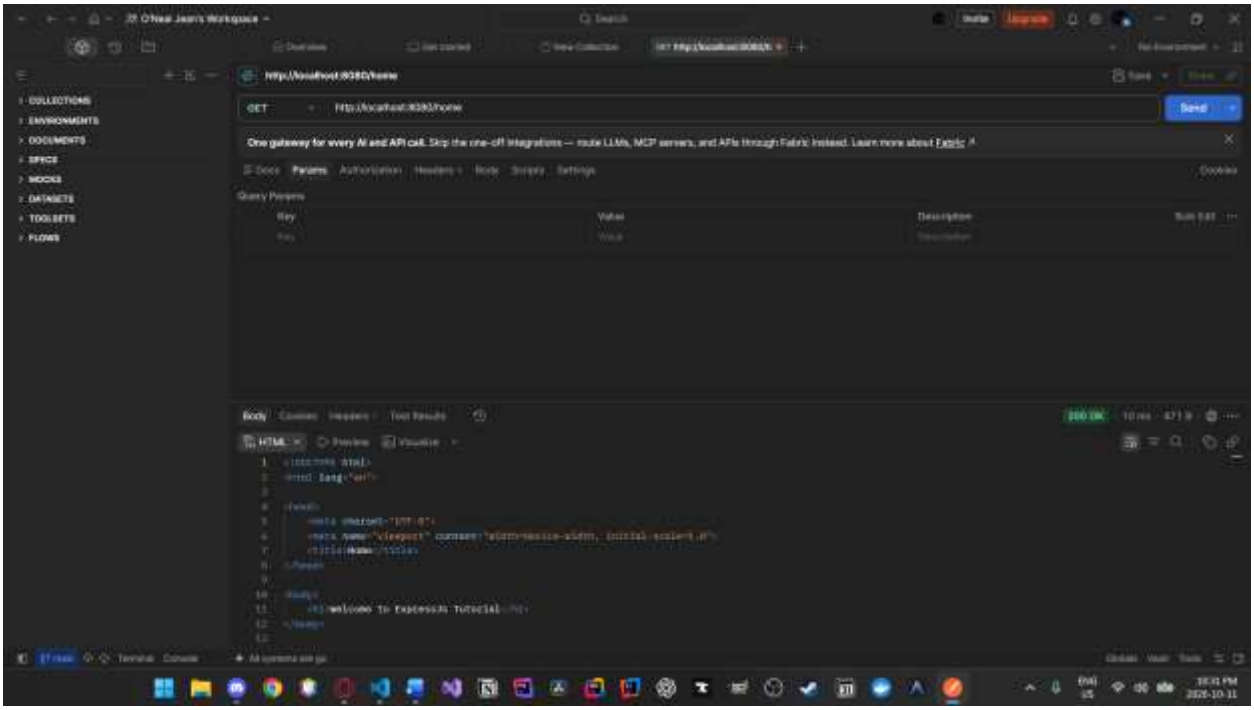

const express = require('express');
const fs = require('fs');
const router = express.Router();
// Root route
router.get('/', (req, res) => {
fs.readFile(__dirname + '/../home.html', 'utf8', (err, data) => {
if (err) {
return res.status(500).send('Error loading home page');
}
[nodemon] 3.1.14
[nodemon] to restart at any time, enter `rs`
[nodemon] watching path(s): *.*
[nodemon] watching extensions: js,mjs,cjs,json
[nodemon] starting `node ./server.js localhost 8000`
Web server is listening at port:8000
Books logger called
Log Saved!
Books logger called
Log Saved!
Books logger called
Log Saved!
Books logger called
Log Saved!
Books logger called
Log Saved!
Books logger called
Log Saved!
Books logger called
Log Saved!
Books logger called
Log Saved!

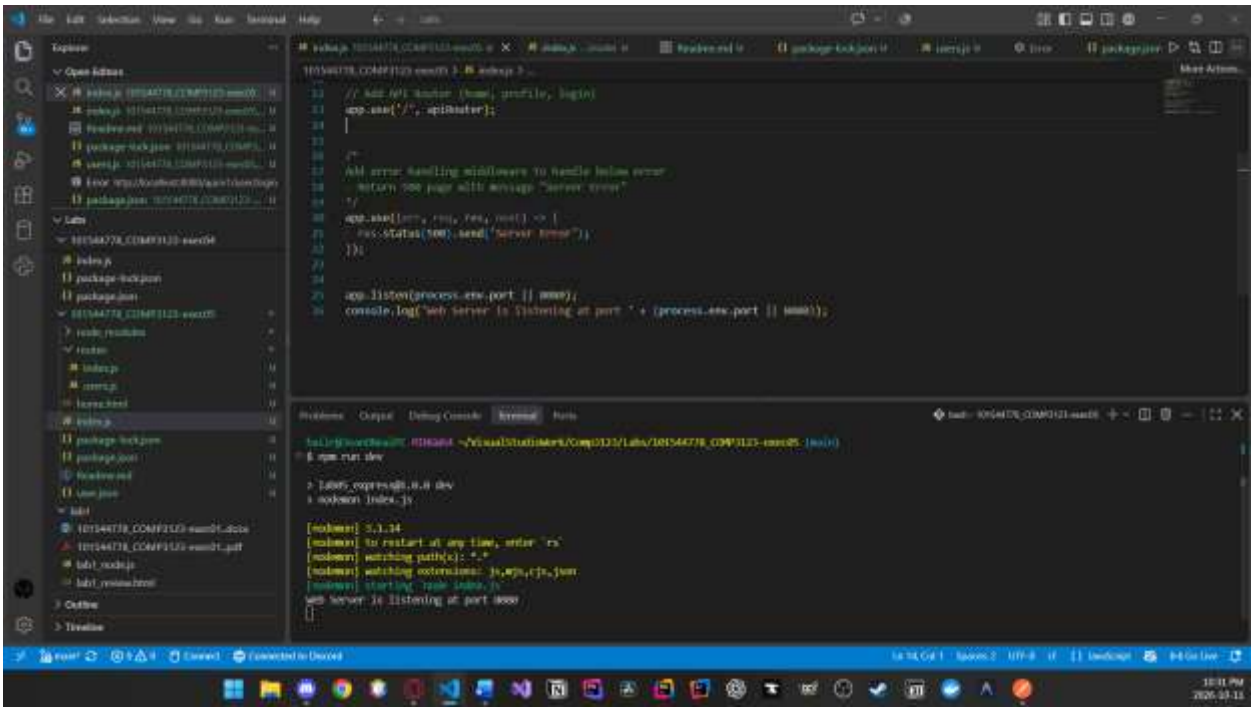

POST
http://localhost:8080/books/computers/java
Send
Params
Body
200 OK
Used POST method -> /books/computers/java

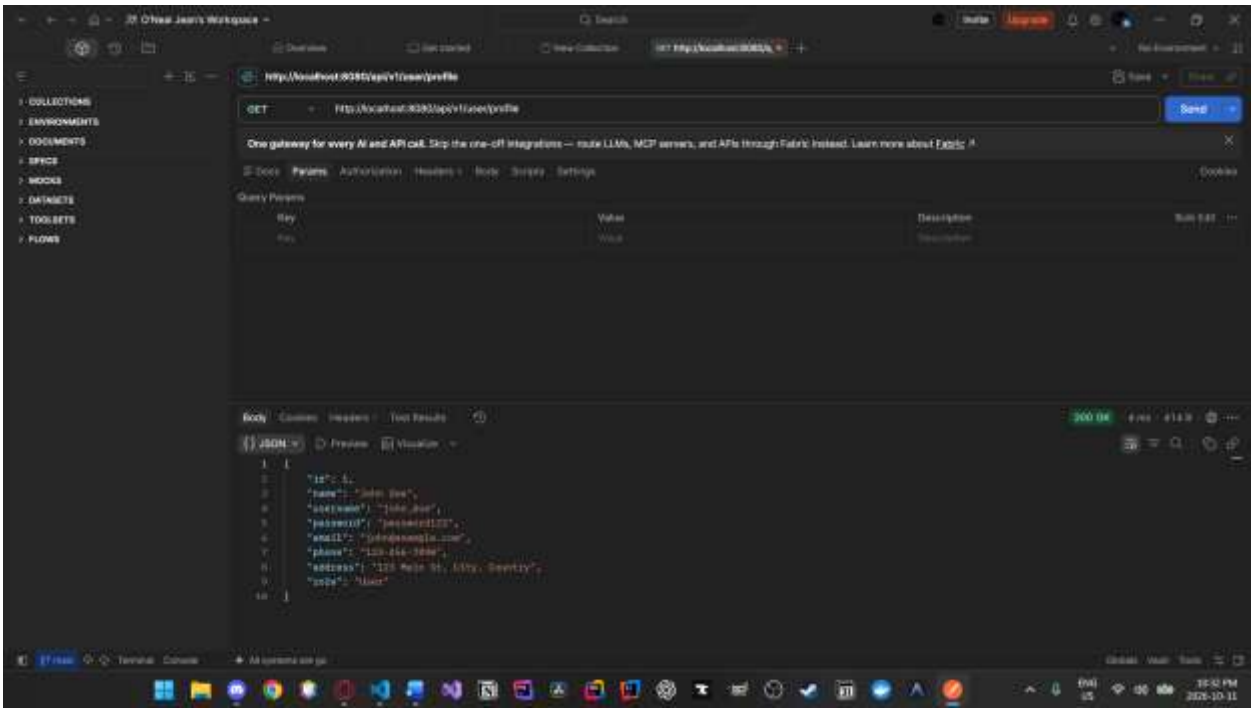

PUT
http://localhost:8080/books/computers/python
Send
Params
Body
200 OK
Used PUT method -> /books/computers/python

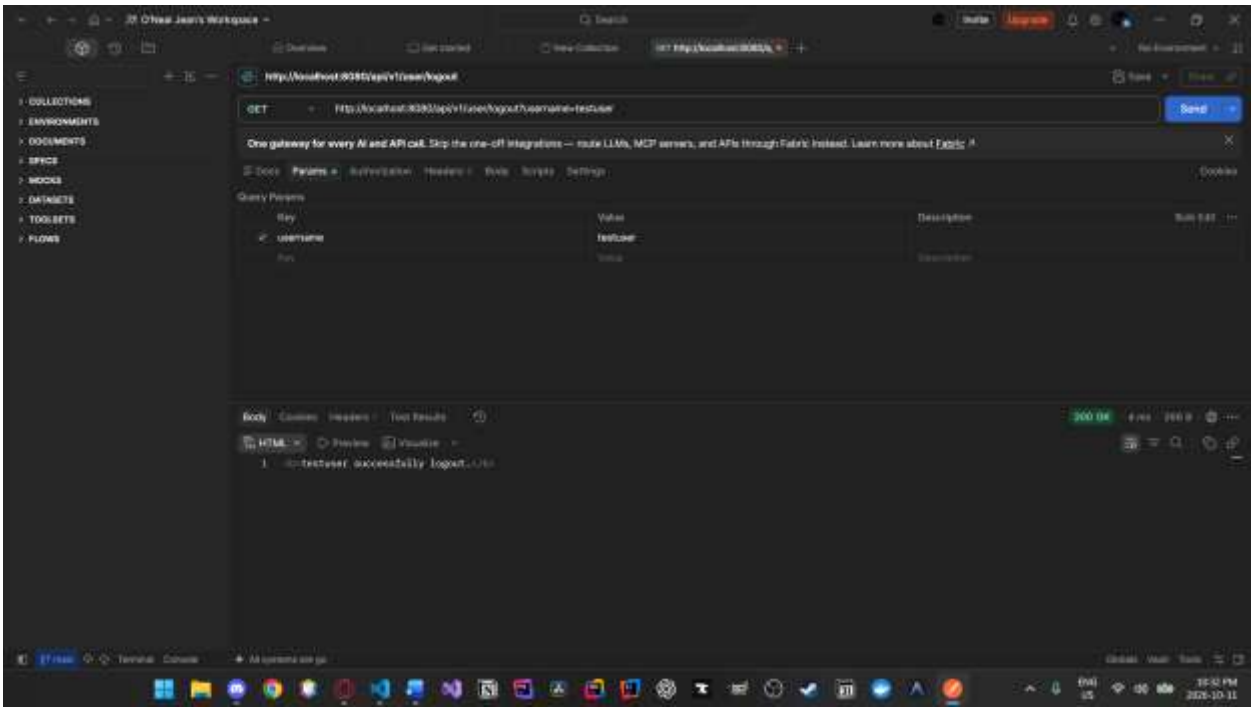


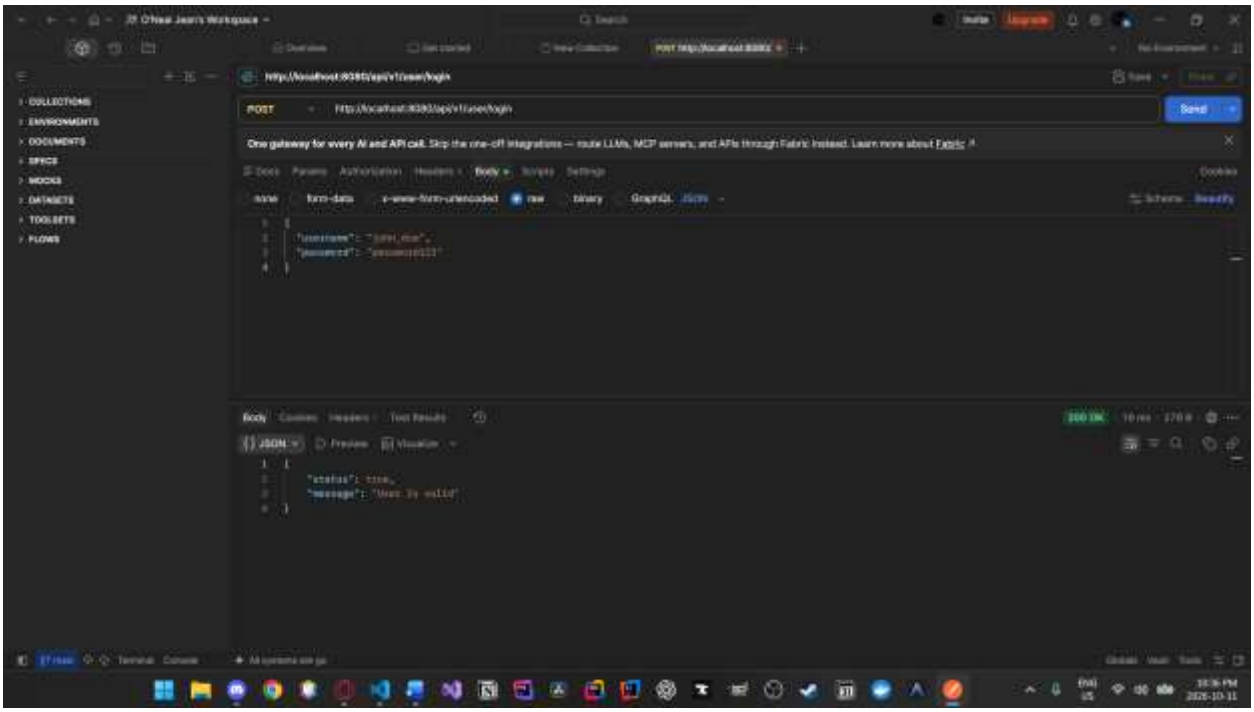
Pritesh Main Lab 05 Screenshots:

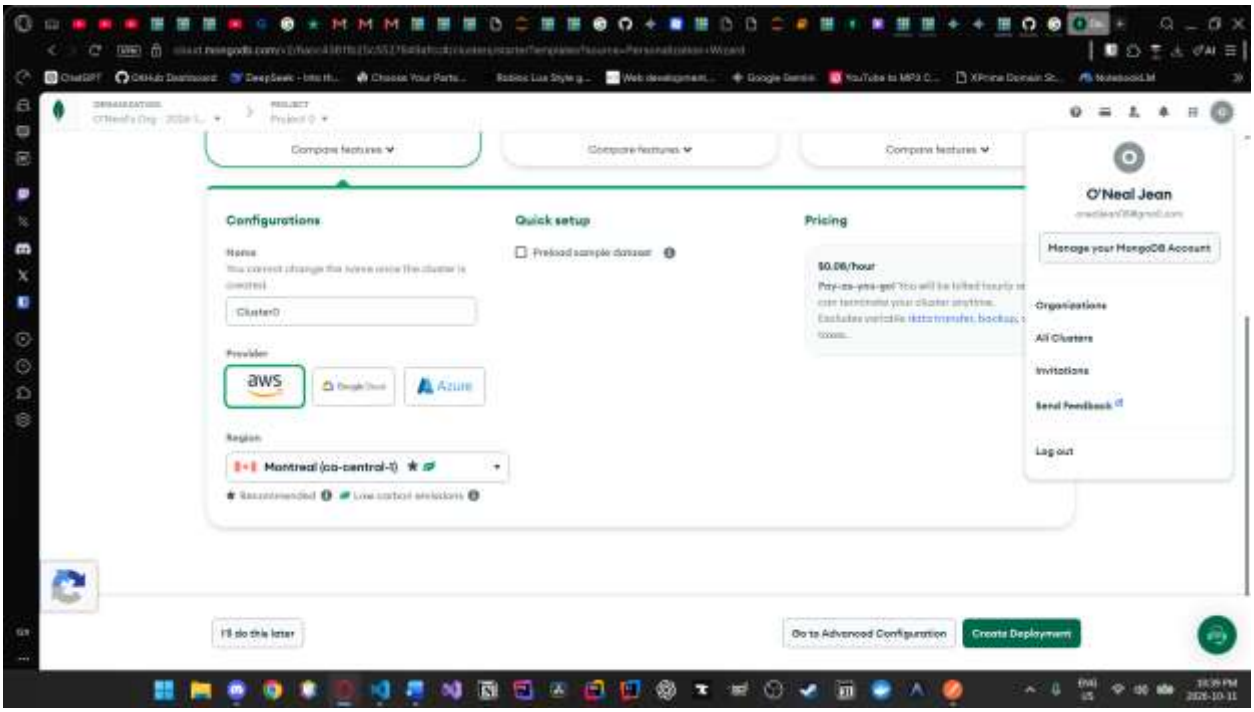



// Add API Router (home, profile, login)
app.use('/', apiRouter);
/*
Add error handling middleware to handle below error
- return 500 page with message "Server Error"
*/
app.use((err, req, res, next) => {
res.status(500).send('Server Error');
});
app.listen(process.env.port || 8000);
console.log('Web Server is listening at port ' + (process.env.port || 8000));
$ npm run dev
> lab05_express@0.0.0 dev
> nodemon index.js
[nodemon] 3.1.14
[nodemon] to restart at any time, enter `rs`
[nodemon] watching path(s): *.*
[nodemon] watching extensions: js,mjs,cjs,json
[nodemon] starting `node index.js`
Web Server is listening at port 8000


http://localhost:8080/api/v1/user/profile
GET
http://localhost:8080/api/v1/user/profile
Send
One gateway for every AI and API call. Skip the one-off integrations — route LLMs, MCP servers, and APIs through Fabric Instead. Learn more about Fabric
Params
Query Params
Key
Value
Description
Body
200 OK
JSON
{
"id": 1,
"name": "John Doe",
"username": "john_doe",
"password": "password123",
"email": "john@example.com",
"phone": "123-456-7890",
"address": "123 Main St, City, Country",
"role": "User"
}


GET
http://localhost:8080/api/v1/user/logout?username=testuser
Send
One gateway for every AI and API call. Skip the one-off integrations — route LLMs, MCP servers, and APIs through Fabric instead. Learn more about Fabric
Params
Body
testuser successfully logout.


POST
http://localhost:8080/api/v1/user/login
Send
One gateway for every AI and API call. Skip the one-off integrations — route LLMs, MCP servers, and APIs through Fabric instead. Learn more about Fabric
Body
raw
{
"username": "john_doe",
"password": "password123"
}
JSON
{
"status": true,
"message": "User is valid"
}


Compare features
Compare features
Compare features
Configurations
Quick setup
Pricing
Name
Cluster0
Provider
aws
Azure
Region
Montreal (ca-central-1)
Preload sample dataset
$0.08/hour
O'Neal Jean
Manage your MongoDB Account
Organizations
All Clusters
Invitations
Send Feedback
Log out
I'll do this later
Go to Advanced Configuration
Create Deployment