

# Module Guide for Software Engineering

Team #11, OKKM Insights

Mathew Petronilho

Oleg Glotov

Kyle McMaster

Kartik Chaudhari

April 2, 2025

# 1 Revision History

| Date         | Version | Notes |
|--------------|---------|-------|
| January 17th | 1.0     |       |

## 2 Reference Material

This section records information for easy reference.

### 2.1 Abbreviations and Acronyms

See SRS Documentation [here](#)

# Contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Revision History</b>                           | <b>i</b>  |
| <b>2</b> | <b>Reference Material</b>                         | <b>ii</b> |
| 2.1      | Abbreviations and Acronyms . . . . .              | ii        |
| <b>3</b> | <b>Introduction</b>                               | <b>1</b>  |
| <b>4</b> | <b>Anticipated and Unlikely Changes</b>           | <b>2</b>  |
| 4.1      | Anticipated Changes . . . . .                     | 2         |
| 4.2      | Unlikely Changes . . . . .                        | 2         |
| <b>5</b> | <b>Module Hierarchy</b>                           | <b>3</b>  |
| <b>6</b> | <b>Connection Between Requirements and Design</b> | <b>8</b>  |
| <b>7</b> | <b>Module Decomposition</b>                       | <b>9</b>  |
| 7.1      | Hardware Hiding Modules (M1) . . . . .            | 9         |
| 7.2      | Behaviour-Hiding Module . . . . .                 | 9         |
| 7.2.1    | Account Creation Interface (M2) . . . . .         | 9         |
| 7.2.2    | Account Database (M4) . . . . .                   | 10        |
| 7.2.3    | Account Database Connector (M3) . . . . .         | 10        |
| 7.2.4    | Account Update Interface (M5) . . . . .           | 10        |
| 7.2.5    | Login Interface (M6) . . . . .                    | 10        |
| 7.2.6    | Access Token (M7) . . . . .                       | 11        |
| 7.2.7    | Labeler (M8) . . . . .                            | 11        |
| 7.2.8    | Client (M9) . . . . .                             | 11        |
| 7.2.9    | User (M10) . . . . .                              | 11        |
| 7.2.10   | Satellite Image Request Interface (M14) . . . . . | 11        |
| 7.2.11   | Satellite Image Request (M16) . . . . .           | 12        |
| 7.2.12   | Project Creation Interface (M17) . . . . .        | 12        |
| 7.2.13   | Project (M21) . . . . .                           | 12        |
| 7.2.14   | Service Request Failure Interface (M22) . . . . . | 12        |
| 7.2.15   | Image Upload Interface (M23) . . . . .            | 12        |
| 7.2.16   | Report Interface (M24) . . . . .                  | 13        |
| 7.2.17   | Report (M26) . . . . .                            | 13        |
| 7.2.18   | Project Selection Interface (M27) . . . . .       | 13        |
| 7.2.19   | Labeling Interface (M29) . . . . .                | 13        |
| 7.2.20   | Image (M31) . . . . .                             | 13        |
| 7.2.21   | Label Server (32) . . . . .                       | 14        |
| 7.2.22   | Label Database Connector (33) . . . . .           | 14        |
| 7.2.23   | Label Database (34) . . . . .                     | 14        |
| 7.2.24   | ImageObject Database Connector (35) . . . . .     | 14        |

|           |  |           |
|-----------|--|-----------|
| 7.2.25    | ImageObject Database (36)                | 14        |
| 7.2.26    | Labeller Database Connector (37)         | 15        |
| 7.2.27    | Labeller Database (38)                   | 15        |
| 7.2.28    | Object Extraction Manager (39)           | 15        |
| 7.2.29    | Image Service Manager (40)               | 15        |
| 7.2.30    | ModelCreation (Abstract Class) (M41)     | 16        |
| 7.2.31    | CNNModelCreation (M42)                   | 16        |
| 7.2.32    | OtherModelCreation (M43)                 | 16        |
| 7.2.33    | ModelManager (M44)                       | 16        |
| 7.2.34    | MLModelDatabase (M45)                    | 17        |
| 7.3       | Software Decision Module                 | 17        |
| 7.3.1     | Account Creation Controller (M11)        | 17        |
| 7.3.2     | Account Update Controller (M12)          | 17        |
| 7.3.3     | Authentication Controller (M13)          | 18        |
| 7.3.4     | Satellite Image Request Controller (M15) | 18        |
| 7.3.5     | Project Creation Controller (M18)        | 18        |
| 7.3.6     | Tile Creation Interface (M19)            | 18        |
| 7.3.7     | Tile Creation Controller (M20)           | 19        |
| 7.3.8     | Report Controller (M25)                  | 19        |
| 7.3.9     | Project Selection Controller (M28)       | 19        |
| 7.3.10    | Labeling Controller (M30)                | 19        |
| 7.3.11    | Label Confidence Service (46)            | 20        |
| 7.3.12    | Object Extraction Service (47)           | 20        |
| 7.3.13    | Image Prior Analyzer (48)                | 20        |
| 7.3.14    | Labeller Expertise Calculator (49)       | 20        |
| 7.3.15    | Image Mask Service (50)                  | 20        |
| 7.3.16    | Image Selection Service (51)             | 21        |
| 7.3.17    | ModelComparision Evaluation (M52)        | 21        |
| 7.3.18    | CrossValidation Evaluation (M53)         | 21        |
| 7.3.19    | ModelTrainingService (M54)               | 21        |
| 7.3.20    | ModelEvaluationService (M55)             | 22        |
| <b>8</b>  | <b>Traceability Matrix</b>               | <b>22</b> |
| <b>9</b>  | <b>Use Hierarchy Between Modules</b>     | <b>24</b> |
| <b>10</b> | <b>User Interfaces</b>                   | <b>31</b> |
| <b>11</b> | <b>Design of Communication Protocols</b> | <b>36</b> |
| <b>12</b> | <b>Timeline</b>                          | <b>38</b> |

## List of Tables

|   |   |    |
|---|---|----|
| 1 | Module Hierarchy . . . . .                              | 6  |
| 2 | Module Hierarchy . . . . .                              | 7  |
| 3 | Module Hierarchy . . . . .                              | 8  |
| 4 | Trace Between Requirements and Modules . . . . .        | 22 |
| 5 | Trace Between Anticipated Changes and Modules . . . . . | 24 |

## List of Figures

|    |   |    |
|----|---|----|
| 1  | ML Model . . . . .  | 27 |
| 2  | Project selection . . . . .   | 28 |
| 3  | Labelling model . . . . .   | 29 |
| 4  | UI interfaces . . . . .   | 30 |
| 5  | Home Page . . . . .   | 31 |
| 6  | Login Page . . . . .  | 31 |
| 7  | Forgot Password . . . . .   | 32 |
| 8  | Register Page . . . . .   | 32 |
| 9  | Projects to Label Page . . . . .  | 33 |
| 10 | Label Page . . . . .  | 33 |
| 11 | Client Projects Page . . . . .  | 34 |
| 12 | Project Status Page . . . . .   | 35 |
| 13 | User Information Page . . . . .   | 35 |
| 14 | Page Flow Diagram . . . . .   | 36 |
| 15 | Project timeline illustrating key development milestones and deadlines. . . . . | 38 |

### 3 Introduction

Decomposing a system into modules is a commonly accepted approach to developing software. A module is a work assignment for a programmer or programming team (Parnas et al., 1984). We advocate a decomposition based on the principle of information hiding (Parnas, 1972). This principle supports design for change, because the “secrets” that each module hides represent likely future changes. Design for change is valuable in SC, where modifications are frequent, especially during initial development as the solution space is explored.

Our design for OrbitWatch follows the rules layed out by Parnas et al. (1984), as follows:

- System details that are likely to change independently should be the secrets of separate modules.
- Each data structure is implemented in only one module.
- Any other program that requires information stored in a module’s data structures must obtain it by calling access programs belonging to that module.

After completing the first stage of the design, the Software Requirements Specification (SRS), the Module Guide (MG) is developed (Parnas et al., 1984). The MG specifies the modular structure of the system and is intended to allow both designers and maintainers to easily identify the parts of the software. The potential readers of this document are as follows:

- New project members: This document can be a guide for a new project member to easily understand the overall structure and quickly find the relevant modules they are searching for.
- Maintainers: The hierarchical structure of the module guide improves the maintainers’ understanding when they need to make changes to the system. It is important for a maintainer to update the relevant sections of the document after changes have been made.
- Designers: Once the module guide has been written, it can be used to check for consistency, feasibility, and flexibility. Designers can verify the system in various ways, such as consistency among modules, feasibility of the decomposition, and flexibility of the design.

The rest of the document is organized as follows. Section 4 lists the anticipated and unlikely changes of the software requirements. Section 5 summarizes the module decomposition that was constructed according to the likely changes. Section 6 specifies the connections between the software requirements and the modules. Section 7 gives a detailed description of the modules. Section 8 includes two traceability matrices. One checks the completeness of the design against the requirements provided in the SRS. The other shows the relation between anticipated changes and the modules. Section 9 describes the use relation between modules.

## 4 Anticipated and Unlikely Changes

This section lists possible changes to the system. According to the likeliness of the change, the possible changes are classified into two categories. Anticipated changes are listed in Section 4.1, and unlikely changes are listed in Section 4.2.

### 4.1 Anticipated Changes

Anticipated changes are the source of the information that is to be hidden inside the modules. Ideally, changing one of the anticipated changes will only require changing the one module that hides the associated decision. The approach adapted here is called design for change.

- AC1:** Change in labeling tool(s) used or the introduction of additional labeling tools.
- AC2:** Change in form parameters for project creation and account registration workflows.
- AC3:** Change in the set and presentation of project statistics displayed to clients.
- AC4:** Changes in algorithms used to calculate image priors.
- AC5:** Changes in algorithms for object extraction from images.
- AC6:** Changes in algorithms that update and refine labeller expertise metrics.
- AC7:** Changes in image serving and distribution algorithms.
- AC8:** Change in satellite image providers or addition of multiple providers, requiring adjustments in data ingestion modules.
- AC9:** Change in backend hosting services (e.g., switching or integrating additional cloud providers beyond AWS/Azure) affecting deployment modules.
- AC10:** Change in consensus algorithms or user accuracy models used to resolve labeling conflicts, impacting the data validation modules.

### 4.2 Unlikely Changes

The module design should be as general as possible. However, a general system is more complex. Sometimes this complexity is not necessary. Fixing some design decisions at the system architecture stage can simplify the software design. If these decision should later need to be changed, then many parts of the design will potentially need to be modified. Hence, it is not intended that these decisions will be changed.

- UC1:** The predefined user access levels and roles (e.g., admin, labeller, client) are considered stable.



**UC2:** The choice of database technology (e.g., relational database) and its core schema structure is fixed early on.

**UC3:** The foundational languages and frameworks selected for development (e.g., Node.js for backend services, Typescript for frontend) are assumed to remain constant.

**UC4:** Decisions around the overall architectural pattern (such as microservices) are made early and considered stable.

## 5 Module Hierarchy

This section provides an overview of the module design. Modules are summarized in a hierarchy decomposed by secrets in Table 3. The modules listed below, which are leaves in the hierarchy tree, are the modules that will actually be implemented.

**M1:** Hardware-Hiding Module

**M2:** Account Creation Interface

**M3:** Account Database Connector

**M4:** Account Database

**M5:** Account Update Interface

**M6:** Login Interface

**M7:** Access Token

**M8:** Labeler

**M9:** Client

**M10:** User

**M11:** Account Creation Controller

**M12:** Account Update Controller

**M13:** Authentication Controller

**M14:** Satellite Image Request Interface

**M15:** Satellite Image Request Controller

**M16:** Satellite Image Request

**M17:** Project Creation Interface

**M18:** Project Creation Controller

**M19:** Tile Creation Interface

**M20:** Tile Creation Controller

**M21:** Project

**M22:** Service Request Failure Interface

**M23:** Image Upload Interface

**M24:** Report Interface

**M25:** Report Controller

**M26:** Report

**M27:** Project Selection Interface

**M28:** Project Selection Controller

**M29:** Labeling Interface

**M30:** Labeling Controller

**M31:** Image

**M32:** Label Server

**M33:** Label Database Connector

**M34:** Label Database

**M35:** ImageObject Database Connector

**M36:** ImageObject Database

**M37:** Labeller Database Connector

**M38:** Labeller Database

**M39:** Object Extraction Manager

**M40:** Image Service Manager

**M41:** ModelCreation (Abstract Class)

**M42:** CNNModelCreation

**M43:** OtherModelCreation

M44: ModelManager  
M45: MLModelDatabase  
M46: Label Confidence Service  
M47: Object Extraction Service  
M48: Image Prior Analyzer  
M49: Labeller Expertise Calculator  
M50: Image Mask Service  
M51: Image Selection Service  
**M52: ModelComparision Evaluation**  
**M53: CrossValidation Evaluation**  
**M54: ModelTrainingService**  
**M55: ModelEvaluationService**  
M56: Project Manager  
M57: Project Collection Manager  
M58: Project Database Connector  
M59: Core Image Database Connector  
M60: Planet Labs Connector  
M61: Report Manager

| Level 1                     | Level 2 |
|-----------------------------|---------|
| Hardware-Hiding Mod-<br>ule |         |

Table 1: Module Hierarchy

| Level 1                            | Level 2                           |
|------------------------------------|-----------------------------------|
| <b>Behaviour-Hiding<br/>Module</b> | Account Creation Interface        |
|                                    | Account Database                  |
|                                    | Account Update Interface          |
|                                    | Login Interface                   |
|                                    | Access Token                      |
|                                    | Labeler                           |
|                                    | Client                            |
|                                    | User                              |
|                                    | Satellite Image Request Interface |
|                                    | Satellite Image Request           |
|                                    | Project Creation Interface        |
|                                    | Project                           |
|                                    | Service Request Failure Interface |
|                                    | Image Upload Interface            |
|                                    | Report Interface                  |
|                                    | Report                            |
|                                    | Project Selection Interface       |
|                                    | Labeling Interface                |
|                                    | Image                             |
|                                    | Label Server                      |
|                                    | Label Database Connector          |
|                                    | Label Database                    |
|                                    | ImageObject Database Connector    |
|                                    | ImageObject Database              |
|                                    | Labeller Database Connector       |
|                                    | Labeller Database                 |
|                                    | Object Extraction Manager         |
|                                    | Image Service Manager             |
|                                    | ModelCreation (Abstract Class)    |
|                                    | CNNModelCreation                  |
|                                    | OtherModelCreation                |
|                                    | ModelManager                      |
|                                    | MLModelDatabase                   |

Table 2: Module Hierarchy

| Level 1                             | Level 2                            |
|-------------------------------------|------------------------------------|
| <b>Software Decision<br/>Module</b> | Account Creation Controller        |
|                                     | Account Database Connector         |
|                                     | Account Update Controller          |
|                                     | Authentication Controller          |
|                                     | Satellite Image Request Controller |
|                                     | Project Creation Controller        |
|                                     | Report Controller                  |
|                                     | Project Selection Controller       |
|                                     | Labeling Controller                |
|                                     | Label Confidence Service           |
|                                     | Object Extraction Service          |
|                                     | Image Prior Analyzer               |
|                                     | Labeller Expertise Calculator      |
|                                     | Image Mask Service                 |
|                                     | Image Selection Service            |
|                                     | ModelComparision Evaluation        |
|                                     | CrossValidation Evaluation         |
|                                     | ModelTrainingService               |
|                                     | ModelEvaluationService             |
|                                     | Tile Creation Interface            |
|                                     | Tile Creation Controller           |

Table 3: Module Hierarchy

## 6 Connection Between Requirements and Design

The design of the system is intended to satisfy the requirements developed in the SRS. In this stage, the system is decomposed into modules. The connection between requirements and modules is listed in Table 4.

There are several key high level design decisions that were made to ensure the requirements outlined in the SRS are met. First, the system has been decomposed into several microservices. These services all connect to the same databases, but have the flexibility to operate on their own cadence. Each service can be mirrored by a duplicate service to improve capacity. These decisions are critical to ensuring the speed, uptime, capacity, and latency requirements. Each of the key algorithms in the system have been encapsulated in their own module. These include the object extraction service, image serving, ML model creation, and report generation, among others. This gives the development team the flexibility to experiment with alternative algorithms, allowing continuous improvement towards performance and accuracy requirements. The authentication service is designed to meet the authentication requirements by ensuring only approved users can access privileged information. Every functional requirement is covered by the functionality of a subsystem.

## 7 Module Decomposition

Modules are decomposed according to the principle of “information hiding” proposed by [Parnas et al. \(1984\)](#). The *Secrets* field in a module decomposition is a brief statement of the design decision hidden by the module. The *Services* field specifies *what* the module will do without documenting *how* to do it. For each module, a suggestion for the implementing software is given under the *Implemented By* title. If the entry is *OS*, this means that the module is provided by the operating system or by standard programming language libraries. *Software Engineering* means the module will be implemented by the Software Engineering software.

Only the leaf modules in the hierarchy have to be implemented. If a dash (–) is shown, this means that the module is not a leaf and will not have to be implemented.

### 7.1 Hardware Hiding Modules (M1)

**Secrets:** The data structure and algorithm used to implement the virtual hardware.

**Services:** Serves as a virtual hardware used by the rest of the system. This module provides the interface between the hardware and the software. So, the system can use it to display outputs or to accept inputs.

**Implemented By:** OS

### 7.2 Behaviour-Hiding Module

**Secrets:** The contents of the required behaviours.

**Services:** Includes programs that provide externally visible behaviour of the system as specified in the software requirements specification (SRS) documents. This module serves as a communication layer between the hardware-hiding module and the software decision module. The programs in this module will need to change if there are changes in the SRS.

**Implemented By:** –

#### 7.2.1 Account Creation Interface (M2)

**Secrets:** The design format of the account creation user interface.

**Services:** Displays a form to collect user information and submits that information to be processed.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.2 Account Database (M4)

**Secrets:** The data structure, storage, and access mechanisms for account related data.

**Services:** Can store, insert, update and retrieve user account data.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Data Type

### 7.2.3 Account Database Connector (M3)

**Secrets:** The database access key and database access algorithms.

**Services:** Can request storage, insertion, updates and retrieval of user account data from the database.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Data Type

### 7.2.4 Account Update Interface (M5)

**Secrets:** The design format of the update account information user interface.

**Services:** Displays a form with the users current information that can be modified and submits any updated information to be processed.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.5 Login Interface (M6)

**Secrets:** The design format of the login user interface.

**Services:** Displays a form to collect login credentials and submits that information to be processed.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object



### 7.2.6 Access Token (M7)

**Secrets:** Token structure, encryption, expiration, and renewal mechanisms.

**Services:** Can determine if a user's token has expired and allows the token to be renewed.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Data Type

### 7.2.7 Labeler (M8)

**Secrets:** The format and structure of Labeler data.

**Services:** Takes in the necessary data to create a Labeler.

**Implemented By:** OrbitWatch

**Type of Module:** Record

### 7.2.8 Client (M9)

**Secrets:** The format and structure of Client data.

**Services:** Takes in the necessary data to create a Client.

**Implemented By:** OrbitWatch

**Type of Module:** Record

### 7.2.9 User (M10)

**Secrets:** The format and structure of User data.

**Services:** Takes in the necessary data to create a User.

**Implemented By:** OrbitWatch

**Type of Module:** Record

### 7.2.10 Satellite Image Request Interface (M14)

**Secrets:** The design format of the interface for requesting satellite images.

**Services:** Displays a form to collect specifics on the satellite images, calculates estimated cost based on current form entries and submits the form information to be processed.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.11 Satellite Image Request (M16)

**Secrets:** The format and structure of the data needed for a satellite image request.

**Services:** Takes in the necessary data to create a satellite image request.

**Implemented By:** OrbitWatch

**Type of Module:** Record

### 7.2.12 Project Creation Interface (M17)

**Secrets:** The design format of the project creation interface.

**Services:** Displays a form to collect project details, calculates an estimated cost using these details and submits that information to be processed.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.13 Project (M21)

**Secrets:** The format and structure of the data needed for a Project.

**Services:** Takes in the necessary data to create a Project.

**Implemented By:** OrbitWatch

**Type of Module:** Record

### 7.2.14 Service Request Failure Interface (M22)

**Secrets:** The design format of the request failure interface.

**Services:** Displays a warning to users that something went wrong.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.15 Image Upload Interface (M23)

**Secrets:** The design format of the image upload interface.

**Services:** Allows users to upload images from their device, and validates they are images of the correct format.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

#### **7.2.16 Report Interface (M24)**

**Secrets:** The design format of the summary report interface.

**Services:** Displays statistics and results of a specific project.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

#### **7.2.17 Report (M26)**

**Secrets:** The format and structure of Report data.

**Services:** Takes in the necessary data to create a Report.

**Implemented By:** OrbitWatch

**Type of Module:** Record

#### **7.2.18 Project Selection Interface (M27)**

**Secrets:** The design format of the project selection interface.

**Services:** Display all available projects that a user can label images from.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

#### **7.2.19 Labeling Interface (M29)**

**Secrets:** The design format of the labeling interface.

**Services:** Displays an image to be labeled, displays label choices which can be selected, and allows images to be skipped.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

#### **7.2.20 Image (M31)**

**Secrets:** The format and structure of Image data.

**Services:** Takes in the necessary data to create a Image.

**Implemented By:** OrbitWatch

**Type of Module:** Record

### 7.2.21 Label Server (32)

**Secrets:** The steps to accept and store a label.

**Services:** Converts a label JSON object and passes it to be stored in the database.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.22 Label Database Connector (33)

**Secrets:** The steps to connect to and manipulate a database.

**Services:** Connects to a database and executes pushing and fetching of data.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.23 Label Database (34)

**Secrets:** The storing and retrieving of data.

**Services:** Allows connection by a database connector to facilitate the storage and retrieval of data.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.24 ImageObject Database Connector (35)

**Secrets:** The steps to connect to and manipulate a database.

**Services:** Connects to a database and executes pushing and fetching of data.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.25 ImageObject Database (36)

**Secrets:** The storing and retrieving of data.

**Services:** Allows connection by a database connector to facilitate the storage and retrieval of data.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.26 Labeller Database Connector (37)

**Secrets:** The steps to connect to and manipulate a database.

**Services:** Connects to a database and executes pushing and fetching of data.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.27 Labeller Database (38)

**Secrets:** The storing and retrieving of data.

**Services:** Allows connection by a database connector to facilitate the storage and retrieval of data.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.28 Object Extraction Manager (39)

**Secrets:** The algorithms used to aggregate labels into usable ImageObjects for Model training.

**Services:** Calls other modules to efficiently compute the most likely set of objects from a set of independent labels.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.29 Image Service Manager (40)

**Secrets:** The algorithms used to select images to be served to a user.

**Services:** Calls other modules to select the next images to be server to a user.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.30 ModelCreation (Abstract Class) (M41)

**Secrets:** The abstract details of how machine learning (ML) model creation is organized, including any hidden complexities of managing configuration parameters.

**Services:** Defines the interface for creating ML models. Specific implementations (e.g., Convolutional Neural Networks, Support Vector Machines) extend this class to instantiate the appropriate model structure.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.31 CNNModelCreation (M42)

**Secrets:** The underlying architecture for a convolutional neural network model, including details about layer definitions, activation functions, and other internal configurations.

**Services:** Accepts layer configurations and constructs a CNN model suitable for training or inference tasks.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.32 OtherModelCreation (M43)

**Secrets:** The hyperparameter configurations and implementation details necessary for creating alternative model types (e.g., Decision Trees, SVMs).

**Services:** Allows the instantiation of various ML models by applying specific parameters (such as maximum tree depth or kernel functions) to build a model instance.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.33 ModelManager (M44)

**Secrets:** The internal logic that governs model lifecycle management (e.g., statuses such as “Training,” “Evaluating,” or “Completed”) as well as the way creation and update timestamps are maintained.

**Services:** Manages ML models by creating new instances, updating their status, retrieving existing models, and deleting models as needed.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.2.34 MLModelDatabase (M45)

**Secrets:** The database schema, connection details, and query mechanisms for storing and retrieving ML model metadata and configurations.

**Services:** Provides persistent storage for ML model data, supporting operations such as create, read, update, and delete (CRUD).

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Data Type

## 7.3 Software Decision Module

**Secrets:** The design decision based on mathematical theorems, physical facts, or programming considerations. The secrets of this module are *not* described in the SRS.

**Services:** Includes data structure and algorithms used in the system that do not provide direct interaction with the user.

**Implemented By:** –

### 7.3.1 Account Creation Controller (M11)

**Secrets:** Form validation and account creation algorithms.

**Services:** Validates the form information, creates an account with that information, and can upload the account to the database.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.2 Account Update Controller (M12)

**Secrets:** Form validation and account modification algorithms.

**Services:** Gets current user information, validates the update form information and can pass account updates to the database.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.3 Authentication Controller (M13)

**Secrets:** Credential validation, access token validation, and access token generation algorithms.

**Services:** Validates credentials given by user, generates access tokens, and validates access tokens.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.4 Satellite Image Request Controller (M15)

**Secrets:** Form validation and image request algorithms.

**Services:** Validates the form information, creates and sends a request to a third party for the necessary pictures.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.5 Project Creation Controller (M18)

**Secrets:** Form validation and project creation algorithms.

**Services:** Validates project information provided and creates a new project.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.6 Tile Creation Interface (M19)

**Secrets:** Tile creation algorithms and related tools.

**Services:** Provides a user interface for creating tiles.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object



### 7.3.7 Tile Creation Controller (M20)

**Secrets:** Tile creation algorithms and related tools.

**Services:** Validates incoming images and creates a new tiles in the database.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.8 Report Controller (M25)

**Secrets:** Logic for getting statistics of a project and exporting images onto the users device.

**Services:** Get statistics and labeled images of project, and exports images to external devices.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.9 Project Selection Controller (M28)

**Secrets:** Logic for getting active projects and redirecting labelers upon selection.

**Services:** Gets valid projects that are currently available, and redirects labelers to a selected project labeling interface.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.10 Labeling Controller (M30)

**Secrets:** Algorithms for label creation, removal and submission.

**Services:** Creates label for an image, removes label from an image, and submits labels to be processed.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.11 Label Confidence Service ([46](#))

**Secrets:** The algorithms used to determine confidence in detected ImageObjects.

**Services:** Calculates the confidence of a detected ImageObject.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.12 Object Extraction Service ([47](#))

**Secrets:** The algorithms used to extract ImageObjects.

**Services:** Calculates the most likely ImageObjects from a set of labels and priors.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.13 Image Prior Analyzer ([48](#))

**Secrets:** The algorithms used to calculate ImagePriors.

**Services:** Calculates the prior likelihood of a pixel being relevant.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.14 Labeller Expertise Calculator ([49](#))

**Secrets:** The algorithms used to calculate Labeller Expertise.

**Services:** Calculates the expertise of a labeller in a given class using previous labels.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.15 Image Mask Service ([50](#))

**Secrets:** The algorithms used to modify a given image.

**Services:** Modifies an image in an attempt to improve labelling accuracy or efficiency.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.16 Image Selection Service (51)

**Secrets:** The algorithms used to select the next image to show a user.

**Services:** Selects an image to show to a given user.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.17 ModelComparison Evaluation (M52)

**Secrets:** The evaluation metrics and internal comparison algorithms (e.g., accuracy, F1-score) used to contrast multiple ML models.

**Services:** Evaluates one or more models against provided test data, calculates a set of performance metrics, and produces a comparison summary or report.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.18 CrossValidation Evaluation (M53)

**Secrets:** The logic behind performing K-fold cross-validation (or alternative validation schemes), including how folds are formed and results are averaged.

**Services:** Executes cross-validation on a given model and dataset, aggregates the results of each fold, and computes final performance metrics such as mean accuracy, mean precision, etc.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.19 ModelTrainingService (M54)

**Secrets:** The training algorithms, hyperparameter optimization logic, and internal routines for monitoring the status of model training.

**Services:** Orchestrates the process of training ML models using specified data and configuration parameters; can also halt training if requested.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

### 7.3.20 ModelEvaluationService (M55)

**Secrets:** The design and algorithms for evaluating models, combining metrics, and aggregating results for final output.

**Services:** Evaluates a trained model on test data, computes relevant performance metrics, and exposes them for reporting or further analysis.

**Implemented By:** OrbitWatch

**Type of Module:** Abstract Object

## 8 Traceability Matrix

This section shows two traceability matrices: between the modules and the requirements and between the modules and the anticipated changes.

Table 4: Trace Between Requirements and Modules

| Req. | Modules   |
|------|---|
| FR0  | M11, M2, M3, M4, M10, M9                                |
| FR1  | M13, M6, M7, M3, M4, M10, M9                            |
| FR2  | M13, M7, M3, M4, M12, M5, M10, M9                       |
| FR4  | M17, M18, M56, M19, M20                                 |
| FR5  | M24, M25, M61, M26                                      |
| FR6  | M23, M56  |
| FR7  | M14, M15, M16, M56                                      |
| FR8  | M22, M56, M19, M20                                      |
| FR9  | M11, M2, M3, M4, M10, M9                                |
| FR10 | M13, M6, M7, M3, M4, M10, M8                            |
| FR11 | M13, M7, M3, M4, M12, M5, M10, M9                       |
| FR13 | M29, M30, M32, M34, M33, M40, M51                       |
| FR14 | M24, M25, M39, M46, M47, M48, M50                       |
| LF0  | M5, M6, M2, M14, M22, M17, M23, M24, M27, M29, M19, M20 |
| LF1  | M5, M6, M2, M14, M22, M17, M23, M24, M27, M29, M19, M20 |
| LF2  | M5, M6, M2, M14, M22, M17, M23, M24, M27, M29, M19, M20 |
| UH0  | M5, M6, M2, M14, M22, M17, M23, M24, M27, M29, M19, M20 |

*Continued on next page*

| Req. | Modules   |
|------|---|
| UH1  | M5, M6, M2, M14, M22, M17, M23, M24, M27, M29, M19, M20 |
| UH2  | M5, M12   |
| UH6  | M29   |
| UH7  | M22   |
| UH9  | M29   |
| PR0  | M2, M11, M9   |
| PR1  | M2, M11, M8   |
| PR2  | M24, M25, M26, M61                                      |
| PR3  | M29, M30, M31, M40, M51                                 |
| PR5  | M24, M25, M39, M46, M47, M48, M50                       |
| PR6  | Related to all modules                                  |
| PR7  | Related to all modules                                  |
| PR8  | M23, M14, M15, M16, M50, M40, M51, M48, M36, M35        |
| PR9  | Related to all modules                                  |
| OE0  | Related to all modules                                  |
| OE1  | M14, M15, M16   |
| OE4  | M41, M42, M43, M54, M55                                 |
| OE5  | M36, M35, M54, M55, M44, M41                            |
| MR0  | Related to all modules                                  |
| SE0  | M13, M7, M29, M30, M27, M28                             |
| SE1  | M13, M7, M17, M18, M19, M20                             |
| SE2  | M2, M11   |
| SE3  | M2, M11   |
| SE4  | M22   |
| SE5  | M11, M12, M18, M39, M46, M47, M48, M50                  |
| SE6  | M56, M30  |
| SE7  | M4, M3, M36, M35, M37, M38, M33, M34, M45               |
| SE8  | M12, M11, M4  |
| SE10 | M3, M35, M37, M33                                       |

| AC   | Modules  |
|------|----------|
| AC1  | M29      |
| AC2  | M17, M2  |
| AC3  | M24, M26 |
| AC4  | M48      |
| AC5  | M47      |
| AC6  | M49      |
| AC7  | M40      |
| AC8  | M15      |
| AC10 | M46      |

Table 5: Trace Between Anticipated Changes and Modules

## 9 Use Hierarchy Between Modules

In this section, the uses hierarchy between modules is provided. [Parnas \(1978\)](#) said of two programs A and B that A *uses* B if correct execution of B may be necessary for A to complete the task described in its specification. That is, A *uses* B if there exist situations in which the correct functioning of A depends upon the availability of a correct implementation of B. Figure 4 illustrates the use relation between the modules. It can be seen that the graph is a directed acyclic graph (DAG). Each level of the hierarchy offers a testable and usable subset of the system, and modules in the higher level of the hierarchy are essentially simpler because they use modules from the lower levels.

### Level 1: Foundational Modules

- **Label Database**

- **Secrets:** The storing and retrieving of data.
- **Services:** Allows connection by a database connector to facilitate the storage and retrieval of data.

- **ImageObject Database**

- **Secrets:** The storing and retrieving of data.
- **Services:** Allows connection by a database connector to facilitate the storage and retrieval of data.

- **Labeller Database**

- **Secrets:** The storing and retrieving of data.
- **Services:** Allows connection by a database connector to facilitate the storage and retrieval of data.

## Level 2: Database Connectors

- **Label Database Connector**

- **Uses:** Label Database
- **Secrets:** The steps to connect to and manipulate a database.
- **Services:** Connects to a database and executes pushing and fetching of data.

- **ImageObject Database Connector**

- **Uses:** ImageObject Database
- **Secrets:** The steps to connect to and manipulate a database.
- **Services:** Connects to a database and executes pushing and fetching of data.

- **Labeller Database Connector**

- **Uses:** Labeller Database
- **Secrets:** The steps to connect to and manipulate a database.
- **Services:** Connects to a database and executes pushing and fetching of data.

## Level 3: Core Services

- **Label Server**

- **Uses:** Label Database Connector
- **Secrets:** The steps to accept and store a label.
- **Services:** Converts a label JSON object and passes it to be stored in the database.

- **Object Extraction Manager**

- **Uses:** Label Confidence Service, Object Extraction Service, Labeller Expertise Calculator
- **Secrets:** The algorithms used to aggregate labels into usable ImageObjects for model training.
- **Services:** Calls other modules to efficiently compute the most likely set of objects from a set of independent labels.

- **Image Service Manager**

- **Uses:** Image Selection Service, Image Mask Service, Image Prior Analyzer
- **Secrets:** The algorithms used to select images to be served to a user.
- **Services:** Calls other modules to select the next images to be served to a user.

## Level 4: Specialized Services

- **Label Confidence Service**
  - **Secrets:** The algorithms used to determine confidence in detected ImageObjects.
  - **Services:** Calculates the confidence of a detected ImageObject.
- **Object Extraction Service**
  - **Secrets:** The algorithms used to extract ImageObjects.
  - **Services:** Calculates the most likely ImageObjects from a set of labels and priors.
- **Image Prior Analyzer**
  - **Secrets:** The algorithms used to calculate ImagePriors.
  - **Services:** Calculates the prior likelihood of a pixel being relevant.
- **Labeller Expertise Calculator**
  - **Secrets:** The algorithms used to calculate Labeller Expertise.
  - **Services:** Calculates the expertise of a labeller in a given class using previous labels.
- **Image Mask Service**
  - **Secrets:** The algorithms used to modify a given image.
  - **Services:** Modifies an image to improve labelling accuracy or efficiency.
- **Image Selection Service**
  - **Secrets:** The algorithms used to select the next image to show a user.
  - **Services:** Selects an image to show to a given user.

## Directed Acyclic Graph (DAG)

The following hierarchy is represented as a directed acyclic graph, with arrows showing the *uses* relationship:

- **Foundational Modules** (Label Database, ImageObject Database, Labeller Database)
  - Used by their respective connectors.
- **Database Connectors** (Label Database Connector, ImageObject Database Connector, Labeller Database Connector)



- Used by core services like Label Server, Object Extraction Manager, and Image Service Manager.
- **Core Services** (Label Server, Object Extraction Manager, Image Service Manager)
  - Use specialized services to provide advanced functionalities.
- **Specialized Services** (Label Confidence Service, Object Extraction Service, Image Prior Analyzer, Labeller Expertise Calculator, Image Mask Service, Image Selection Service)
  - Provide algorithms and computations needed by the core services.

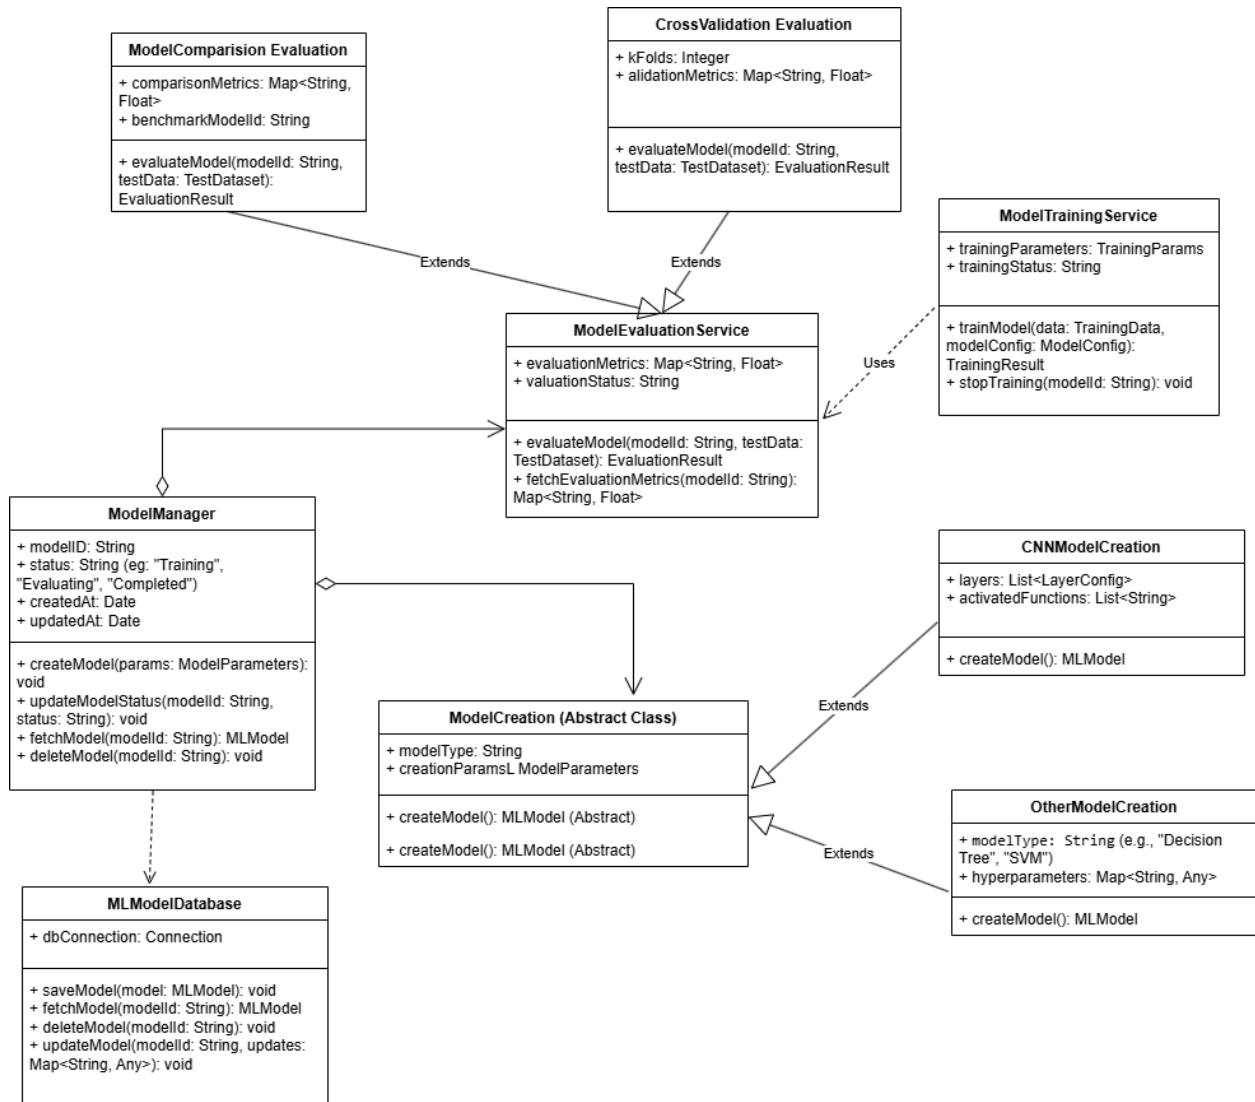


Figure 1: ML Model

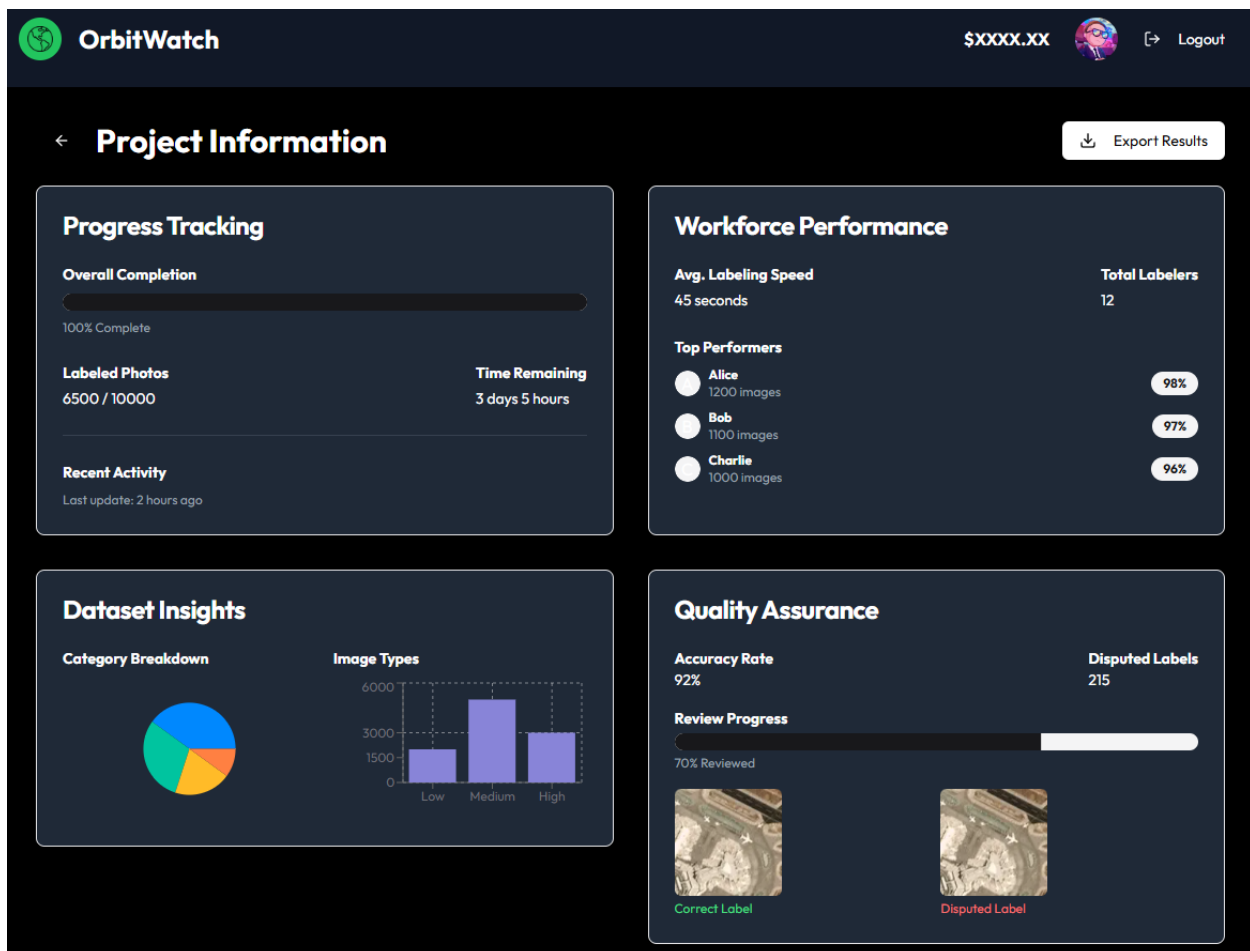


Figure 2: Project selection

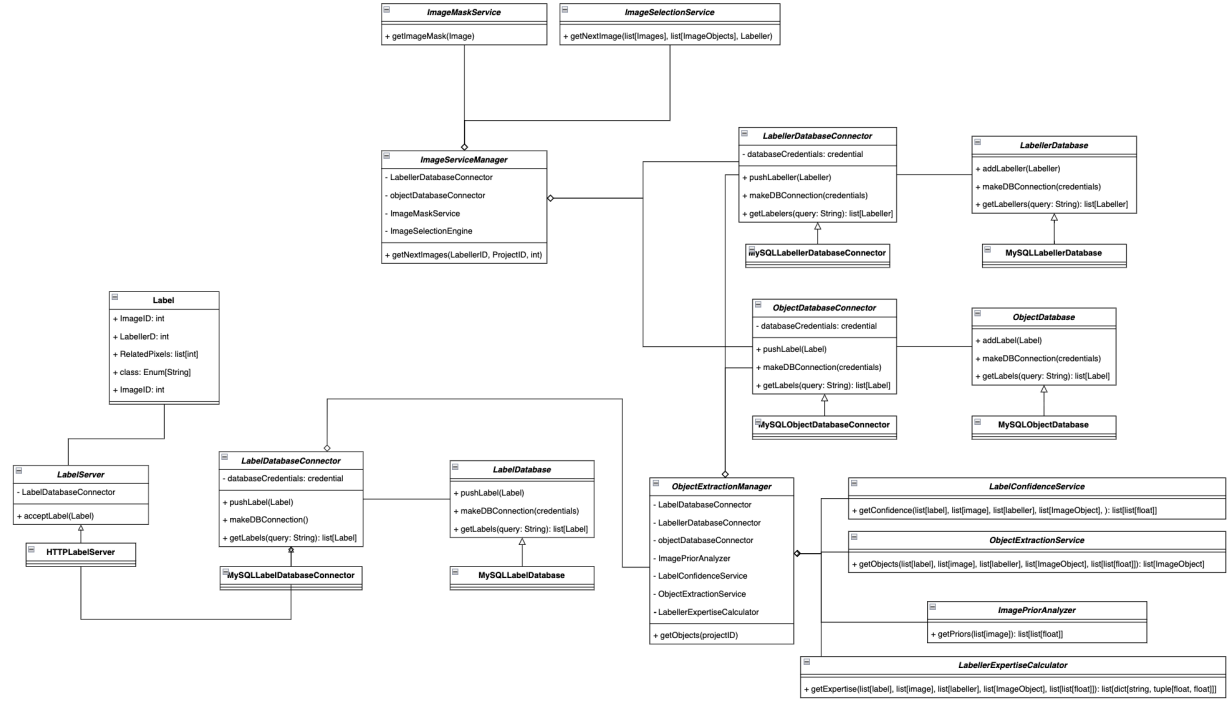


Figure 3: Labelling model

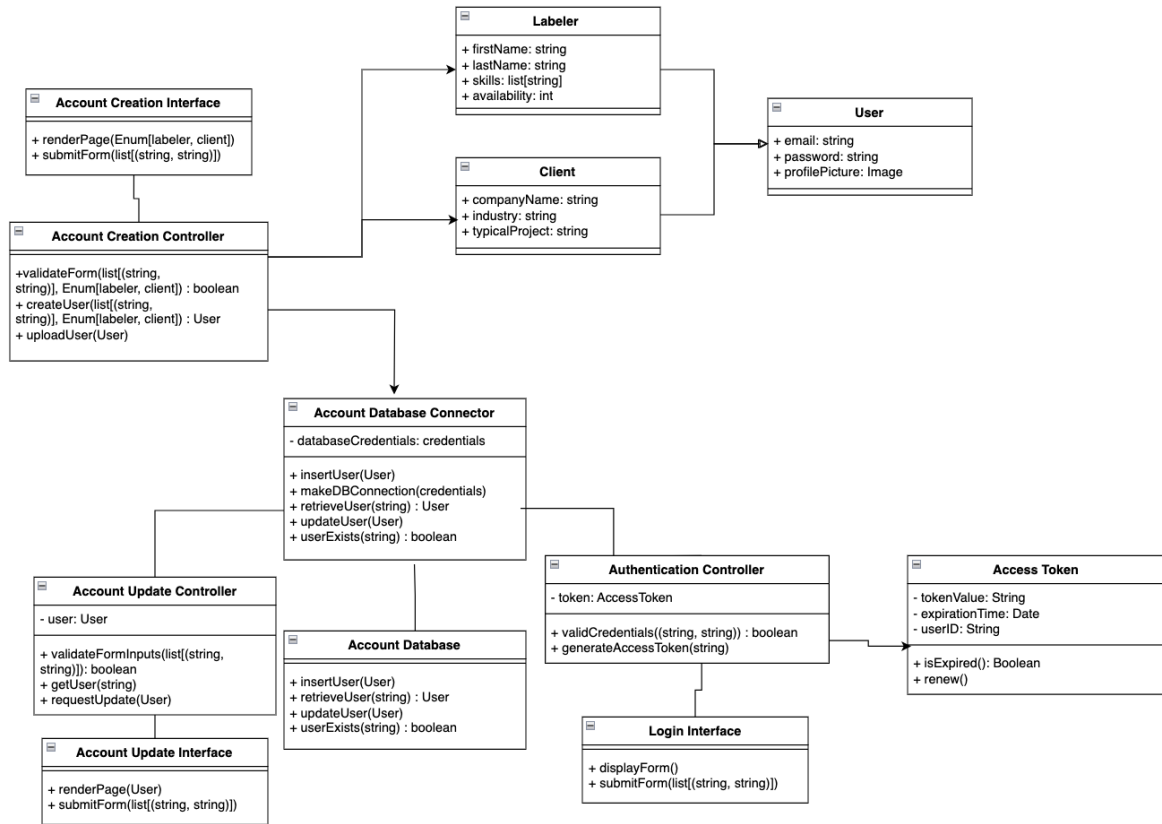


Figure 4: UI interfaces

## 10 User Interfaces

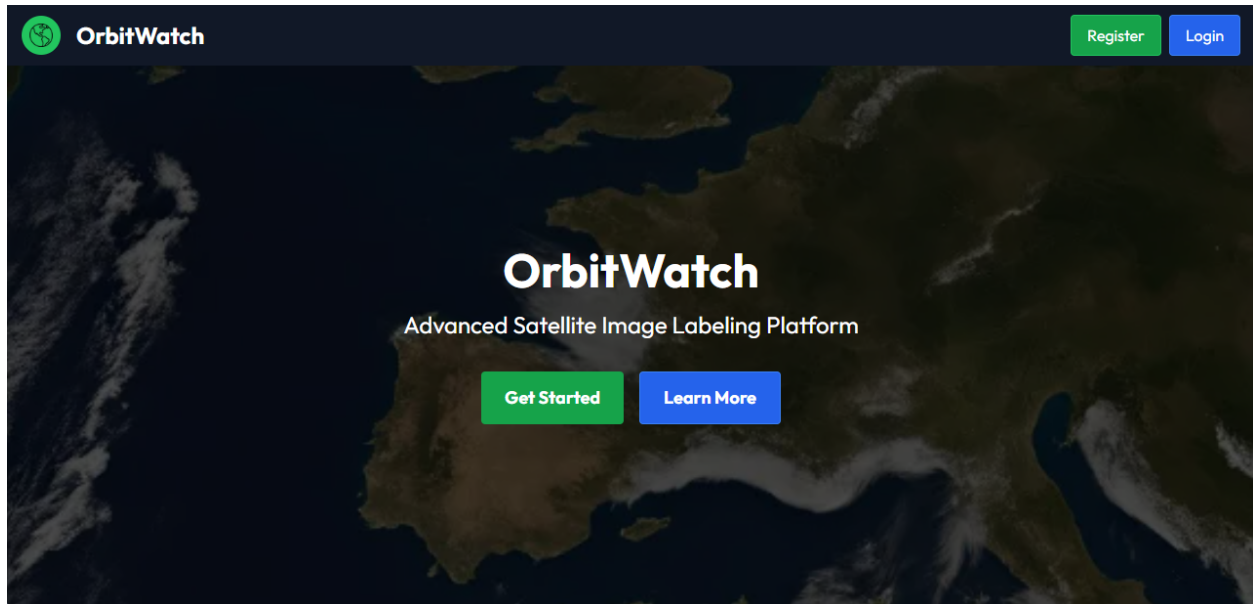


Figure 5: Home Page

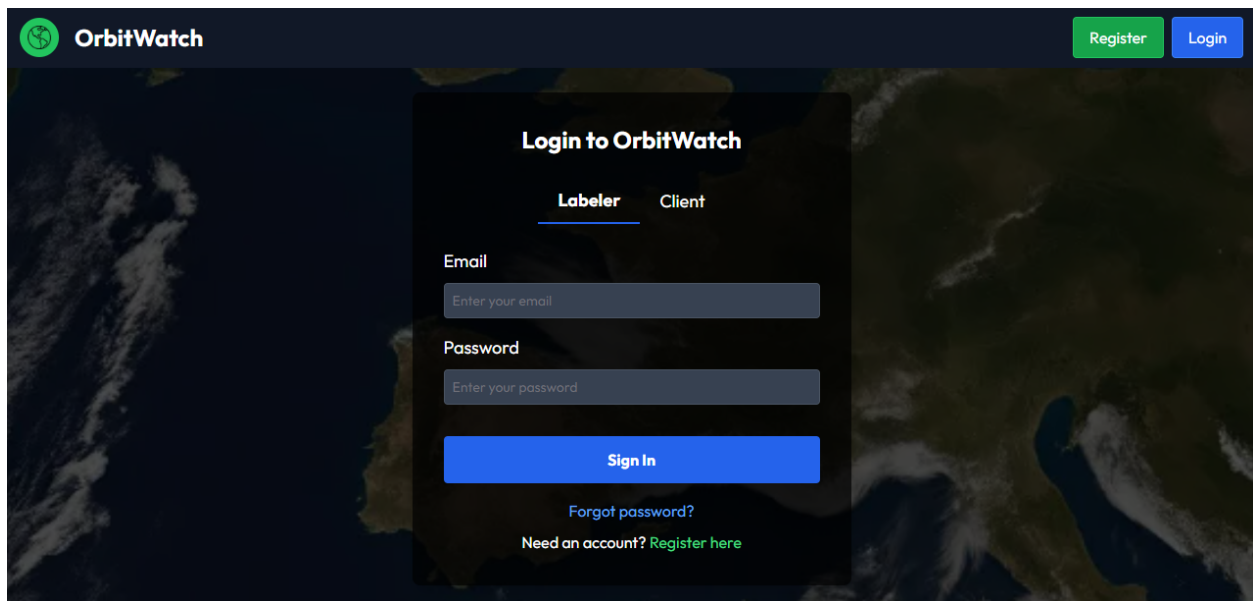


Figure 6: Login Page

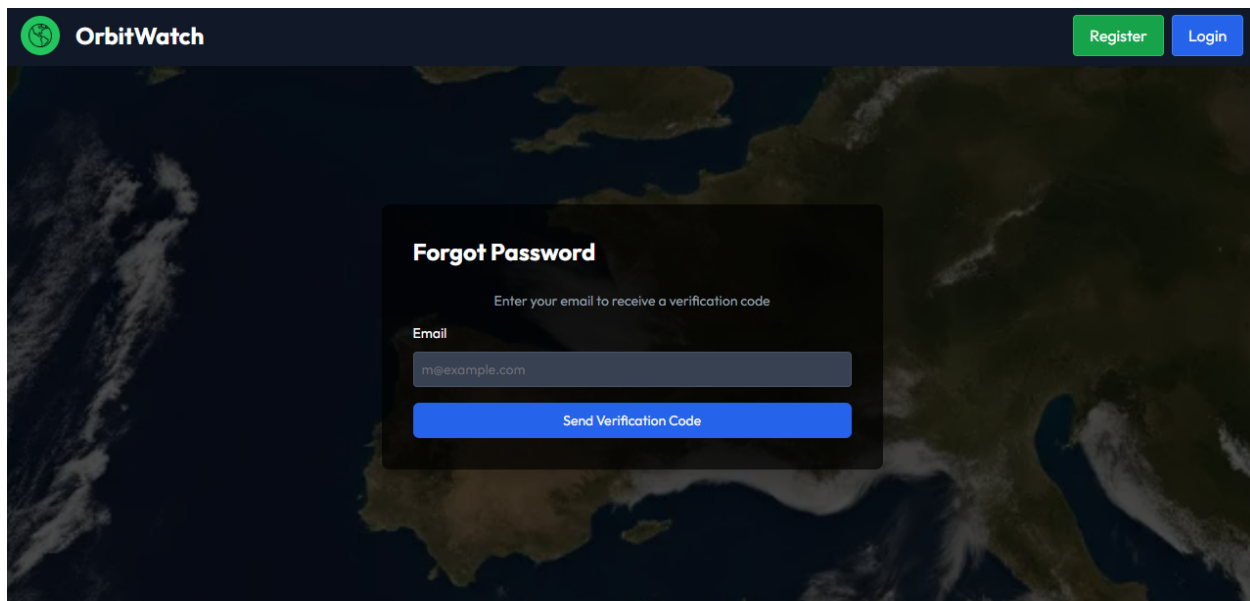


Figure 7: Forgot Password

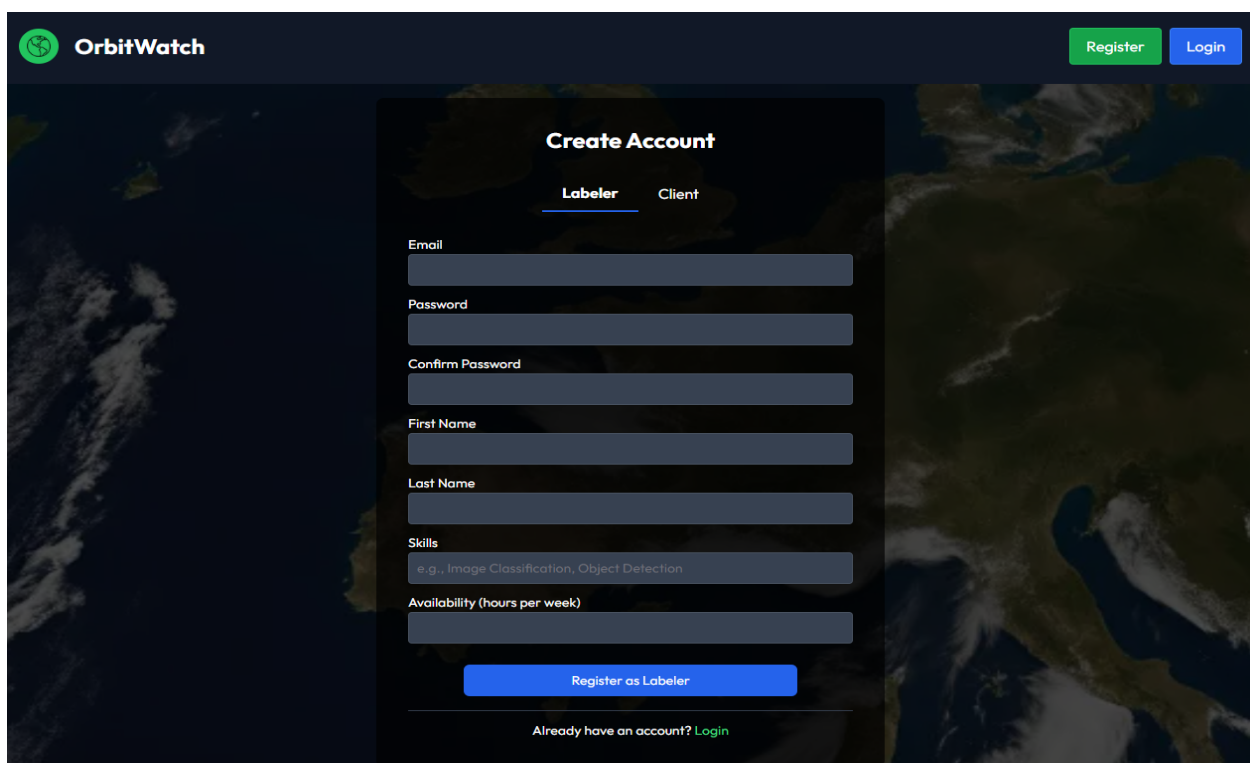


Figure 8: Register Page

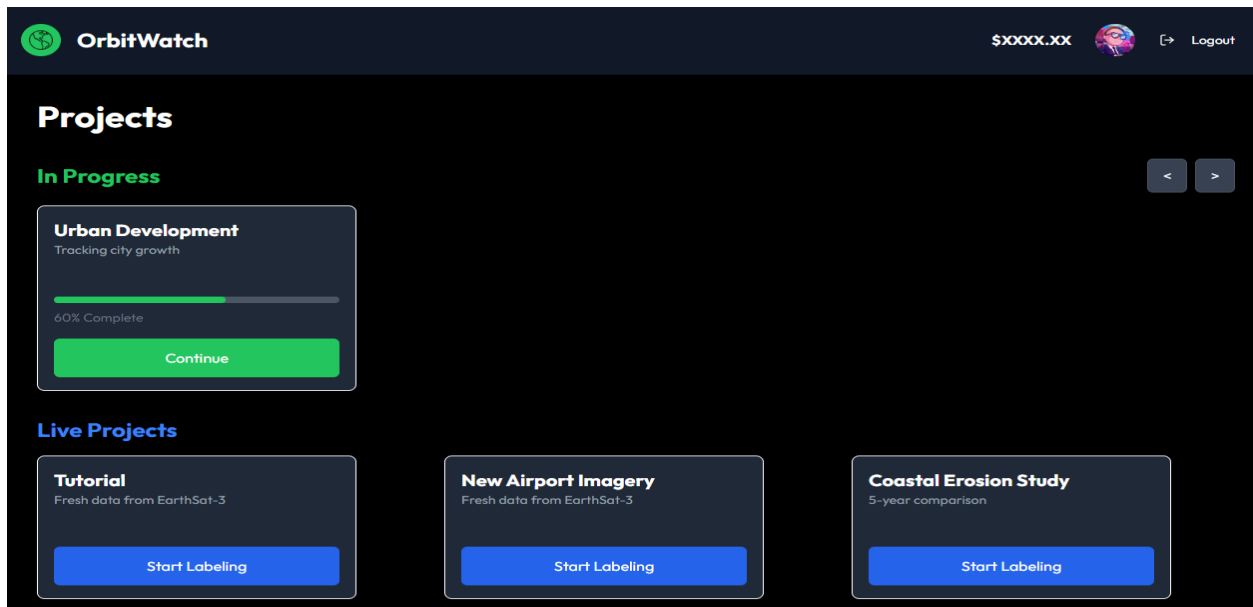


Figure 9: Projects to Label Page

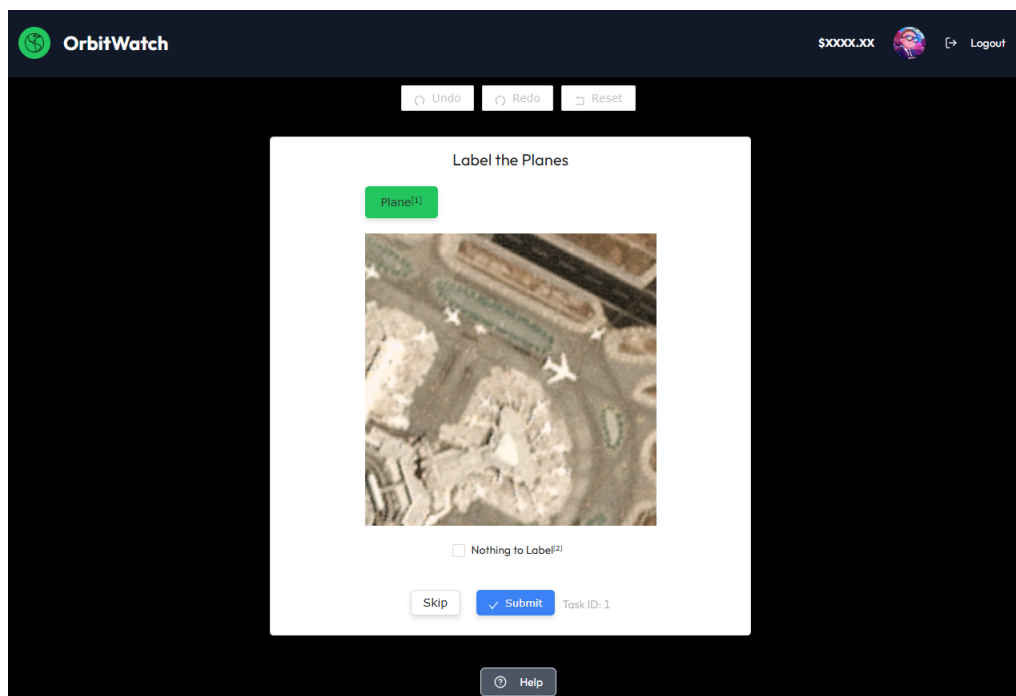


Figure 10: Label Page

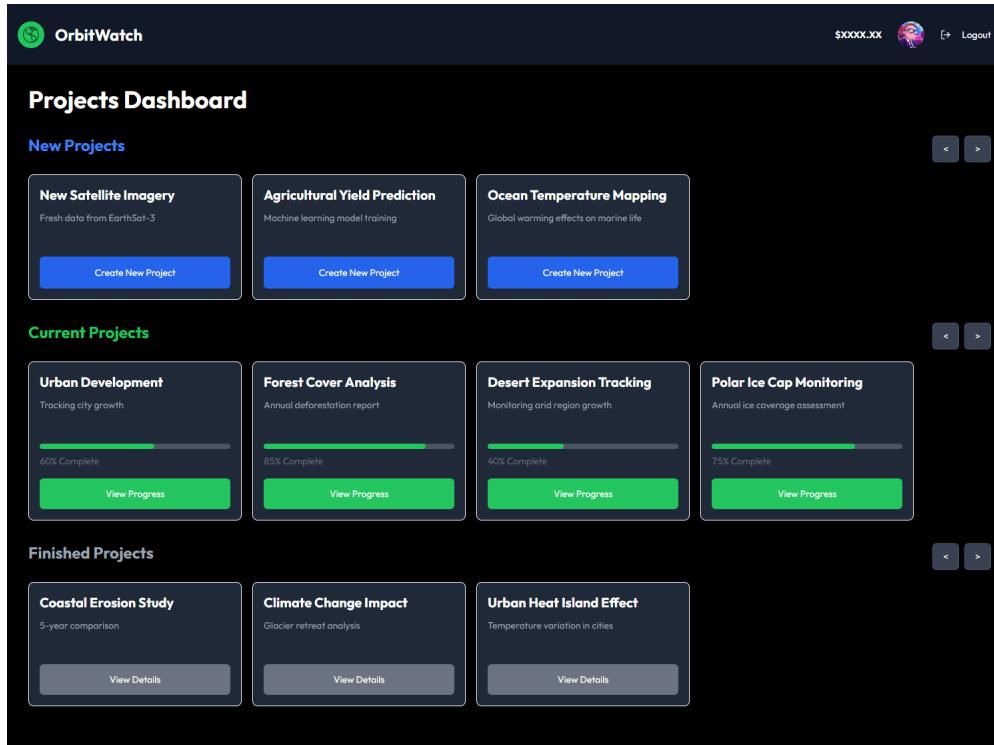


Figure 11: Client Projects Page



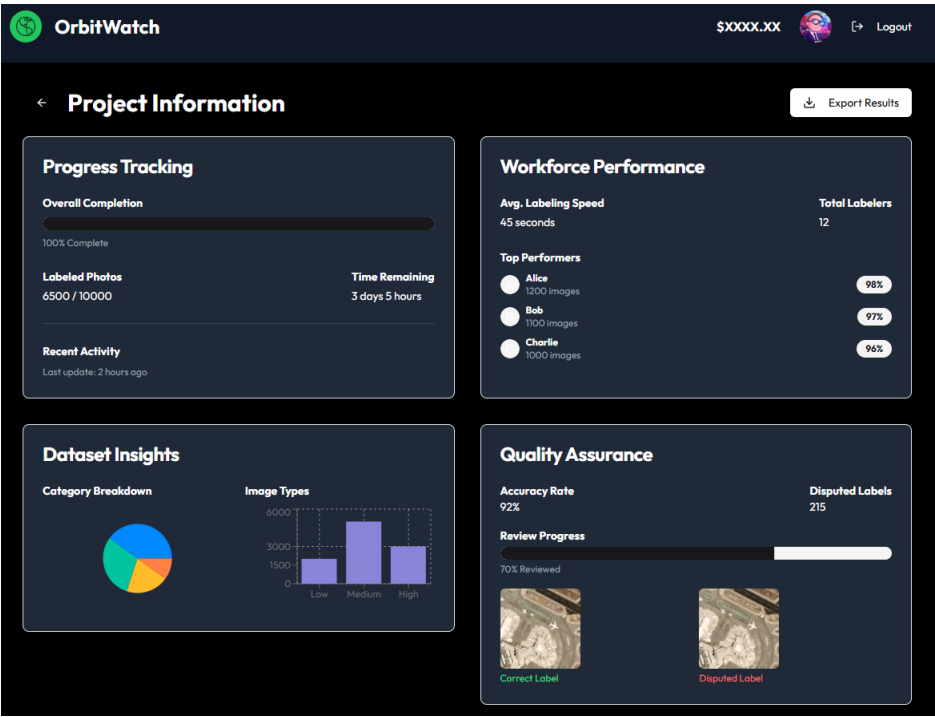


Figure 12: Project Status Page

The screenshot displays the 'User Information' page in the OrbitWatch application. The page features a dark theme with a top navigation bar containing the OrbitWatch logo, a balance of \$XXXX.XX, a user profile icon, and a 'Logout' button. The main content area is a form for user information, including a profile picture, current balance, and fields for email, first name, last name, skills, and availability.

**User Information**

Current Balance: \$XXXX.XX

[Withdraw Balance](#) [Change Password](#)

Email: user@example.com

First Name: John

Last Name: Doe

Skills (comma separated): Image Classification, Object Detection

Availability (hours per week): 40

Figure 13: User Information Page

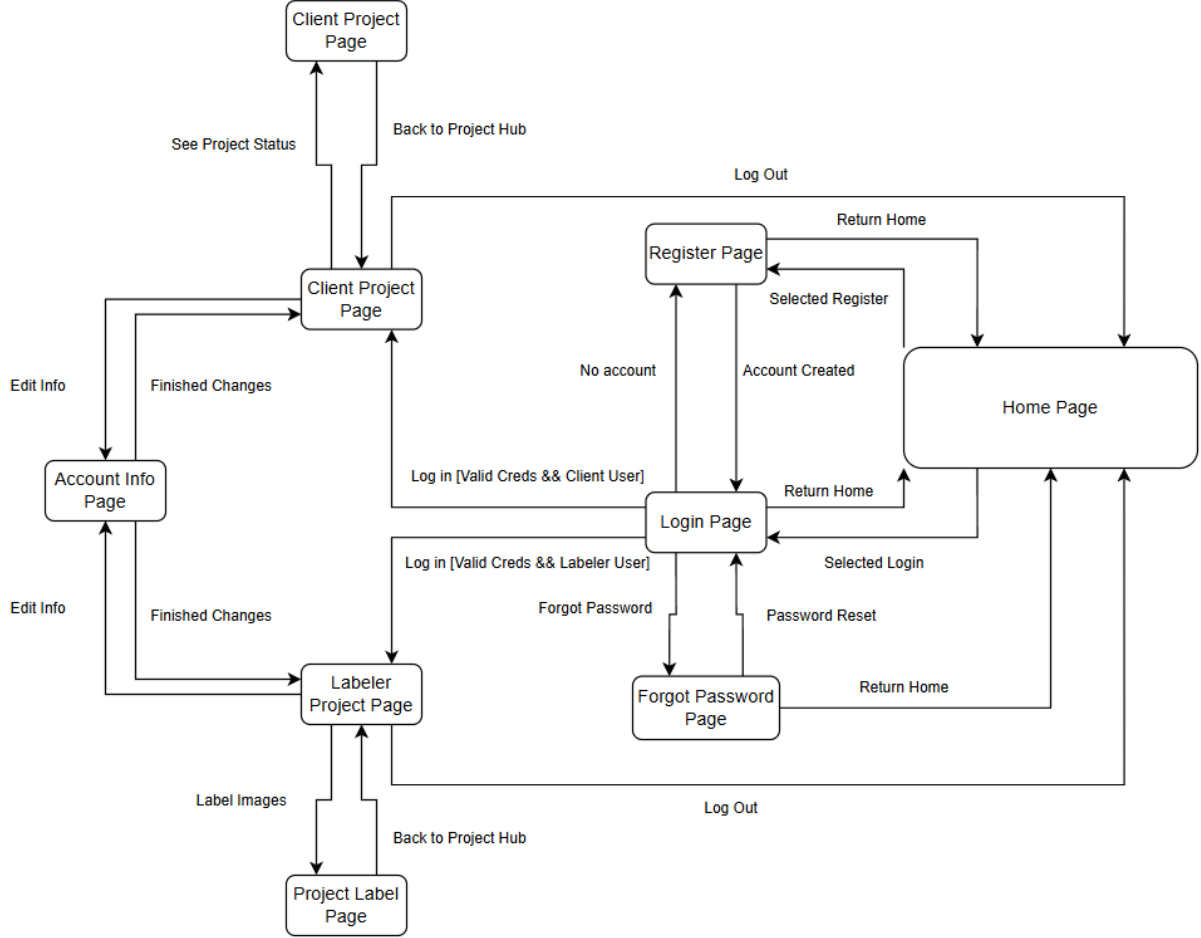


Figure 14: Page Flow Diagram

## 11 Design of Communication Protocols

Our platform will center around secure, efficient, and scalable communication protocols to facilitate interactions between the frontend, backend, and external services. Below is an outline of the key design considerations:

### 1. Client-to-Backend Communication:

**HTTPS/RESTful APIs:** All communication between the web-based frontend and the backend will occur over HTTPS using RESTful API endpoints. This ensures data in transit is encrypted and secure.

**Authentication & Authorization:** We will implement robust authentication mechanisms such as OAuth2 or JWT tokens for verifying and controlling access to API resources.

**Structured Data Format:** Requests and responses will primarily use JSON for lightweight, human-readable, and easily parsed messages.

**Statelessness:** The APIs will be stateless, allowing for easier scaling and handling of parallel requests, critical for enabling multiple users to label the same images concurrently.

**Additional Security Measures:**

- **Input Validation:** All API endpoints will enforce strict input validation to prevent injection attacks.
- **Database Encryption:** Sensitive data stored in databases will be encrypted at rest using industry-standard encryption.
- **Rate Limiting & Throttling:** To mitigate abuse, API endpoints will implement rate limiting and request throttling.

2. Backend Infrastructure and AWS Communication:

**AWS Hosting:** The backend services will be deployed on AWS, taking advantage of its scalable infrastructure and regional availability to reduce latency and increase reliability.

**Microservices & API Gateway:** We may structure the backend as microservices behind an API Gateway to manage routing, authentication, and rate limiting more efficiently.

**AWS Database Connectivity:** The backend will communicate with AWS-hosted databases (Amazon RDS) via secure connections using AWS SDKs or native drivers over HTTPS or proprietary secured protocols.

- **Secure Credential Management:** Database credentials and API keys will be stored securely using AWS Secrets Manager or IAM roles.
- **Network Isolation:** Databases will be deployed within private subnets, accessible only through strict security group rules.

## 12 Timeline

| Milestone                   | Deadline            | Tasks (Code)  | Tasks (Documentation)   |
|-----------------------------|---------------------|---|---|
| Revision 0 Demonstration    | Feb 3 – Feb 14      | <ul style="list-style-type: none"> <li>- Implement foundational modules:</li> <li>- <b>Oleg</b>: Databases (Label, ImageObject, Labeller) and connectors.</li> <li>- <b>Kartik and Kyle</b>: Backend APIs for connectors.</li> <li>- <b>Mathew</b>: Frontend for basic database interactions.</li> </ul>              | <ul style="list-style-type: none"> <li>- Describe the purpose of foundational modules.</li> <li>- Write an overview of functionality and initial design.</li> </ul>                   |
| V&V Report Revision 0       | March 7             | <ul style="list-style-type: none"> <li>- Begin <b>core services</b> implementation:</li> <li>- <b>Kartik and Kyle</b>: Label Server.</li> <li>- <b>Oleg</b>: Database and API integration testing.</li> <li>- <b>Mathew</b>: Develop basic UI for Label Server interactions.</li> </ul>                               | <ul style="list-style-type: none"> <li>- Document module-level testing strategies.</li> <li>- Include high-level testing results.</li> <li>- Update SRS and V&amp;V plans.</li> </ul> |
| Final Demonstration (Rev 1) | March 24 – March 30 | <ul style="list-style-type: none"> <li>- Complete <b>core services</b>:</li> <li>- <b>Kartik and Kyle</b>: Object Extraction Manager, Image Service Manager.</li> <li>- <b>Oleg</b>: Optimize database queries for scalability.</li> <li>- <b>Mathew</b>: Build advanced frontend for services.</li> </ul>            | <ul style="list-style-type: none"> <li>- Document core service implementations and integration steps.</li> <li>- Update diagrams and traceability matrices.</li> </ul>                |
| EXPO Demonstration          | April TBD           | <ul style="list-style-type: none"> <li>- Implement <b>specialized services</b>:</li> <li>- <b>Kartik</b>: Labeller Expertise Calculator.</li> <li>- <b>Kyle</b>: Image Mask Service.</li> <li>- <b>Oleg</b>: Refine backend for API reliability.</li> <li>- <b>Mathew</b>: Enhance frontend interactivity.</li> </ul> | <ul style="list-style-type: none"> <li>- Create presentation materials.</li> <li>- Include screenshots, results, and use cases for EXPO demo.</li> </ul>                              |
| Final Documentation (Rev 1) | April 2             | <ul style="list-style-type: none"> <li>- Conduct <b>end-to-end testing</b>:</li> <li>- <b>Kartik and Kyle</b>: Verify ML pipelines.</li> <li>- <b>Oleg</b>: Test backend and database robustness.</li> <li>- <b>Mathew</b>: Test UI for edge cases.</li> </ul>  | <ul style="list-style-type: none"> <li>- Finalize and submit SRS, V&amp;V Plan, and test results.</li> <li>- Complete user/admin manuals and deployment guide.</li> </ul>             |

Figure 15: Project timeline illustrating key development milestones and deadlines.

The original file for the timeline can be found [here](#).

## References

- David L. Parnas. On the criteria to be used in decomposing systems into modules. *Comm. ACM*, 15(2):1053–1058, December 1972.
- David L. Parnas. Designing software for ease of extension and contraction. In *ICSE '78: Proceedings of the 3rd international conference on Software engineering*, pages 264–277, Piscataway, NJ, USA, 1978. IEEE Press. ISBN none.
- D.L. Parnas, P.C. Clement, and D. M. Weiss. The modular structure of complex systems. In *International Conference on Software Engineering*, pages 408–419, 1984.