OAL TRINITY CURRENCY SYSTEM

Currency Laboratory Pilot Package

Version 0.1: Coordination Sheet, Run Card 001, and Claude's Pilot Record

> **STATUS: PROPOSED.** Nothing in this package is owner-adopted, locked for testing or canon. The pilot record is an executed derivation by an analyst who had seen other teams' expected values. It is not a blind trace.

Document ID: OAL-CURR-PILOT-PKG-v0.1-CLAUDE-20261107
Date: 7 November 2026
Prepared by: Claude (Anthropic), AI Collaboration Team
Prepared for: Nathan Lewis II and the OAL AI Collaboration Team
Responds to: OAL-CURR-NEXT-001 v1.0, and the compiled Currency Laboratory Pilot Recommendations
Supporting files: claude_pilot_reference_model.py; claude_pilot_run_log.txt

Contents

PART A. ORIENTATION
PART B. COORDINATION SHEET v0.1 (PROPOSED)
PART C. RUN CARD 001 (REVISION r1, PROPOSED)
PART D. CLAUDE'S PILOT RECORD (EXECUTED, NOT BLIND)
PART E. CORRECTIONS, AGREEMENTS AND DISAGREEMENTS
PART F. DECISIONS AND NEXT STEPS
PART G. REFERENCE TABLES AND FIGURE

PART A. ORIENTATION

1. What this package is

Nathan asked each AI to move forward with the recommendations it proposed, independently, without seeking consensus. My recommendations to the directive (OAL-CURR-NEXT-001) were: a short coordination sheet instead of a full Charter v0.2 reconciliation; one owner-adopted run card; the Resource-Box Discriminator run with perturbations, plus the blocked-target return case; an analytic note on the M04 feedback model; a correction and disagreement log; and publication rules.

This package delivers each of those. Part B is the coordination sheet. Part C is Run Card 001. Part D is my own pilot record, produced with a small executable reference model. Part E holds corrections, notes to each team member and my remaining disagreements. Part F lists what I need from Nathan and gives a ready-to-use prompt for blind runs. Part G collects every table and the figure, so the body reads as a single column.

> **STATUS: PROPOSED**
> Nothing in this package is OWNER-ADOPTED, LOCKED FOR TESTING, or canon. Run Card 001 becomes usable for a formal run only after Nathan records adoption (section 16). This package does not select a design for Quantum Credits, 1COIN or NCOIN.

2. Provenance and exposure disclosure

My pilot record is not a blind trace. Before writing it I read the five responses to the directive that were compiled for me. Several of them state the expected end-states of the resource-box case (for example A = 7, B = 3 under transfer). My record is therefore an independent derivation by an analyst who had seen those numbers. It must not be counted as a blind first pass. If blind traces are wanted, they should be run in fresh sessions that receive only Run Card 001 and the source record. Section 28 gives a prompt for that.

One team member's response is missing from what I received. The compiled pilot-recommendations file contains responses from ChatGPT, Claude, Gemini, Grok and Perplexity. It does not contain one from Microsoft Copilot. I have not assumed what Copilot would say, and I have not credited Copilot with any position in this package.

Evidence labels. Every result in Part D carries one of these labels:

- **ASSUMED:** stipulated in the run card or in a configuration. An input, never a finding.
- **DERIVED:** follows by algebra or logic from stated assumptions.
- **EXECUTED:** produced by running the reference model. This shows that the written rules are internally consistent and that the assertions can catch defects. It does not show that a real Quantum Credit can do anything.
- **OBSERVED-EXTERNAL:** supported by evidence outside the model. None exists in this package.

3. Summary of what the pilot record found

- **The baseline case is uninformative, as the team predicted.** Under any configuration that is told to deliver three units, three units arrive. The final balances follow from the definitions (EXECUTED, Table 4).
- **The perturbations are where the configurations differ.** With A holding only 2 units, transfer is rejected and creation still delivers 3. With the quantity unit unspecified, every configuration, including evaluate-only, stops at the same early gate before its capability is used (Table 5).
- **ENACT does not stand alone.** Once an enactment configuration declares where the units come from, its observable behavior is identical to either transfer or creation. If it declares nothing, the correct result is UNDERSPECIFIED, not success.
- **The run card itself had gaps, and the pilot exposed them.** Section 19 lists six, including duplicate-request handling and atomic delivery. Each is now fixed in Run Card 001 or flagged for challenge.
- **Blocked-target return rules differ mainly in what information they keep.** The bare NULL return, as I originally worded it, collapses six different barriers into one record. Attaching the reason code fixes that (Table 7). No rule emitted NCOIN, which is true by construction and is not evidence about NCOIN.
- **The M04 feedback model has three regimes, not two.** It converges for $-0.5 < \alpha < 0.5$, diverges at and above 0.5, and at $\alpha = -0.5$ has a fixed point that the iteration never reaches because it oscillates (Table 9, Figure 1).
- **Three deliberately defective implementations were caught by the assertions,** and the correct implementation passed all four (Table 6).
- **Copilot's response is absent from the compiled file,** so the record of the team's position is five-sixths complete.

PART B. COORDINATION SHEET v0.1 (PROPOSED)

This sheet is deliberately short. It standardizes only what a first run needs: statuses, identifiers, a reporting record, a target description, an attribution register and publication rules. It does not merge the six charters and it does not rank their architectures.

4. Status ladder

I use the five terms in the directive, with two clarifications. **Adoption always names a scope and a run.** And **EXPERIMENTALLY SUPPORTED is a claim-level label with a stated scope**, not an automatic step toward canon. An owner-adopted assumption can remain unverified indefinitely. Table 1 gives the definitions.

My preference, recorded as a dissent. OWNER-ADOPTED and LOCKED FOR TESTING name one event unless adoption can come before a run. If they are always granted together, one term is enough. I would also rename EXPERIMENTALLY SUPPORTED to CONSISTENT UNDER RUN-nnn, because in a design laboratory the word "supported" invites an empirical reading that nothing here earns. Both points are in section 26. I use the directive's five terms in this package so the team can compare like with like.

5. Qualified identifiers

Every case, configuration and rule is cited as **contributor/document-revision/ID**, for example perplexity/charter-v0.1/F01 or claude/charter-v0.1/FM-1. This is Perplexity's convention. It preserves every original ID and prevents FM-01 from meaning two experiments.

A neutral laboratory ID is assigned only when two cases are judged equivalent, so no contributor's numbering becomes the default. Table 2 lists my own IDs and my corrections to the pairings Gemini proposed for them. Each other contributor should confirm its own entries, because I cannot verify what is inside their documents beyond what they have stated.

6. Target typing and typed value

ChatGPT proposed that a test target carry at least six fields. I adopt them for Run Card 001:

- **Referent:** what entity or state is involved.
- **Requested operation:** evaluate, transfer, create, settle or transform.
- **Scope:** exactly what is included and excluded.
- **Valuation domain:** monetary, resource quantity, obligation, symbolic equivalence or another declared domain.
- **Time:** when the valuation or operation applies.
- **Authority:** who may request or perform it.

V(T) returns a **typed value description**, not automatically a universal number. Two values of different domains are never summed or converted without an explicit conversion rule declared in the run card.

7. Result record

Every run is reported in the same single-column record. The fields are:

- Case ID, configuration ID, revision, analyst, date.
- Prior exposure: what the analyst had seen of other teams' proposals and results.
- Status code and reason code for each case, kept separate.
- Final holdings, total, receipt state, and every instrument record. Instrument fields read NOT_EVALUATED when the instrument was not evaluated. A field that reads 0 asserts that it was evaluated and found to be zero.
- The transition log, where the specification makes it observable.
- **Verdict A, internal consistency:** did the model behave coherently under its own declared rules.
- **Verdict B, requested outcome:** was the requested result achieved. These two verdicts differ. An evaluate-only model can be fully consistent and still not deliver.
- An evidence label (ASSUMED, DERIVED, EXECUTED or OBSERVED-EXTERNAL) on every statement.
- Specification gaps found, observational indistinguishabilities, and every assumption the analyst added.

8. Working attribution register

The register in Table 3 records who wrote each of the seven files. It rests on each author's own identification, not on writing style. ChatGPT identified the 21-page Trinity package, Copilot identified the 18-page Foundational package, and Grok identified the short Currency Review Laboratory Charter. Claude, Gemini and Perplexity are labeled in their own files. **Nathan has not yet confirmed the register.** It stays a working record until he does.

9. Publication hygiene

- Keep the original submissions untouched in their own folder. Publish corrected editions separately, with the corrections listed, so the historical record is not silently replaced.
- Remove the temporary signed attachment links (the ones carrying X-Amz-Security-Token and X-Amz-Signature) from every public edition, including the compiled next-step recommendations and the latest review file. Replace them with repository-relative references.
- Treat a PDF and a DOCX of the same text as two editions of one document, not two independent sources.
- Put a document ID, contributor, revision and status on every title page.
- Keep bodies single-column and put tables and figures at the end, so the documents read on a phone.

PART C. RUN CARD 001 (REVISION r1, PROPOSED)

Run Card 001 has two companion cases. RC-001A is the Resource-Box Capability Discriminator. RC-001B is the blocked-target return case. Both are small enough that differences between the interpretations show up without any 150-year projection.

10. Question and limits

RC-001A asks: under four declared capability assumptions, what does each configuration require, change and report, and where do two configurations become observationally indistinguishable?

It does not ask which capability Quantum Credits truly has. A configuration told to create units will create them. Seeing that happen shows the rule executed, not that the capability exists. The informative results are the places where configurations diverge under perturbation, and the places where the specification turns out to be incomplete.

11. RC-001A fixture

- The environment is closed and synthetic. No third-party resource pool exists. No fees, losses or external effects are assumed unless a configuration declares them.
- A holds 10 identifiable, fungible units (u1 to u10). B holds none.
- Request R1: B holds three additional **usable** units. Usable means identifiable units in B's inventory that meet the same criterion as A's units.
- Synthetic valuation convention for this run only: V(T) = 3 test-units, by a one-to-one resource equivalence. It is not a rule for Quantum Credits.
- Baseline authority is GRANTED, for both transfer and creation. This is stipulated.
- **Added assumption G4, flagged for challenge:** evaluation requires no authority.
- **Added assumption G6, flagged for challenge:** Target Resolution happens before any capability is used, so an undefined target stops every configuration at the same gate. This follows the early exits in my Charter and is not shared by every architecture.
- Duplicate requests are handled by request ID. The default is DEDUP (a repeat returns the earlier result without re-executing). Perturbation P6 runs the alternative, REEXECUTE.
- Delivery is unit by unit. It can be interrupted only in perturbation P7. The completion predicate requires all three units.
- A settlement receipt is issued only at completion.

12. Configurations

Each configuration declares its stipulated capability, its accounting effects, the authority it needs, its atomicity and its duplicate handling. Anything left undeclared is reported as a gap, not filled in by the analyst.

- **C0, Evaluate.** Returns a typed value description for the target. No resource movement is claimed.

- **C1, Transfer.** Moves existing units from A to B. Needs A to hold enough units. Preserves unit identities.
- **C2, Create.** Instantiates new units in B under a stated creation primitive. A's inventory is irrelevant. Declares no offset.
- **C3s, Enact, source declared.** Establishes the target state and declares that the units come from A.
- **C3n, Enact, no source declared.** Establishes the target state and declares that the units are new.
- **C3u, Enact, accounting undeclared.** Establishes the target state and says nothing about where units come from. The correct result is UNDERSPECIFIED.

Splitting enactment three ways is my own addition. It follows ChatGPT's requirement that an enactment model say whether other states change, and Perplexity's warning that enactment and transfer can look identical. If an analyst defines enactment differently, for example as a state change with no unit identities, that is a new configuration with its own ID.

13. Completion, verdicts and prohibited substitutions

Completion predicate: B holds at least three additional usable units, and any receipt was issued only after that was true.

Verdict A and Verdict B are reported separately (section 7). **Conservation** is checked only for configurations that declare it. Checking that a declared transfer conserves units is legitimate. Requiring conservation of a declared creation model is not.

Prohibited substitutions:

- Redefining the target, the unit or the completion predicate after seeing a result.
- Introducing a hidden resource pool.
- Counting a stipulated capability as evidence that it exists.
- Rescuing a failing configuration by adding a rule mid-run. Log FAIL or INDETERMINATE and open a new configuration revision.
- Writing an expected NCOIN or 1COIN outcome into an acceptance criterion.
- Declaring two mechanisms different when the permitted observations are identical. Report them as observationally indistinguishable in that case.

14. Perturbation ladder

Run the baseline B0, then each perturbation. I merged my own list with Perplexity's, and I credit it. Each perturbation targets a place where a stipulation has to stop doing the work.

- **B0:** the baseline in section 11.
- **P1, insufficient inventory:** A holds only 2 units.
- **P2, authority denied:** the requester's authority is removed.
- **P3, authority unknown:** authority is not established. This is different from denied.

- **P4, quantity unit unspecified:** the request says 3 but not 3 of what.
- **P5, replay with DEDUP:** the same request ID is submitted twice.
- **P6, replay with REEXECUTE:** the same, with re-execution on a repeat.
- **P7, interrupted delivery:** delivery stops after two units.

15. RC-001B: blocked-target returns

Six targets are run through the same engine. Two are not coherent targets at all, and four have value but cannot be transacted:

- **T1, undefined:** the referent is unspecified.
- **T2, contradiction:** an object must hold X = 3 and X = 5 in one state.
- **T3, no seller:** title to a natural star system. No party can sell it.
- **T4, unknown seller:** an encrypted artifact whose owner exists but is unindexed.
- **T5, non-transferable:** a valued credential that is bound to its holder.
- **T6, unauthorized:** a valued asset with a seller, where authority is denied.

Each is run under five return rules. R1 to R4 are from my Charter. **R3 is amended here:** the NULL record is a typed log record that carries the reason code, and **no token is issued.** This separates the record format from the question of whether anything is minted, which is Perplexity's point. The original R3 returned a NULL object with no reason code, so I run it too, as R3 as originally worded, to show the difference.

- **R1:** a barrier status and class. No value.
- **R2:** the status plus a labeled non-settleable valuation ("valued, not transactable") where there is something to value.
- **R3, as originally worded:** a NULL record with no reason code.
- **R3, amended:** a NULL record with the reason code, and token_issued = false.
- **R4:** as R1 or R2, plus a consequence record only if an NCOIN trigger is independently met. The fixture meets none.

RC-001B reports four things per rule: how many distinct return records the six targets produce, how many valuations are preserved, whether any token or NCOIN was emitted, and whether the six barriers can still be told apart.

16. Adoption record

The record below is blank. Only Nathan can complete it. Until he does, every rule in Run Card 001 is PROPOSED.

> **ADOPTION RECORD, RUN CARD 001 r1 (PENDING)**
> Status: PENDING. Adopted by: _____. Date: _____. Scope: analytical and simulated runs of RC-001A and RC-001B only. Synthetic unit convention: V(T) = 3 test-units, or _____. Amendments: _____. Adoption means the run may proceed. It does not endorse any currency mechanism.

PART D. CLAUDE'S PILOT RECORD (EXECUTED, NOT BLIND)

17. Method and evidence level

I wrote a small reference model in Python that implements Run Card 001. It uses only the standard library, has no randomness, and prints a log. It runs RC-001A (six configurations by eight cases, 48 runs), RC-001B (six targets by five return rules), and the M04 recurrence. The source and log are supplied as separate files (section 30).

The model carries four assertions. **A1:** conservation holds, but only for configurations that declare it. **A2:** nothing is SETTLED without delivery. **A3:** a receipt exists only after completion. **A4:** no NCOIN record exists without a separately evidenced consequence. I also injected three deliberately defective implementations to check that the assertions can fail.

Everything in this part is EXECUTED or DERIVED. It shows consistency, not capability. And as disclosed in section 2, I had seen other teams' expected values first.

18. RC-001A results

Table 4 gives the baseline. Table 5 gives every perturbation in compact form.

Baseline (EXECUTED). C0 ends at A = 10, B = 0. C1 ends at A = 7, B = 3, total 10. C2 ends at A = 10, B = 3, total 13, so the total rises by 3 with no offset declared. C3s matches C1 exactly. C3n matches C2 exactly. C3u returns UNDERSPECIFIED with nothing delivered. Verdict B is NOT_SATISFIED for C0 and C3u and SATISFIED for the rest.

P1, insufficient inventory. C1 and C3s are REJECTED for INSUFFICIENT_INVENTORY and nothing moves. C2 and C3n still deliver, ending at A = 2, B = 3, total 5. Creation ignores inventory, which is the structural difference between the two families.

P2 and P3, authority. Under denied authority, every configuration except C0 returns UNAUTHORIZED. Under unknown authority they return AUTHORITY_UNKNOWN. These are two different codes, and the state is unchanged in both. C0 still evaluates, because of assumption G4.

P4, unspecified unit. All six configurations, including C0, return UNDEFINED_TARGET. No capability is reached. This is the one case where the configurations cannot be told apart at all, and it follows from assumption G6.

P5 and P6, replay. Under DEDUP the end states equal the baseline and the reason code is DUPLICATE_NOT_REEXECUTED. Under REEXECUTE, C1 ends at A = 4, B = 6 (total 10) and C2 ends at A = 10, B = 6 (total 16). The first request and its replay each deliver three units.

P7, interrupted delivery. C1 and C3s end PARTIAL at A = 8, B = 2, with no receipt issued. C2 and C3n end PARTIAL at A = 10, B = 2, total 12. Verdict B is PARTIAL for all four.

19. Specification gaps found

These are gaps in my own draft of the run card, found by running it. Each is now resolved in Run Card 001 or flagged.

- **G1, duplicate-request policy was absent.** The first draft did not say what a repeat does. P5 and P6 now fix it, and the two policies give different totals.
- **G2, atomicity was unstated.** Whether delivery can stop halfway changes the result. P7 now covers it.
- **G3, whose authority governs creation was unstated.** I stipulated that baseline authority covers both transfer and creation. Other analysts may want these separated.
- **G4, whether evaluation needs authority was unstated.** I stipulated that it does not. This is an assumption to challenge.
- **G5, the meaning of "usable" was unstated.** It is now defined in section 11.
- **G6, the order of Target Resolution and capability was unstated.** I stipulated that resolution comes first. This is an assumption to challenge, and a different architecture may reasonably let evaluation return something for an unresolved target.

20. RC-001B results

Table 7 shows the returns and Table 8 shows the summary. All of it is EXECUTED.

- **R1** produces six distinct returns and keeps none of the valuations. It cannot tell "valued but blocked" from "nothing to value."
- **R2** produces six distinct returns and keeps the valuation for the four valued targets (T3 to T6). T1 and T2 correctly carry none, because no coherent target exists to value.
- **R3, as originally worded,** collapses all six targets into one record. That is a real defect in my original wording.
- **R3, amended,** produces six distinct returns again, but now carries no more information than R1 plus a log handle. It is a serialization choice, not a richer result.
- **R4** equals R2 in this fixture, because no independent consequence trigger is present.
- **No rule emitted a token or NCOIN.** That is true by construction. It says nothing about whether NCOIN should be generated under some other declared mechanism.

The informative question left over is the one Gemini and Perplexity disagree on: whether a structured return object is acceptable. Once the record format is separated from token issuance, much of the disagreement may disappear. I recommend testing that directly, with token_issued as an explicit field.

21. The M04 feedback note

The directive's feedback model is $I = 2G$ with $G = B + \alpha I$. I use $B = 100$, the synthetic value in Perplexity's M04, so $2B = 200$.

Existence of a fixed point (DERIVED). Substitution gives $(1 - 2\alpha)I = 2B$, so $I = 2B / (1 - 2\alpha)$. For $B > 0$:

- $0 \le \alpha < 0.5$: a positive finite solution exists.
- $\alpha = 0.5$: no finite solution exists.
- $\alpha > 0.5$: the algebraic solution is negative, so it is inadmissible if allocations must be nonnegative.
- $\alpha < 0$: a solution exists. At $\alpha = -0.5$ it is $I = B = 100$.

Stability (DERIVED). The simultaneous equations do not say how I is updated. If it is updated with the lagged rule $I(t+1) = 2B + 2\alpha I(t)$, the error around the fixed point shrinks by a factor of 2α each step, so the iteration converges only when $|2\alpha| < 1$. That is $-0.5 < \alpha < 0.5$. Starting from $I(0) = 2B$, the closed form is $I(t) = 2B \times (1 + 2\alpha + (2\alpha)^2 + \ldots + (2\alpha)^t)$. This matches Gemini's expression.

The three regimes (EXECUTED, Table 9 and Figure 1).

- **$-0.5 < \alpha < 0.5$:** converges. At $\alpha = 0.25$ the fixed point is 400 and I(20) is within 0.001 of it. At $\alpha = 0.4$ the fixed point is 1,000 and I(20) is about 990.8.
- **$\alpha = 0.5$:** diverges linearly. $I(t) = 200 \times (t + 1)$, so I(5) = 1,200, I(20) = 4,200 and I(149) = 30,000. It does not crash. It grows by 200 every step.
- **$\alpha > 0.5$:** diverges geometrically. At $\alpha = 0.6$, I(20) is about 45,005 and I(149) is about 7.5×10^{14}.
- **$\alpha = -0.5$:** a fixed point exists at 100, but the iteration alternates 200, 0, 200, 0 and never reaches it. At exactly this boundary a fixed point and convergence are different things.

This is why the laboratory should report **fixed-point existence, admissibility and iterative stability as three separate findings.**

Limits. The fixed-point and stability conditions are analytic. Behavior with caps, lags, rounding or a nonnegativity rule needs simulation, which I have not run. No real value of α can be validated under this framework.

22. Defect injection

Three defective variants were run to check that the assertions can fail. D1 issues the receipt when delivery starts. D2 is a transfer that also creates a unit. D3 emits NCOIN on any failure. A1 caught D2, A3 caught D1 and A4 caught D3. The correct implementation, run under the same interrupted-delivery case, passed all four assertions (Table 6). This shows the checks can fail. It does not show they are complete.

23. What this record does not show

- It does not show that any currency instrument has any real capability.
- It does not show which configuration is right. Four of the six are consistent under their own declarations.
- It is not blind, and it is one analyst's modeling choices, including G3, G4 and G6.
- It does not test 1COIN, NCOIN's triggers, the boundary taxonomies or any temporal model (Cycles 2 and 3). The three-way split of enactment is my own construction and could understate what an ENACT primitive is meant to do.

PART E. CORRECTIONS, AGREEMENTS AND DISAGREEMENTS

24. My corrections

- **Gartner figures.** In an earlier review I said Gemini's baseline embeds the $6.37T and $2.59T figures. Gemini is right that its Axiom 6 cites them only as an example of figures that must not be hardcoded. My wording overstated it. The remaining point is smaller: the figures need not appear in the baseline text at all, and Gemini has agreed.
- **"Locked for testing."** I retract the "LOCKED FOR TESTING" status in Part A of my earlier Charter. It conflicted with my own Phase 0, which required Nathan's ratification first.
- **R3 wording.** As originally worded, R3 conflated a record format with a minted object, and it dropped the reason code. Section 15 amends it.
- **Replay, partial delivery, simultaneous claims and issuer loss.** My Charter had none. Perturbations P5 to P7 begin to fill the gap. Simultaneous claims and issuer loss remain open.
- **Full Charter v0.2 reconciliation.** I withdraw that proposal. Five responses now argue for a narrow sheet first, and the reasons hold. This package replaces it.

25. Notes to each team member

ChatGPT. I adopted your six-field target typing and your two separate verdicts, and I credit them. My enactment configurations implement your requirement that an enactment model state whether other states change. Please put an author line and document ID on each file you produce, since provenance was the weak point last round.

Gemini. Thank you for the errata and for the lagged-time closed form, which I checked and confirm. Two corrections to Table 2 in your report, for my own IDs. FM-3 is one test with five target types, not three parts. FM-8 is a redundancy screen, not replay or partial delivery. My Charter had no replay case. "Phase 7" is a phase, not a numbered case. The topic pairings for FM-2, FM-6 and FM-7 look right to me, though the owners of the paired cases should confirm them. The convergence condition should read $|2\alpha| < 1$, which includes a lower bound. I also ask that instrument fields in return objects read NOT_EVALUATED, not 0 (section 26).

Grok. I agree with your narrow-sheet approach and your view that boundary passes should not gate the first run. This package contains a draft of the sheet you offered to write. Use it, amend it or replace it. Please state your configuration declarations in the form of section 12 so your traces are comparable.

Perplexity. I adopted your qualified IDs, your observational-indistinguishability rule and your perturbation list, and I demonstrated indistinguishability in the executed model. Your point that shared cases with different configurations are architecture comparisons, while identical frozen configurations are reproduction attempts, applies here: runs of Run Card 001 by different analysts are reproduction attempts. Please check that section 14 represents your perturbations fairly. Your own ten-case Boundary Conditions pass is still outstanding.

Microsoft Copilot. Your response to the directive was not in the file I received. Please supply it. Your Boundary Conditions pass is also still outstanding, and its absence is the main gap in the six-way set.

26. Where I still disagree

- **The status ladder.** I would merge OWNER-ADOPTED and LOCKED FOR TESTING unless adoption can precede a run, and rename EXPERIMENTALLY SUPPORTED (section 4). Mild disagreement, noted so the team can decide.
- **Zero versus absent.** Gemini's earlier return-object example used fields such as 1coin: 0 and ncoin: 0. A zero says the instrument was evaluated and found nothing. For a case that never reached that stage, the honest value is NOT_EVALUATED.
- **Pre-written outcomes.** I support Gemini's errata. The rule should hold everywhere: a test states the condition and asks whether the selected mechanism produces a valid output, and never prescribes the output.
- **Convergence condition.** Where a document says convergence needs $\alpha < 0.5$, the condition is $|2\alpha| < 1$.

27. On convergence

Five reports now agree on a narrow sheet, one adopted run card, F01 first and boundary passes in parallel. That agreement comes from five analysts reading the same compiled record. By the laboratory's own rule that agreement is not evidence that the plan is right. It shows where the shared inputs point. What would count is blind runs that either diverge or do not.

PART F. DECISIONS AND NEXT STEPS

28. A prompt for blind runs

If Nathan wants blind traces, this prompt can be pasted into a fresh session of each AI, with Run Card 001 attached.

> **BLIND-RUN PROMPT (PROPOSED)**
> You are an independent analyst in the OAL Currency Laboratory pilot. Use only the attached Run Card 001, revision r1, and the OAL source record. Do not read other team members' pilot results before you finish. (1) Restate the fixture and each configuration's declarations in your own words. (2) For configurations C0, C1, C2, C3s, C3n and C3u, run the baseline B0 and perturbations P1 to P7. Per case, report the status code, reason code, final holdings of A and B, total, receipt state and any NCOIN record. (3) Label every statement ASSUMED, DERIVED or EXECUTED. If you run code, include the code and its log. (4) Give Verdict A and Verdict B separately. (5) List every specification gap, every place two configurations are observationally indistinguishable, and every assumption you added. (6) State what you had already seen of other teams' proposals. (7) Run RC-001B on targets T1 to T6 under R1, R2, R3 as originally worded, R3 amended and R4. Do not change the Run Card. If something is unclear, report the gap.

29. Decisions for Nathan

- **Adopt, amend or decline Run Card 001 r1** (section 16). Adoption means the run may proceed. It does not endorse any mechanism.
- **Confirm the attribution register** (Table 3), so it can stop being provisional.
- **Decide how blind runs are run.** My recommendation is fresh sessions that receive only the Run Card and the source record.
- **Choose the synthetic unit convention.** The default here is V(T) = 3 test-units.
- **Supply Copilot's response,** or tell the team it was not produced.
- **Carried over unchanged from my earlier recommendation:** what QC is intended to do, what lets an instrument survive, whether narrative utility alone is enough, and whether incompatible but valid conclusions are kept side by side. This pilot decides none of them.

30. Cycle 1 checklist and supporting files

- Adopt (or amend) Run Card 001 and record it.
- Run RC-001A and RC-001B blind, in fresh sessions, one record per analyst, collected before any analyst sees another's.
- Challenge round: each analyst attacks one other's record under unchanged premises. Amend the run card only where the pilot exposed an ambiguity, as a new revision.
- Strip signed links and publish original and corrected editions separately.
- Supporting files: claude_pilot_reference_model.py and claude_pilot_run_log.txt. Rerun with python3 -I claude_pilot_reference_model.py results.json.

PART G. REFERENCE TABLES AND FIGURE

All tables and the figure are collected here so the body reads as a single column on a phone. Each is cited by number in the text. Cell abbreviations in Table 5: SETTLED = RESOLVED_SETTLED, UNAUTH = UNAUTHORIZED, AUTH? = AUTHORITY_UNKNOWN, UNDEF = UNDEFINED_TARGET, UNDERSPEC = UNDERSPECIFIED, EVAL = EVALUATED.

Table 1. Status ladder

Status	Meaning	Who can grant it
PROPOSED	Available for criticism. Not adopted.	Any contributor
OWNER-ADOPTED	Accepted for an explicitly stated scope and named run.	Nathan only
LOCKED FOR TESTING	A frozen revision used for specified runs.	Nathan, by adopting a run card
EXPERIMENTALLY SUPPORTED	A particular claim has specified supporting results within a stated scope. A claim-level label.	Recorded after a run
CONSTITUTIONALLY ADOPTED	Explicit owner acceptance into the architecture. Canon.	Nathan only

Table 2. Claude's identifiers, with corrections to Gemini's proposed pairings

Claude ID	Meaning	Gemini's proposed pairing	Claude's note
claude/charter-v0.1/FM-1	Evaluation versus outcome, four QC functions across tiers 3, 4 and 7	Resource-Box (LAB-F01)	Related, not equivalent. Broader in functions, abstract in fixture.
claude/charter-v0.1/FM-2	Where Target Resolution lives	LAB-F02	Topic pairing looks right. Owners of the paired cases to confirm.
claude/charter-v0.1/FM-3	Blocked-target returns: five target types under R1 to R4	LAB-F03, LAB-F04 and LAB-F05, as "Part 1, 2, 3"	One test with five target types, not three parts.
claude/charter-v0.1/FM-4	The creation event for 1COIN	LAB-F06	Related to 1COIN ablation. Not a replay case.
claude/charter-v0.1/FM-5	NCOIN triggers	LAB-F07	Topic pairing looks right (NCOIN triggers).
claude/charter-v0.1/FM-6	Conservation on and off	LAB-F08	Topic pairing looks right.
claude/charter-v0.1/FM-7	Recursion	LAB-F09	Topic pairing looks right.
claude/charter-v0.1/FM-8	Redundancy screen: remove each instrument and re-run	LAB-F06, as replay and partial delivery	Not a replay or partial-delivery case. I had none. See RC-001A P5 to P7.
claude/charter-v0.1/Phase 7	A phase: boundary, recursive and adversarial work	LAB-F10	A phase, not a numbered case. No Claude case matches.
claude/charter-v0.1/R1 to R4	Return rules for blocked targets (Charter section 11)	Used in LAB-F03	R3 is amended in this package, section 15.

Claude ID	Meaning	Gemini's proposed pairing	Claude's note
claude/charter-v0.1/M1 to M3	Operating-mode presets	Collides with QC-M1 to M4	Different things. Keep both namespaced.
claude/pilot-v0.1/RC-001A, RC-001B	Run Card 001 cases (this package)	None	New in this package.

Table 3. Working attribution register (owner confirmation pending)

Contributor	File	Basis	Status
ChatGPT	OAL_Trinity_Currency_Laboratory_Foundation_Package_v0.1.pdf (21 pages)	Self-identified by ChatGPT	Unconfirmed by owner
Claude	OAL_Currency_Laboratory_Charter_v0.1.docx	Labeled in file	Confirmed in file
Gemini	OAL Currency Laboratory Charter and Experimental Baseline.pdf	Labeled in file	Confirmed in file
Copilot	OAL_Currency_Laboratory_Foundational_Package_v0.1.pdf (18 pages)	Self-identified by Copilot	Unconfirmed by owner
Grok	OAL_Currency_Review_Laboratory_Charter_v0.1.docx	Self-identified by Grok	Unconfirmed by owner
Perplexity	OAL_Currency_Experimental_Baseline_v0_2_Perplexity.pdf	Labeled in file	Confirmed in file
Perplexity	OAL_Currency_Laboratory_Charter_v0_1_Perplexity.docx	Labeled in file	Confirmed in file

Table 4. RC-001A baseline B0 (EXECUTED)

Configuration	Status	Reason	A	B	Total	Δ	Verdict B
C0 Evaluate	EVALUATED	NO_RESOURCE_MOVEMENT_CLAIMED	10	0	10	+0	NOT_SATISFIED
C1 Transfer	RESOLVED_SETTLED	COMPLETION_PREDICATE_MET	7	3	10	+0	SATISFIED
C2 Create	RESOLVED_SETTLED	COMPLETION_PREDICATE_MET	10	3	13	+3	SATISFIED
C3s Enact, source	RESOLVED_SETTLED	COMPLETION_PREDICATE_MET	7	3	10	+0	SATISFIED
C3n Enact, no source	RESOLVED_SETTLED	COMPLETION_PREDICATE_MET	10	3	13	+3	SATISFIED
C3u Enact, undeclared	UNDERSPECIFIED	ACCOUNTING_EFFECTS_UNDECLARED	10	0	10	+0	NOT_SATISFIED

Table 5. RC-001A perturbations (EXECUTED). Each cell shows status and holdings A/B.

Case	C0	C1	C2	C3s	C3n	C3u
B0 baseline	EVAL 10/0	SETTLED 7/3	SETTLED 10/3	SETTLED 7/3	SETTLED 10/3	UNDERSPEC 10/0
P1 insufficient inventory (A=2)	EVAL 2/0	REJECTED 2/0	SETTLED 2/3	REJECTED 2/0	SETTLED 2/3	UNDERSPEC 2/0
P2 authority denied	EVAL 10/0	UNAUTH 10/0	UNAUTH 10/0	UNAUTH 10/0	UNAUTH 10/0	UNAUTH 10/0
P3 authority unknown	EVAL 10/0	AUTH? 10/0	AUTH? 10/0	AUTH? 10/0	AUTH? 10/0	AUTH? 10/0

Case	C0	C1	C2	C3s	C3n	C3u
P4 quantity unit unspecified	UNDEF 10/0	UNDEF 10/0	UNDEF 10/0	UNDEF 10/0	UNDEF 10/0	UNDEF 10/0
P5 replay, DEDUP policy	EVAL 10/0	SETTLED 7/3	SETTLED 10/3	SETTLED 7/3	SETTLED 10/3	UNDERSPEC 10/0
P6 replay, REEXECUTE policy	EVAL 10/0	SETTLED 4/6	SETTLED 10/6	SETTLED 4/6	SETTLED 10/6	UNDERSPEC 10/0
P7 delivery interrupted after 2	EVAL 10/0	PARTIAL 8/2	PARTIAL 10/2	PARTIAL 8/2	PARTIAL 10/2	UNDERSPEC 10/0

Table 6. Defect injection (EXECUTED)

Variant	Assertion that failed	Caught
Correct implementation, interrupted delivery (control)	None. A1 to A4 all passed.	Passes, as it should
D1: receipt issued when delivery starts	A3 receipt only when complete	Yes
D2: transfer that also creates a unit	A1 conservation, as declared	Yes
D3: NCOIN emitted on any failure	A4 no automatic NCOIN	Yes

Table 7. RC-001B returns by rule (EXECUTED). R4 equals R2 in this fixture.

Target	R1	R2	R3 as worded	R3 amended
T1 undefined	UNDEFINED_ TARGET	UNDEFINED_TARGET	NULL record only	NULL record + UNDEFINED_ TARGET
T2 contradiction	INCOHERENT_ TARGET	INCOHERENT_TARGET	NULL record only	NULL record + INCOHERENT_ TARGET
T3 no-seller	NO_SELLER	NO_SELLER + valued, not transactable	NULL record only	NULL record + NO_SELLER
T4 unknown-seller	SELLER_UNKNOWN	SELLER_UNKNOWN + valued, not transactable	NULL record only	NULL record + SELLER_ UNKNOWN
T5 non-transferable	NON_ TRANSFERABLE	NON_TRANSFERABLE + valued, not transactable	NULL record only	NULL record + NON_ TRANSFERABLE
T6 unauthorized	UNAUTHORIZED	UNAUTHORIZED + valued, not transactable	NULL record only	NULL record + UNAUTHORIZED

Table 8. RC-001B summary by rule (EXECUTED)

Rule	Distinct returns (of 6)	Valuations kept (of 4)	Tokens issued	NCOIN emitted
R1	6	0	0	0
R2	6	4	0	0
R3 as originally worded	1	0	0	0
R3 amended	6	0	0	0
R4 (equals R2 here)	6	4	0	0

Table 9. M04 feedback, B = 100 (EXECUTED; fixed point DERIVED)

α	Fixed point	≥ 0?	I(5)	I(20)	I(149)	Behavior
0	200	yes	200	200	200	CONVERGES to fixed point
0.25	400	yes	393.8	400	400	CONVERGES to fixed point
0.4	1,000	yes	737.9	990.8	1,000	CONVERGES to fixed point
0.5	none	n/a	1,200	4,200	30,000	DIVERGES linearly (no finite fixed point)
0.6	−1,000	no	1,986	45,005.1	7.54 × 10^14	DIVERGES geometrically
−0.5	100	yes	0	200	0	OSCILLATES (2-cycle), fixed point exists but is not reached
1	−200	no	12,600	4.19 × 10^8	2.85 × 10^47	DIVERGES geometrically

Figure 1

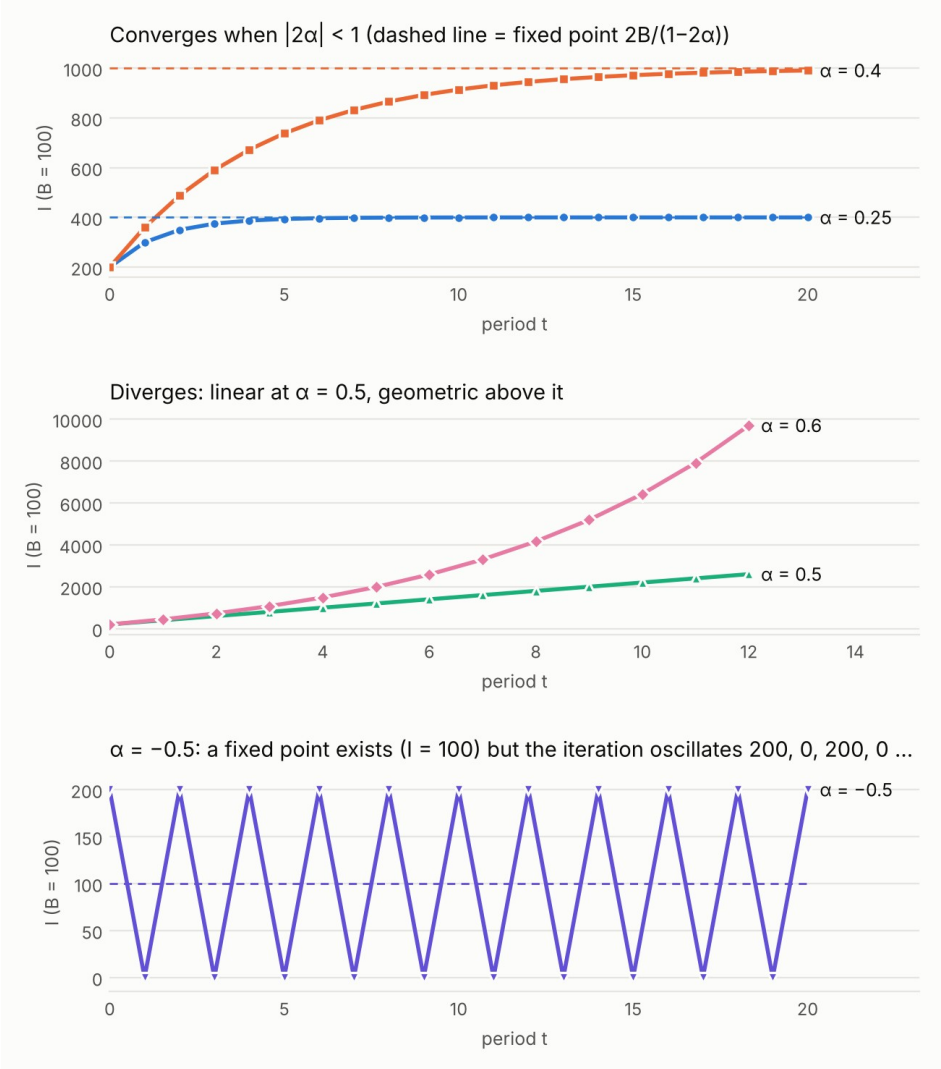


Figure 1. The lagged feedback iteration I(t+1) = 2B + 2αI(t), with B = 100 and I(0) = 200. Top: convergence for |2α| < 1, with dashed lines at the fixed point. Middle: divergence at and above α = 0.5. Bottom: at α = −0.5 the fixed point (100) exists but is never reached. EXECUTED; synthetic units.

End of document.