

MTAT.03.015 Computer Graphics (Fall 2013)

Exercise session XI: Raytracing.

Konstantin Tretyakov, Ilya Kuzovkin

November 18, 2013


In this exercise session we shall study the basics of raycasting, raytracing and raymarching. For simplicity and convenience we shall be using the ShaderToy website¹ and implement our raytracing code as a fragment shader².

The solutions will have to be submitted as a set of text files, zipped in a single archive.

1 Basic Raycasting

Let us start with a basic raycasting example. The idea of raycasting is to send a ray from the eye through each pixel on screen and check whether it intersects with some geometry in the scene. The two main steps of a raycasting algorithm are therefore the following:

1. Convert pixel coordinates to a ray direction. It is best understood using the following diagram:

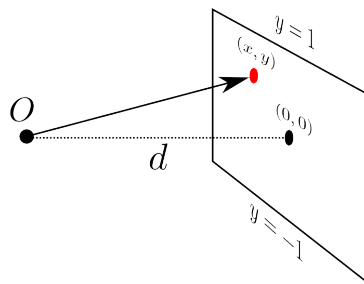

¹<https://www.shadertoy.com/>

²Note, that although GLSL's fragment shaders are conceptually very well suited for implementing raytracing-based techniques, in practice you would not be able to use them for large scenes. Firstly, there is a limit to the amount of data you can keep within the shader code. Secondly, GLSL lacks dynamic memory structures and recursion, which makes it impossible or hard to implement several algorithms. Finally, efficient raytracing may require multiple passes over the whole image – something not possible within a single fragment shader.


Assume our screen is positioned at distance d from the origin. Let the center of the screen have pixel coordinates $(0,0)$, the top and bottom correspond to pixel y coordinate 1 and -1 respectively. If we assume the camera is looking along the negative z direction, the direction of a ray through pixel (x,y) can be computed as $(x,y,-d)$. The parameter d is related to the field of view angle α_y :

$$\frac{1}{d} = \tan\left(\frac{\alpha_y}{2}\right).$$

2. Cast the ray and look for intersections with objects in the scene.

Given the ray origin point O (which corresponds to the camera position, i.e. $(0,0,0)$ in our case) and ray direction that we computed in the previous step, we can check for all primitives in the scene whether the ray intersects them, look for the closest one, and return the color of the pixel.

Exercise 1 (1.0pt). The code base for this exercise is provided on the ShaderToy at <https://www.shadertoy.com/view/ldSGzW>. Examine the code. We would like to raycast the following scene:

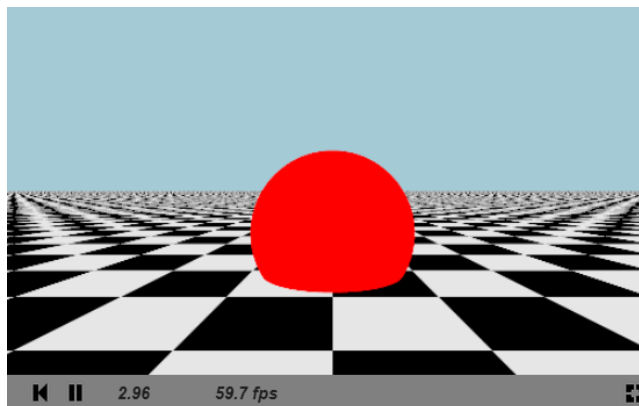

The scene consists of a red sphere and a plane with a checkerboard pattern. The code base provides the specifications for both the plane and the sphere in the variables `plane`, `sphere`. The colors of the sky and sphere are provided in the `sky_color` and `sphere_color` variables. The function `plane_color` takes a point on the plane and returns its color.

The methods for finding ray-object intersection are also provided: functions `raycast_plane` and `raycast_sphere` return the distance from ray origin to the intersection with the object, or `INFINITY` if the ray does not hit the object. You need to introduce three changes to the code:

1. First implement the function `raycast_scene`. The function should return the color of the object, hit first by the given ray.
2. Then fix the main function so that the resulting image would have a field of view of 60 degrees along the y axis.

3. At this point you will see the scene rendered. However, it will have a lot of aliasing artifacts: the sphere has jagged edges and the checkerboard pattern turns into nonsense at a distance. Let us fix this using a simple 3x3 discrete box filter. That is, rather than using a single ray for pixel (x, y) , cast 9 rays, as if you would be rendering pixels $\{x - 0.2, x, x + 0.2\} \times \{y - 0.2, y, y + 0.2\}$, and average the results³.

Submit the solution to this exercise in the file `exercise01.glsl`.

2 Raytracing

Let us now extend the basic raycasting algorithm we just implemented to support shadows and reflections. This results in what is typically referred to as *recursive raytracing*. Open the code base given at <https://www.shadertoy.com/view/Ms2GzW>. This is a slightly extended of the previous exercise. Note the following changes:


1. **Lighting.** We shall now be using lighting computations. Consequently, rather than specifying object colors, we specify their materials as `sphere_mat` and `plane_mat()`. Ambient light is given in the `ambient` variable, and a single light source is described in `light`. Finally, the function `lighting` implements the familiar Blinn-Phong light model. Note that this function takes a `viewer_pos` argument rather than assuming the viewer to be fixed at $(0, 0, 0)$. Think why it is done this way.
2. **More detailed raycasting.** The `raycast_scene` routine is updated to not only return the distance to the closest object, but also the actual point location, the normal at that point and the material of the object.
3. The actual scene rendering routine, `render_scene` is now separate from the raycasting function (the latter is now just a useful primitive).

Exercise 2 (1pt). Update the function `render_scene` to implement recursive raytracing with shadows and reflections.


1. To implement shadows, cast a ray from the point towards the light source. If this *shadow ray* hits anything on the way, you can consider the point to be in shadow (and thus only affected by ambient light).
2. To implement reflections, note that the `Material` structure has a field `reflectivity`. This is the weight with which the reflected ray contributes to the visible color of a point with this material. The full color of a point is then its “usual” color + reflectivity weight times the color “seen” by the reflected ray. Implement at least two reflection steps (Hint: this is naturally done using a loop).

³You are free to try larger grids, however note that having long nested loops in shader code may lead to weird results on some graphics cards.

Submit the solution to this exercise in the file `exercise02.gls1`. The resulting image should look as follows:

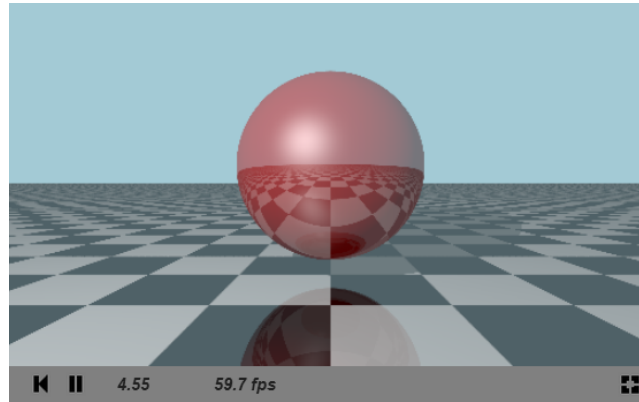

Exercise 3* (0.5pt). An example of a great purely-raytracing based scene is the shader “Relentless”: <https://www.shadertoy.com/view/lss3WS>. Study the code. Your task is to figure out enough of it to be able to modify it by adding a perfectly reflective sphere right in front of the camera, getting a result like the following:

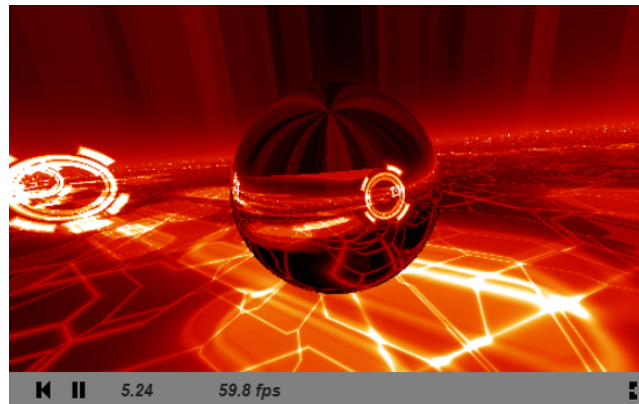

Let the sphere radius be 1 and its center be right in front of the camera, at distance 2. For simplicity you may assume that the sphere is always the topmost object (i.e. resolve ray intersection with the sphere first of all).