

20250721日报

今日工作内容

1. 研究工蜂CI/CD流水线。


Stream流水线底层就是蓝盾，和蓝盾流水线一样遵循T-J-S结构。配置文件使用yaml语法，统一放到.ci目录下，每个配置文件对应一条流水线，配置文件就是描述当仓库发生相应事件时，stream应该如何去进行处理。

工蜂CI/CD下的流水线其实和蓝盾流水线是一样的，只是前者需要在yaml配置文件中写各个触发动作，比如：触发事件（pull、merge等）、手动添加容器镜像等。下面给出和蓝盾流水线中的MR前置和后置处理有着相同作用的Stream yaml配置：

MR前置：

```
1  version: v2.0
2
3  on:
4    mr: [master]
5
6  jobs:
7    build:
8      runs-on:
9        pool-name: docker
10       container:
11         image: mirrors.tencent.com/sgameproto/auto-build:latest
12         credentials: mrfront
13     steps:
14       - run: |
15         source ~/.bashrc
16         cd ${ci.workspace}
17         git init
18         git reset --hard HEAD 2>/dev/null || true
19         git clean -fdx
20         # git remote remove origin 2>/dev/null || true
21         # git remote add origin
22         https://drewjjli:xi4357RLY@git.woa.com/drewjjli/helloworld
23         # git remote add origin https://git.woa.com/drewjjli/helloworld
24         git fetch origin ${ci.head_ref}
25         git fetch origin ${ci.base_ref}
26         git checkout ${ci.head_ref}
27         # git checkout -f ${ci.head_ref}
28         # git reset --hard origin/${ci.head_ref}
29         git checkout ${ci.base_ref}
30         # git checkout -f ${ci.base_ref}
31         # git reset --hard origin/${ci.base_ref}
32
33         git diff --name-only ${ci.head_ref} | grep -v "^\.ci/" | while read file; do
```

mr: [master]表示目标分支为master的mr的push-update、open、reopen均会触发执行。
v7分支合并到master流水线触发结果：

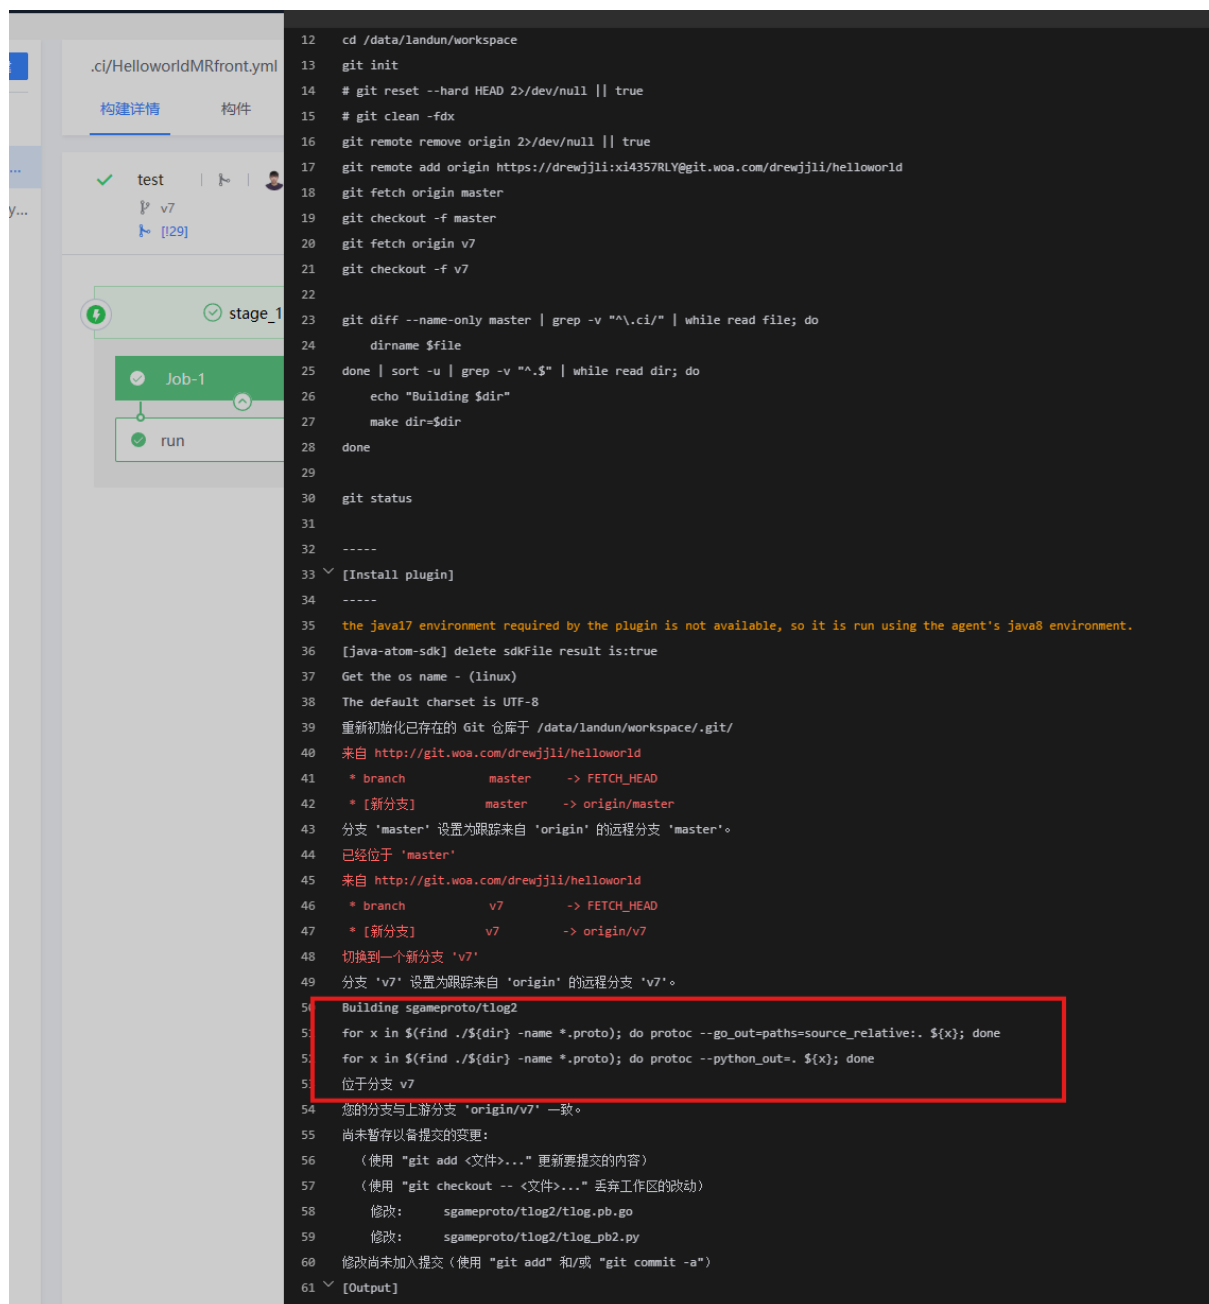

```
12 cd /data/landun/workspace
13 git init
14 # git reset --hard HEAD 2>/dev/null || true
15 # git clean -fdx
16 git remote remove origin 2>/dev/null || true
17 git remote add origin https://drewjjli:xi4357RLY@git.woa.com/drewjjli/helloworld
18 git fetch origin master
19 git checkout -f master
20 git fetch origin v7
21 git checkout -f v7
22
23 git diff --name-only master | grep -v "^\.ci/" | while read file; do
24     dirname $file
25 done | sort -u | grep -v "^\.$" | while read dir; do
26     echo "Building $dir"
27     make dir=$dir
28 done
29
30 git status
31
32 -----
33 [Install plugin]
34 -----
35 the javal7 environment required by the plugin is not available, so it is run using the agent's java8 environment.
36 [java-atom-sdk] delete sdkFile result is:true
37 Get the os name - (linux)
38 The default charset is UTF-8
39 重新初始化已存在的 Git 仓库于 /data/landun/workspace/.git/
40 来自 http://git.woa.com/drewjjli/helloworld
41 * branch      master      -> FETCH_HEAD
42 * [新分支]    master      -> origin/master
43 分支 'master' 设置为跟踪来自 'origin' 的远程分支 'master'。
44 已经位于 'master'
45 来自 http://git.woa.com/drewjjli/helloworld
46 * branch      v7          -> FETCH_HEAD
47 * [新分支]    v7          -> origin/v7
48 切换到一个新分支 'v7'
49 分支 'v7' 设置为跟踪来自 'origin' 的远程分支 'v7'。
50 Building sgameproto/tlog2
51 for x in $(find ./${dir} -name *.proto); do protoc --go_out=paths=source_relative:. ${x}; done
52 for x in $(find ./${dir} -name *.proto); do protoc --python_out=. ${x}; done
53 位于分支 v7
54 您的分支与上游分支 'origin/v7' 一致。
55 尚未暂存以备提交的变更：
56   (使用 "git add <文件>..." 更新要提交的内容)
57   (使用 "git checkout -- <文件>..." 丢弃工作区的改动)
58   修改:      sgameproto/tlog2/tlog.pb.go
59   修改:      sgameproto/tlog2/tlog_pb2.py
60 修改尚未加入提交 (使用 "git add" 和/或 "git commit -a")
61 [Output]
```


MR 后置：

```
1  version: v2.0
2
3  on:
4    mr:
5      action: [merge]
6
7  jobs:
8    build:
9      runs-on:
10        pool-name: docker
11        container:
12          image: mirrors.tencent.com/sgameproto/auto-build:latest
13          credentials: mrfront
14      steps:
15        - run: |
16          source ~/.bashrc
17          git init
18          # git config user.name "drewjjli"
19          # git config user.email "drewjjli@tencent.com"
20          # git reset --hard HEAD 2>/dev/null || true
21          # git clean -fdx
22          # git remote remove origin 2>/dev/null || true
23          # git remote add origin
24          https://drewjjli:xi4357RLY@git.woa.com/drewjjli/helloworld
25          git fetch origin ${ci.branch}
26          git checkout ${ci.branch}
27          # git checkout -f ${ci.branch}
28          # git reset --hard origin/${ci.branch}
29          git diff --name-only HEAD^ HEAD | while read file; do dirname "$file"; done |
30          sort -u | grep -v "^. $" | while read dir; do echo "$dir"; make dir="$dir"; done
31
32          git add .
33          if ! git diff-index --quiet HEAD --; then
```

mr:

action: [merge]表示MR成功后的后置触发。


v7分支合并成功后的效果：

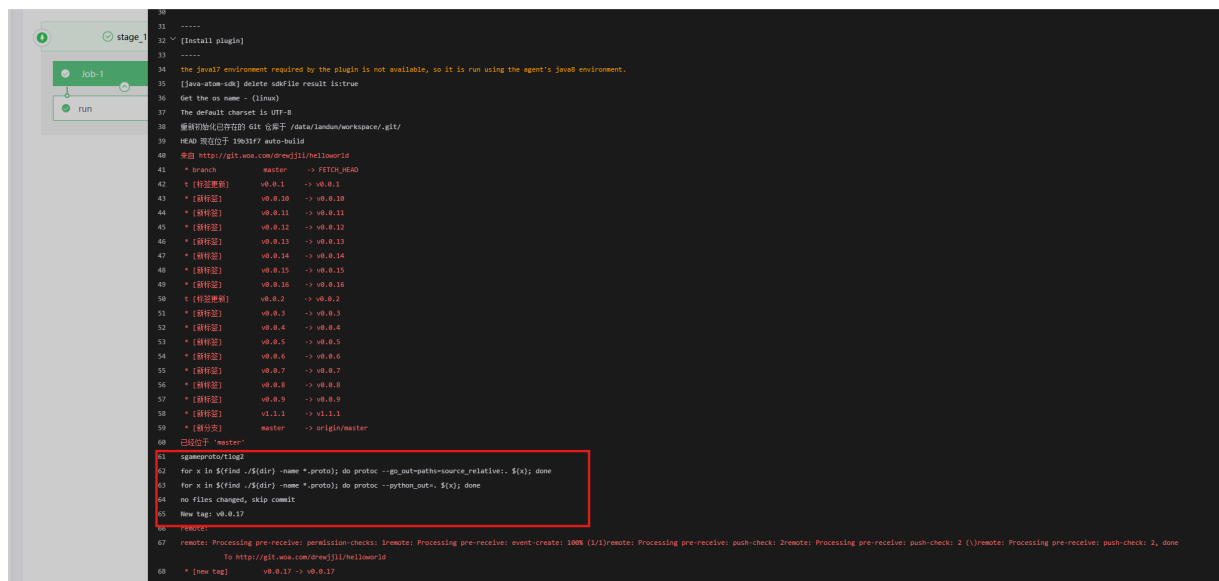

```
31 -----
32 [Install plugin]
33 -----
34 the java17 environment required by the plugin is not available, so it is run using the agent's java8 environment.
35 [java-atom-sdk] delete sdkFile result is: true
36 Get the os name - (linux)
37 The default charset is UTF-8
38 重新初始化已存在的 git 仓库于 /data/landu/workspace/.git/
39 HEAD 现在位于 19b31f7 auto-build
40 来自 https://git.woa.com/drewjjli/helloworld
41 * Branch          master      -> f810c94ead
42 * (待定规则)      v0.0.1    -> v0.0.1
43 * (待定规则)      v0.0.10   -> v0.0.10
44 * (待定规则)      v0.0.11   -> v0.0.11
45 * (待定规则)      v0.0.12   -> v0.0.12
46 * (待定规则)      v0.0.13   -> v0.0.13
47 * (待定规则)      v0.0.14   -> v0.0.14
48 * (待定规则)      v0.0.15   -> v0.0.15
49 * (待定规则)      v0.0.16   -> v0.0.16
50 * (待定规则)      v0.0.2    -> v0.0.2
51 * (待定规则)      v0.0.3    -> v0.0.3
52 * (待定规则)      v0.0.4    -> v0.0.4
53 * (待定规则)      v0.0.5    -> v0.0.5
54 * (待定规则)      v0.0.6    -> v0.0.6
55 * (待定规则)      v0.0.7    -> v0.0.7
56 * (待定规则)      v0.0.8    -> v0.0.8
57 * (待定规则)      v0.0.9    -> v0.0.9
58 * (待定规则)      v1.1.1    -> v1.1.1
59 * (待定规则)      master    -> origin/master
60 已处于 "master"
61 =====
62 for x in $(find ./${dir} -name *.proto); do protoc --proto-path=source_relative. $x; done
63 for x in $(find ./${dir} -name *.proto); do protoc --python_out=. $x; done
64 no files changed, skip commit
65 New tag: v0.0.17
66 =====
67 remote: Processing pre-receive: permission-check; 1remote: Processing pre-receive: event-create: 100% (1/1)remote: Processing pre-receive: push-check: 2remote: Processing pre-receive: push-check: 2, done
68 [new tag]      v0.0.17 -> v0.0.17
```

今日所遇问题：

1. 问题：Stream上报错：

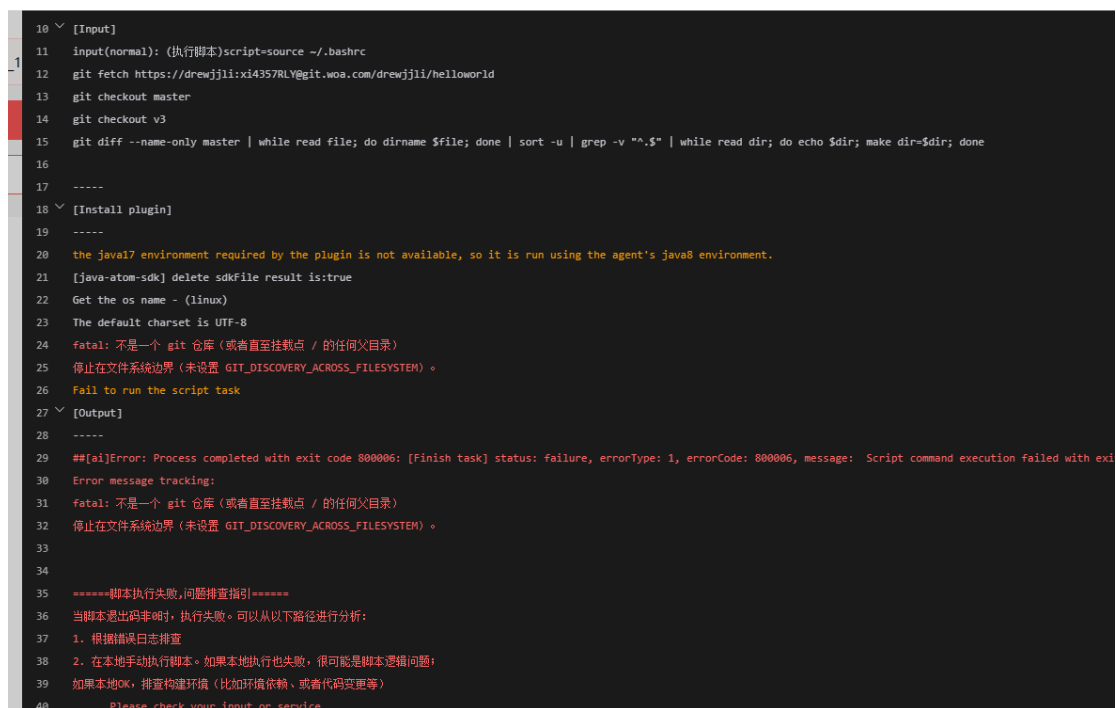

```
10 [Input]
11 input(normal): (执行脚本)script=source ~/.bashrc
12 git fetch https://git.woa.com/drewjjli:x14357RLV@git.woa.com/drewjjli/helloworld
13 git checkout master
14 git checkout v3
15 git diff --name-only master | while read file; do dirname $file; done | sort -u | grep -v "^. $" | while read dir; do echo $dir; make dir=$dir; done
16
17 -----
18 [Install plugin]
19 -----
20 the java17 environment required by the plugin is not available, so it is run using the agent's java8 environment.
21 [java-atom-sdk] delete sdkFile result is: true
22 Get the os name - (linux)
23 The default charset is UTF-8
24 fatal: 不是一个 git 仓库 (或者直至挂载点 / 的任何父目录)
25 停止在文件系统边界 (未设置 GIT_DISCOVERY_ACROSS_FILESYSTEM) 。
26 Fail to run the script task
27 [Output]
28 -----
29 ##[ai]Error: Process completed with exit code 800006: [Finish task] status: failure, errorType: 1, errorCode: 800006, message: Script command execution failed with exit code 1
30 Error message tracking:
31 fatal: 不是一个 git 仓库 (或者直至挂载点 / 的任何父目录)
32 停止在文件系统边界 (未设置 GIT_DISCOVERY_ACROSS_FILESYSTEM) 。
33
34
35 =====脚本执行失败, 问题排查指引=====
36 当脚本退出码非0时, 执行失败。可以从以下路径进行分析:
37 1. 根据错误日志排查
38 2. 在本地手动执行脚本。如果本地执行也失败, 很可能是脚本逻辑问题;
39 如果本地OK, 排查构建环境 (比如环境依赖、或者代码变更等)
40 . Please check your input or service.
```

2. 解决办法：在最前面添加git init (奇怪的是，此报错在蓝盾流水线上没有出现过)。

总的来说，工蜂CI/CD中的Stream其本质就是蓝盾流水线，只是是一个第三方调用而已，使用起来不如直接操作蓝盾流水线方便，因此还是建议后续直接使用蓝盾流水线。

明日待办：

1. 研究桩代码的流水线构造。