


Linux-Wireshark

Task

task_id: linux.wireshark.export_protocol_bundle
Platform: Linux
App: Wireshark

Task instruction

In Wireshark, use the seeded retail capture to create a protocol export bundle:
- Export displayed DNS packets to `/tmp/helloworld\_wireshark/dns\_only.pcapng`.
.....
- Save every export as `pcapng`.
.....
- Preserve the `/checkout` request URI and the `200` response code in the combined HTTP export.

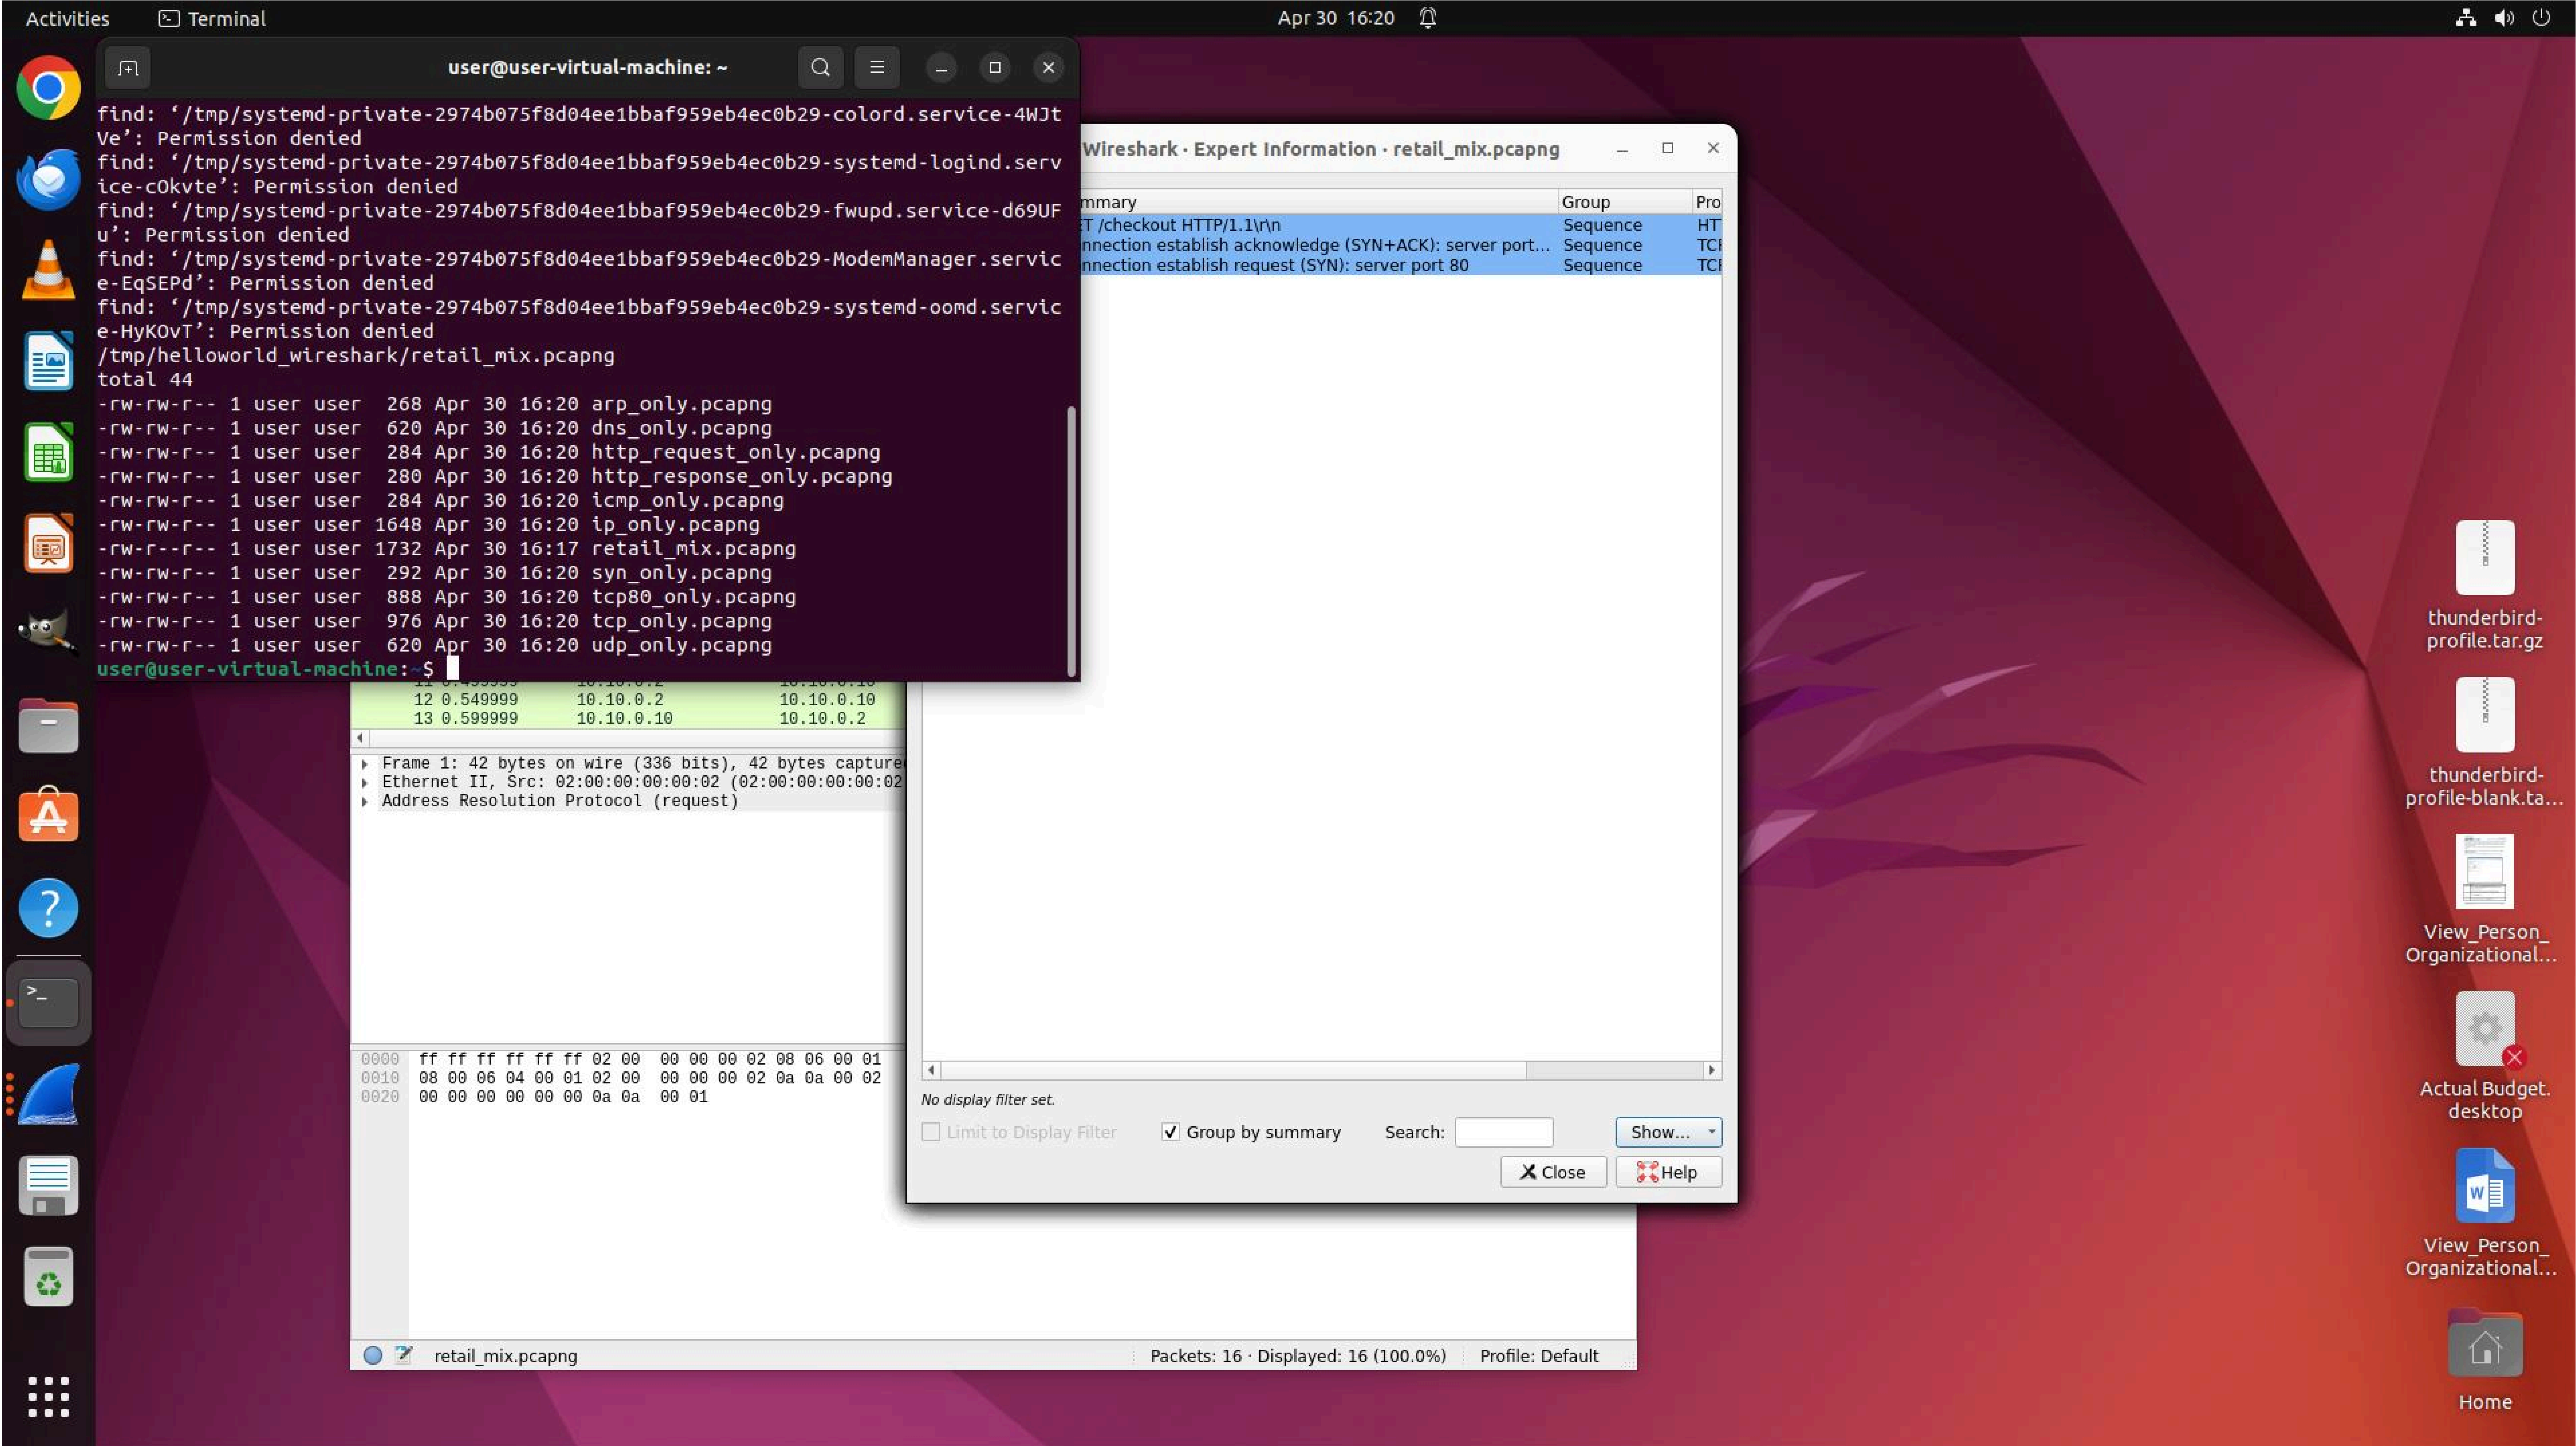

Linux-Gedit

Task

task_id: linux.notepadqq.update_banner
Platform: Linux
App: Gedit

Task instruction

In Gedit, edit the prepared launch note:
...
- Open `notes/launch-note.txt`.
- Change the first line from `Launch note draft` to `Launch note final`.
- Leave the remaining note content unchanged.
- Save the file.

