

Full Title of the Presentation

Subtitle if necessary

Your Name

Autonomous Multisensor Systems Group
Institute for Intelligent Cooperating Systems
Faculty of Computer Science
Otto von Guericke University Magdeburg

21.07.2026

Introduction

Full Title of the Presentation



Design Rules

- avoid text-heavy slides
- prefer vector graphics
- all text has to be readable

Design Rules

- avoid text-heavy slides
- prefer vector graphics
- all text has to be readable

Text Boxes

You can change the color of the text boxes.

Design Rules

- avoid text-heavy slides
- prefer vector graphics
- all text has to be readable

Text Boxes

You can change the color of the text boxes.

Shadows

You can change the color of the text boxes.

You can use the usual Typst markup syntax such as headings.

Note that within this presentation template, thanks to `touying`, **level 1 headings correspond to new slides** while level 2 headings effectively act as chapters within these slides – basically offset by one.

You can change or add certain stylistic choices – let's number the headings & add spacing below headings for a less cluttered look:

```
#show heading: set block(below: 1em)
#set heading(numbering: (_, ..n) => numbering("1.1", ..n))
```

(This ignores level 1 headings since we don't want them numbered.)

→ *See next slide for visible changes...*

0.1 Example Subheading


- This level 2 subheading is now numbered as 0.1 since the one before is not numbered.
 - Either apply set rules globally or locally within a slide scope.
 - When using the heading-based slide-syntax, set rules start being applied from the point they are defined in the source code.
 - If the `#slide()`-function is used instead, they are locally constrained.
 - A scope can also be manually created with `#{...}`.
- The template sets the numbering of level 1 headings to `none`.¹

¹Otherwise, “First Section” in the header would be numbered.

New Section Slides

- By default, when a new slide-section is created, an additional “new section slide” is also created (see the previous slide).
- Content will automatically overflow to a new slide within a section.
- If desired, `#pagebreak()` or `---` will manually break the “page”, i.e., slide without creating a new section or “new section slide”.
- To create a slide with a new section but **without** a new section slide, append the `<touying:skip>` label to the heading (see next slide as example).¹

¹See <https://touying-typ.github.io/docs/intro> for more features.

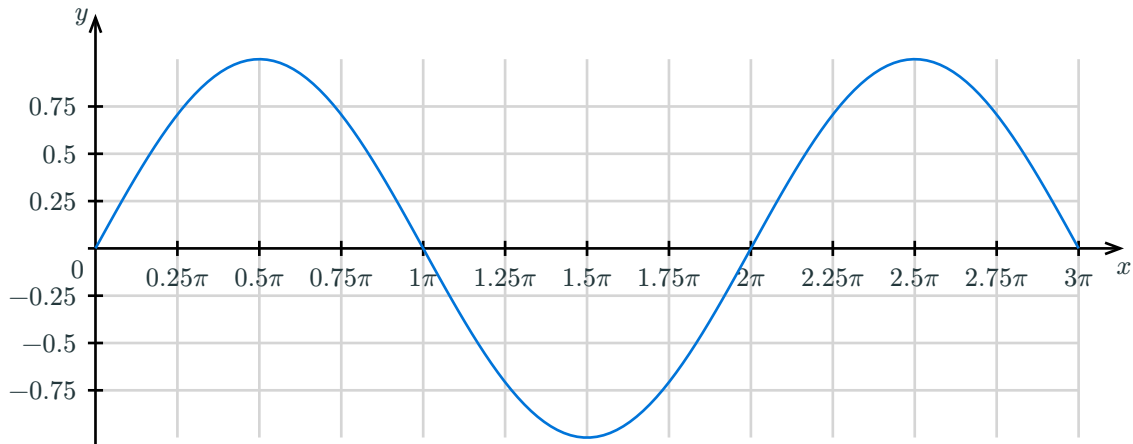

Alignment

- Default alignment per slide is `top + left`, this can be changed with `#set align(..)`.
- Slide bodies are padded by default, this can be disabled by...
 - ...manually calling `#slide(..)` with setting: `body => body`.

Special functions

- `#title-slide()` generates the title slide from the information given in the show-rule.
- `#thank-you-slide()` to create a slide for thanking your audience.
- `#slide()` and `#new-section-slide()` can also be manually called with a title & subtitle.
 - In the first case, no new section slide is automatically created.
 - In the second case, a custom subtitle & title can be created (see next slides).

Random Text

Custom Presentation Title!

No padding to the sides.

Good for placing big images.

Easier manual placement!

Full Title of the Presentation

Subtitle if necessary

Thank You For Your Attention!

Your Name

Web: <https://ams.ovgu.de>

Mail: NCC-1701@ovgu.de