Numerically admitted GPU solve has no B = 1 cost advantage

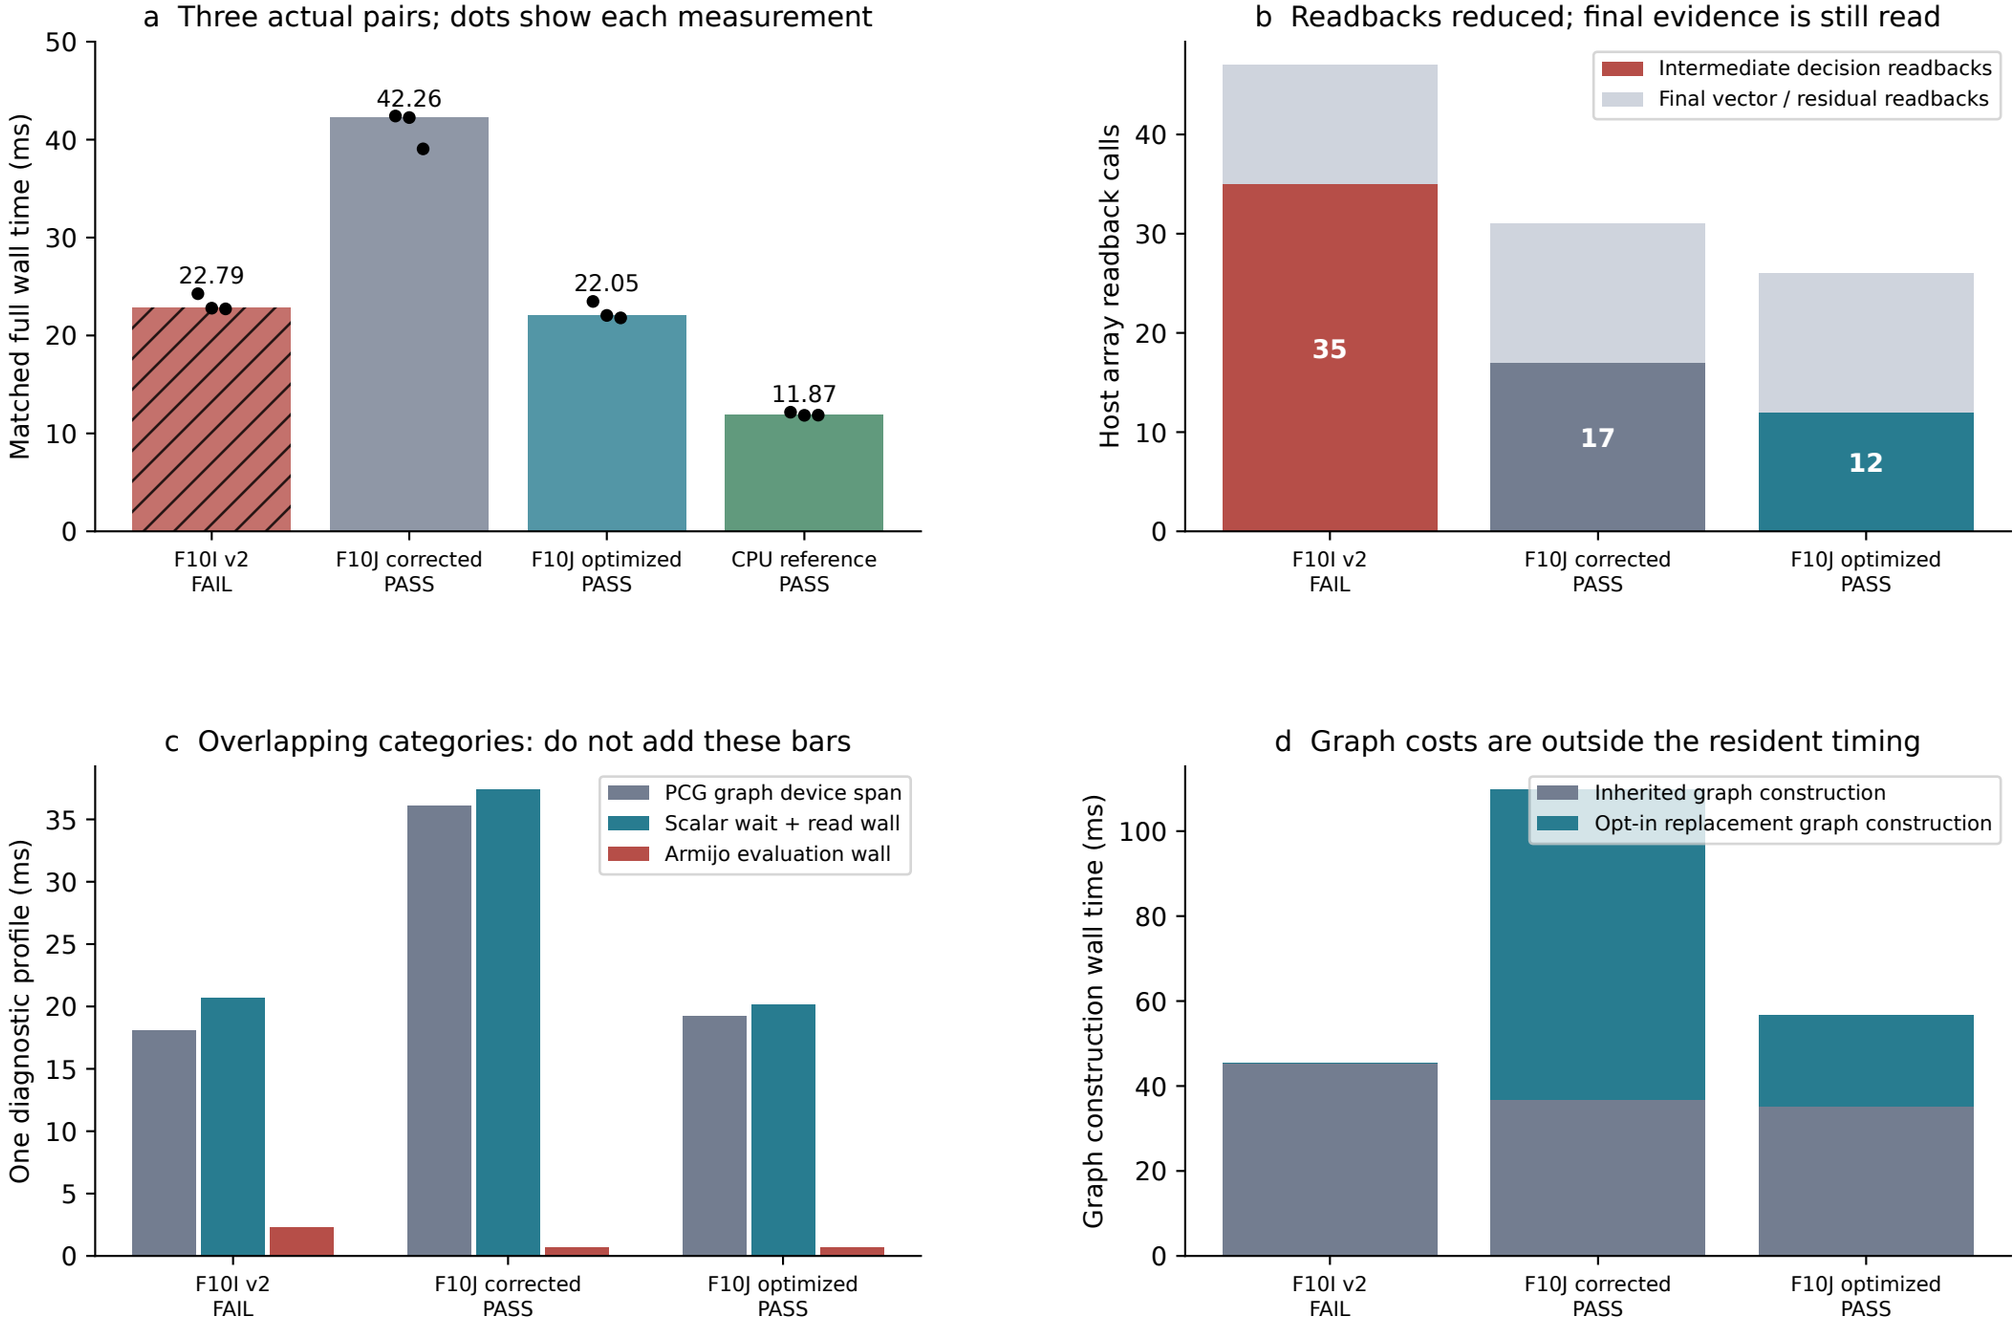

Full time includes preparation, solve, identical independent quality checks and matched serialized output. CPU uses the same accuracy targets.
Independent new processes (one each; warm compiler cache): original: 0.651 s, corrected: 0.747 s, optimized: 0.662 s, cpu: 0.446 s
GPU buffer/input preparation in diagnostic profiles (original / corrected / optimized): 0.119 / 0.102 / 0.102 ms.
F10I is a failed diagnostic, not a production speed baseline. No long trajectory or batch throughput was measured.