F10E | Effective yield includes every failed attempt and replay

Four independent initial seed families; controls and numerical variants never create new independent samples

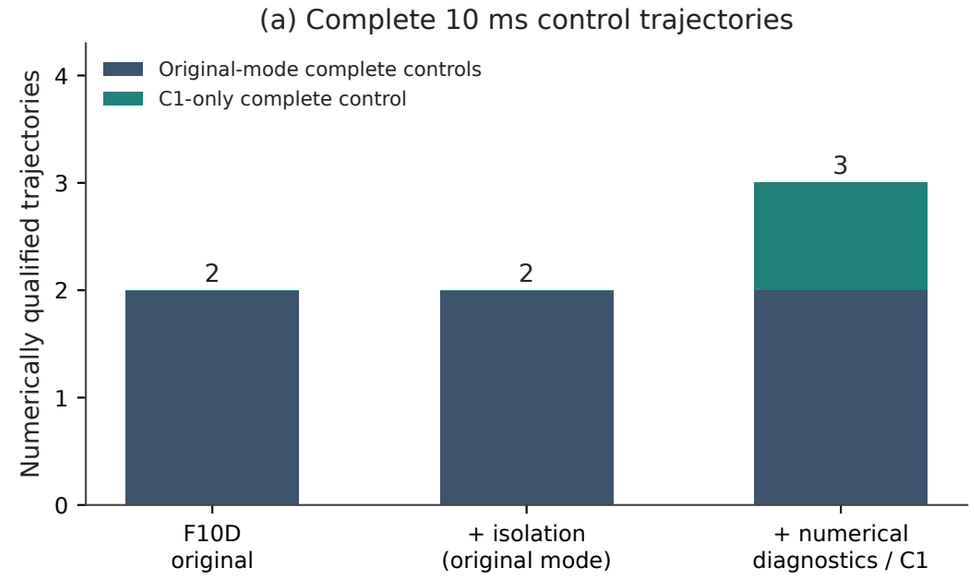

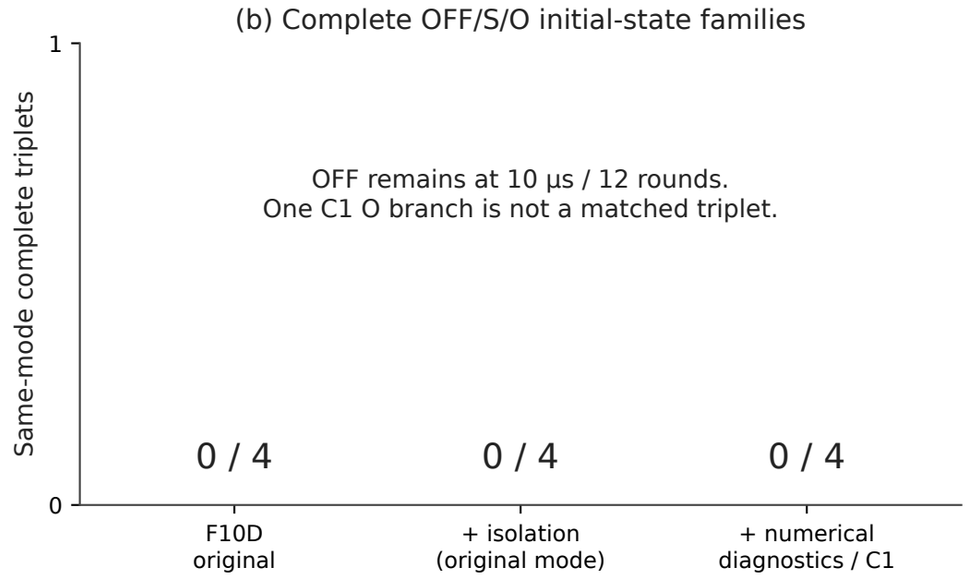

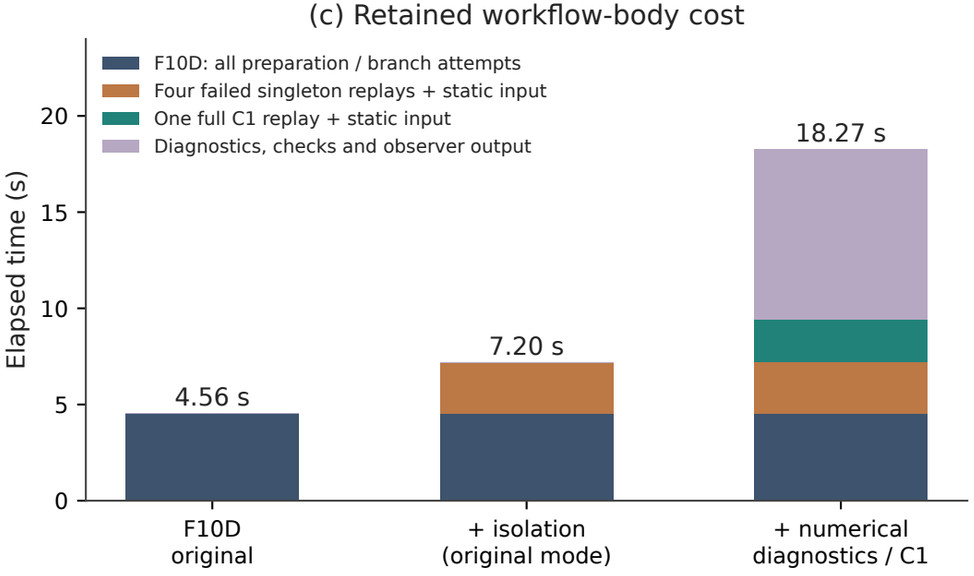

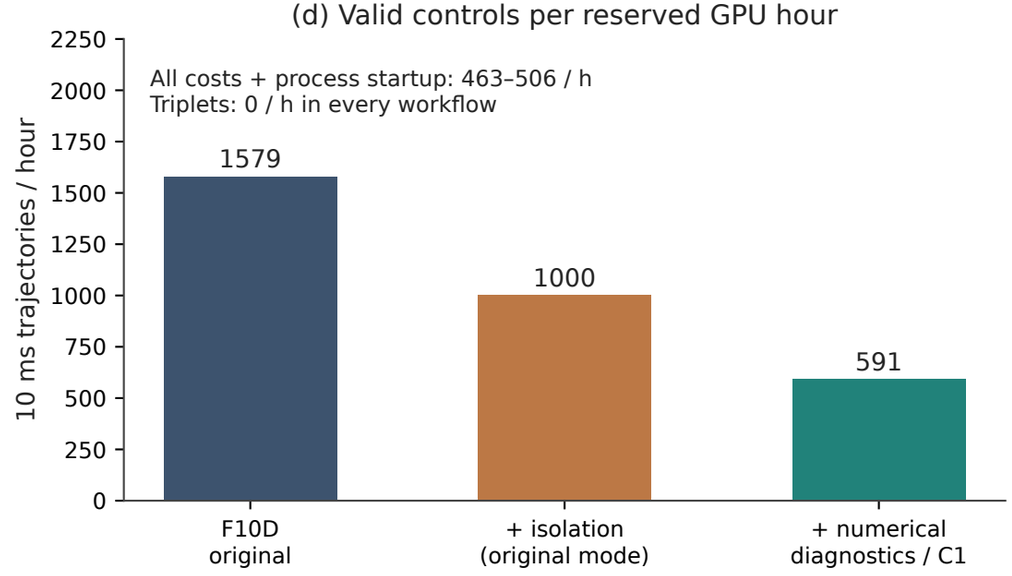

Historical cost accounting, not a paired speed benchmark or sustained production estimate. Device reservation includes CPU work; CUDA spans are not pure kernel time.