
Krino v4 — listwise marker model on Qwen3.5-4B

Hybrid GDN backbone with LoRA; whole-set marker readout; base-anchored per-type gates

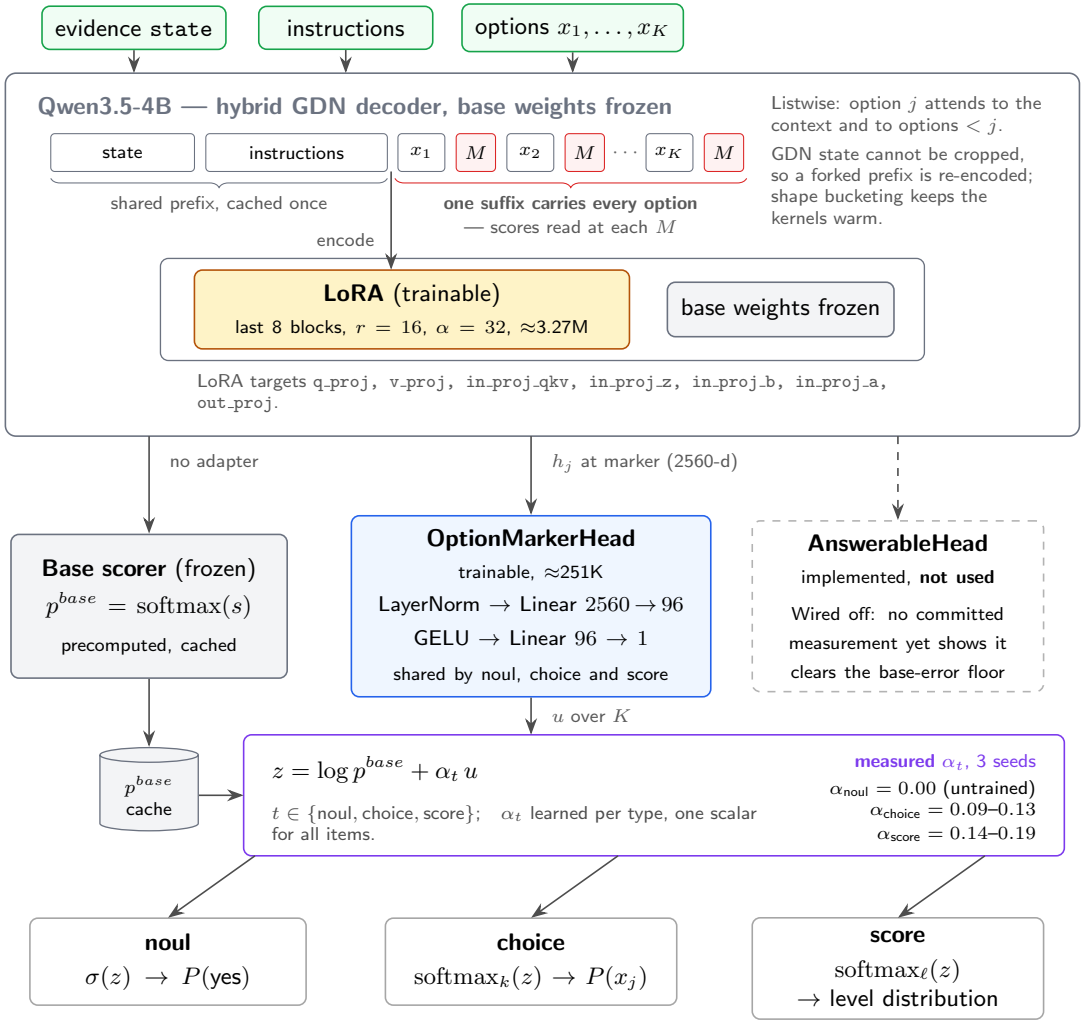

Metric. cc = chance-corrected accuracy, $(\text{acc} - 1/K)/(1 - 1/K)$, reported per type. Promotion reads the frozen held-out (6,254 scored of 6,424 rows); the 231-item JevBench public set is a hard veto.

Loss

$$\mathcal{L} = 1.0 \cdot \mathrm{KL}(p^{base} \,\|\, p) + 0.2 \cdot \mathrm{CE}(z, y) + 1.0 \cdot \mathrm{KL}(p^{base} \,\|\, q)$$

q is the readout before fusion. Weights as recorded in the canonical seed-0 checkpoint; the anchor weight defaults to 0 in code.

Inference. LoRA folds into the base weights, so the shared-prefix cache stays valid and one decision costs **133 ms** (1.29 s unfolded).

Measured (canonical arm, 3 seeds)

choice	+1.83 to +2.61 pp
score	+2.89 to +3.05 pp
noul	±0.00 pp (untrained here)

ranges over seeds; the paired McNemar test is run on the pooled held-out, not per type

Not promoted. JevBench cc 0.5187 / 0.5129 / 0.5187 against the 0.5187 control; seed 1 misses by 0.58 pp.

Canonical corpus 243,366 rows, 35 sources

noul 113,594 choice 100,257 score 29,515

label kind: option 98,257 / level 27,610 / fractional 1,905 / withheld 2,000