
Krino v4 — listwise marker model on Qwen3.5-4B

Hybrid GDN backbone with LoRA; whole-set marker readout; base-anchored per-type gates

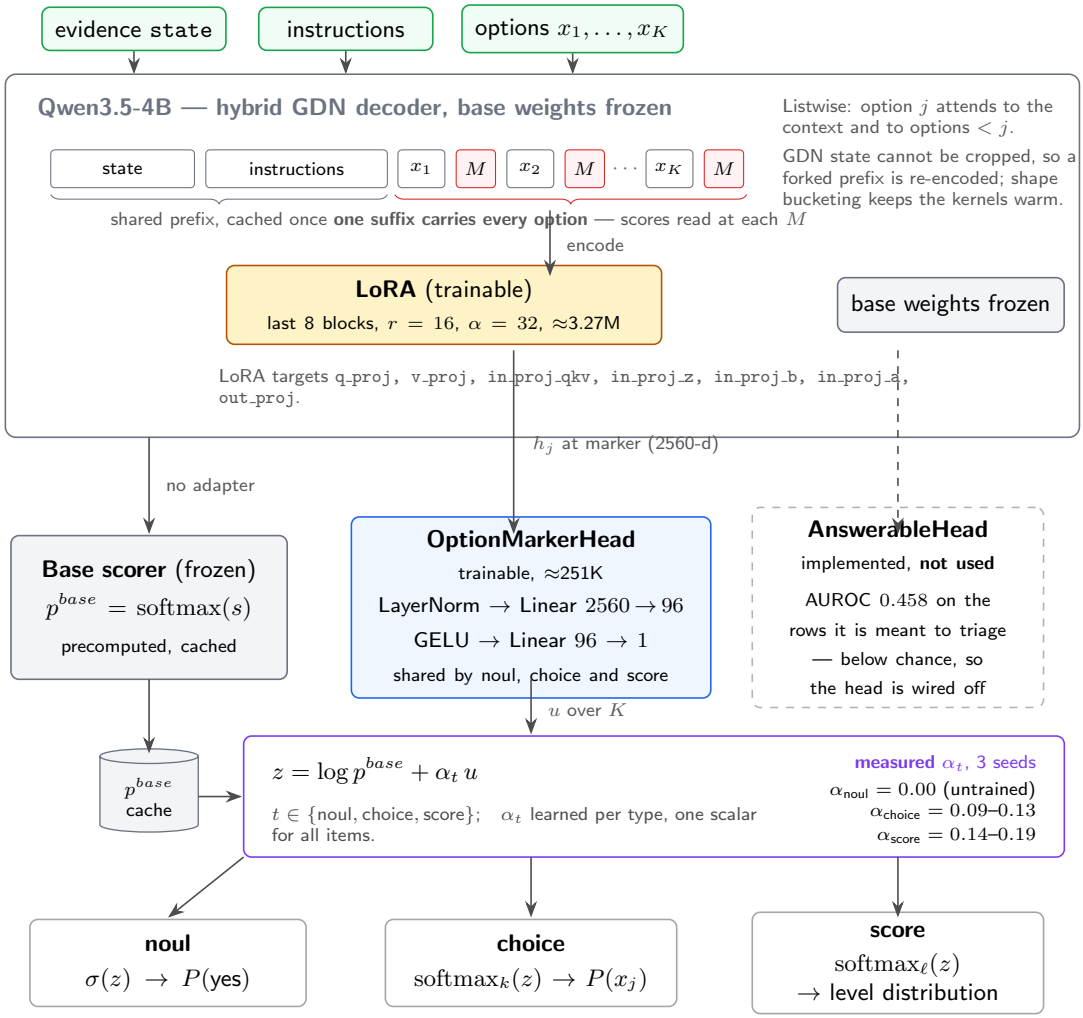

Metric. cc = chance-corrected accuracy, $(\text{acc} - 1/K)/(1 - 1/K)$, reported per type. Promotion reads the frozen held-out (6,254 scored of 6,424 rows); the 231-item JevBench public set is a hard veto.

Loss

$$\mathcal{L} = 1.0 \cdot \mathrm{KL}(p^{base} \,\|\, p) + 1.0 \cdot \mathrm{CE}(z, y)$$

The KL anchor is on by default in v4 ($w = 1.0$).

Inference. LoRA folds into the base weights, so the shared-prefix cache stays valid and one decision costs **133 ms** (1.29 s unfolded).

Measured (canonical arm, 3 seeds)

choice $+1.83$ to $+2.61$ pp (3/3 significant)
score $+2.89$ to $+3.05$ pp (2/3 significant)
noul ± 0.00 pp (untrained in this arm)

JevBench cc 0.5187, equal to the control.

Canonical corpus 243,366 rows, 35 sources
noul 113,594 choice 100,257 score 29,515
label kind: option 98,257 / level 27,610 / fractional 1,905 / withheld 2,000