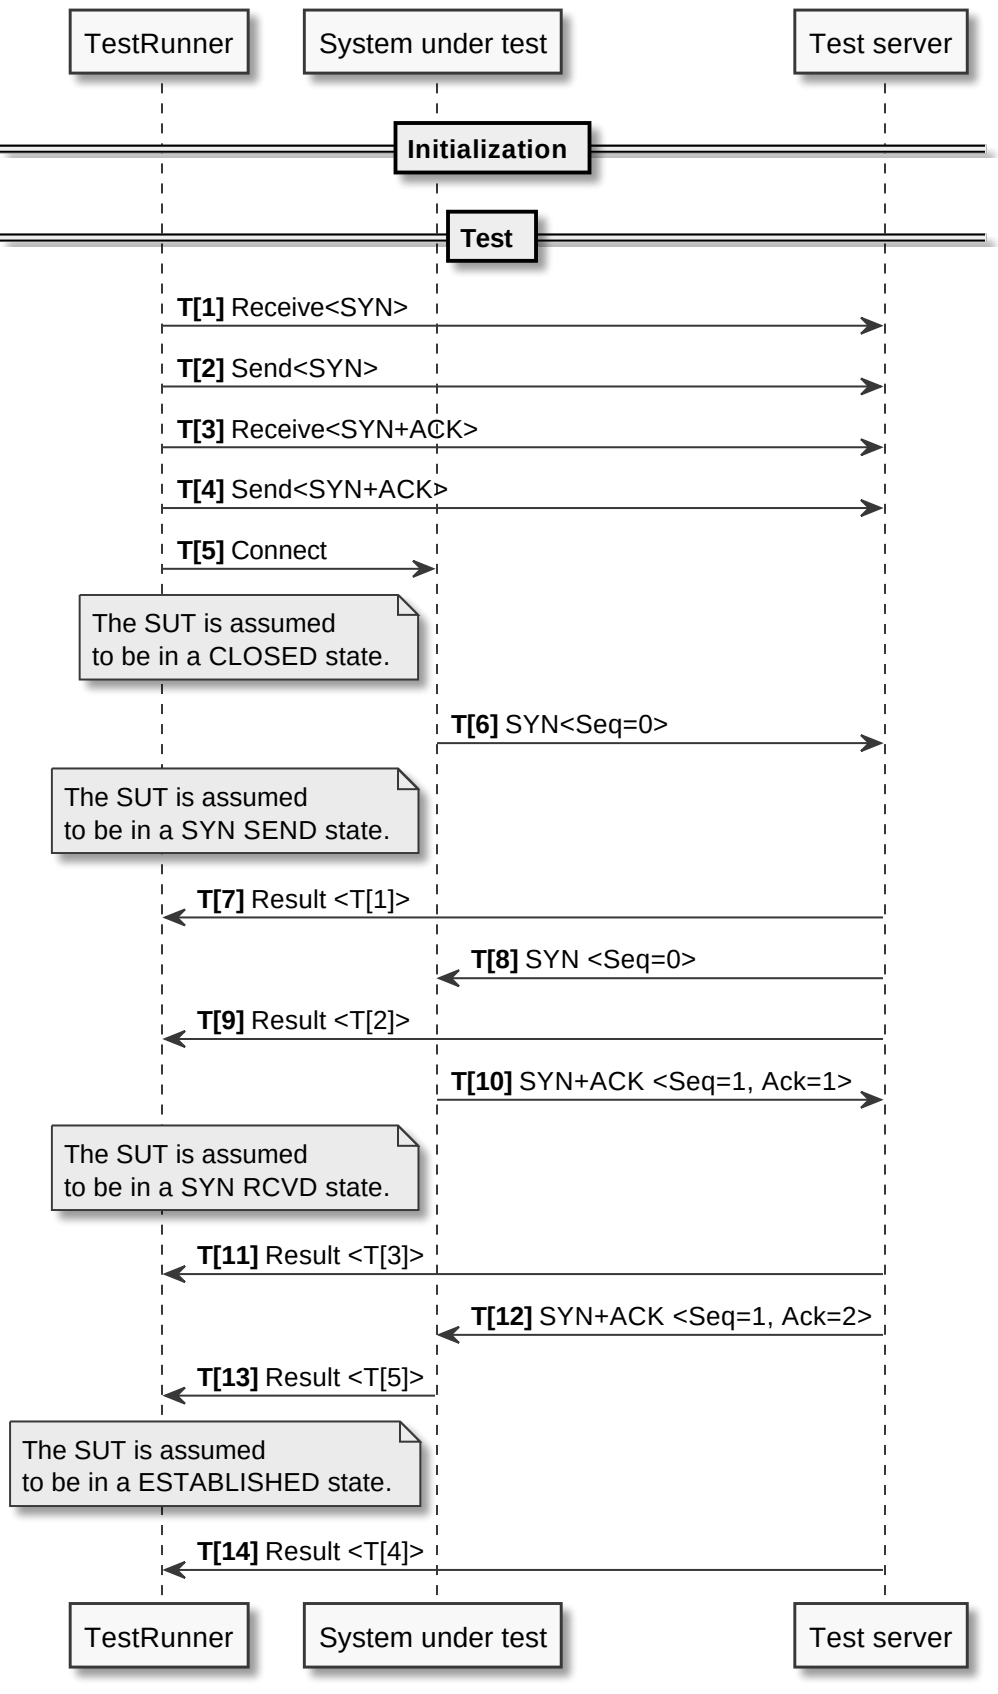
TestRunner
System under test
Test server
Initialization
Test
T[1] Receive<SYN>
T[2] Send<SYN>
T[3] Receive<SYN+ACK>
T[4] Send<SYN+ACK>
T[5] Connect
The SUT is assumed to be in a CLOSED state.
T[6] SYN<Seq=0>
The SUT is assumed to be in a SYN SEND state.
T[7] Result <T[1]>
T[8] SYN <Seq=0>
T[9] Result <T[2]>
T[10] SYN+ACK <Seq=1, Ack=1>
The SUT is assumed to be in a SYN RCVD state.
T[11] Result <T[3]>
T[12] SYN+ACK <Seq=1, Ack=2>
T[13] Result <T[5]>
The SUT is assumed to be in a ESTABLISHED state.
T[14] Result <T[4]>
TestRunner
System under test
Test server