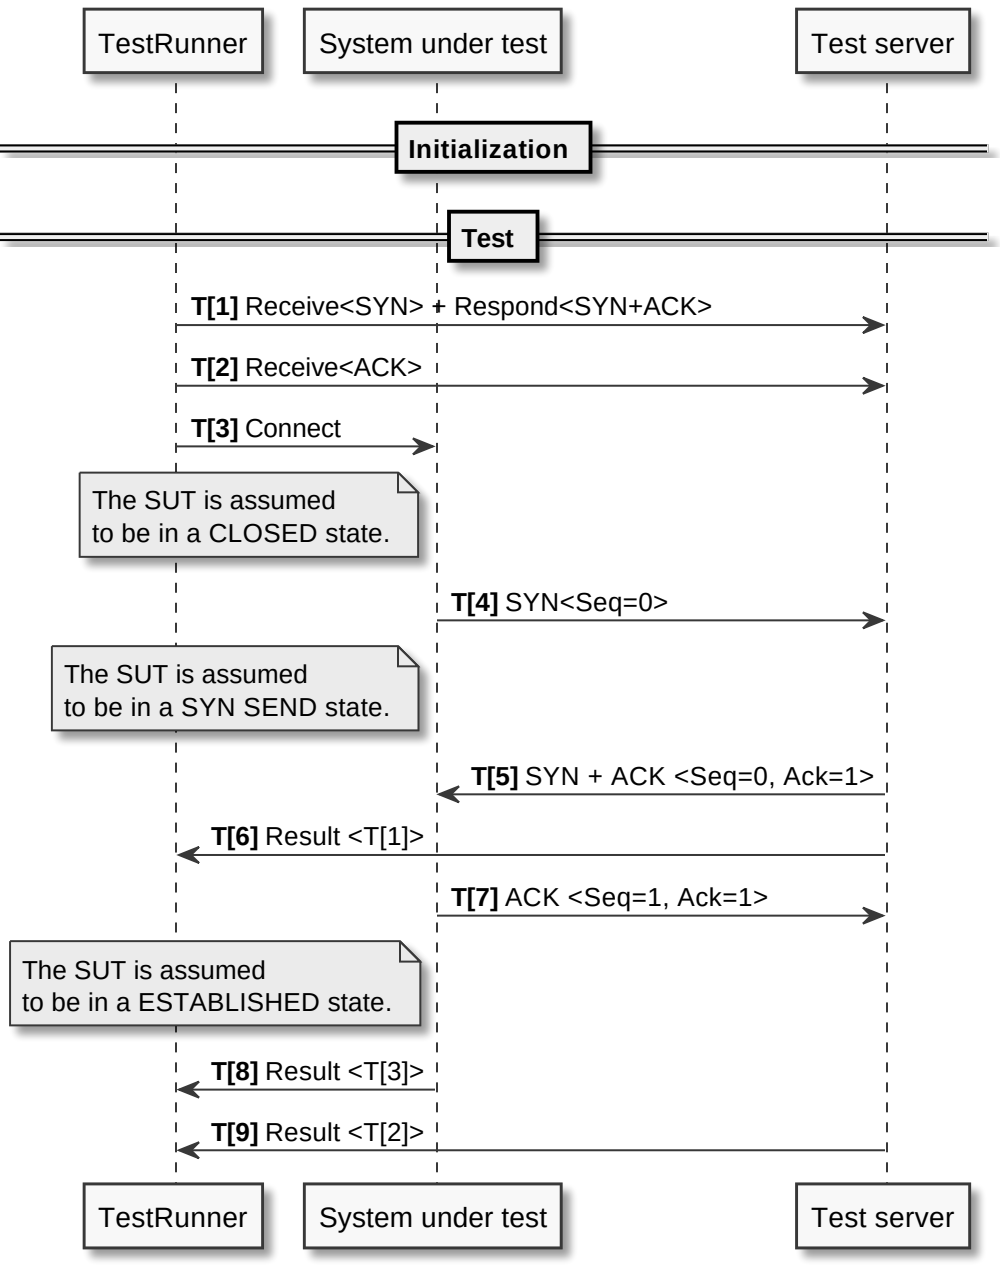
TestRunner
System under test
Test server
Initialization
Test
T[1] Receive<SYN> + Respond<SYN+ACK>
T[2] Receive<ACK>
T[3] Connect
The SUT is assumed to be in a CLOSED state.
T[4] SYN<Seq=0>
The SUT is assumed to be in a SYN SEND state.
T[5] SYN + ACK <Seq=0, Ack=1>
T[6] Result <T[1]>
T[7] ACK <Seq=1, Ack=1>
The SUT is assumed to be in a ESTABLISHED state.
T[8] Result <T[3]>
T[9] Result <T[2]>
TestRunner
System under test
Test server